


Address: Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

M/N: Y0BUF0CA2EA

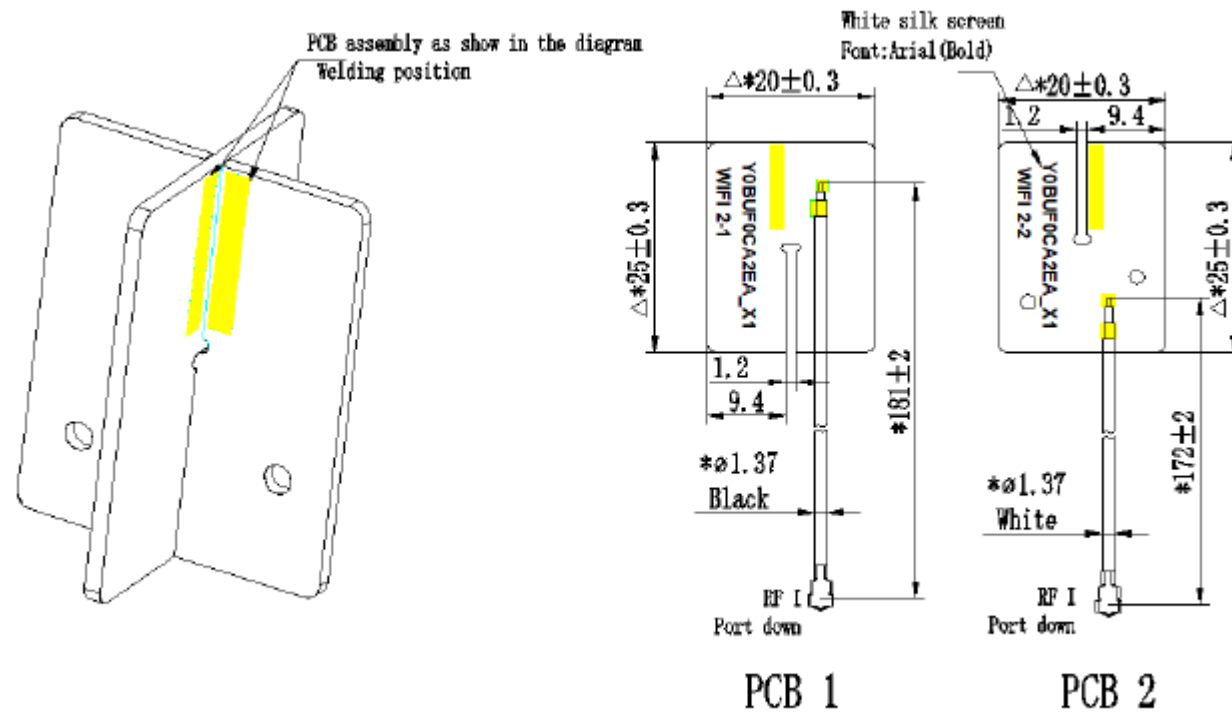


WiFi-ANT2

黑线 WiFi-ANT2				
频率(MHz)	增益(dBi)	效率(dB)	效率(%)	
2400	2.73	-2.33	58.5	
2410	1.99	-2.85	51.85	
2420	2.08	-2.59	55.12	
2430	1.85	-2.65	54.33	
2440	1.98	-2.42	57.22	
2450	2.18	-2.38	57.76	
2460	2.44	-2.37	57.98	
2470	2.9	-2.36	58.01	
2480	2.79	-2.56	55.42	
2490	3.19	-2.45	56.9	
2500	3.1	-2.69	53.81	


5150	2.36	-3.04	49.7
5160	2.83	-2.96	50.54
5170	3.23	-2.86	51.76
5180	2.58	-2.9	51.33
5190	2.27	-3.05	49.49
5200	2.41	-2.97	50.42
5210	2.45	-3.08	49.2
5220	2.42	-2.98	50.4
5230	2.51	-2.96	50.6
5240	2.49	-2.95	50.73
5250	2.41	-2.9	51.25
5260	2.52	-2.98	50.33
5270	2.53	-2.92	51.09
5280	2.6	-3.09	49.05
5290	2.5	-3.04	49.63
5300	2.14	-3.1	48.97
5310	2.1	-3.11	48.9
5320	1.96	-3.09	49.04
5330	1.86	-3.11	48.82
5340	1.79	-3.09	49.06
5350	1.68	-3.14	48.51
5360	1.56	-3.14	48.53
5370	1.42	-3.13	48.68
5380	1.24	-3.1	48.98
5390	1.06	-3.11	48.86
5400	0.89	-3.08	49.23
5410	0.94	-3.01	49.95
5420	1.06	-2.94	50.83
5430	1.45	-2.82	52.25
5440	1.17	-2.75	53.07
5450	0.94	-2.75	53.03

频率(MHz)	增益(dBi)	效率(dB)	效率(%)
5460	1.27	-2.78	52.7
5470	1.54	-2.85	51.92
5480	1.87	-2.76	52.95
5490	1.78	-2.9	51.34
5500	1.94	-2.82	52.22
5510	1.68	-2.99	50.18
5520	1.57	-2.97	50.45
5530	1.56	-3.01	50.02
5540	1.51	-3.11	48.92
5550	1.78	-2.98	50.3
5560	1.67	-3.14	48.52
5570	1.71	-3.03	49.82
5580	2.15	-2.99	50.27
5590	2.26	-2.84	51.98
5600	2.15	-2.9	51.3
5610	2.03	-2.98	50.41
5620	1.85	-3.17	48.23
5630	1.7	-3.29	46.86
5640	1.6	-3.14	48.51
5650	1.23	-3.15	48.47
5660	1.11	-3.14	48.53
5670	1.08	-3.27	47.13
5680	0.99	-3.25	47.32
5690	0.84	-3.36	46.12
5700	0.69	-3.48	44.9
5710	0.87	-3.47	44.97
5720	0.62	-3.7	42.66
5730	0.91	-3.59	43.76
5740	0.84	-3.69	42.77
5750	1.14	-3.61	43.59
5760	1.33	-3.53	44.4
5770	1.23	-3.55	44.15
5780	1.48	-3.5	44.62
5790	1.23	-3.69	42.78
5800	1.45	-3.56	44.08
5810	1.22	-3.6	43.61
5820	1.15	-3.64	43.22
5830	1.19	-3.64	43.27
5840	0.99	-3.74	42.28
5850	1.08	-3.66	43.03

2450MHz(ANT2)

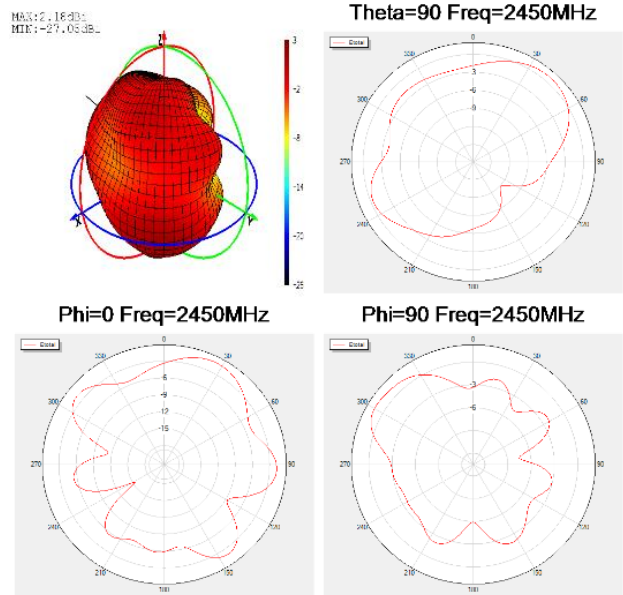

5500MHz(ANT2)

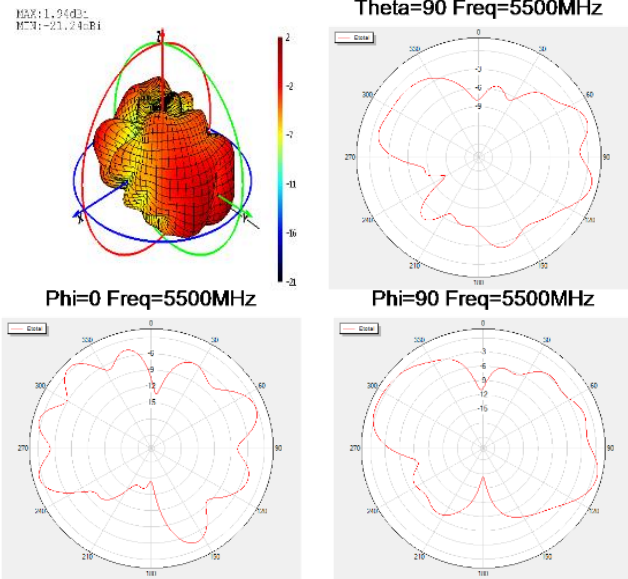


WiFi-ANT1

白线 WiFi-ANT1			
频率 (MHz)	增益 (dBi)	效率 (dB)	效率 (%)
2400	2.81	-2.04	62.53
2410	2.65	-2.36	58.11
2420	2.7	-2.17	60.62
2430	2.78	-2.03	62.65
2440	2.81	-2.03	62.59
2450	2.69	-1.95	63.86
2460	2.61	-1.96	63.66
2470	2.61	-2.12	61.45
2480	2.39	-2.27	59.25
2490	2.42	-2.37	57.93
2500	2.46	-2.44	57.03

5150	1.42	-4.55	35.11
5160	1.49	-4.55	35.06
5170	1.6	-4.52	35.32
5180	1.48	-4.62	34.55
5190	1.7	-4.61	34.61
5200	1.71	-4.52	35.34
5210	1.92	-4.46	35.8
5220	1.71	-4.44	35.95
5230	1.75	-4.38	36.48
5240	1.85	-4.35	36.71
5250	1.75	-4.35	36.69
5260	1.94	-4.39	36.39
5270	1.75	-4.41	36.2
5280	1.95	-4.44	36.01
5290	2.09	-4.33	36.87
5300	2.15	-4.35	36.69
5310	2.13	-4.36	36.62
5320	1.96	-4.45	35.9
5330	1.79	-4.51	35.37
5340	1.64	-4.54	35.19
5350	1.68	-4.52	35.34
5360	1.62	-4.47	35.74
5370	1.59	-4.39	36.41
5380	1.45	-4.32	36.99
5390	1.31	-4.32	37.02
5400	1.17	-4.23	37.73
5410	1.06	-4.2	37.98
5420	1.15	-4.04	39.45
5430	0.94	-3.98	39.96
5440	1.29	-3.77	41.94
5450	1.36	-3.82	41.51

白线 WiFi-ANT1			
频率 (MHz)	增益 (dBi)	效率 (dB)	效率 (%)
5460	1.6	-3.74	42.26
5470	1.62	-3.69	42.75
5480	1.57	-3.65	43.17
5490	1.52	-3.76	42.11
5500	1.36	-3.79	41.79
5510	1.47	-3.86	41.1
5520	1.35	-3.87	41.05
5530	1.53	-3.9	40.74
5540	1.62	-3.92	40.56
5550	1.77	-3.83	41.44
5560	1.83	-3.84	41.29
5570	1.63	-3.89	40.79
5580	2.15	-3.85	41.24
5590	2.2	-3.83	41.36
5600	2.25	-3.87	40.99
5610	2.31	-3.89	40.81
5620	2.41	-3.99	39.92
5630	2.48	-3.97	40.05
5640	2.41	-3.9	40.71
5650	2.26	-3.98	40.02
5660	2.19	-4.01	39.74
5670	2.42	-3.98	39.97
5680	2.43	-3.96	40.21
5690	2.38	-4.08	39.09
5700	2.33	-4.2	37.98
5710	2.38	-4.22	37.82
5720	2.52	-4.26	37.5
5730	2.39	-4.19	38.14
5740	2.38	-4.23	37.76
5750	2.27	-4.25	37.61
5760	2.25	-4.24	37.71
5770	2.16	-4.32	37
5780	2.05	-4.4	36.27
5790	2.16	-4.47	35.7
5800	2.07	-4.44	35.98
5810	2.01	-4.41	36.21
5820	1.86	-4.46	35.82
5830	1.89	-4.39	36.36
5840	1.82	-4.41	36.23
5850	1.68	-4.38	36.49

2450MHz(ANT1)

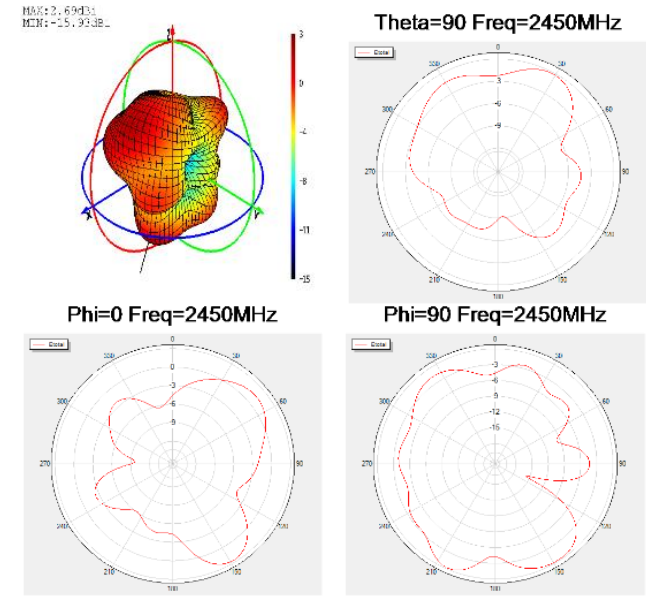

5500MHz(ANT1)

