

REVOLUTION WITH SPEAKERS
QUICK START GUIDE



HOW TO VIDEOS
VIDEO TUTORIAL
INSTRUCTIEVIDEO' S
TUTORIELS
VIDEOANLEITUNGEN
VÍDEOS GUÍA
使用方法视频
하는 법 영상
使用方法動画

ATTENTION : PLEASE READ QUICK START GUIDE BEFORE USE

ATTENTION : PRIÈRE DE LIRE LE GUIDE DE
DÉMARRAGE RAPIDE AVANT UTILISATION

ATENCIÓN : LEA LA GUÍA DE INICIO RÁPIDO ANTES DE USARLO

BEACHTUNG : VOR DEM GEBRAUCH BITTE DIE SCHNELLSTARTANLEITUNG LESEN

ATTENZIONE : LEGGERE LA GUIDA DI AVVIAMENTO RAPIDO PRIMA DEL USO

OPGELET : VOOR HET GEBRUIK DE SNELSTARTGIDS LEZEN

注意：ご使用前にクイックスタートガイドを必ずお読みください。

提示：使用前請閱讀快速使用說明


주의：사용 전에 빠른 시작 가이드를 읽어 주십시오.

INDEX

English	2
Français	14
Español	28
Deutsche	42
Italiano	52
Nederlands	63


ENGLISH

PRODUCT MAP

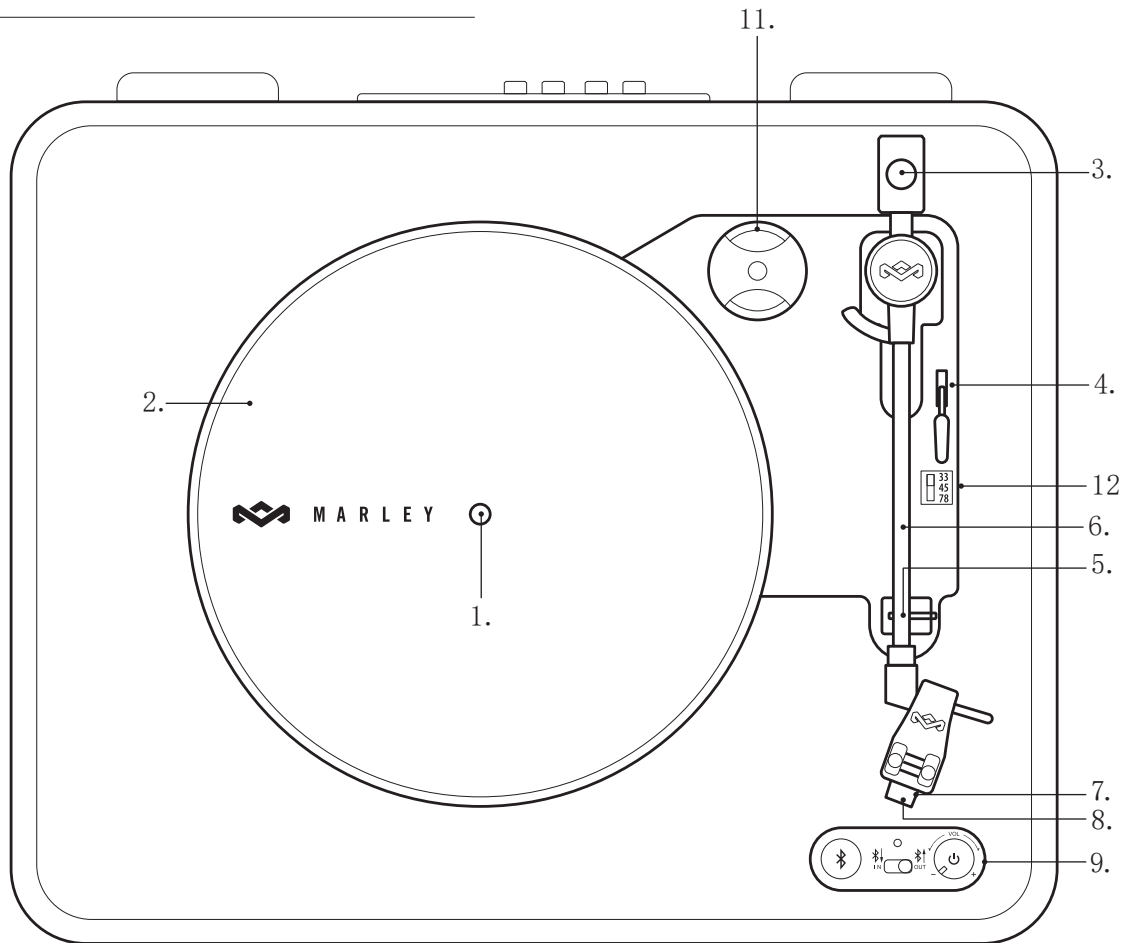

LEGEND


- | | |
|---------------------------|--|
| 1. Spindle | 8. Needle Cover |
| 2. Turntable | 9. Controls |
| 3. Counter Balance Weight | 10. Power Adaptor W4th Interchangeable Plugs |
| 4. Tone Arm Lift Level | 11.45 Adaptor |
| 5. Tone Arm Rest Holder | 12. RPM Switch |
| 6. Tone Arm | 13. Passive Speaker Cables (x2) |
| 7. Stylus | 14. Passive Speakers (x2) |



13.



14.





x2

FUNCTION LAYOUT

LEGEND


- A. Passive Speaker Out
B. RCA Line Out
C. Bluetooth® Button
D. Bluetooth® In / Out Switch
E. LED Status Indicator
F. - VOL + Knob / Power Button

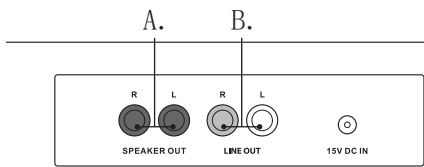

SETUP

BALANCING THE TONEARM


- Take the counter-balance from the accessory box and slide onto the tonearm.

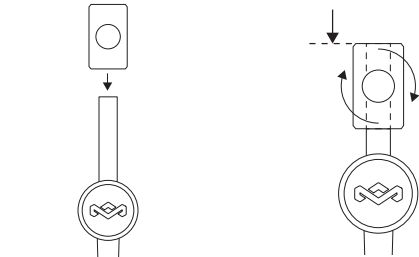

- Slide the balance, as far as it can go forward, then tighten the screw to fix in place
- The tonearm is now balanced.


CONNECTING THE PASSIVE SPEAKERS

- Make sure the Revolution is powered off.
- Connect the Passive Speaker Cables to the back of the passive speakers, and then connect the other end to the Turntable. They must go into the BLACK RCA Speaker out ports on the back of the turntable.

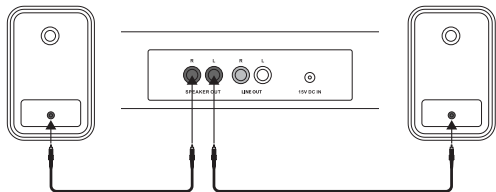


PLAYING A RECORD


- Make sure the Revolution is connected to the power adapter and a wall outlet, and the outlet is switched on.
- Put a vinyl on the turntable.




- Make sure the stylus needle cover is removed.
- Select the RPM switch to the correct speed for the record. E.g. 45 / 33 / 78

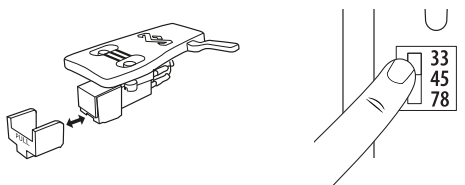

- Power the turntable on by pressing the Power/Volume knob down. Note: The LED indicator should turn red, showing that the power is now on.
- If wanting to play via Bluetooth – Please see the "Bluetooth Pairing" section and then come back here once connected to an output device. If wanting to play via Line out or Passive Speaker Out – please check their sections on how to connect the output device. And then come back here.
- Lift the tonearm via the lift lever and move the tonearm head to the edge of the record.
- Now lower the tonearm, by lowering the tone arm lift lever.

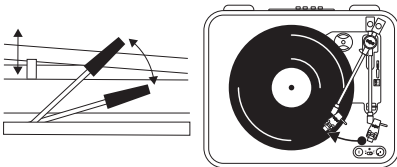

NOTE: The turntable platter will auto-start spinning once the tonearm is above the platter.

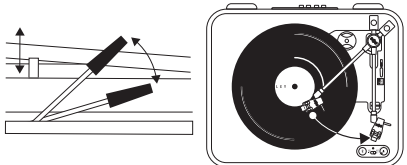

- Once the record is finished, the turntable platter will auto stop. Lift the tonearm and place it on the tonearm rest. To listen to the B side of your record, flip the record and repeat the above from step 6.

NOTE: Once finished listening to a record, make sure the stylus needle cover is re-attached to protect the stylus.

Do not try to adjust the balance weight while playing a record, this could break the stylus needle and scratch the record.

Do not try to turn the turntable platter manually. Moving or jarring the turntable without securing the tonearm, could result in damage to the tonearm.


Re-secured the tone arm before transportation to protect the needle.

Remove the balance weight before transportation to prevent damage or breakage to the unit.

BLUETOOTH® PAIRING - OUT

- Make Sure the Bluetooth Switch is set to "OUT" – to pair out to a speaker or headphone
- Power on the external Bluetooth® device first before turning on the BT function on the Turntable.
- Press the BT button on the turntable to enable the unit to search the Bluetooth® device till BT indicator light becomes solid. This will indicate your devices are paired.


NOTE: If the Turntable does not pair with your Bluetooth® device within 30 seconds, press the Bluetooth® search button again on the turntable and it should pair.

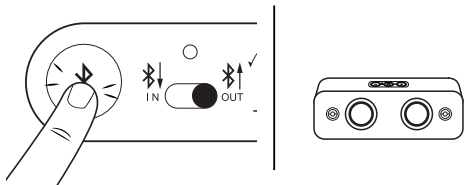

- Blue LED light flash = Searching for Bluetooth Device to Pair to
- Blue LED light stable = Paired
- Red LED = Pairing Failed, Press The Bluetooth button to initiate Pairing

DISCONNECT BLUETOOTH® PAIRING

Long press and hold the BT button till the BT indicator light turns red. Turntable will then disconnect from external device.

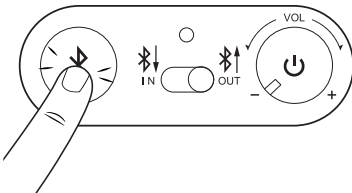


- Blue LED light will turn to Red. This indicates Bluetooth is off, but turntable still has power.

VOLUME CONTROL

Increase Volume: Rotate the Volume Knob clockwise.



Decrease Volume: Rotate Volume Knob counter clockwise.

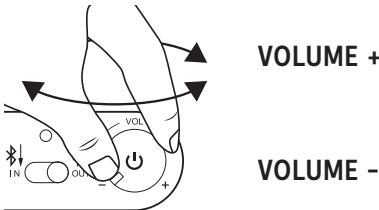

BLUETOOTH® PAIRING - IN

NOTE: to stream music from your device e.g. mobile phone, tablet, laptop etc - you need to have a set of speakers connected via the Line out or Passive speaker out ports. You can then stream Spotify, Apple Music etc, through the turntable.

- Make Sure the Bluetooth Switch is set to "IN" – to pair a mobile device, such as a phone, tablet or laptop.
- Press the BT button on the turntable to enable the unit to Enter Pairing Mode.
- Go to your mobile device, make sure the Bluetooth is on
- Then find the Revolution and press to pair.

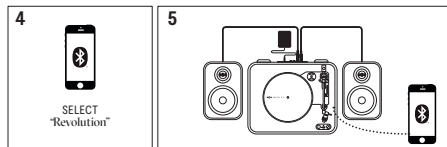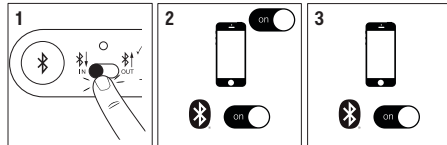


- You are Now Paired, and can play music.

NOTE, the LED on the Revolution indicates

- Red LED = Power On
- Blue LED light flash = Searching for Bluetooth Device to Pair to
- Blue LED light stable = Paired

LINE OUT

LED will also be solid RED when power is on.

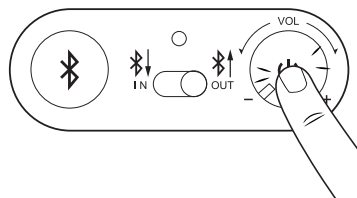


CAUTION: Switch off the power to all equipment before making connections. Read the instructions of each component you intend to use with this unit. Be sure to insert each plug securely. To prevent hum and noise, avoid bundling the signal interconnection cables together with the AC power cord.

LINE OUT OPERATION

- Plug one end of the RCA cable (not included) into the LINE OUT socket at the back of the unit. Be sure to match the color with the socket.

NOTE: DO NOT connect active speakers to the Passive Speaker Output, as this could damage your active speakers. Please only use Line Out for your active speakers.

- Plug the other end of the cable into the LINE IN socket of your home amplifier device.
- Switch on the unit and the amplifier device you connected.
- Adjust the volume on the amplifier device.

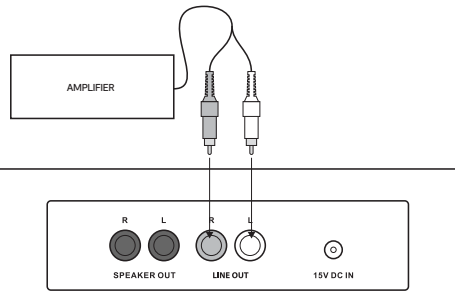

Compliance Info

Conformité / Conformidad / Beachtung / Conformità / Nalevingsinformatie 合規情報 / 규정 준수 정보 /コンプライアンス情報

REVOLUTION

READ ALL INSTRUCTIONS BEFORE USE AND SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- This device complies with FCC radiation exposure limits set forth for an uncontrolled environment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC RF EXPOSURE STATEMENT:

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

CAUTION!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. To Maintain compliance with the FCC's RF exposure guidelines, place the product at least 20cm from nearby persons.

ISED STATEMENT

This device complies with Innovation, Science, and Economic Development Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device complies with RF exposure guidelines, users can obtain Canadian information on RF exposure and compliance.

Les utilisateurs peuvent sur l'exposition aux radiofréquences et la conformité et compliance d'acquiescer les informations correspondantes. Utilisateurs peut obtenir l'information canadienne sur l'exposition et la conformité de rf.

The device should be installed and operated with a minimum distance of 20cm between the radiator and your body.

L'appareil doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de classe b est conforme à la norme nmb - 003 du canada.


ISED RF EXPOSURE STATEMENT:

The device is compliance with RF exposure guidelines, users can obtain Canadian information on RF exposure and compliance.

LE PRÉSENT APPAREIL EST CONFORME

Après examen de ce matériel aux conformité ou aux limites d'intensité de champ RF, les utilisateurs peuvent sur l'exposition aux radiofréquences et la conformité et compliance d'acquiescer les informations correspondantes.

WEEE EXPLANATION

 This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources.

Hereby, FKA Brands Ltd, declares that this radio equipment is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. A copy of the Declaration of Conformity can be obtained from www.thehouseofmarley.co.uk/declaration-of-conformity