


# ZP-THP60-Gamma


## PRODUCT INFORMATION GUIDE



# PRODUCT OVERVIEW

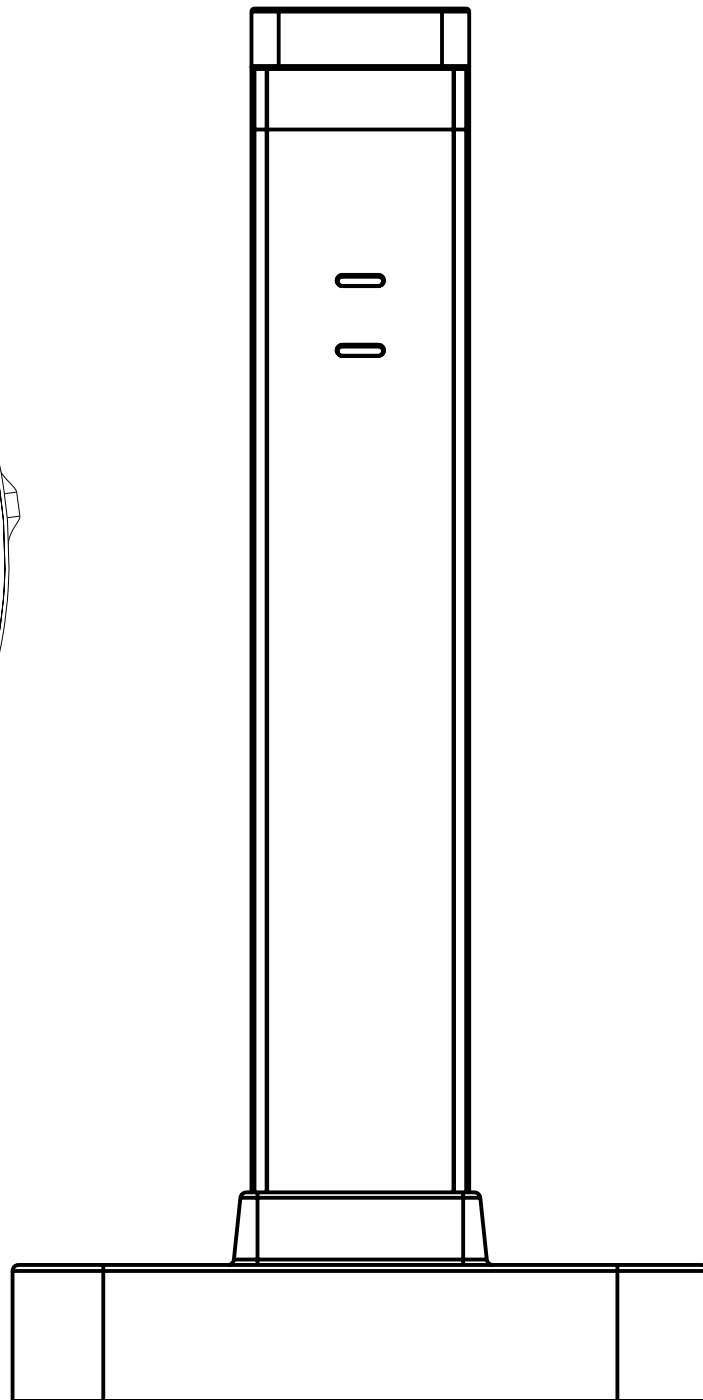



- Pogo-pin for charging
- Adaptive design headband
- Micro USB cable for charging
- RCA to 3.5mm cable
- Soft Ear cushion
- Wireless Transmitter & charging base
- Adapter

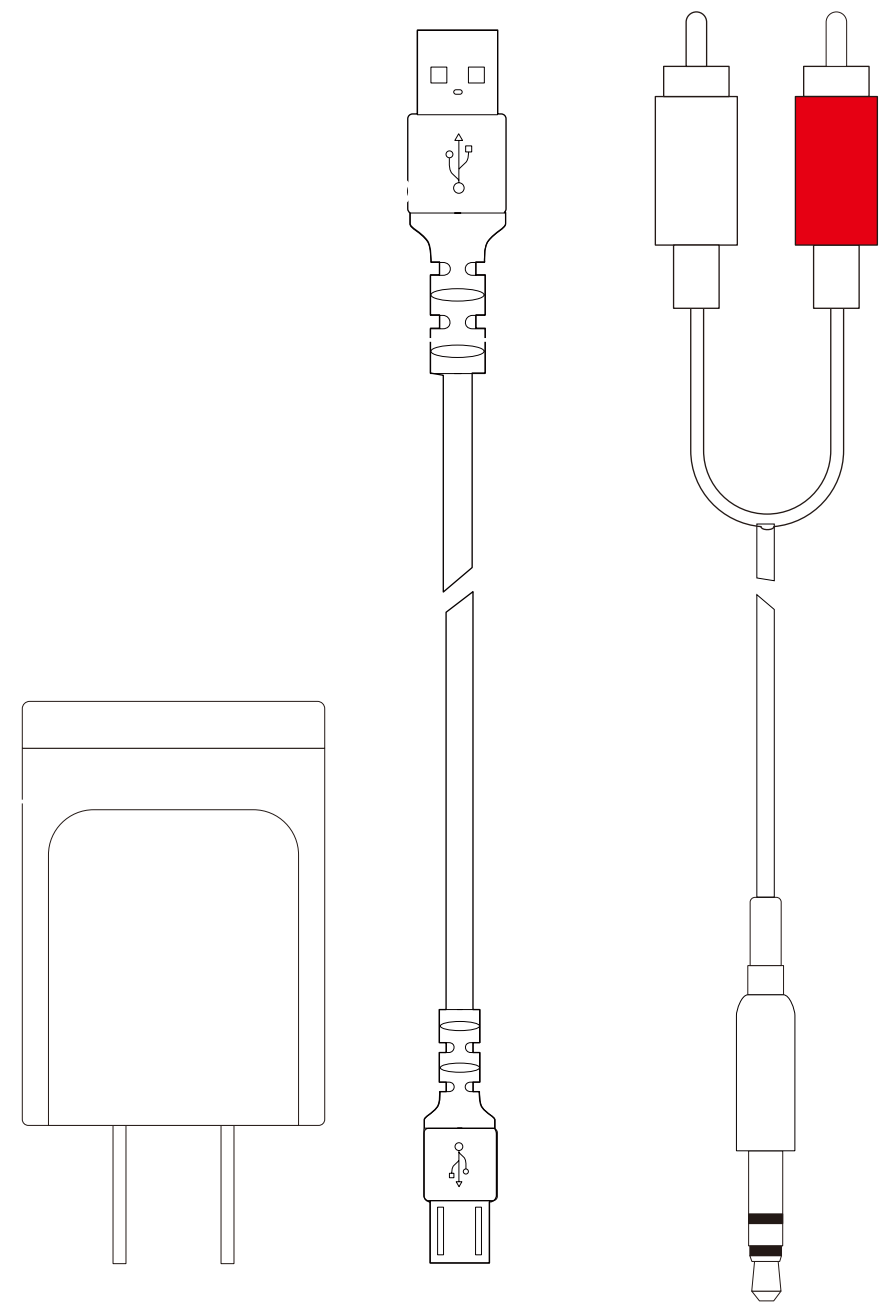

# PRODUCT OVERVIEW

Connect LED indicator (Base station)  
Charging LED indicator(Base station)  
Pogo-pin for charging(Headphone)  
3.5mm input for wired use  
Bulid-in mic(optional)  
Micro-USB for charging(Headphone)  
LED Indicator(Headphone)  
Volume down  
Mute  
Power  
Volume up  
Power switch(Base station)

Micro-USB for power  
Audio source switch(Optical/3.5mm)  
3.5mm input  
Optical input

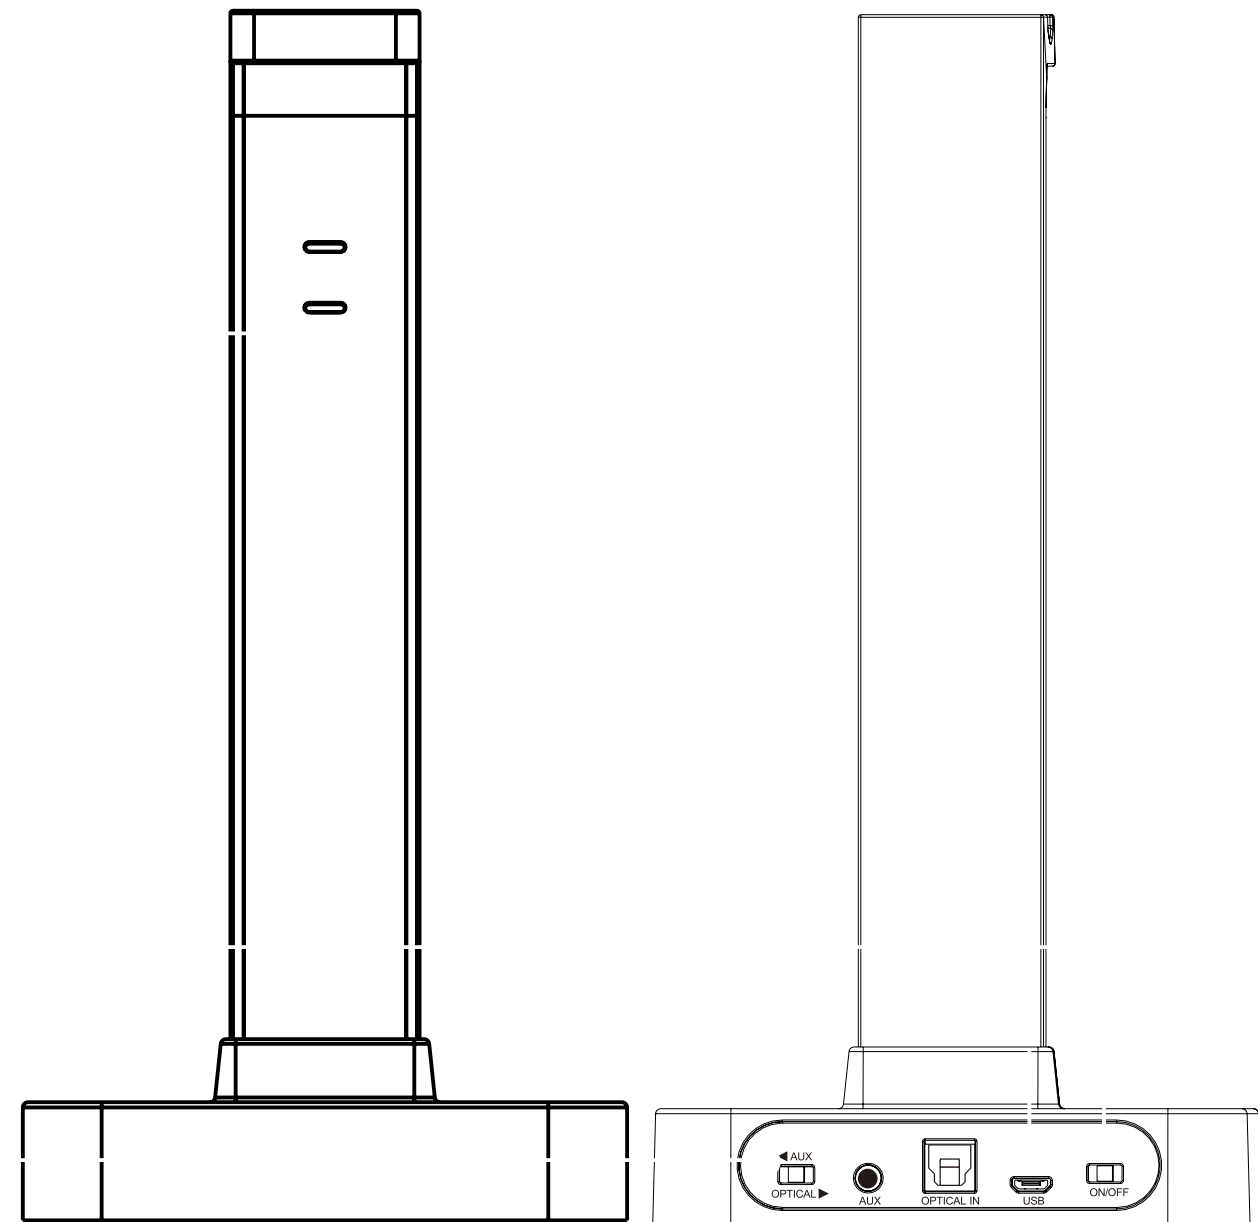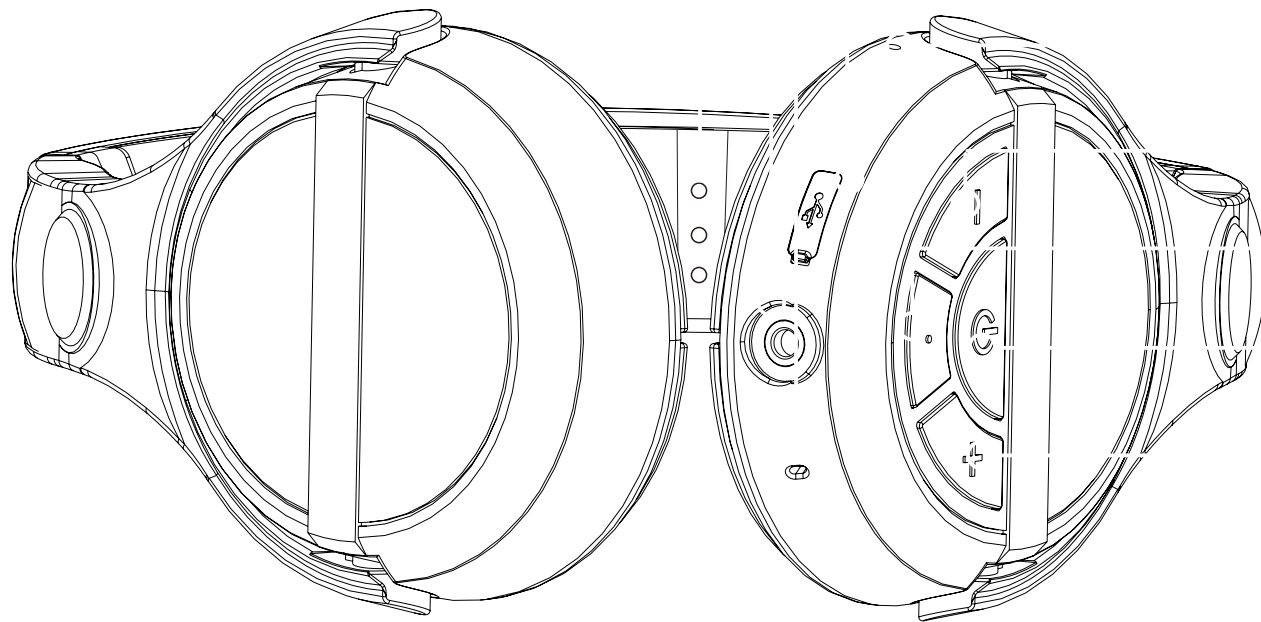

# SETUP

1. Use the Micro-USB cable to connect Adapter and Base station for power up
2. Power up the headphone, and will see the LED indicator on headphone and Base station turn to solid Blue




## 3.5mm Audio source

1. Use the RCA to 3.5mm cable connect your TV(RCA output Jack/headphone jack) to Base station(3.5mm Input jack)
2. You can also use 3.5mm to 3.5mm cable connect Mobile/soundBar to Headphone directly


## Optical audio source

- Use the OPTICAL cable connect your TV(optical output) to Base station(optical input)
- Select the audio output to optical in your TV setup menu.

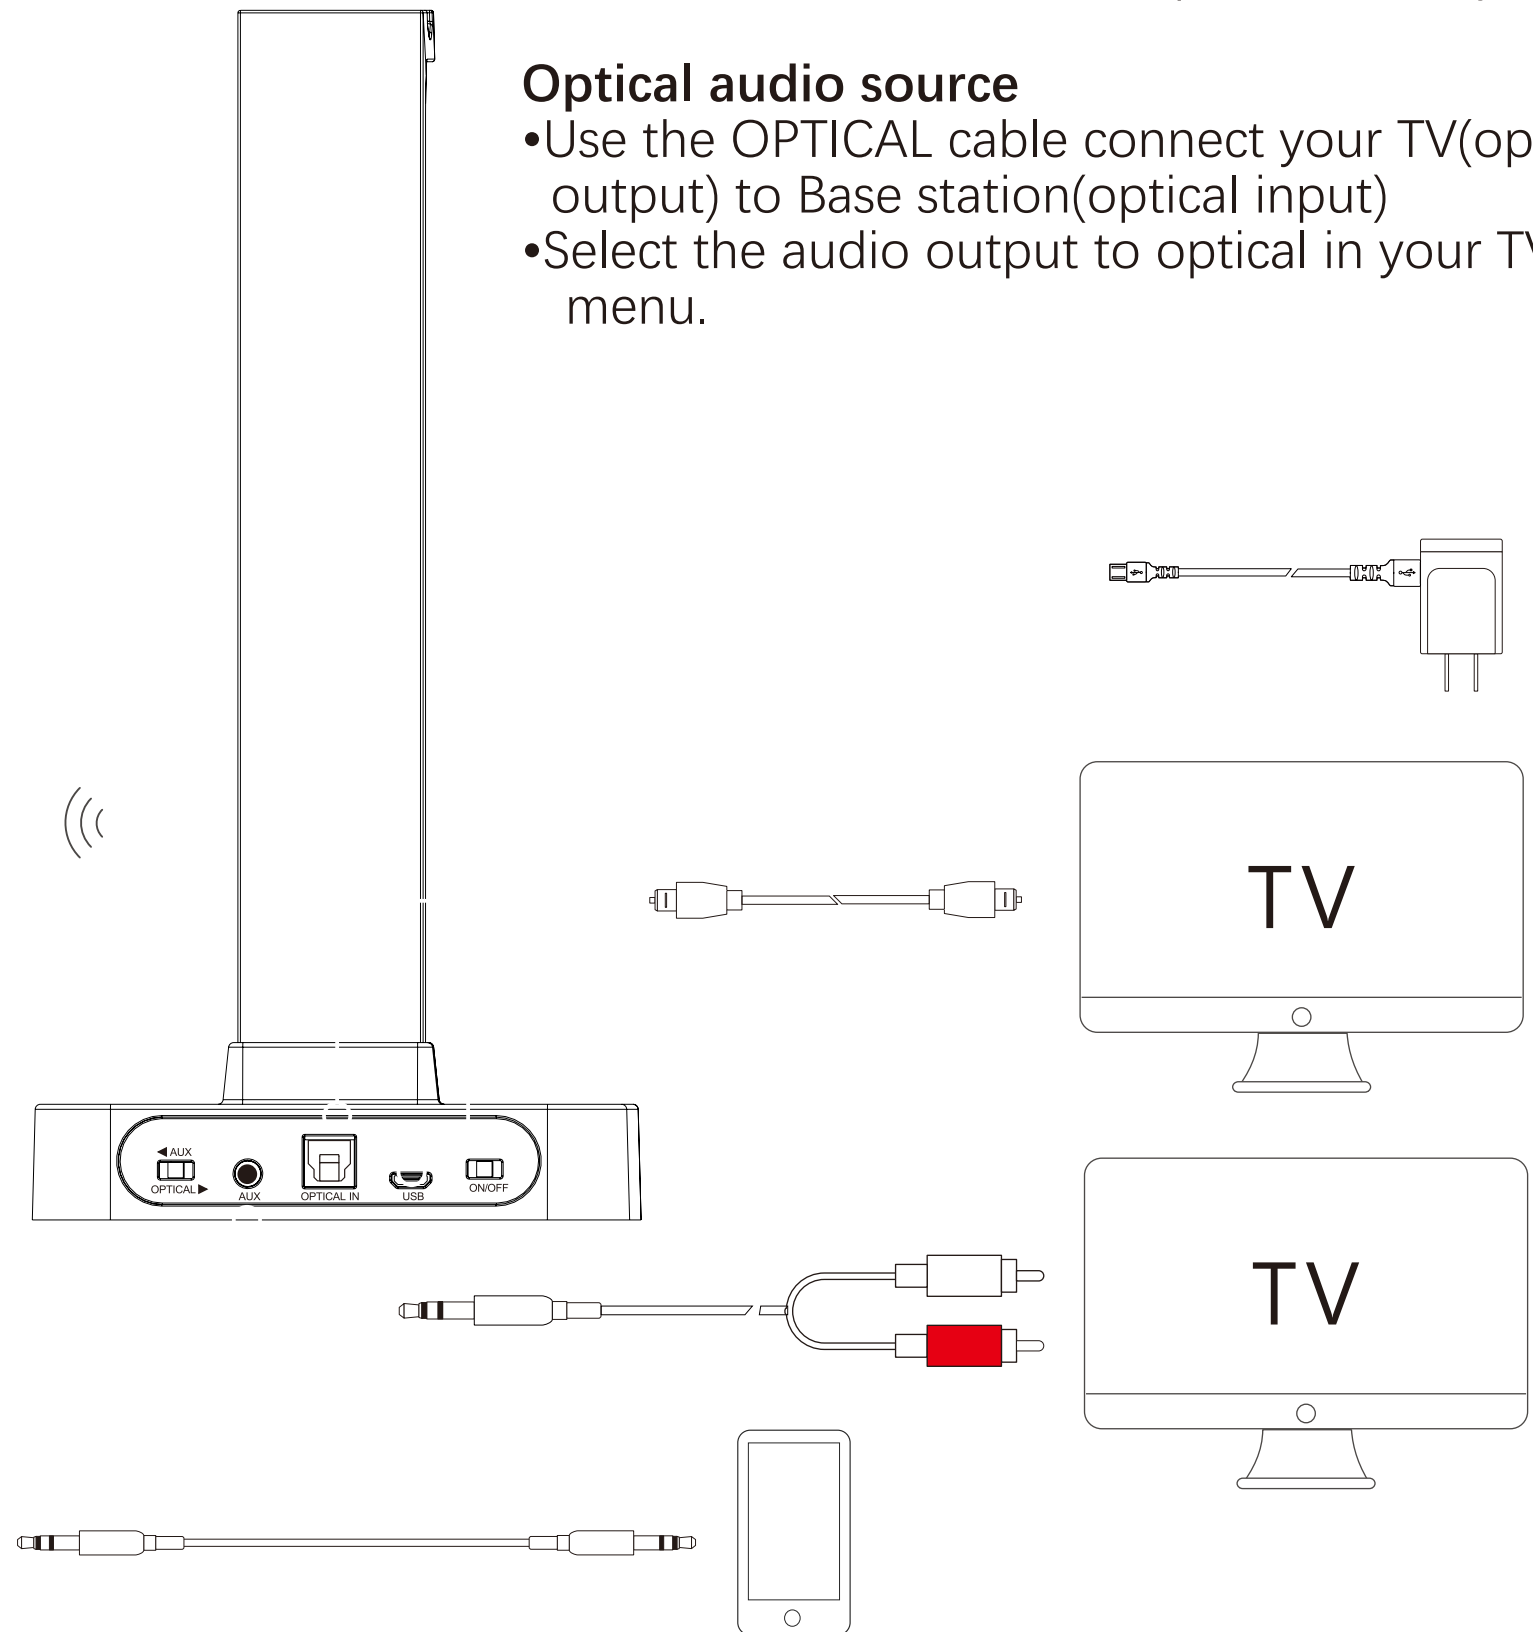


# CHARGING

1. You can hang the headphone to the base station for charging, make sure that the headphone and the base are in correct contact, and the charging indicator light is on. You can also charge the headset to use the micro-USB cable to the charging port on the headset, and plug the other end into any USB power source(5V/1A)
2. LED indicator will Red when charging, will off when charging full.

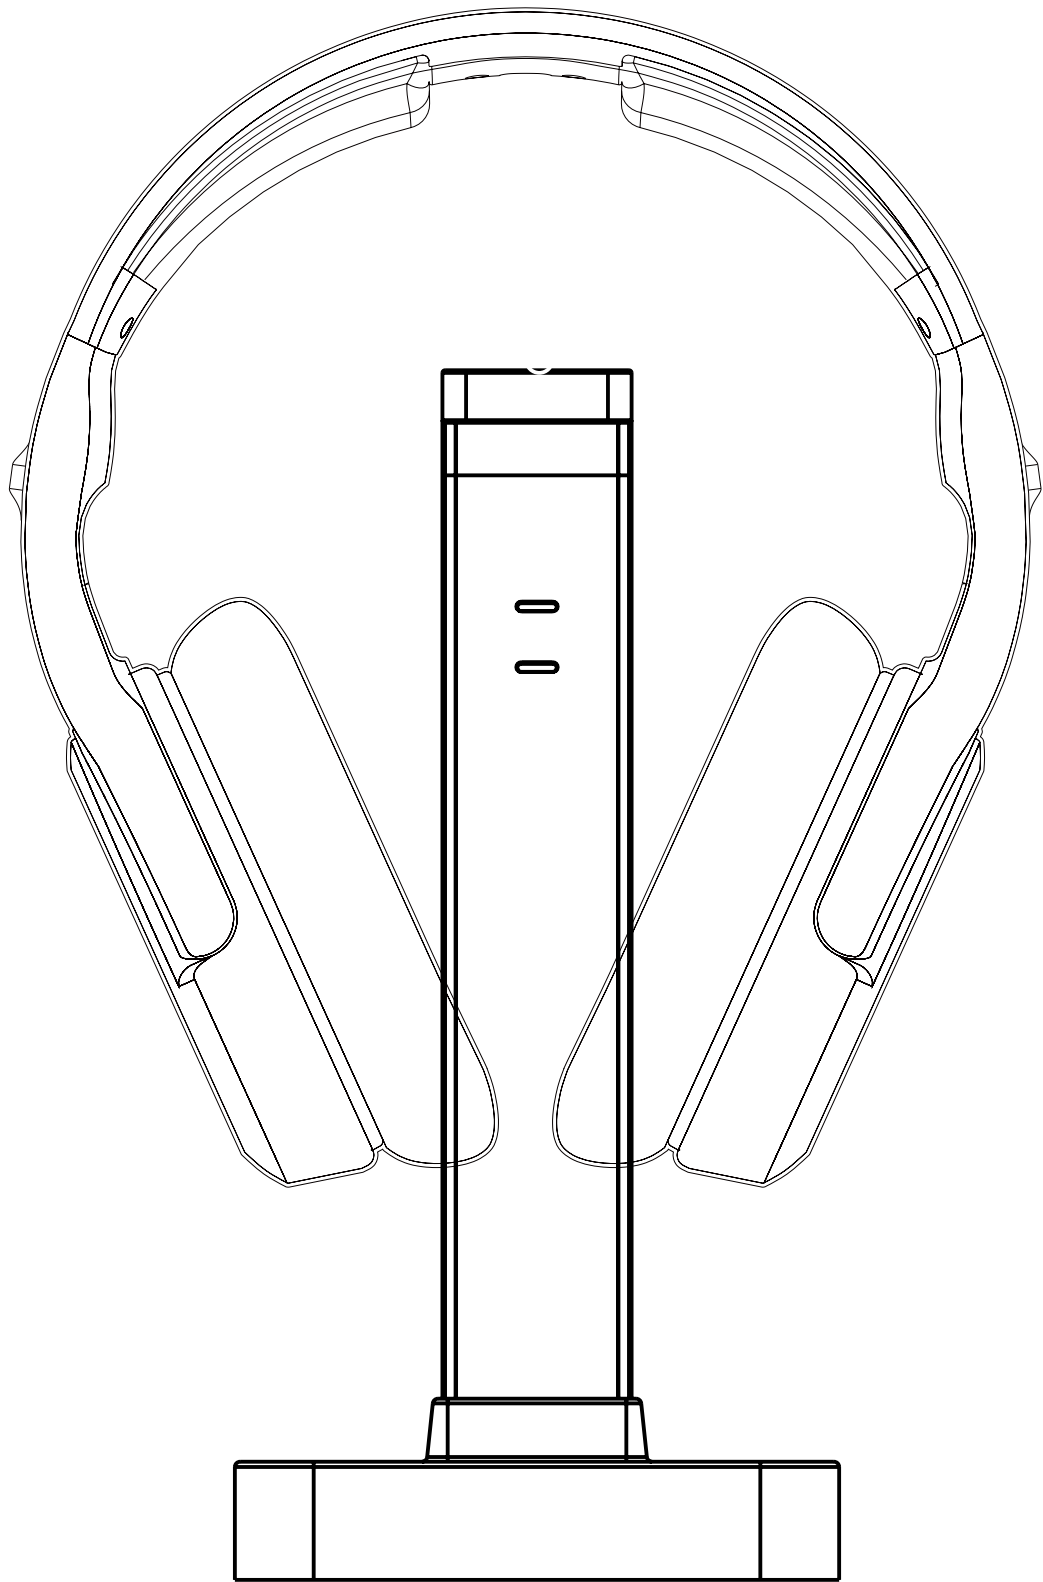

# POWER ON/OFF

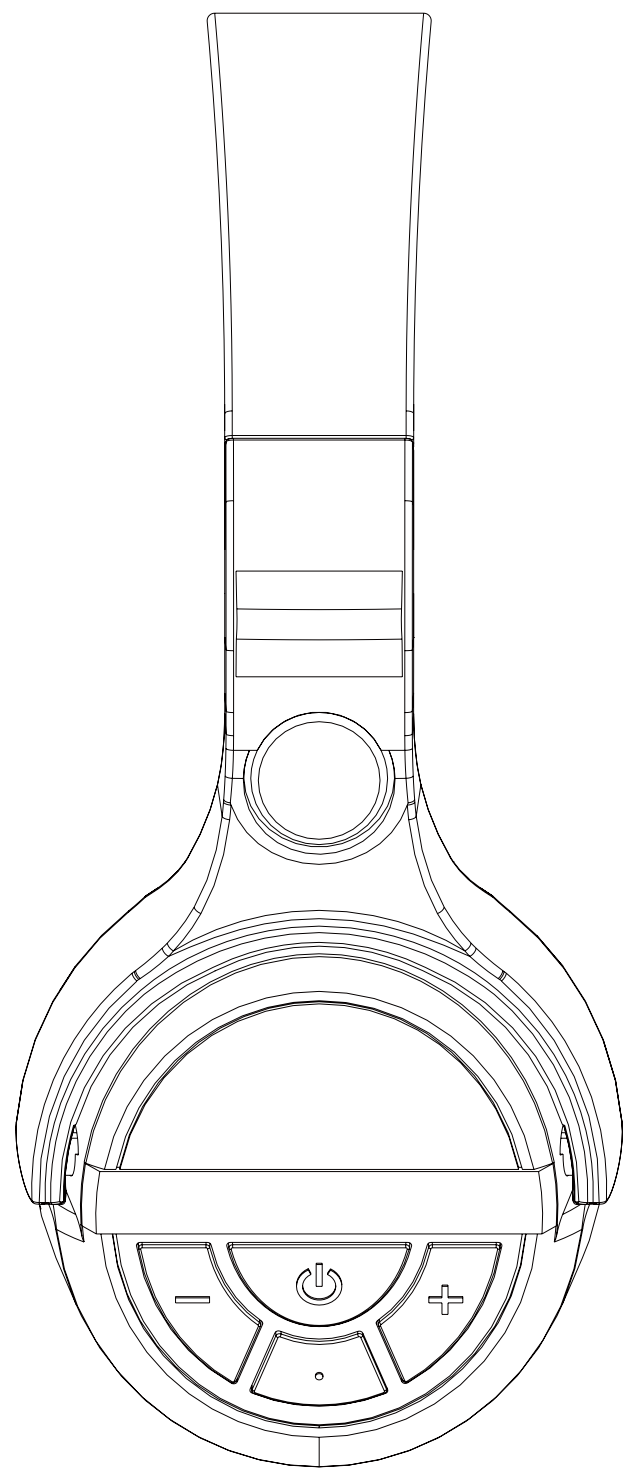



To power on the headset press and hold the power button for at least 3 seconds. The LED indicator will Blue.




To power off the headset press and hold the power button for at least 3 seconds. The LED indicator will off.

# PAIRING


- Press and hold the headset microphone mute button for 3 seconds at same time, you will see the LED indicator blue blinking
- Press and hold the transmitter pairing button for 3 seconds until the LED indicator blue blinking rapidly
- Pairing will be completed automatically, and there is no need to pair again for use

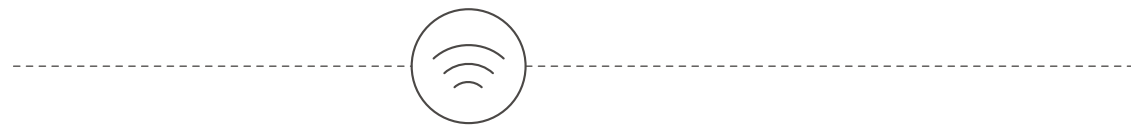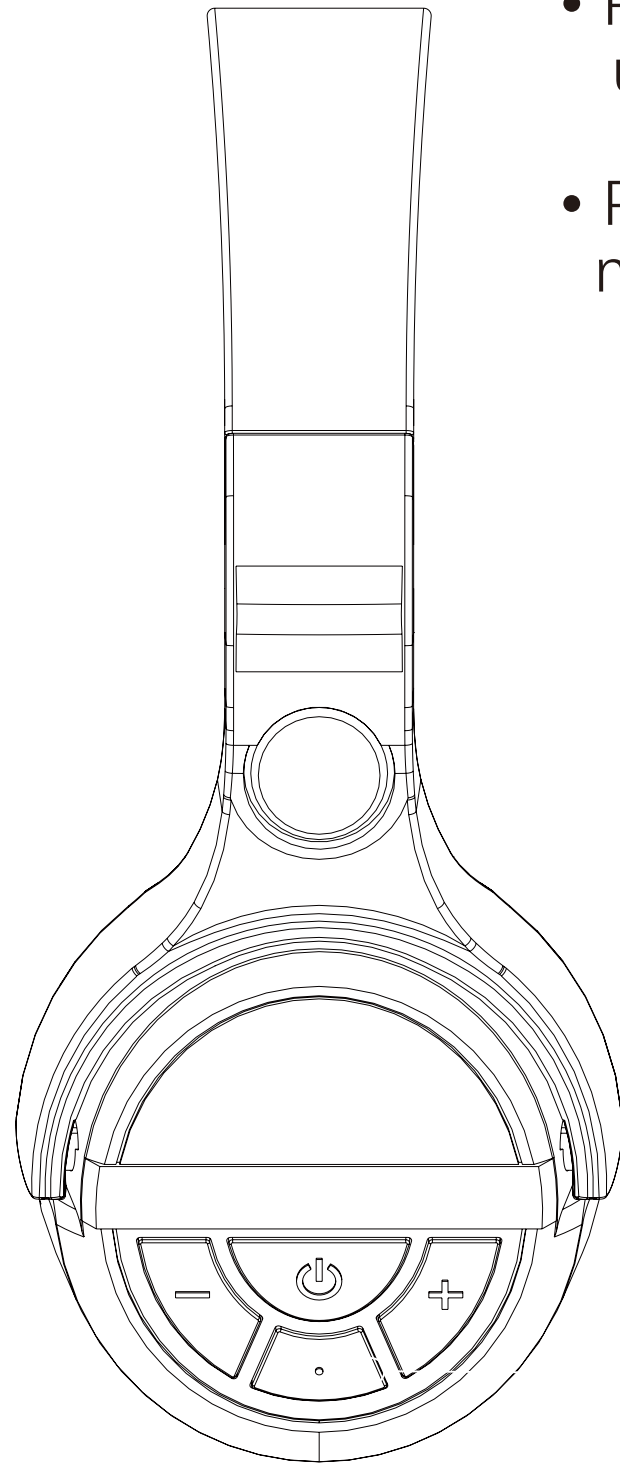



Press and hold the headphone & Wireless transmitter pairing button for 3 seconds, you will see the LED indicator blinking and Turn Blue, the pairing will be done.

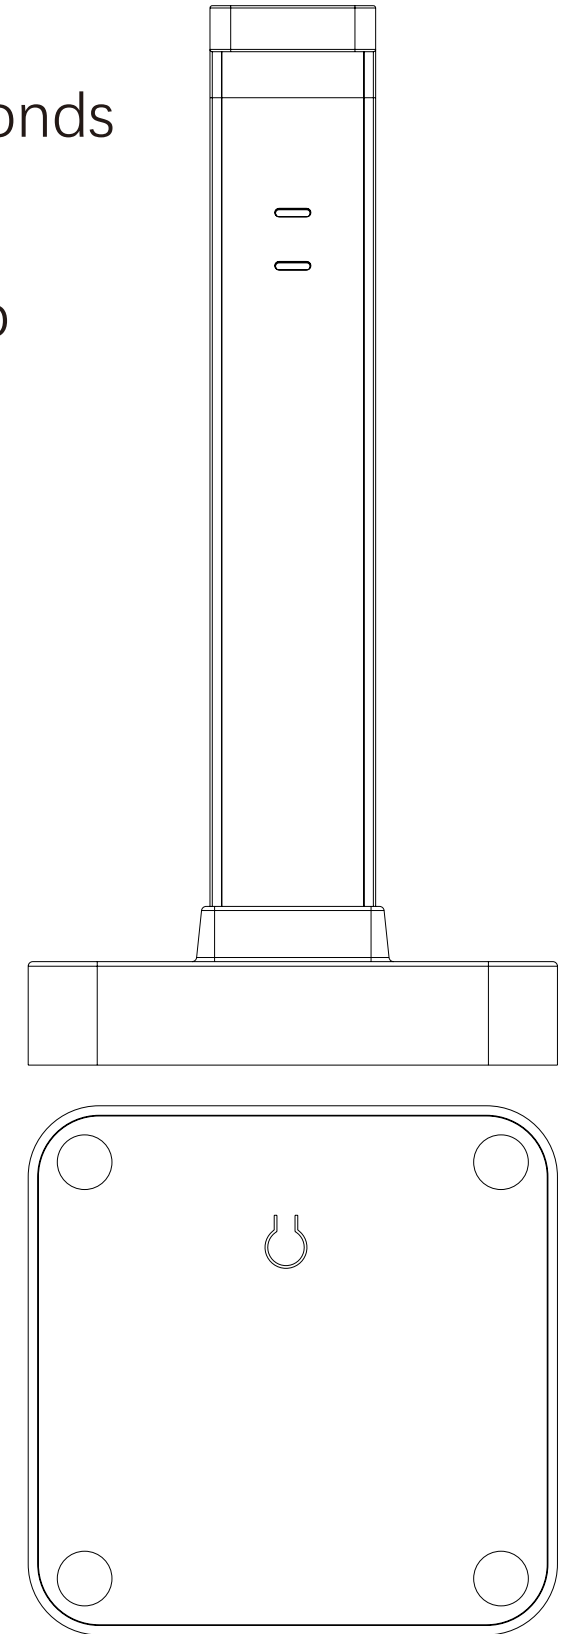



# OTHER CONNECT FOR WIRELESS AUDIO

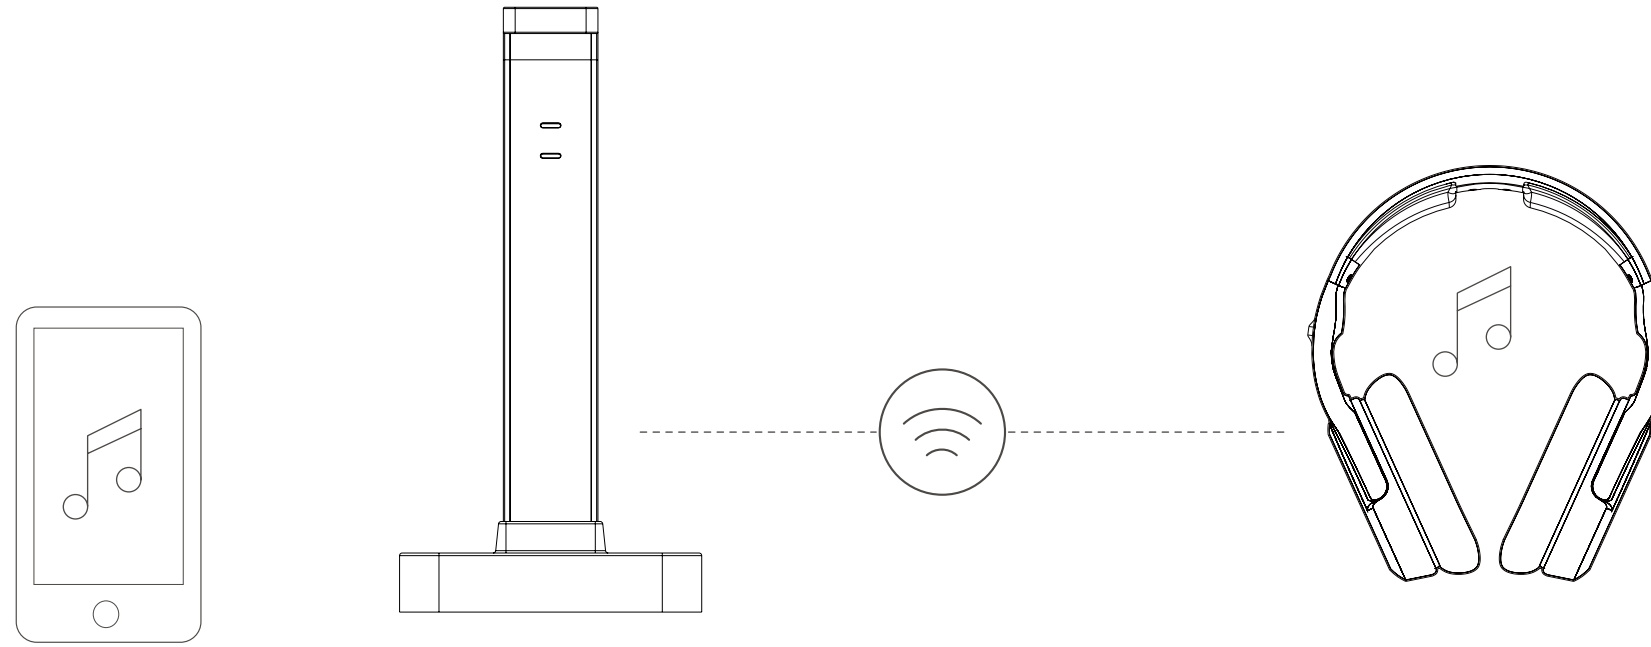

3.5mm TO 3.5mm  
CABLE

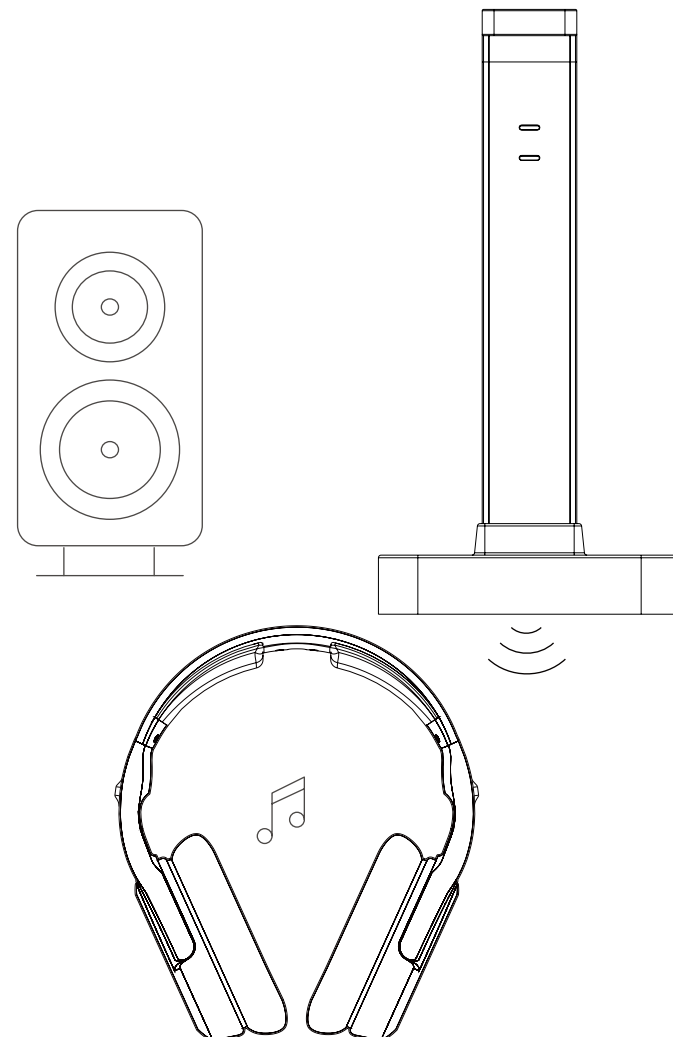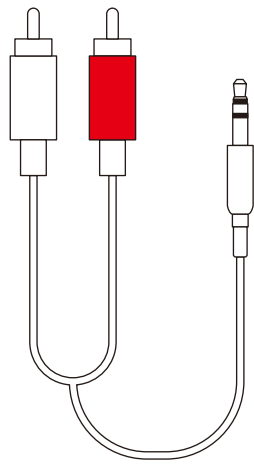


RCA AUDIO CABLE

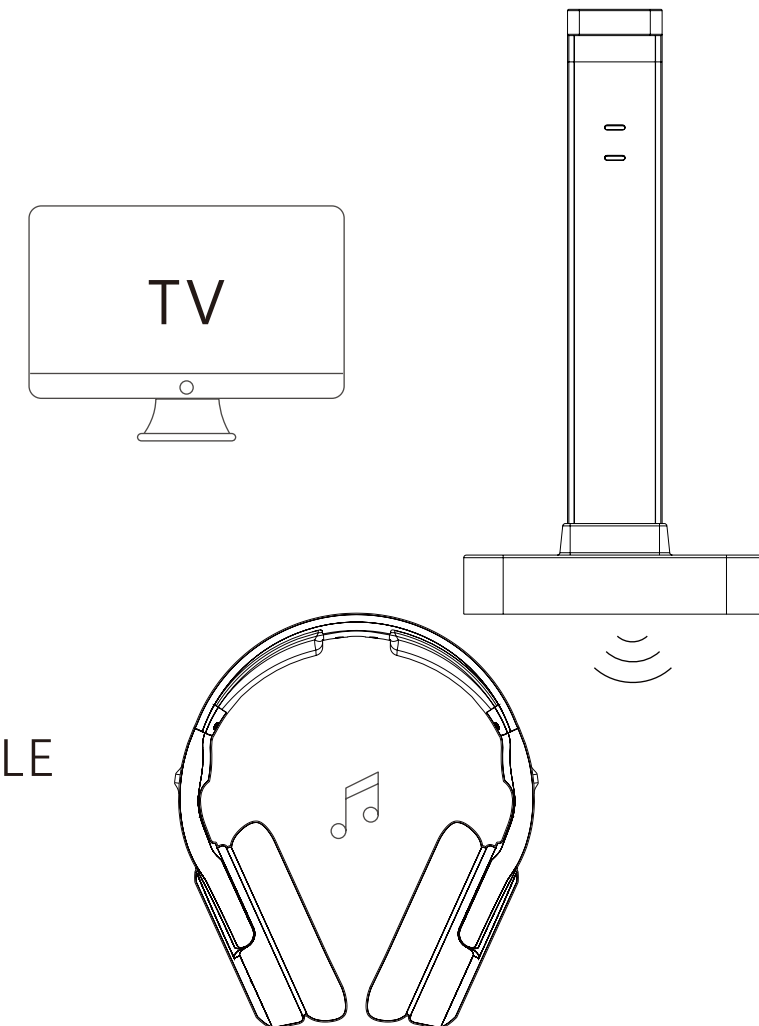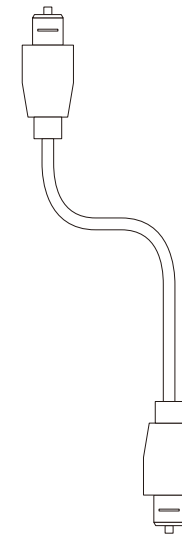


OPTICAL CABLE



# Connect To TV

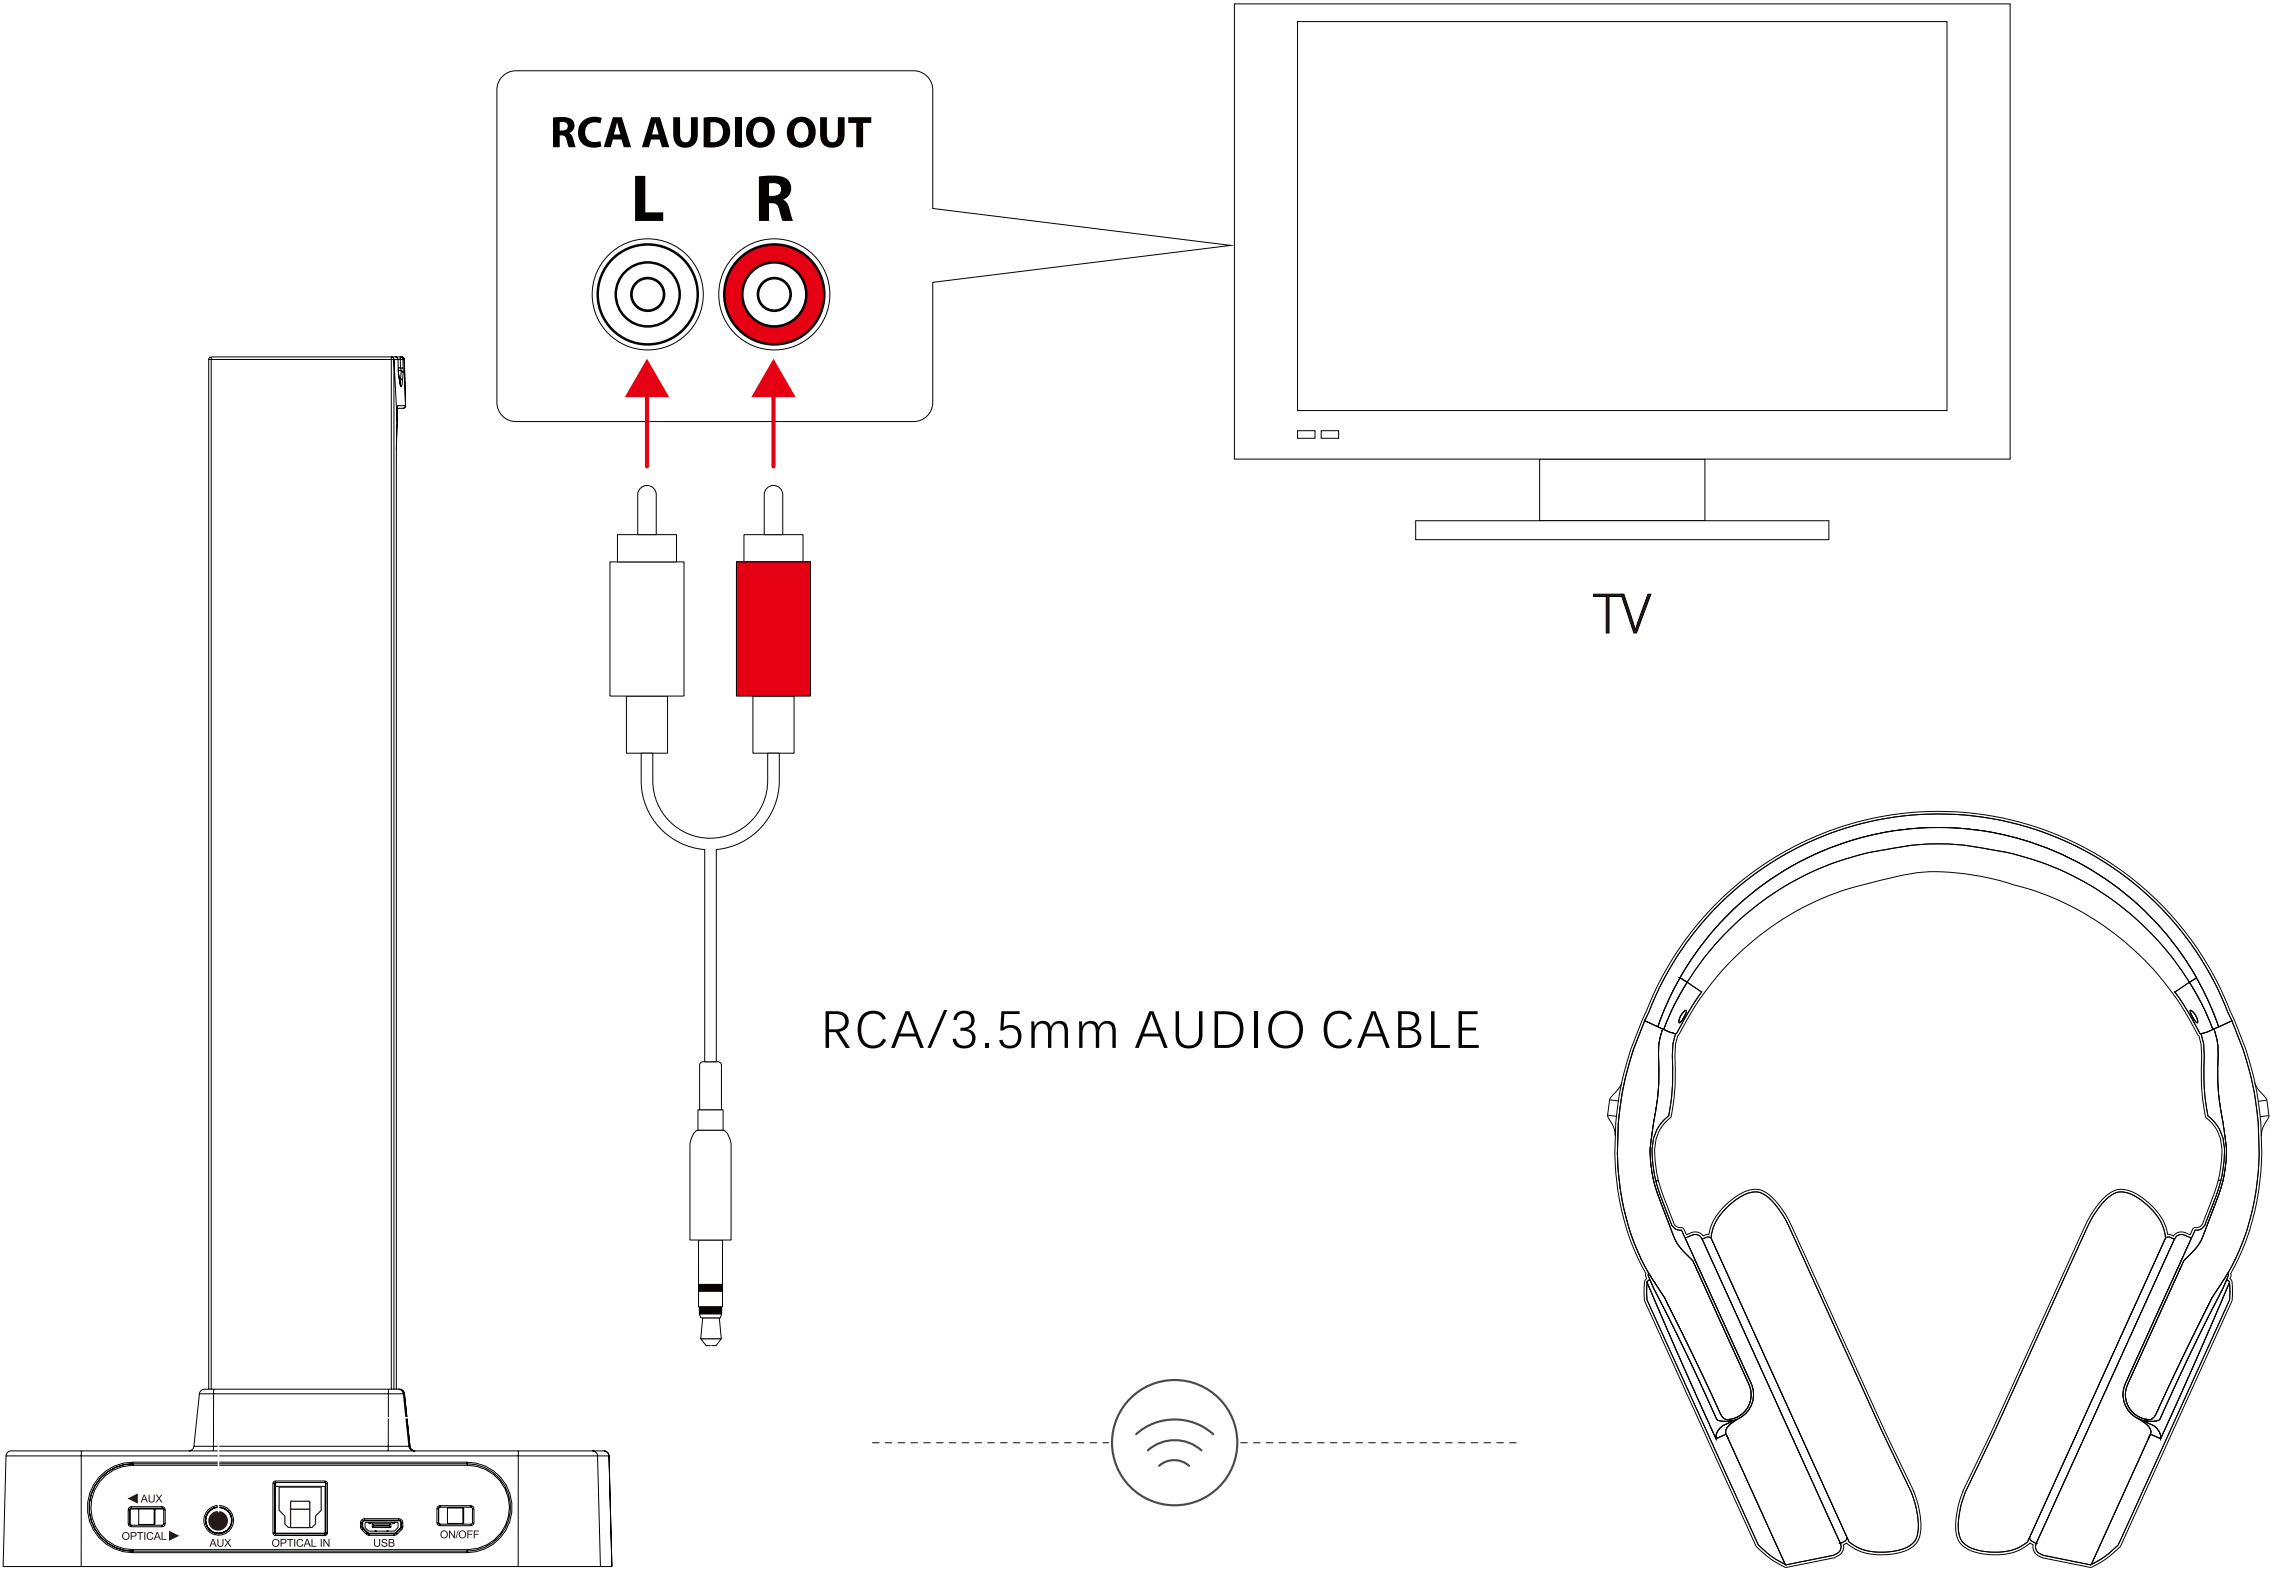

# Connect To SoundBar/Other Audio equipment

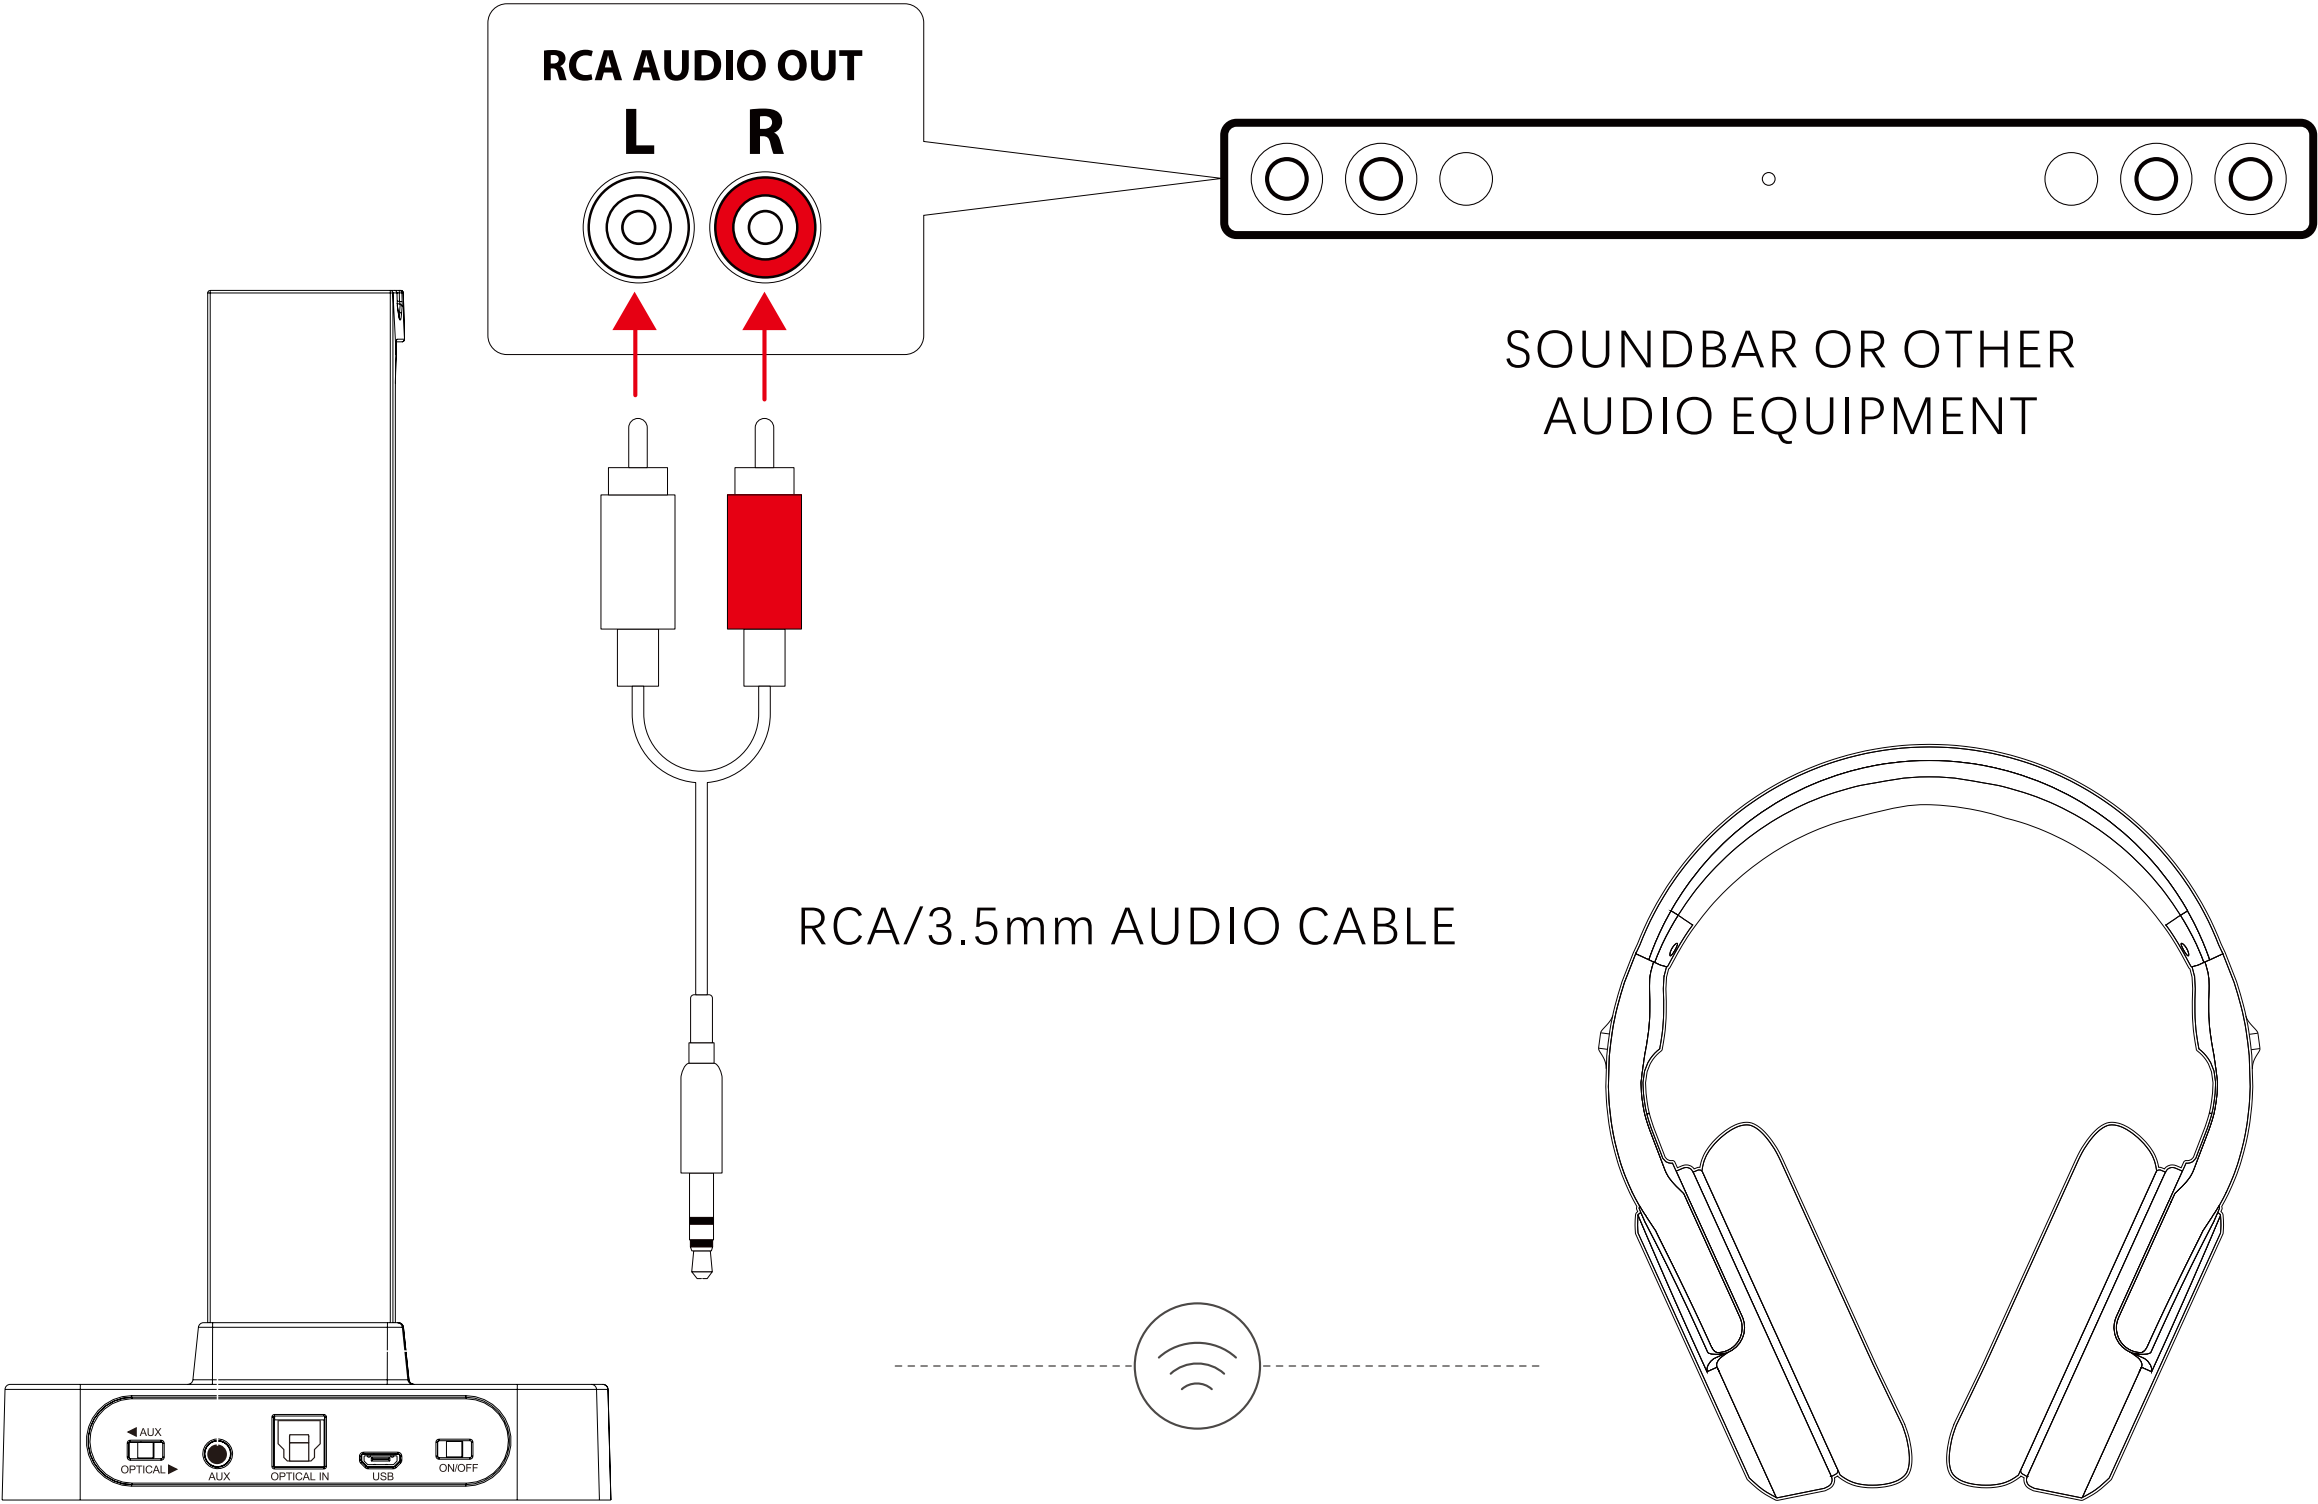



[www.zfxtech.cn](http://www.zfxtech.cn)

## **FCC Statement**

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## **Radiation Exposure Statement**

To comply with FCC RF exposure compliance requirements, this grant is applicable to only mobile configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.