

MEASUREMENT AND TECHNICAL REPORT

DIRECTED ELECTRONICS INCORPORATED 2560 Progress Street Vista, CA 92083

DATE: 22 October 2002

This Report Concerns:	Original Grant: X			Class II Change:		
Equipment Type:	Viper Transmitte	r, Model 47	74V			
Deferred grant requested per 47 0.457(d)(1)(ii)?	CFR	Yes: Defer ur	ntil:	No: X		
Company Name agrees to notify to Commission by: of the intended date of announce date.		N/A duct so th	nat the grant c	an be issued on t	hat	
Transition Rules Request per 15.	37? Yes:		No: X*			
(*) FCC Part 15, Paragraph(s) 15.2 3	31(a), 15.231(b), 1	5.231(c)				
Report Prepared b	y:	10040 M San Die Phone: 8	ERICA, INC lesa Rim Road go, CA 92121- 858 546 3999 858 546 0364			



TABLE OF CONTENTS

			Pages
1.0	GEN	IERAL INFORMATION	3 - 6
	1.1	Product Discription	3 - 5
	1.2	Related Submittal Grant	6
	1.3	Tested System Details	6
	1.4	Test Methodology	6
	1.5	Test Facility	6
	1.6	Part 2 Requirements	6
2.0	SYS	TEM TEST CONFIGURATION	7
	2.1	Justification	7
	2.2	EUT Exercise Software	7
	2.3	Special Accessories	7
	2.4	Equipment Modifications	7
	2.5	Configuration of Test System	7
3.0	DEA	CTIVATION EQUIPMENT/DATA	8 - 15
	RAD	NATED SPURIOUS EMISSIONS EQUIPMENT/DATA	
	3.1	Field Strength Calculation	
	EMIS	SSIONS BANDWIDTH EQUIPMENT/DATA	
	DUT	Y CYCLE MEASUREMENTS EQUIPMENT/DATA	
4.0	ATT	ESTATION STATEMENT	16



1.0 GENERAL INFORMATION

1.1 Product Description

below.	Description - NOTE: Th	is information will be input into your test report as snown
EUT Description:	Keyfob transmitter	
EUT Name:	Viper Transmitter	
Model No.:	474V	Serial No.:
Product Options:		
Configurations to be to	ested:	
Power Requirement		
Regulations require te	sting to be performed at typic	cal power ratings in the countries of intended use. (i.e.,
		AC 50 Hz, single and three phase, respectively)
Voltage: 3V	(CR2032 lithium Battery)	(If battery powered, make sure battery life is sufficient to complete testing.)
# of Phases:		-
Current (Amps/phase	(max)):	Current (Amps/phase(nominal)):
Other:		
Other Special Requ	irements	
, 22 2		
	and/or Operating Enviror	
(ie. Hospital, Smal	I Business, Industrial/Facto	ory, etc.)
Automotive		
EUT Power Cable		
	OR Removable	Length (in meters):
☐ Shielded (☐ Not Applicable	OR Unshielded	

Page 3 of 16



Interface

EUT Interface Ports and Cables

Shielding

	Analog	Digital	ŏ	∀9 5	<u>o</u>					Length In meters	Зетомар	Pormanor	
-	a.	_				-	- · ·	Connector	D . T	-	œ	8	
Туре						Туре	Termination	Туре	Port Termination				
EXAMPLE:								Metallized 9-	Characteristic				
RS232			2			Foil over braid	Coaxial	pin D-Sub	Impedance	6			
		Ш		Ш	Ш								
EUT Software													
Revision Level:													
Description:													
FUT Operation	a M	oho	s to	he	ΤΔς	tad list the or	erating mode	s to he used d	uring test. It is re	commen	hah	the	
									ng of personal co				
peripherals red	quire	s th	nat a	ı sir	nple	program gene	rate a compl	ete line of up	per case H's. Pro	ovide a	gene	eral	
								d in the equip	ment. List all co	de mod	ules	as	
						evel used during vice Representa		nal accietance	is required				
Consult with ye	Juli	OV	FIO	Juci	361	vice ixepresenta	ative ii additioi	iai assisiaiice	is required.				
1. Contir	nuou	s tra	ansm	nissi	on v	with typical mod	ulation.						
EUT System C	om	pon	ents	L	_ist a	and describe all	components	which are part	of the EUT. For I	-CC test	ing a	a	
_		-					•	•	Drive, Motherboar				
Description						Mode	el#	Seria	I #	FCC ID	#		
		nt -	- List	and	d de	scribe all suppo	ort equipment	which is not pa	art of the EUT. (i.	e. periph	erals	5,	
simulators, etc		nt -	- List	and			· ·	<u>'</u>	,	e. periph	erals	5,	
		nt -	- List	and		scribe all suppo	ort equipment	<u>'</u>	art of the EUT. (i.	e. periph	erals	6,	



Frequency	Derived Frequency	Component #	# / Location	Desc	Description of Use			
433.92 MHz				RF C	Carrier frequency			
Power Supply	,							
Manufacturer	Model #	Serial #	Туре					
			Switched	_	(Frequency)			
Power Line Fi	Iters							
Manufacturer	Мо	del #	Location in	EUT				
Critical EMI Co	omponents (Ca	pacitors, ferrite	es, etc.)					
Description		nufacturer	Part # or Value	Qty	Component # / Location			
EMC Cuitical D	Antall December	- 41 FMO D	sign details used to re	ala de la San	de francisco de cian			

Page 5 of 16



1.2 Related Submittal Grant

None

1.3 Tested System Details

The FCC ID's for all equipment, plus descriptions of all cables used in the tested system are:

None

1.4 Test Methodology

Purpose of Test: To demonstrate compliance with the following tests.

TEST	FCC CFR 47#	PASS/FAIL
Deactivation	15.231(a)	Pass
Radiated Spurious Emissions	15.231(b)	Pass
Emissions Bandwidth	15.231(c)	Pass
Duty Cycle Measurements	ANSI C63.4, Appendix 14, Para. 10	Pass

Both Conducted and Radiated testing were performed according to the procedures in FCC/ANSI C63.4 and CSA 108.8-M1983. Radiated testing was performed at an antenna-to-EUT distance of 3 meters (1 - 25 GHz).

1.5 Test Facility

The open area test site and conducted measurement data were tested by:

TÜV AMERICA, INC 10040 Mesa Rim Road San Diego, CA 92121-2912 Phone: 858 546 3999 Fax: 858 546 0364

The Test Site Data and performance comply with ANSI C63.4 and are registered with the FCC, 7435 Oakland Mills Road, Columbia Maryland 21046. All Measurement Data is acquired according to the content of FCC Measurement Procedure and ANSI C63.4, unless supplemented with additional requirements as noted in the test report.



2.0 SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was initially tested for FCC emissions in the following configuration:

See Block Diagram

2.2 EUT Exercise Software

None

2.3 Special Accessories

None

2.4 Equipment Modifications

None

2.5 Configuration of Test System

See Block Diagram



3.0 DEACTIVATION EQUIPMENT/DATA RADIATED SPURIOUS EMISSIONS EQUIPMENT/DATA

The following data lists the significant emission frequencies, measured levels, correction factor (which includes cable and antenna corrections), the corrected reading, and the limit.

EMISSIONS BANDWIDTH EQUIPMENT/DATA
DUTY CYCLE MEASUREMENTS EQUIPMENT/DATA

See following page(s).





3.1 Field Strength Calculation

If a preamplifier was used during the Radiated Emission Testing, it is required that the amplifier gain must be subtracted from the Spectrum Analyzer (Meter) Reading. In addition, a correction factor for the antenna, cable used and a distance factor, if any, must be applied to the Meter Reading before a true field strength reading can be obtained. In the automatic measurement, these considerations are automatically presented as a part of the print out. In the case of manual measurements and for greater efficiency and convenience, instead of using these correlation factors for each meter reading, the specification limit was modified to reflect these correlation factors at each frequency value so that the meter readings can be compared directly to the modified specification limit. This modified specification limit is referred to as the "Corrected Meter Reading Limit" or simply the CMRL, which is the actual field strength present at the antenna. The quantity can be derived in the following manner:

Corrected Meter Reading Limit (CMRL) = SAR + AF + CL - AG - DC

Where, SAR = Spectrum Analyzer Reading

AF = Antenna Factor

CL = Cable Loss

AG = Amplifier Gain (if any)

DC = Distance Correction (if any)

Assume the following situation: A meter reading of 29.4 dBuV was obtained from a Class A computing device measured at 83 MHz. Assume an antenna factor of 9.2 dB, a cable loss of 1.4 dB and amplifier gain of 20.0 dB at 83 MHz. The final field strength would be determined as follows:

CMRL = 29.4 dBuV + 9.2dB = 1.4 dB - 20 dB/M - 0.0 dB

CMRL = 20.0 dBuV/M

This result is well below the FCC and CSA Class A limit of 29.5 dbuV/m at 83 MHz.

For the manual mode of measurement, a table of corrected meter reading limit was used to permit immediate comparison of the meter reading to determine if the measure emission amplitude exceeded the specification limit at that specific frequency.



Test Conditions: Emissions

Report No.

15.231(b) Field Strength of Emissions

Photos taken? Yes

10/8/02

Roof, 3-meter open site

Test			

Test	Equipment Used:					
	Model Number	Prop. #	Description	Manufacturer	Serial No.	Cal. Dates
	hp8566B	407	Spectrum Analyzer	Hewlett Packard	2311A02209	11/13/02
	PreAmp 2-20 GHZ	719	PreAmp	TUV PS	na	n.c.r.
	3146	243/6641	Antenna, Log Per.	Electro Mechanics Co	106X	4/11/03
	3115	251	Antenna, Horn	Electro Mechanics Co	2595	12/1/03
	Cable 1	732	30 ' cable	United Microwave Products	na	n.c.r.
	Cable 2	656	10" cable	United Microwave Products	na	n.c.r.
	FF 6548-2	777	900 MHz High Pass Filter	Sage	006	n.c.r.

Test Conditions:

15.231(a) Deactivation

15.231(c) Bandwidth

15.231(b) Duty Cycle

SR 2, Shielded Room, 12' x 24' x 10', Metal Chamber

hp8566B	6676	Spectrum Analyzer	Hewlett Packard	2332A02751	8/5/03
CBL6111	460	Antenna, Bilog	Chase	1013	n.c.r.

- 1. No emissions within 20 dB of the FCC Part 15.109 limits were noted during testing.
- 2. Duty cycle was calculated by:

 $[(12 \times 480 \text{ us}) + (50 \times 880 \text{ us}) + (16 \times 580 \text{ us})]/100 \text{ ms} \times 100\% = 57.44 \%$ Duty Cycle = 20 log (.5744) = -4.8 dB

- 3. Deactivation occurred as the operater releases the transmit key.
- 4. 20 dB Bandwidth was measured to be 11.9 kHz which is less than 0.25 % of the operating frequency or 1.08 MHz. .0025 x 433.9 MHz = 1.08 MHz
- 5. Field Strength Limit

Aveage Limit = $20 \times Log [3750 dBuV + (Fo - 260) \times (12500-3750)/(470-260)]$

Fo = 433.9 MHz

Average Limit = 80.8 dBuV

6. Spurious Field Strength Limit

Aveage Limit = $20 \times Log [375 dBuV + (Fo - 260) \times (1250-375)/(470-260)]$


Fo = 433.9 MHz

Average Limit = 80.8 dBuV

Peak Limit = Average Limit + 20 dB

Page 10 of 16



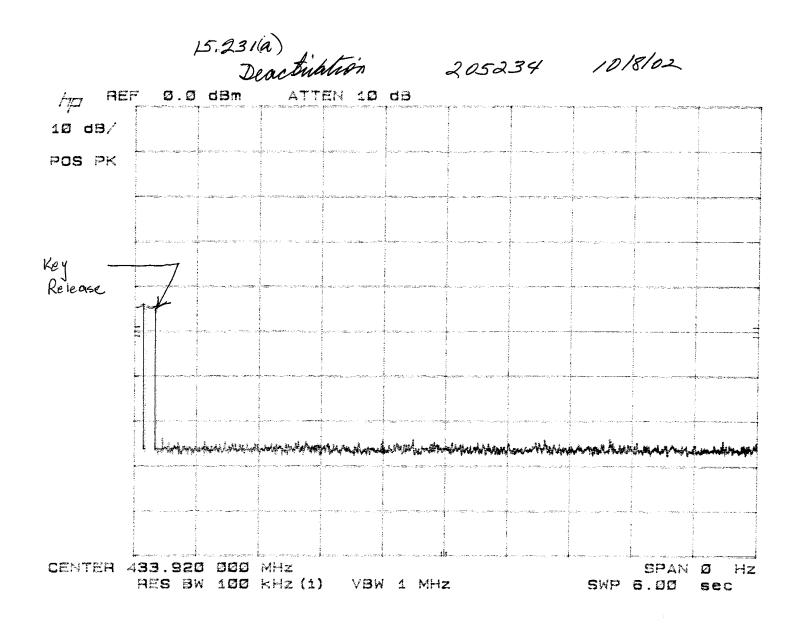

TESTER:

Alan Laudani

FCC Part 15 para 15.231(b)

CUSTOMER: Directed Electronics Inc.

TEST DIST:

3 Meters Roof

N/A

243

474V Vehicle Remote Control EUT:

TEST SITE:

EUT MODE: Transmiting

DATE:

BICONICAL:

Oct. 8, 2002

LOG:

OTHER: 251

NOTES:

57% Duty Cycle=


above 1GHz: RBW & VBW 1 MHz for Pk; AVG = PK - 20LOG(Duty Cycle) below 1GHz: RBW & VBW 100 kHz for Pk; AVG = PK - 20LOG(Duty Cycle)


CF = Antenna Factor + Cable Loss - Preamplifier Gain


												v.beta23	1	
FREQ (MHz)	VERT. pk	(dBuv) DCav	HORIZ pk	(dBuv) DCav	CF (dB/m)	MAX LEVE pk	L (dBuV/m) av		LIMIT IV/m) av	MAR pk	GIN (dB) av	EUT Rotation	Antonna Height	Notes
433.920	52.5	47.7	64.5	59.7	16.9	81.4	76.6	100.8	80.8	-19.4	-4.3	110	1	
867.840	32.0	27.2	37.0	32.2	23.5	60.5	55.7	80.8	60.8	-20.3	-5.1	100	1	
1301.760	65.8	61.0	65.3	60.5	-11.4	54.4	49.6	74.0	54.0	-19.6	-4.4	0	1.3	
1735.680	50.1	45.3	59.9	55.1	-8.2	51.7	46.9	80.8	60.8	-29.1	-14.0	20	1	
2169.600	49.0	44.2	53.4	48.6	-5.5	47.9	43.1	80.8	60.8	-32.9	-17.7	350	1.2	
2603.520	55.2	50.4	53.3	48.5	-3.5	51.7	46.8	80.8	60.8	-29.2	-14.0	50	1.5	
3037.440	49.4	44.6	47.1	42.3	-2.1	47.3	42.5	80.8	60.8	-33.5	-18.3	5	1.8	
3471.360	47.0	42.2	50.0	45.2	-0.3	49.7	44.9	80.8	60.8	-31.1	-16.0	75	1	
3905.280	44.6	39.8	48.9	44.1	0.9	49.8	45.0	74.0	54.0	-24.2	-9.0	75	1	
4339.200	44.2	39.4	45.4	40.6	0.5	45.9	41.1	74.0	54.0	-28.1	-12.9	90	1.1	
													-	
				-										
											-			
- +														
	-													
									-					
		i i	i											





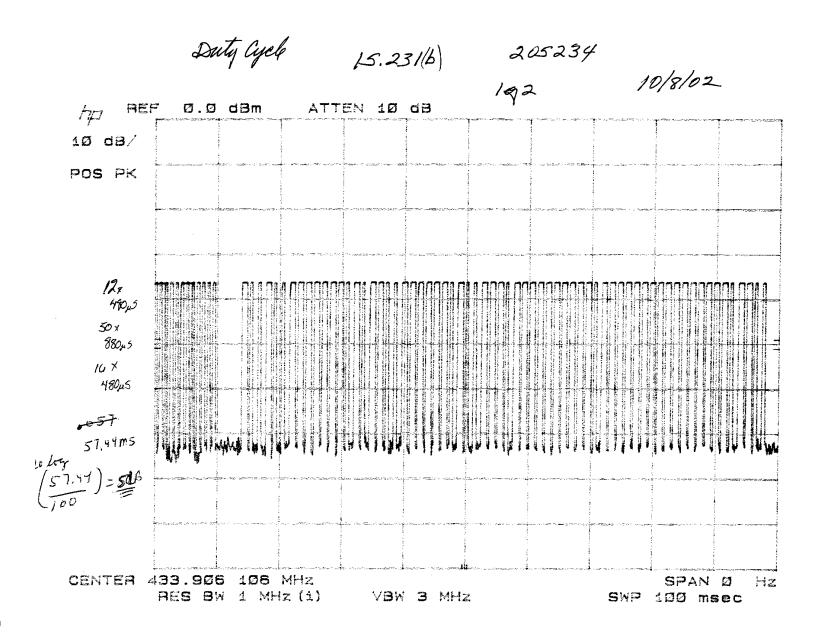

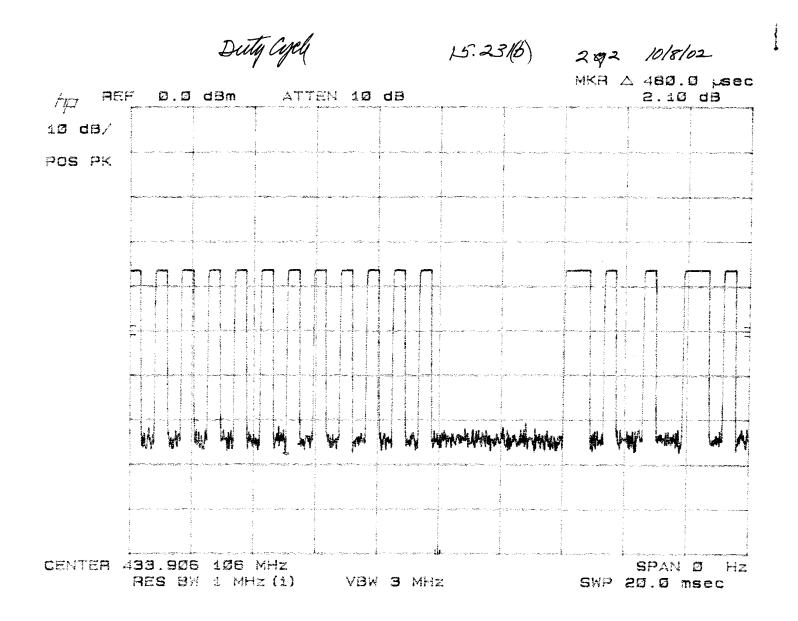

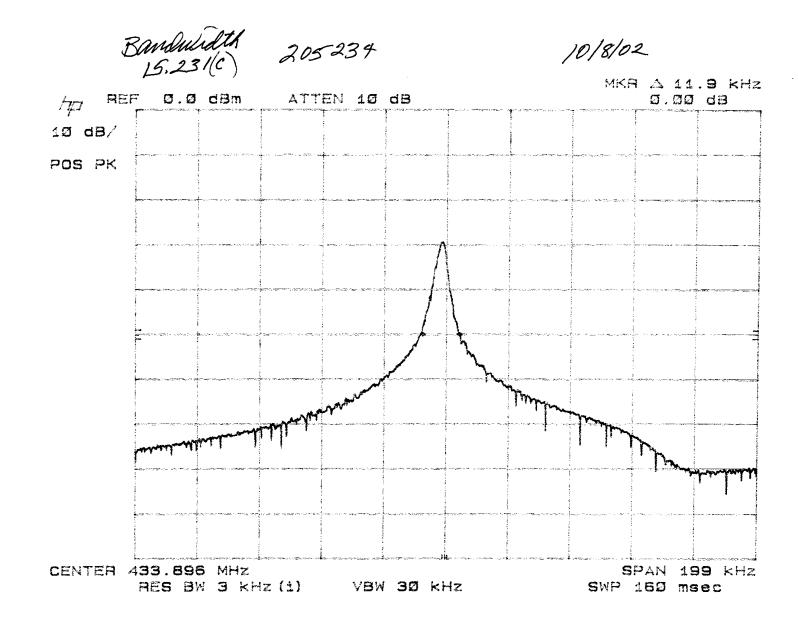



4.0 ATTESTATION STATEMENT

GENERAL REMARKS:

SUMMARY:

All tests were performed per CFR 47, Part(s) 15.231(a), 15.231(b), 15.231(c)

■ - Performed

The Equipment Under Test

■ - Fulfills the requirements of CFR 47, Part(s) 15.231(a), 15.231(b), 15.231(c)

- TÜV AMERICA, INC. -

Responsible Engineer:

Responsible Technician:

L. Lacedoni

Jim Owen (EMC Chief Engineer)

Alan Laudani (EMC Technician)