
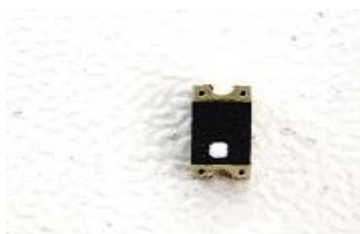


Ceramic Antenna Specification





Summary:

ITEM	DONGLE
Model Name	Ceramic Antenna
MAX Gain	2.0395dBi
Azimuth Beam Pattern	Omni-directional
Impedance	50 Ohm
Antenna Length	3.2mm
Manufacture	SHENZHEN AONI ELECTRONIC CO.,LTD
Address:	Room 412, Building 7, Yungu Phase II, No. 2, Pingshan Road, Taoyuan Street, Nanshan District, Shenzhen Contact Tel: 18118726256





Dimension and Terminal Configuration

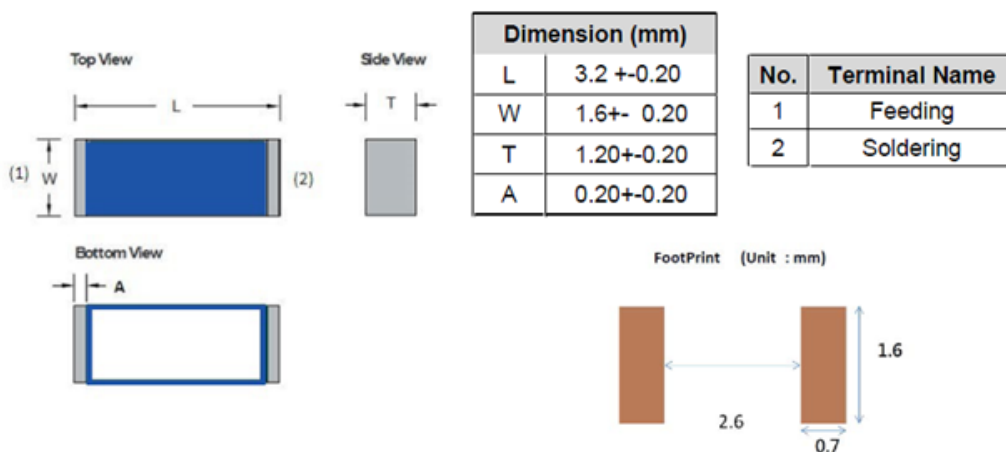

Freq(MHz)	Gain(dBi)	Efficiency(dB)	Efficiency(%)
2400	1.9564	-1.5703	69.6571
2410	2.0386	-1.5281	70.3376
2420	1.9251	-1.6044	69.1128
2430	1.8992	-1.6101	69.0222
2440	2.0395	-1.4927	70.9144
2450	1.9602	-1.5573	69.8667
2460	1.7842	-1.7748	66.4535
2470	1.9018	-1.7159	67.3610
2480	1.9349	-1.6985	67.6312
2490	1.9203	-1.8277	65.6492
2500	1.8941	-1.8779	64.8954

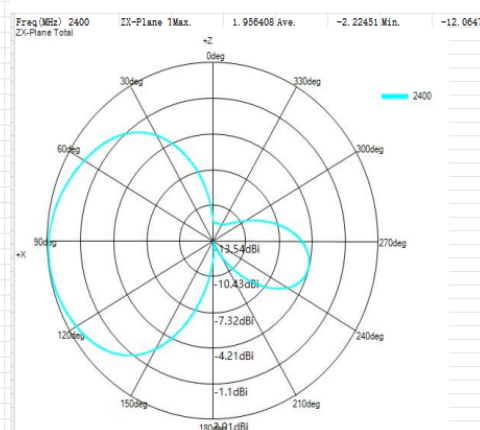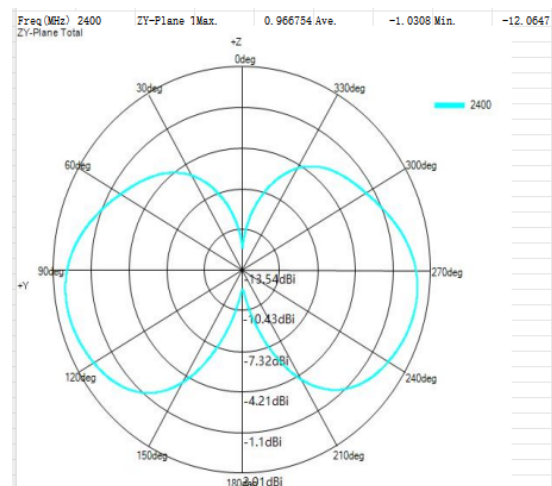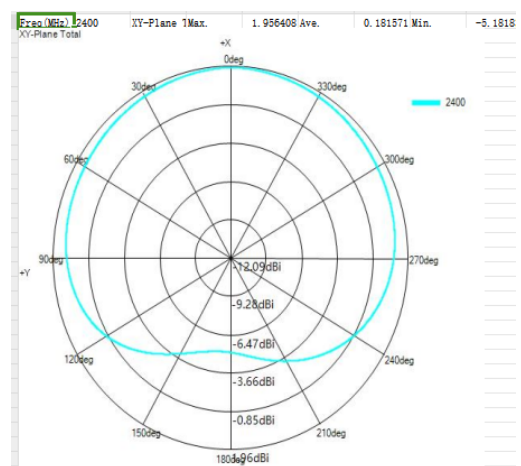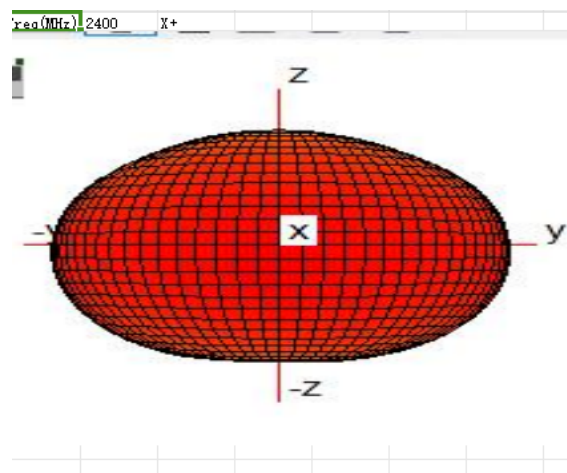

Freq(MHz)	Gain(dBi)	Efficiency(dB)	Efficiency(%)
2400	1.9564	-1.5703	69.6571
2410	2.0386	-1.5281	70.3376
2420	1.9251	-1.6044	69.1128
2430	1.8992	-1.6101	69.0222
2440	2.0395	-1.4927	70.9144
2450	1.9602	-1.5573	69.8667
2460	1.7842	-1.7748	66.4535
2470	1.9018	-1.7159	67.3610
2480	1.9349	-1.6985	67.6312
2490	1.9203	-1.8277	65.6492
2500	1.8941	-1.8779	64.8954

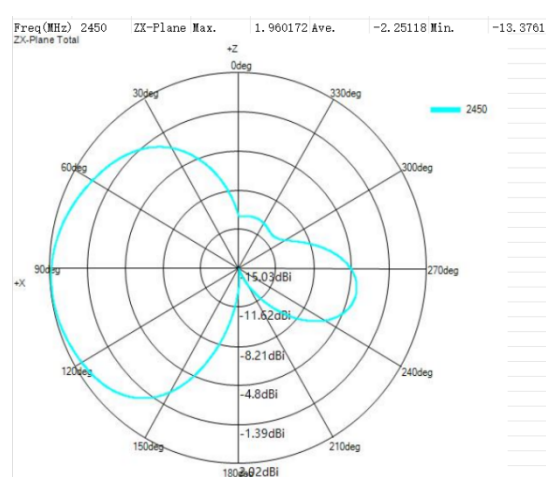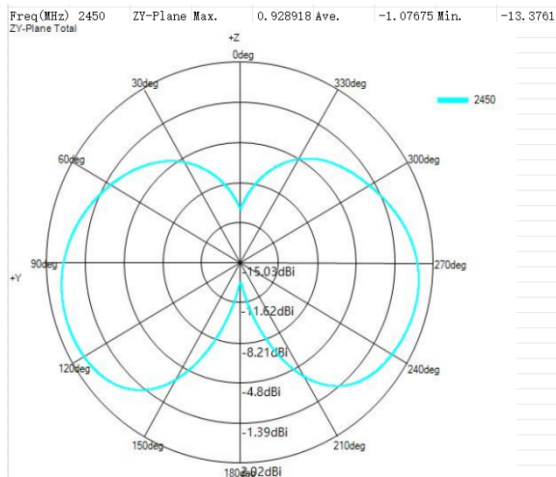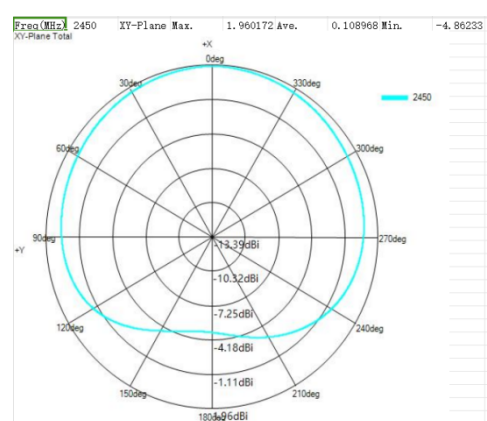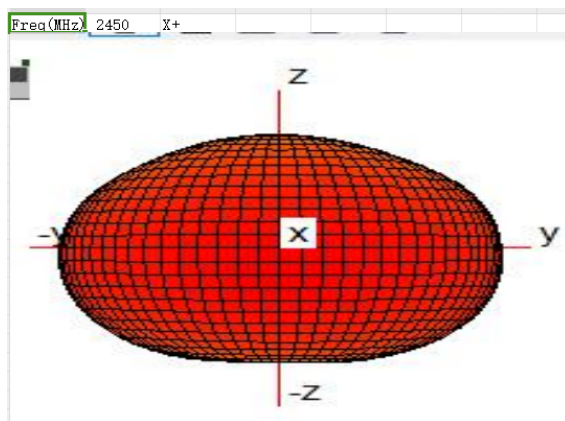

Freq(MHz)	Gain(dBi)	Efficiency(dB)	Efficiency(%)
2400	1.9564	-1.5703	69.6571
2410	2.0386	-1.5281	70.3376
2420	1.9251	-1.6044	69.1128
2430	1.8992	-1.6101	69.0222
2440	2.0395	-1.4927	70.9144
2450	1.9602	-1.5573	69.8667
2460	1.7842	-1.7748	66.4535
2470	1.9018	-1.7159	67.3610
2480	1.9349	-1.6985	67.6312
2490	1.9203	-1.8277	65.6492
2500	1.8941	-1.8779	64.8954

