

Shenzhen Yi Sheng Bang technology Co., LTD
101, Building C, Shenzhen Qianwan Hard Science and Technology Industrial Park, Bao 'an District,
Shenzhen, China

深圳市亿圣邦科技有限公司

The Holy bond Electronics Co., Ltd. Antenna Test Report

Customer: 科金明

Project: T800

Product: WIFI Antenna—FPC

Report date: 2024.06.07

Prepared by : 范新竹

Checked by : Eason Huang

Approved by :

Purpose

This report is to measure the performance of SLK for Master Antenna on 科金明. All measure data are showed below.

Content

1. Product Overview

2. Test Result

2.1 VSWR/S11



2.2 Antenna Parameters

2.3 WIFI Antenna TRP/TIS


2.4 WIFI Antenna Gain/Efficiency/3D DATA

3. Conclusions

1. Product Overview

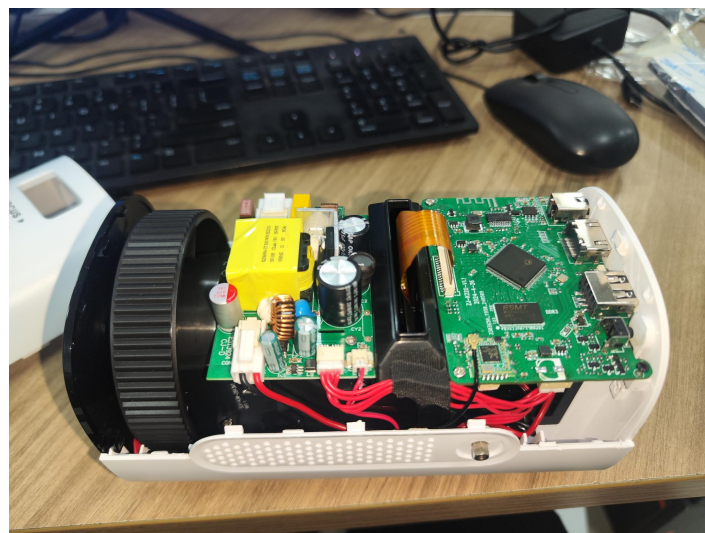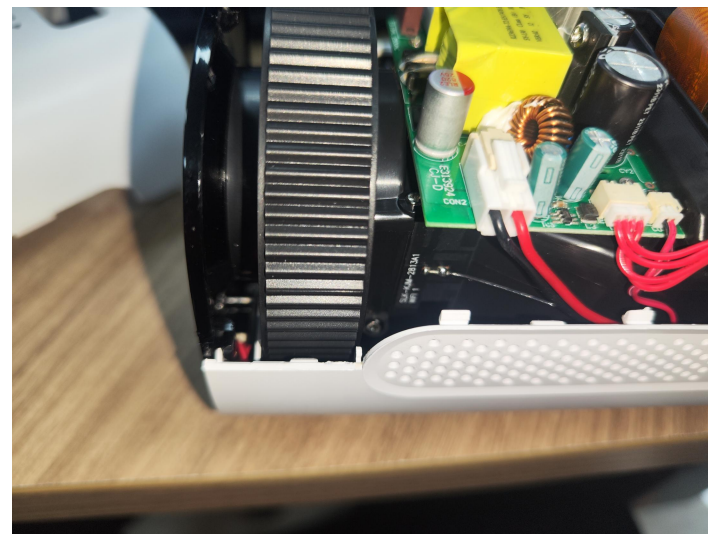

文件编号	SLK-KJM-2813A1-M-100I-B	单位: mm	版次	标记	更改描述	日期
			A1		新增物料	24-5-23

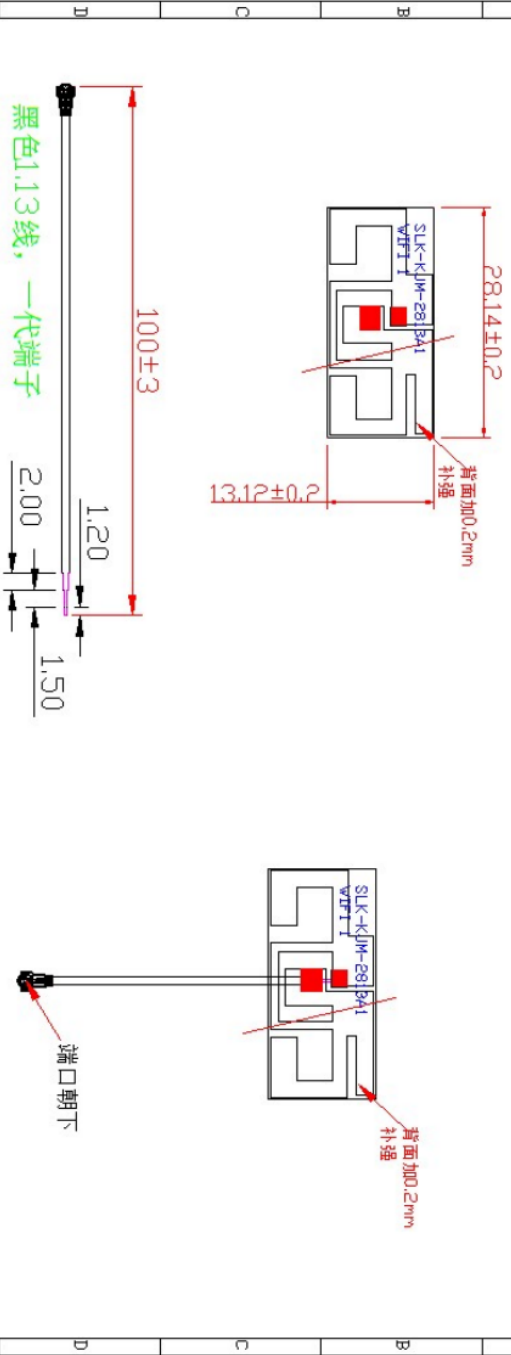



技术要求:

- 1、FPC基材: PI, 阴影部分为铜箔,正表面上**黑油**。
- 2、背胶型号: 3M300。
- 3、红色部位铜**外露**,表面无油污, 杂质, 毛刺等。
- 4、手撕位离型纸切断勿伤及线路。
- 5、重要尺寸用“*”标注 (制作模具要控制, 模具验收必测)
- 6、Cable线为黑色1.13线, 线长100MM 一代端子

设计	刘才亮			名 称	
审核	范新竹			客户料号	
批准	黄 震	重量	数量	比 例	
				1:1	
		第 1 张 共 1 张			图 号
		深圳市亿圣邦科技有限公司			


2. Test Result

2.1 VSWR/S11

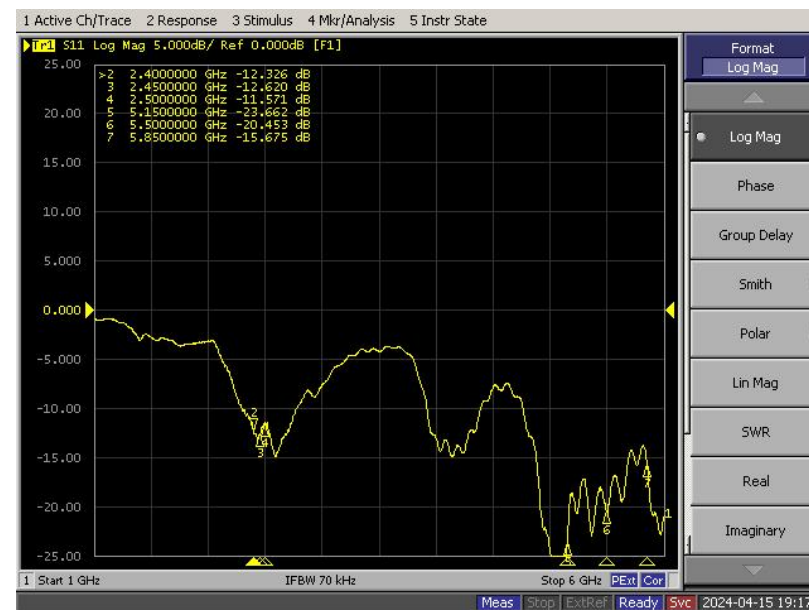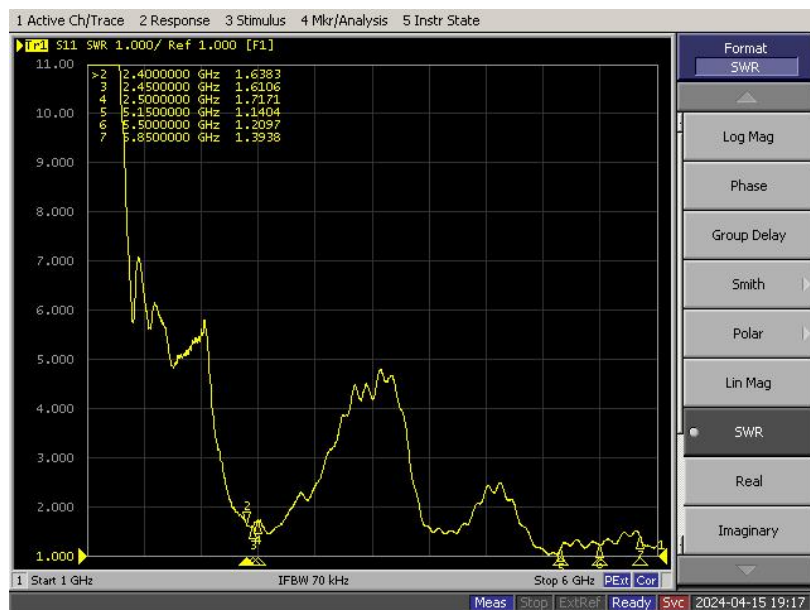

2. Test Result

2.2 Antenna Parameters

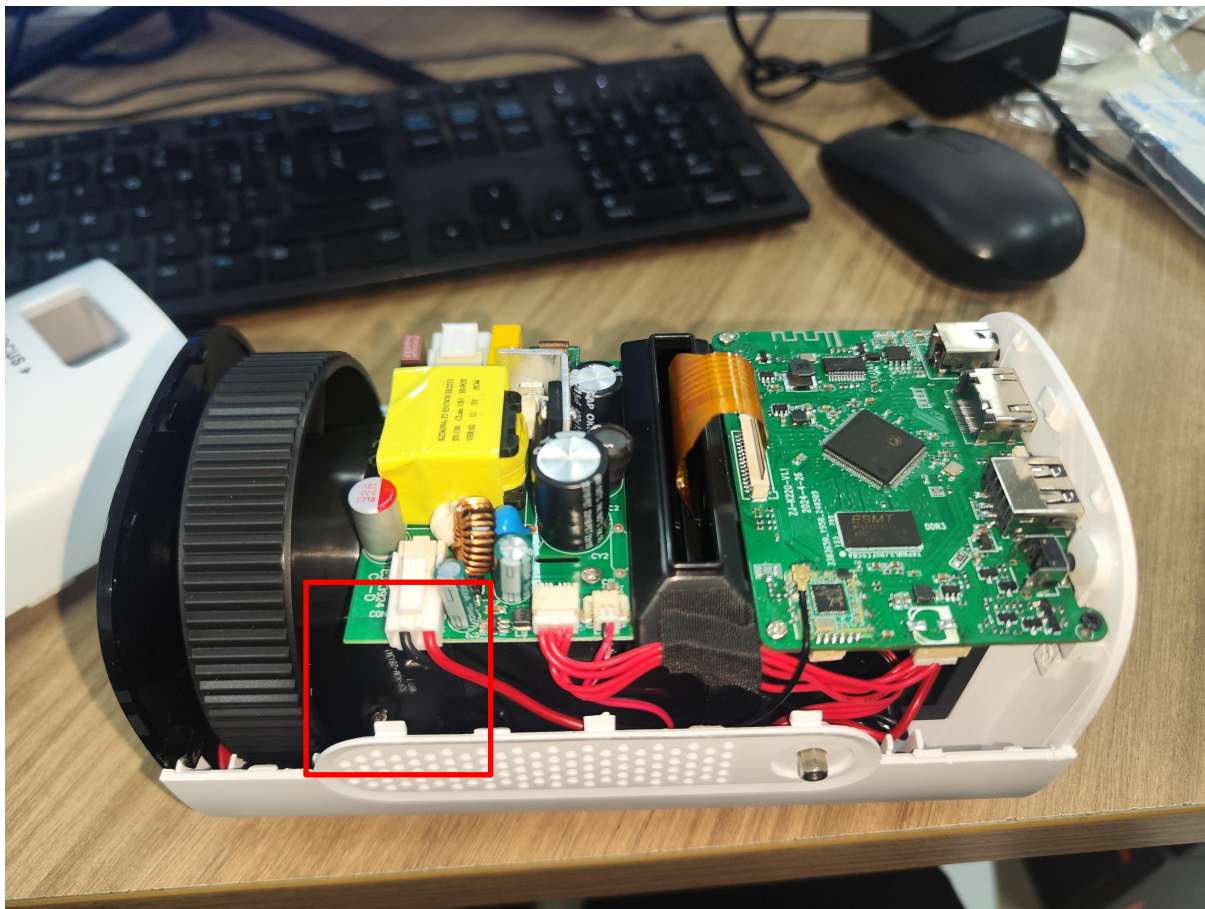

2. Test Result

2.3 WIFI Antenna TRP/TIS


WIFI	CH	功率(54M)	灵敏度(54M)	WIFI	CH	功率(54M)	灵敏度(54M)
802.11a	36	10.89	-74.04	802.11g	1	15.24	-65.08
	149	14.09	-74.6		6	15.52	-64.21
	165	13.98	-74.26		11	15.48	-64.59
WIFI	CH	功率(11M)	灵敏度(11M)	WIFI	CH	功率(MCS7)	灵敏度(MCS7)
802.11b	1	16.26	-78.38	802.11n	1	15.05	-60.85
	6	16.95	-78.92		6	15.17	-60.09
	11	17.11	-78.12		11	15.46	-60.37

2. Test Result


2.4 WIFI Antenna Gain/Efficiency/3D DATA

Frequency (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500	5150	5350	5500	5650	5850
Efficiency (dBi)	-3.03	-2.88	-2.55	-2.57	-2.68	-2.74	-2.56	-2.84	-2.75	-2.68	-2.84	-2.61	-2.52	-2.71	-2.62	-2.74
Gain (dBi)	1.91	1.99	2.21	2.19	1.96	1.87	2.22	2.13	2.33	2.63	2.66	2.49	2.44	2.16	2.27	2.95
Efficiency (%)	49.77	51.52	55.64	55.31	54.00	53.23	55.41	52.05	53.05	53.91	51.97	54.81	55.94	53.52	54.60	53.16


2450.0MHz H+V, Eff: 53.2%

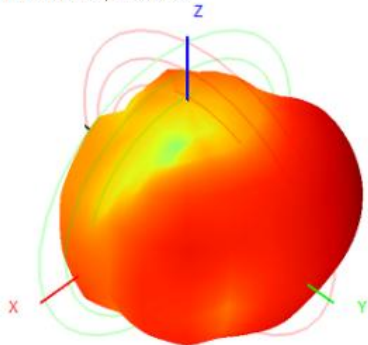


Back View



5850.0MHz H+V, Eff: 53.2%



Back View





3. Conclusions

Thank you