
气传导无线耳机

使用说明书

健康・舒适・释放双耳

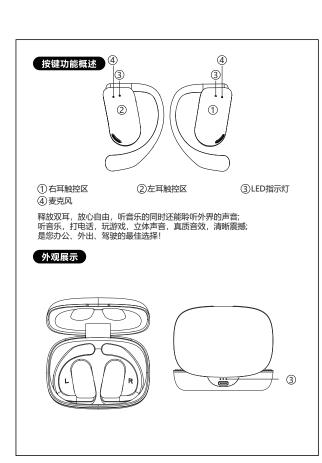

控制说明

开机: 1.耳机从充电仓取出后自动开机;

2.耳机关机状态下,长按触控区2秒耳机开机,注意: (左右耳需单独操作)

**开机时耳机指示灯及提示音:**白灯长亮3秒然后白灯和橙灯交替闪烁;耳机提示音:"开机" **关机**: 1.把耳机放回充电仓充电时,耳机自动关机

2.长按耳机触控区5秒关机,注意: (左右耳需单独操作)

3.断开蓝牙5min后,耳机自动关机; 4.电量耗尽时,耳机自动关机;

**关机时耳机指示灯及提示音:**橙灯闪烁;耳机提示音:"蓝牙正在准备关机"

连接BT: 1.首次使用耳机,左右耳开机在3秒内配对成功;

2.耳机开机后自动进入配对状态,指示灯为白灯、橙灯交替闪烁,耳机提示音:

"等待连接",此时打开您所要配对的设备蓝牙并搜索耳机,点击蓝牙名Monster Airmars XKO07进行配对;

3.耳机从充电仓拿出来,左右耳机自动进行配对与回连;

配对成功: 开机状态下, 耳机自动进入搜索配对模式, 白灯每5S闪烁一次, 首次开启蓝牙 需手动点击连接,耳机提示音:"蓝牙已配对成功"

**断开蓝牙**: 手动或超距离断开蓝牙,白灯、橙灯交替闪烁,耳机提示音:"等待连接"

播放/暂停:连接音乐状态下双击左耳/右耳触控区进行音乐播放/暂停;

上一曲:连接音乐状态下,三击左耳触控区,播放上一曲; **下一曲**:连接音乐状态下,三击右耳触控区,播放下一曲;

**音量加**:通话/音乐状态下,单击右耳触控区音量增加;(最大音量时播放音乐提示音)

**音量减**: 诵话/音乐状态下, 单击左耳触控区音量减小;

语音助手: 蓝牙连接状态下,长按左耳/右耳触控区2秒后松开进入语言模式,再按2秒后松开退出;

接听/挂断/拒接:来电状态下,耳机白灯快闪双击左耳/右耳触控区为接听,再双击左耳

或右耳触控区挂断:来电状态下,长按2秒左耳或右耳触控区为拒接;

恢复出厂设置: 开机状态下,单击五次触控区,白灯/橙灯交替闪烁,表示恢复出厂设置成功。

耳机提示音: "等待连接"

低电量提示: 电量为20%时橙灯每2s闪一下, "咚咚"提示音每60s提示一次;

**充电:** 1、充电仓 (正在充电) 给耳机充电,耳机充电时倒了常亮,充满后转为白灯,1min后熄灭。 充电仓橙灯慢闪,充满后橙灯常亮;

2、充电仓(不在充电)给耳机充电,耳机充电时偿灯常亮,充满后转为白灯,1min后熄灭。 充电仓白灯常亮,充满耳机后白灯熄灭;

## 充电器和电池

## 充电器和电池

使用任何充电器给本耳机充电前请检查充电器的规格标注是否符合要求(建议充电器 输出电压为DC5V+/-0.25V,输出电流为: 100mA-500mA),充电电压过高极有可 能损坏蓝牙耳机

警告: 仅可使用经过认可与此配套的充电器,使用其它规格的充电器可能违反对设备的 认可和保修条款,并可能导致危险。如果出厂是配充电线出货的,需连接通过3C认证的 充电器或电脑给其充电。禁止对本产品严重碰撞,严重撞击有可能损坏电子主板及电池。

### 为电池充电

本耳机使用内置式不可拆卸充电电池,请勿尝试从耳机中取出电池,以免损坏耳机。长 期不使用耳机时,请将其存放到于燥涌风的地方,并每个月给其充电一次。

1.当连接的耳机橙灯常亮,并听到低电量提示音时,表示耳机电量不足。如果继续使用会 自动关机,此时需要充电,请将耳机放回充电仓。

2.将充电器插到交流电源插座上。

3.充电时充电仓指示灯橙灯闪烁。如果充电未开始,请断开电源与充电仓的连接,然后将 其重新插入耳机再试一次。充电仓电池充满电后,橙灯闪烁改为常亮,此时断开充电器与 电源插座和充电仓的连接。

4.实际通话时间和待机时间可能与手机的使用设置、使用方法和环境而存在差异。

# 将耳机旋转到合适的角度,以体验最佳效果。

### 产品规格

待机时间	2db
充电时间3小时 双耳机重量21.5	g
BT版本5.3 蓝牙连接距离10米	


- 长时间听大音量的音乐可能会带来不适感,请尽可能使用中等左右的音量,避免长
- 无论音量大小, 使用耳机都将影响您对周围环境的感知, 使用耳机时多加注意; • 切勿抛扔、坐压耳机或将其浸入盐水中; 耳机应远离火和高压设备;
- 不适合三岁以下儿童使用,包含小零件;
- 请勿将其归类为生活垃圾,而将其送往当地相应的电器电子设备回收站;
- 请勿过度扭曲或折弯后挂部件,避免损坏内部元件;
- ★若用户因违反以上警告内容造成的人身财产损失,本公司不承担任何责任。



Air conduction wireless headset

**User Manual** 

Health • comfort • Release the ears

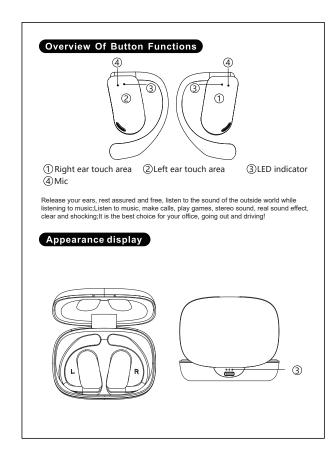

### Control Description

Power on: 1. The headset will automatically power on after it is taken out of the charging 2. When the earphone is turned off, press and hold the touch area for 2 seconds

to turn on the earphone. Note: (the left and right ears need to be operated separately) Headphone indicator light and prompt tone when powering on: the white light is on or 3 seconds and then the white light and orange light flash alternately;the earphone prompt tone: "power on"; will flash and the machine will play a mechanical prompt

Power off: 1. When the headset is put back into the charging compartment for charging,

the headset will automatically shut down;

2. Long press the earphone touch area for 5 seconds to shut down, note:

(the left and right ears need to be operated separately)

 After disconnecting Bluetooth for 5 minutes, the headset will automatically shut down
 When the power is exhausted, the headset will automatically shut down; Headphone indicator light and prompt tone when powering off: The orange light

flashes; the headset prompts: "Bluetooth is preparing to shut down";

Connecting to BT:1. When using the headset for the first time, the left and right earphones are paired successfully within 3 seconds after power on:

 After the headset is turned on, it automatically enters the pairing state, the indicator light is white and orange flashing alternately, and the headset prompts:"Waiting for connection", turn on the bluetooth of the device you want to pair and search for the headset, click the

bluetooth name Monster Airmars XKO07 to pair;

3. The earphones are taken out from the charging compartment, and the left and right earphones are automatically paired and reconnected; Successful pairing: In the power-on state, the headset automatically enters the search pairing mode, the white light flashes every 5S, and the Bluetooth is turned on for the first time Need to manually click to connect, the headset prompts: "Bluetooth paired successfully";

Disconnect Bluetooth: Disconnect Bluetooth manually or over distance, the white light and orange light flash alternately, and the headset prompts: "Waiting for connection";

Play/Pause: When connected to music, Double click the area of the right ear to play/pause music; Previous song: Triple-click the touch area of the left ear while connected to music to play

the previous song;

Next song: Triple-click the touch area of the right ear when connected to music to play the next song; Volume up: In the call/music state, click the right ear touch area to increase the volume; (play music prompts at the maximum volume)

Volume down: In the call/music state, click the left ear touch area to decrease the volume

Voice Assistant: Press and hold the left/right ear touch area for 2 seconds and then release to enter the language mode, then press for 2 seconds and then release to exit;

Answer/hang up/reject: In the incoming call status, the white light flashes quickly, double-click the touch area of the left/right ear to answer, and then double-click the left/right ear Hang up on the touch area; in the incoming call state, press and hold the left or right ear touch area for 2 seconds to reject the call;

Restore factory settings: In the power-on state, click the touch area five times, and the white light/orange light will flash alternately, indicating that the factory settings are restored successfully; Low battery reminder: when the battery is 20%, the orange light flashes every 2s, and the donadona" prompt sounds once every 60s:

Charging: 1.The charging compartment (charging) charges the earphones. The orange light is always on when the earphones are charging, and turns to white when fully charged, and turns off after 1 minute. The orange light in the charging compartment flashes slowly, and the orange light

stays on when fully charged;
2. The charging compartment (not charging) charges the earphones, the orange light is always on when the earphones are charging, it turns to white when fully charged, and turns off after 1 minute. The white light in the charging compartment is always on, and the white light turns off when the headset is fully charged;

# Chargers and Batteries

Before using any charger to charge the headset, please check whether the specifications of the charger meet the requirements (recommended charger the output voltage is: DC5V +/- 0.25V, the output current is: 100mA-500mA),the charging voltage

is extremely high and it is possible. Can damage Bluetooth headset. **WARNING:** Only use chargers approved with this accessory. Use of other types of chargers may violate approval and warranty terms, and may cause danger, if the factory is shipped with a charging cable, you need to connect a 3C certifie Charger or computer. It is forbidden to severely collide with this product. Serious impact may damage the electronic motherboard and battery.

# Charge the battery

This headset uses a built-in non-removable rechargeable battery. Do not attempt to remove the battery from the headset, as it may damage the headset. When you are not using the headset, store it in a dry and ventilated place and charge it every months. 1. When the orange light of the connected earphone is always on and the low battery prompt tone is heard, it means that the earphone is low in power. If you continue to use It will automatically shut down, and it needs to be charged at this time, please put the neadset back into the charging compartment 2.Plug the charger into an AC power outlet.

When charging, the indicator light of the charging compartment flashes orange. If charging does not start, disconnect the power source from the charging It's replugging the headset and trying again. After the battery in the charging compartment is fully charged, the orange light will change from blinking to steady on. Disconnect the charger from the Connection to power outlet and charging case

4. The actual talk time and standby time may vary with the phone's usage settings, usage

# Wearing Instructi



Rotate the headset to the right angle to experience the best results.

Music playing time----Standard status: 9 hours Speaker impedance----16Ω±15%db Standby time ----- 80h Mike sensitivity---------40±2db Charging time ---- 3 hours Product weight ----- 21.5g BT version -----5.3 Connection distance --- 10m

# Important

• The correct wearing position of the earphone speaker is the cheek bone in front of the ear, do not put the speaker in the ear;

• Listening to loud music for a long time may cause discomfort, please try to use a moderate volume to avoid prolonged Use loud volume all the time; Regardless of the volume level, the use of headphones will affect your perception of

the surrounding environment, so pay more attention when using headpho . Do not throw, sit on the headset or immerse it in salt water; keep the headset away from fire and high-voltage equipment; Not suitable for children under three years old, contains small parts:

• Do not sort it into household waste, but take it to the appropriate local recycling point for electrical and electronic equipment;

Do not twist or bend the rear hanger excessively to avoid damage to internal components; ★If the user violates the above warning content and causes personal and property losses, the company will not bear any responsibility.



## FCC Warnning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection againstharmful interference in a residential installation. This equipment generates, uses and can radiateradio frequency energy and, if not installed and used in accordance with the instructions, maycause harmful interference to radio communications. However, there is no guarantee thatinterference will not occur in a particular installation. If this equipment does cause harmfulinterference to radio or television reception, which can be determined by turning the equipmentoff and on, the user is encouraged to try to correct the interference by one or more of thefollowing measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1)This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.