

August 22, 2024 EX3DV4 - SN:7679

Parameters of Probe: EX3DV4 - SN:7679

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm (µV/(V/m) ²) A	0.66	0.51	0.67	±10.1%
DCP (mV) B	105.9	105.6	102.6	±4.7%

Calibration Results for Modulation Response

UID	Communication System Name		dB	$dB\sqrt{\mu V}$	С	D dB	WR mV	Max dev.	Max Unc ^E k = 2		
0	CW	X	0.00	0.00	1.00	0.00	142.2	±3.2%	±4.7%		
7.71	1777	Y	0.00	0.00	1.00	9800-00	130.2	-053 0000000			
		Z	0.00	0.00	1.00		139.0				
10352	Pulse Waveform (200Hz, 10%)	X	1.43	60.16	6.15	10.00	60.0	±2.9%	±9.6%		
		Y	1.58	60.92	6.52		60.0				
		Z	1.50	60.59	6.48		60.0				
10353	Pulse Waveform (200Hz, 20%)	X	0.82	60.00	4.96	6.99	80.0	±2.3%	±9.6%		
10-11/00		Y	0.82	60.00	4.97	80.0	80.0				
		Z	0.77	60.00	4.97		80.0				
10354	Pulse Waveform (200Hz, 40%)	X	0.05	123.83	0.26	3.98	95.0	±2.6%	±9.69		
	7. FORE MAIN STOLEN	Y	24.00	72.00	7.00	848403	95.0	S-TACKSON NO.			
		Z	0.01	121.73	2.37		95.0				
10355	Pulse Waveform (200Hz, 60%)	X	0.53	60.00	2.57	2.22	120.0 ±1.5	±1.5%	±9.69		
	8	Y	11.26	155.45	11.45		120.0				
		Z	0.64	157.20	1.03		120.0				
10387	QPSK Waveform, 1 MHz	X	0.58	61.72	10.83	1.00	150.0	±4.1%	±4.1%	±4.1%	±9.69
		Y	0.56	62.82	11.68	150.0	-7-0010	100			
		Z	0.72	62.65	11.42		150.0	1			
10388	QPSK Waveform, 10 MHz	X	1.28	63.69	12.80	0.00	150.0	±1.4%	±9.69		
on the st	A7700000000000000000000000000000000000	Y	1.32	65.00	13.43	10000000	150.0	5.55,555,000	DOM: NO		
		Z	1.39	63.95	13.12		150.0		ros escaca		
10396	64-QAM Waveform, 100 kHz	X	1.57	62.98	14.97	3.01	150.0	±1.4%	±9.69		
		Y	1.68	64.13	15.49		150.0				
		Z	1.53	62.44	14.99		150.0				
10399	64-QAM Waveform, 40 MHz	X	2.77	65.21	14.40	0.00	150.0	±2.0%	±9.69		
	CONTRACTOR CONTRACTOR	Y	2.82	65.93	14.83	5000	150.0)	20000		
		Z	2.88	65.26	14.54		150.0		i l		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	3.83	65.03	14.74	0.00	150.0	±3.5%	±9.69		
	CONTROL OF COURSE OF COURS	Y	3.83	65.66	15.06	entree:	150.0	110000000	368600		
		Z	3.99	65.05	14.88		150.0	1			

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX-7679_Aug24 Page 3 of 22

F-TP22-03 (Rev. 06) Page 133 of 364

A The uncertainties of Norm X.Y.Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Parameters of Probe: EX3DV4 - SN:7679

Sensor Model Parameters

	C1 fF	C2 fF	α V ⁻¹	T1 msV ⁻²	T2 ms V ⁻¹	T3 ms	T4 V-2	T5 V-1	Т6
x	12.3	88.68	33.01	3.48	0.00	4.90	0.28	0.00	1.00
v	10.5	75.44	33.06	3.66	0.00	4.90	0.48	0.00	1.00
z	14.3	105.54	34.62	1.00	0.00	4.90	0.00	0.00	1.01

Other Probe Parameters

Certificate No: EX-7679_Aug24

Sensor Arrangement	Triangular
Connector Angle	52.0°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

F-TP22-03 (Rev. 06) Page 134 of 364

Page 4 of 22



August 22, 2024 EX3DV4 - SN:7679

Parameters of Probe: EX3DV4 - SN:7679

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc ^H (k = 2)
750	41.9	0.89	9.71	9.03	9.52	0.35	1.27	±11.0%
835	41.5	0.90	9.44	8.78	9.25	0.35	1.27	±11.0%
900	41.5	0.97	9.33	8.68	9.15	0.35	1.27	±11.0%
1640	40.2	1.31	8.54	7.94	8.37	0.35	1.27	±11.0%
1750	40.1	1.37	8.47	7.87	8.30	0.35	1.27	±11.0%
1900	40.0	1.40	8.13	7.56	7.97	0.35	1.27	±11.0%
2300	39.5	1.67	7,77	7.23	7.61	0.35	1.27	±11.0%
2450	39.2	1.80	7,50	6.97	7.35	0.35	1.27	±11.0%
2600	39.0	1.96	7.35	6.84	7.20	0.35	1.27	±11.0%
3300	38.2	2.71	7.07	6.58	6.93	0.35	1.27	±13.19
3500	37.9	2.91	7.02	6,53	6.88	0.35	1.27	±13.19
3700	37.7	3.12	6.86	6.38	6.72	0.35	1.27	±13.19
3900	37.5	3.32	6.81	6.33	6.67	0.35	1.27	±13.19
4100	37.2	3.53	6.61	6.14	6.47	0.35	1.27	±13.19
5250	35.9	4.71	5.87	5.46	5.75	0.31	1.27	±13.1%
5600	35.5	5.07	5.36	4.99	5.26	0.28	1.27	±13.1%
5750	35.4	5.22	5.33	4.95	5.22	0.27	1.27	±13.19
5800	35.3	5.27	5.36	4.99	5.26	0.26	1.27	±13.19

Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the Com/F uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 26, 40, 50 and 70 MHz for Com/F assessed at 5 MHz is 4-9 MHz, and Com/F assessed at 12 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

The probes are calibrated using tissue simulating liquids (TSL) that deviate for ε and σ by less than ±5% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10% 4 SAR correction is applied.

Alpha/Depth are determined during dalibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the

H The stated uncertainty is the total calibration uncertainty (x = 2) of Norm-ConvF. This is equivalent to the uncertainty component with the symbol CF in Table 9 of IEC/IEEE 82209-1528:2020.



August 22, 2024 EX3DV4 - SN:7679

Parameters of Probe: EX3DV4 - SN:7679

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc ^H (k = 2)
6500	34.5	6.07	5.75	5.35	5.63	0.20	1.27	±18.6%

Certificate No: EX-7679_Aug24 Page 6 of 22

Frequency validity at 6.5 GHz is -600/+700 MHz, and ±700 MHz at or above 7 GHz. The uncertainty is the RSS of the CorwF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

The probes are calibrated using tissue simulating liquids (TSL) that deviate for c and or by less than ±10% from the target values (typically better than ±6%) and are valid for TSL with deviations of up to ±10%.


AphaCoophi are determined during casibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz; below ±2% for frequencies between 3-6 GHz; and below ±4% for frequencies between 6-10 GHz at any distance larger than half the probe tip clameter from the boundary.

If The stated uncertainty is the total calibration uncertainty (it = 2) of Norm-ConvF. This is equivalent to the uncertainty component with the symbol CF in Table 9 of IEC/IEEE 92209-1528:2020.



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide:R22)

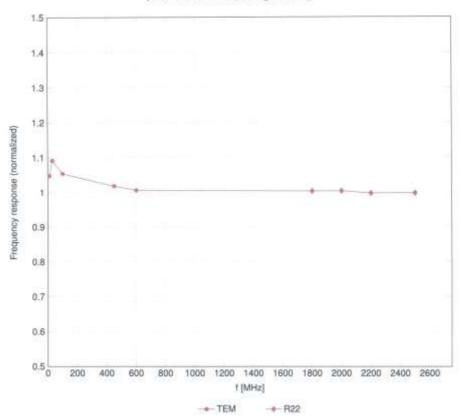


Uncertainty of Frequency Response of E-field: ±6.3% (k=2)

Certificate No: EX-7679_Aug24 Page 7 of 22

F-TP22-03 (Rev. 06) Page 137 of 364



Receiving Pattern (ϕ), $\theta = 0^{\circ}$

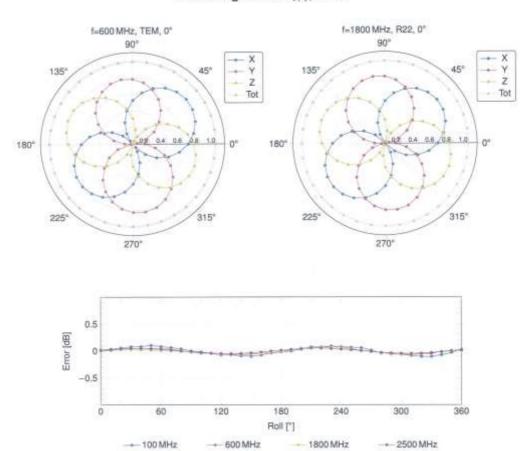



Uncertainty of Axial Isotropy Assessment: ±0.5% (k=2)

Certificate No: EX-7679_Aug24 Page 8 of 22

F-TP22-03 (Rev. 06) Page 138 of 364



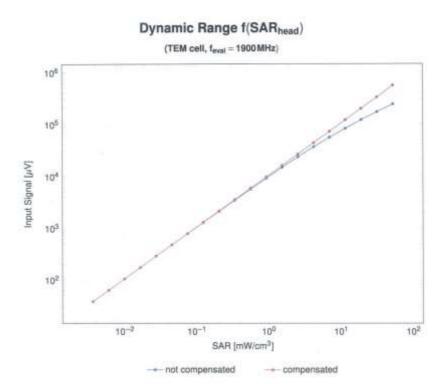

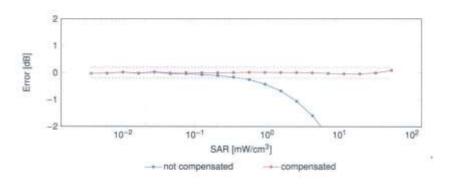

Uncertainty of Linearity Assessment: ±0.6% (k=2)


Certificate No: EX-7679_Aug24 Page 9 of 22

F-TP22-03 (Rev. 06) Page 139 of 364




August 22, 2024

Conversion Factor Assessment

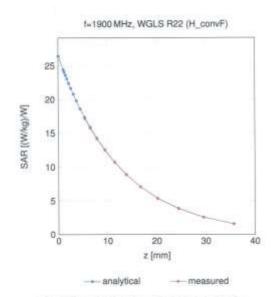

Deviation from Isotropy in Liquid

Error (ϕ, θ) , f = 900 MHz

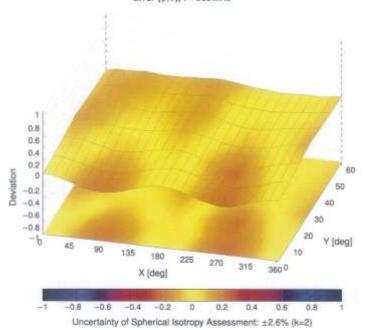

Certificate No: EX-7679_Aug24

Page 10 of 22

F-TP22-03 (Rev. 06) Page 140 of 364



Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	UncE k = 2
0		CW	CW	0.00	±4.7
10010	CAB	BAR Validation (Square, 100 ms, 10 ms)	Test	10.00	±9.6
10011	CAC	UMTS-FDD (WCDMA)	WCDMA	2.91	±9.6
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1,87	±9.6
10013	CAB	IEEE 802.11g WFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	±9.6
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	±9.6
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	±9.6
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	±9.6
10025	DAC	EDGE FDD (TDMA, BPSK, TN 0)	GSM	12.62	19.6
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	±9.6
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.60	±9.6
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	19.6
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	±9.6
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	±9.6
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	±9.6
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DHS)	Bluetooth	1.16	±9.6
	CAA	IEEE 802.15.1 Bluetooth (PV4-DQPSK, DH1)	Bluetooth	7.74	±9.6
10033	CAA	IEEE 802 15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	±9.6
10034		The state of the s	Bluetooth	3.83	±9.6
10035	CAA	IEEE 802.15.1 Bluetooth (PU4-DQPSK, DH5)	Stuetooth	8.01	19.6
10036	CAA	IEEE 802.15.1 Bluetooth (B-DPSK, DH1)	Bluetooth	4.77	19.6
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.10	19.5
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)		4.57	19.6
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000		-
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PV4-DQPSK, Halfrate)	AMPS	7.78	±9.6
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	±9.6
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Skit, 24)	DECT	13.80	±9.5
10049	CAA	DECT (TDO, TDMA/FDM, GFSK, Double Skit, 12)	DECT	10.79	±9.5
10056	CAA	UMTS-T00 (TD-SC0MA, 1.28 Mcps)	TD-SCDMA	11.01	±9.6
10058	DWC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	±9.6
10:059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	±9.5
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	±9.6
10061	CAB	IEEE 802.11b WIFI 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	±9.6
10062	CAE	IEEE 802.11a/h WIFI 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	±9.6
10063	CAE	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	±9.6
10064	CAE	IEEE 802.11a/h WIFI 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	±9.6
10065	CAE	IEEE 802.11a/h WFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	±9.6
10066	CAE	IEEE 802.11a/h WFI 5 GHz (OFDM, 24 Mbps)	WLAN	9.35	±9.6
10067	CAE	IEEE 802.11a/h W.F. 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	±9.6
10068	CAE	IEEE 802.11a/h WIFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	±9.6
10069	CAE	IEEE 802.11a/h WIFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	±9.6
10071	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	±9.6
10072	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	±9.6
10073	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	19.6
10074	CAB	IEEE 802.11g WIFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	±9.6
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	19.6
10076	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	±9.6
10077	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	19.6
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	±9.6
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PV4-DQPSK, Fullrate)	AMPS	4.77	19.6
10090	DAG	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	19.6
10097	CAC	UMTS-FDD (HSDRA)	WCDMA	3.98	±9.6
10098	CAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	±9.6
10098	DAC	EDGE-FDD (TOMA, 8PSK, TN 0-4)	GSM	9.55	±9.6
10100	CAF	A CONTRACTOR OF THE PROPERTY O	LTE-FDD	5.67	±9.6
	CAF	LTE-FDD (SC-FDMA, 100% RB, 20MHz, QPSK)	LTE-FDD	10.00	141111
10101	CAF	LTE-FDD (SC-FDMA, 100% RB, 20MHz, 16-QAM)		6.42	±9.6
10102	THE RESIDENCE OF STREET	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10103	CAH	LTE-TDD (SC-FDMA, 100% RB, 20MHz, QPSK)	LTE-TOO	9.29	±9.6
10104	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TD0	9.97	±9.6
10105	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	±9.6
10108	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	±9.6
10109	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10110	CAH	LTE-FDD (SC-FDMA, 100% RB, 5MHz, QPSK)	LTE-FDD	5.75	±9.6
10111	CAH	LTE-FDD (SC-FDMA, 100% RB, 5MHz, 16-QAM)	LTE-FDD	6.44	±9.6

Certificate No: EX-7679_Aug24 Page 11 of 22

F-TP22-03 (Rev. 06) Page 141 of 364



UID	Rev	Communication System Name	Group	PAR (dB)	Une ^E k
0112	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDO	6.59	±9.5
0113	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
0114	CAE	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	±9.6
0115	CAE	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	±9.6
0116	CAE	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	±9.6
0117	CAE	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	±9.6
0118	CAE	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	±9.8
0119	CAE	IEEE 802.11n (HT Mixed, 135Mbps, 64-QAM)	WLAN	8.13	±9.8
0140	CAF	LTE-FDD (SC-FDMA, 100% RB, 15MHz, 16-QAM)	LTE-FDD	6.49	±9.4
0141	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	±9.6
0142	CAF	LTE-FDD (SC-FDMA, 100% RB, 3MHz, QPSK)	LTE-FDD	5.73	±9.6
143	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDO.	6.35	194
1144	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDO	6.65	±9.6
0145	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	±9.6
146	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	±9.0
0147	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FOD	6.72	±93
1149	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 18-QAM)	LTE-FDD	6.42	±9.6
150	CAF	LTE-FDO (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.0
0151	CAH	LTE-TOD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TOD	9.28	19.8
0152	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	±9.
153	CAH	LTE-TOD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TOD	10.05	±B.
3354	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5,75	±9.
0155	CAH	LTE-FDD (SC-FDMA, 50% R8, 10 MHz, 16-QAM)	LTE-FDD	6.43	±90
0156	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FD0	5.79	±9.
0157	CAH	LTE-FDD (SC-FDMA, 50% FB, 5MHz, 15-QAM)	LTE-FDD	6.49	±9,
0158	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	±9.
0159	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	±9.
0160	CAF	LTE-FDD (SC-FDMA, 50% RB, 15MHz, QPSK)	LTE-FDD	5.82	±9.
0161	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	±9.
0162	CAF	LTE-FDD (SC-FDMA, 50% RB, 15MHz, 64-QAM)	LTE-FOD	6.58	±9.
0166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FOD	5.46	±9.
0167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	±9.
0168	CAG	LTE FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	±9:
0169	CAF	LTE-FDD (SC-FDMA, 1 R8, 20 MHz, QPSK)	LTE-FDD	5.73	±9:
0170	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±9.
0171	AAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	±9.
0172	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TOD	9.21	±9.
0173	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	±9.
0174	CAH	LTE-TDD (SC-FDMA, 1 R8, 20 MHz, 64-QAM)	LTE-TOD	10.25	±9
0175	CAH	LTE-FDD (SC-FDMA, 1 RB, 10MHz, QPSK)	LTE-FDD	5.72	±9.
0176	CAH	LTE-FDD (SC-FDMA, 1 R8, 10 MHz, 16-QAM)	LTE-FDD	6.52	±9.
0177	CAL	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	±9.
0178	CAH	LTE-FDD (SC-FDMA, 1 R8, 5MHz, 16-QAM)	LTE-FDD	6.52	±9.
0179	CAH	LTE-FDD (SC-FDMA, 1 RB, 10MHz, 64-QAM)	LTE-FDD	8.50	±9:
0180	CAH	LTE-FDD (SC-FDMA, 1 R8, 5MHz, 64-QAM)	LTE-FDD	5.50	±9.
0181	CAF	LTE-FDD (SC-FDMA, 1 R8, 15MHz, QPSK)	LTE-FDD	5.72	±9.
0182	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, 18-QAM)	LTE-FDD	6.52	±9.
0183	AAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	±9.
0184	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.
0185	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6,51	±9.
0186	AAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	±9.
0187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4MHz, QPSK)	LTE-FDD	5.79	±9.
0188	CAG	LTE-FDD (SC-FDMA, 1-RB, 1.4MHz, 16-QAM)	LTE-FDD	6.52	±9.
0189	AAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 84-QAM)	LTE-FDD	6.50	±9.
0193	CAE	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	19
0194	CAE	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	19
0195	CAE	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	±9.
0198	CAE	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	±9.
0197	CAE	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	±9
0198	CAE	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	±9.
0219	CAE	IEEE 802.11n (HT Mixed, 7.2 Mops, 8PSK)	WLAN .	8.03	±9.
0220	CAE	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	19
0221	CAE	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	±9.
0222	CAE	IEEE 802.11n (HT Mixed, 15Mbps, BPSK)	WLAN	8.06	±9.
0223	CAE	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	±9.
0224	CAE	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	±9.

Certificate No: EX-7679_Aug24

Page 12 of 22



UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^b k = 2
10225	CAC	UMTS-FDD (HSPA+)	WCDMA	5.97	±9.6
10226	CAC	LTE-TOD (SC-FDMA, 1-RB, 1.4 MHz, 16-QAM)	LTE-TOD	9.49	±9.6
10227	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TOD	10.26	±9.6
10228	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4MHz, QPSK)	LTE-TOD	9.22	±9.6
10229	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TOD	9.48	#9.6
10230	CAE	LTE-TOD (SC-FDMA, 1 RB, 3MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10231	CAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK)	LTE-TDD	9.19	±9.6
10232	CAH	LTE-TDB (SC-FDMA, 1 RB, 5MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10233	CAH	LTE-TDD (SC-FDMA, 1 RB, 5MHz, 94-QAM)	LTE-TDD:	10.25	±9.6
10234	CAH	LTE-TDD (SC-FDMA, 1 RB, 5MHz, QPSK)	LTE-TDD	9.21	19.6
10235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10236	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TD0	10.25	±9.6
10237	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	±9.6
10238	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10239	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 84-QAM)	LTE-TDD	10.25	±9.6
10240	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TD0	9.21	±9.6
10241	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TOO	9.82	±9.6
10242	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 84-QAM)	LTE-TDD	9.86	±9.6
10243	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	±9.6
10244	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 18-QAM)	LTE-TOD	10.06	19.6
10245	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	±9.6
10246	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TOD	9.30	±9.6
10247	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TOD	9.91	±9.6
10248	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TOD	10.09	±9.6
10249	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	±9.6
10250	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	±9.6
10251	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	±9.6
10252	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	±9.6
10253	CAG	LTE-TDD (SC-FDMA, 50% RB, 15MHz, 16-QAM)	LTE-TDD	9.90	±9.6
10254	CAG	LTE-TDD (SC-FDMA, 50% RB, 15MHz, 64-QAM)	LTE-TDD	10.14	±9.6
10255	CAG	LTE-TDD (SC-FDMA, 50% RB, 15MHz, QPSK)	LTE-TDD	9.20	±9.6
10256	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	±9.6
10257	CAC	LTE-TOD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-TDD	10.08	±9.6
10258	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	±9.6
10259	CAE	LTE-TDD (SC-FDMA, 100% RB, 3MHz, 16-QAM)	LTE-TDD	9.98	±9.6
10260	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 84-QAM)	LTE-TOD	9.97	±9,6
10261	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TOD	9.24	±9.6
10262	CAH	LTE-TOD (SC-FDMA, 100% RB, 5MHz, 16-QAM)	LTE-TDD	9.83	±9.6
10263	CAH	LTE-TDD (SC-FDMA, 100% RB, 5MHz, 64-QAM)	LTE-TOD	9.23	±9.6
10264	CAH	LTE-TDD (SC-FDMA, 100% RB, 5MHz, QPSK)	LTE-TOD		±9.6
10265	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)		9.30	±9.6
10268	CAG	LTE-TOD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10269	CAG	LTE-TDD (SC-FDMA, 10% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	±9.6
10270	CAG		LTE-TDD	9.58	
10274	CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK) UMTS-FDD (HSUPA, Subject 5, 3GPP Rel8.10)	WCDMA	4.87	±9.6 ±9.8
10275	CAC	UMTS-FDD (HSUPA, Sublest 5, 3GPP Rei8.4)	WCDMA	3.96	±9.6
10277	CAA	PHS (QPSK)	PHS	11.81	±9.6
10278	CAA	PHS (QPSK, BW 884 MHz, Rollott 0.5)	PHS	11,81	±9.6
10279	CAA	PHS (QPSK, BW 884MHz, Polioff 0.38)	PHS	12.18	±9.6
10290	AAB	CDMA2000, RC1, S065, Full Rate	COMA2000	3.91	±9.6
10291	AAB	CDMA2000, PC3, SOSS, Full Plate CDMA2000, PC3, SOSS, Full Plate	CDMA2000	3.46	29.6
10292	AAB	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3,39	±9.6
10293	AAB	COMAZGOO, RC3, SC3, Full Rate	CDMA2000	3.50	±9.6
10295	A STATE OF THE PARTY OF THE PAR	CDMA2000, RC1, SC3, 1/8th Rate 25 fr.	CDMA2000	12.49	±9.6
10297	and the state of the last	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, OPSK)	LTE-FDD	5.81	=9.6
10298	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	±9.6
10299	-	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	5.39	±9.6
10300	AAE	LTE FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10301	AAA	IEEE 802.166 WIMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)	WIMAX	12.03	±9.6
10302		IEEE 802.16e WIMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)	WIMAX	12.57	±9.6
10303	AAA	IEEE 802.16e WMAX (23:15, 5 ms, 10 MHz, 64QAM, PUSC)	WIMAX	12.52	±9.6
10304	of the section of the section of	IEEE 802-166 WMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)	WIMAX	11.80	±9.6
10305	-	IEEE 802.18e WIMAX (31:15, 10 ms. 10 MHz, 64QAM, PUSC, 15 symbols)	WIMAX	15.24	±9.6
	THE PERSON NAMED IN	more version transcripting reals, rewrite, present, rude, to symbols;	AKTINIAN.	10/64	29.0

Certificate No: EX-7679_Aug24 Page 13 of 22

F-TP22-03 (Rev. 06) Page 143 of 364



August 22, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unc [®] k ≈
10307	AAA	IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, QPSK, PUSC, 18 symbols)	WIMAX	14.49	±9.6
10308	AAA	IEEE 802 16e WIMAX (29:18, 10 ms, 10 MHz, 16 QAM, PUSC)	WIMAX	14.46	±9.6
10309	AAA	IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, 16QAM, AMC 2x3, 18 symbols)	WIMAX	14.58	±9.6
0310	AAA	IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, QPSK, AMC 2x3, 18 symbols)	WIMAX	14.57	\$9.6
0311	AAE	LTE FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	±9.6
0313	AAA	DEN 1:3	IDEN	10.51	±9.6
10314	AAA	IDEN 1:6	IDEN	13.48	±9.6
10315	AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	WLAN	1.71	19.6
10016	AAB	IEEE 802.11g WIFI 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.6
10317	AAE	IEEE 802.11a WIFI 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.6
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	19.6
0353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	±9.6
0354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	±9.6
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	±9.6
0356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	±9.6
0387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	±9.6
0388	AAA	QPSK Waveform, 10 MHz	Generio	5.22	±9.6
0396	AAA	64-QAM Waveform, 100 kHz	Generic	5.27	±9.6
0399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	±9.6
0400	AAF	IEEE 802.11ac WIFI (20 MHz, 64-QAM, 95pc duty cycle)	WLAN	8.37	±9.6
0401	AAF	IEEE 802.11ac WiFi (40 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.60	±9.6
0402	AAF	IEEE 809.11ac WIFI (80 MHz, 64-QAM, 99pc duty cycle)	WLAN.	8.53	±9.6
0403	BAA	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	±9,6
0404	BAA	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	±9.€
0406	AAH	COMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	±9.6
0410	AAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Cont=4)	LTE-TDD	7.82	±9.6
10414	AAA	WLAN CCDF, 64-QAM, 40 MHz	Generic	8,54	±9.4
0415	AAA.	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	WLAN	1.54	±9.6
10416	AAA	IEEE 802.11g WIFI 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
0417	AAD	IEEE 802.11a/h WIFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
1041B	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preembule)	WLAN	B.14	±9.6
10419	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short presmbule)	WLAN	8.19	±9.6
10422	AAD	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	±9.6
10423	AAD	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	±9.6
10424	AAD	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	±9.6
10425	AAD	(EEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	±9.6
10426	AAD	IEEE 802 11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	±9.6
10427	AAD	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	±9.6
10430	AAE	LTE-FDD (OFDMA, 5MHz, E-TM 3.1)	LTE-FDD	8.28	±9,6
10431	AAE	LTE-FDD (OFDMA, 10MHz, E-TM 3.1)	LTE-FDD	8.38	±9.6
10432	AAD	LTE-FDD (OFDMA, 15MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10433	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10434	AAB	W-CDMA (BS Test Model 1, 64 DPCH)	WCOMA	8.60	±9.6
10435	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.
10447	AAE	LTE-FDD (OFDMA, 5MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.55	±9.6
10448	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%)	LTE-FDD	7.53	±9.6
10449	AAD	LTE-FDD (OFDMA, 15MHz, E-TM 3.1, Cliping 44%)	LTE-FDD	7.51	±9.6
10450	AAD	LTE-FDD (OFDMA, 20MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	±9.6
10451	AAB	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	±9.6
10453	AAE	Validation (Square, 10 ms, 1 ms)	Test	10.00	±9,0
10456	AAD	IEEE 802.11ac WIFI (160 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.63	±9.0
10457	AAB	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	±9.0
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	±9.0
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	±9.
10460	AAB	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	±9.
10461	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	ETE-TDO	7.82	+93
10462	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.30	±9.
10463	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	193
10464	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDO	7.82	±9.
10465	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDO	8.32	191
10466	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDO	8.57	19
10467	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOO	7.82	±9,
10468	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDO	8.32	±9.6
10469	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64 QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	193
10470	-	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±97
	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOO	8.32	±9.0

Certificate No: EX-7679_Aug24

Page 14 of 22

August 22, 2024



EX3DV4 - SN:7679

UID	Rev	Communication System Name	Group	PAR (dB)	UncE k = 2
10472	AAG	LTE-TDD (SC FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10473	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDO	7.82	±9.6
10474	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subtrame=2,3,4,7,8,9)	LTE-TDO	8.32	±9.5
10475	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UI, Subframe=2,3,4,7,8,9)	LTE-TOD	8.57	±9.6
10477	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10478	AAG	LTE-TDD (SC-FDMA, 1 R8, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.57	±9.6
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7.74	±9.6
10480	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subtrame=2,3,4,7,8,9)	LTE-TOD	8.18	支9.6
10481	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±9.6
10482	AAD	LTE-TOD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.71	±9.6
10483	AAD	LTE-TOD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.39	±9.6
10484	CIAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	±9.6
10485	AAG	LTE-TDD (SC-FDMA, 50% RB, 5MHz, QPSK, UL Subtrame=2,3,4,7,8,9)	LTE-TDD	7.59	19.6
10486	AAG	LTE-TDD (SC-FDMA, 50% RB, 5MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	B.38	±9.6
10487	AAG	LTE-TDD (SC-FDMA, 50% RB, 5MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.60	±9.6
10488	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7.70	±9.6
10489	AAG	LTE-TDD (SC-FDMA, 50% RB, 10MHz, 16-QAM, UL Subframe=2.3.4,7,8,9)	LTE-TD0	8.31	£9.6
10490	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.54	±9.6
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7.74	±9.6
10492	AAF	LTE-TDO (SC-FDMA, 50% RB, 15 MHz, 16 QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.41	£9.6
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.55	±9.6
10494	AAG	LTE-TDO (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subtrame=2,3,4,7,8,9)	LTE-TOD	7.74	±9.6
10495	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe-2,3,4,7,8,9)	LTE-TOD	8.37	±9.6
10496	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe-2,3,4,7,8,9)	LTE-TOD	8.54	±9.6
10497	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±9.6
10498	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 15-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.40	±9.6
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.68	±9.6
10500	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subhame=2,3,4,7,8,9)	LTE-TDD	7.67	19.6
10501	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.44	±9.6
10502	AAO	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.52	19.6
10503	AAG	LTE-TDD (SC-FDMA: 100% RB, 5 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.72	±9.6
10504	AAG	LTE-TDD (SC-FDMA, 100% RB. 5MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±9.6
10505	AAG	LTE-TDD (SC-FDMA, 100% RB: 5 MHz, 64-QAM, UL Subtrame=2.3,4,7,8,9)	LTE-TOO	8.54	±9.6
10506	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TOD	7.74	±9.6
10507	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3;4,7,8,9)	LTE-TOD	8.36	±9.6
10508	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.55	±9.6
10509	The second second	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe<2,3,4,7,8,9)	LTE-TOD	7.99	±9.6
10510	4	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subtrame=2,3,4,7,8,9)	LTE-TOD	8.49	±9.6
10511	AAF	LTE-TOD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.51	±9.6
10512	-	LTE-TOD (SC-FDMA, 100% RB, 20 MHz, QPSK, UI, Subtrame<2.3,4,7,8,9)	LTE-TDD	7.74	±9.6
10513	indial substitution	LTE-TOD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.42	±9.6
10514		LTE-TDD (SC-FDMA, 100% RB, 28 MHz, 64-QAM, UL Subframe+2,3,4,7,8,9)	LTE-TDD	8.45	±9.6
10515	-	IEEE 802.11b WIFI 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	WLAN.	1.58	±9.6
10516	- Branch Contract	IEEE 802.11b WIFI 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	WLAN	1.57	±9.6
10517		IEEE 802.11b WIFI 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	WLAN	1.58	±9.6
10518	-	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mops, 99pc duty cycle)	WEAN	8.23	±9.6
10519	-	IEEE 802.11a/h WIFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	WLAN.	8.39	±9.6
10520	AND DESCRIPTION OF	IEEE 802.11a/h WIFI 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8,12	±9.6
10521	_	IEEE 802.11a/h WIFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	WLAN	7.97	±9.6
10522	-	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.45	19.6
10523	ومنوارته ومراجع	IEEE 802.11a/h WIFI 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.06	±9.6
10524	10.00	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	W.AN	8.27	±9.6
10525	to the contract of	IEEE 802,11ac WIFI (20 MHz, MCS0, 99pc duty cycle)	WLAN.	8.36	±9.6
10526	in the annual region to		WLAN	B.42	±9.6
10527		IEEE 802.11ac WIFI (20 MHz, MCS2, 99pc duty cycle)	WLAN	B.21	±9.6
10528			WLAN	8.36	±9.6
10529	the last think the last the		WLAN	8.36	±9.6
10531		4 control from the first control of the control of	WLAN	8.43	±9.6
10532	11111111111		WLAN	8.29	±9.6
10533			WLAN	8.38	±9.6
10534	of the best property for the	A STATE OF THE STA	WLAN	8.45	±9.6
10535		TO STATE OF THE PARTY OF THE PA	WLAN	8.45	±9.6
10536		III DE PERENDIA DE	WLAN	8.32	±9.6
10537	industrial and the second	A CONTRACTOR OF THE PROPERTY O	WLAN	8.44	±9.6
10538	-		WLAN	8.54	19.6
10540	-		WLAN	8.39	±9.6
-9440	1.000	The state of the s	774470.0	2000	2000

Certificate No: EX-7679_Aug24

Page 15 of 22

F-TP22-03 (Rev. 06) Page 145 of 364



August 22, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k =
10541	AAD	IEEE 802.11ac WIFI (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.46	28.6
10542	AAD	IEEE 802.11ac WIFI (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.65	±9.6
10543	AAD	IEEE 802 11ac WIFI (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.65	±8.6
0544	AAD	IEEE 802.11ac WIFI (80 MHz, MCS0, 99pc duty cycle)	WLAN	8.47	±9.6
0545	AAD	IEEE 802.11ac WiFi (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
0546	AAD	IEEE 802.11ac WIFI (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.35	±9.6
0547	DAA	IEEE 802.11ac WIFI (80 MHz. MCS3, 99pc duty cycle)	WLAN	8.49	±9.6
0548	AAD	IEEE 802.11ac WIFI (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.37	±9.6
0550	AAD	IEEE 802.11ac WIFI (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.38	±9.6
0551	AAD	IEEE 802.11ac WiFi (80 MHz, MCS7, 98pc duty cycle)	WLAN	8.50	±9.6
0552	AAD	IEEE 802.11ac WIFI (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.42	±9.6
0553	AAD	IEEE 802,11ac WIFI (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.45	±9.6
0554	AAE	IEEE 802.11ac WIFI (160 MHz, MCS0, 99pc duty cycle)	WLAN	8.48	±9.6
0555	AAE	IEEE 802,11ac WFI (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	19.6
0556	AAE	IEEE 802.11ac WIFI (160 MHz, MCS2, 99pc duty cycle)	WLAN	8.50	±9.6
10557	AAE	IEEE 802.11ac WIFI (160 MHz, MCS3, 99pc duty cycle)	WLAN	8.52	±9.6
0.558	AAE	IEEE 802.11ac WIFI (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.61	±9.0
0560	AAE	IEEE 802.11ac WIFI (160 MHz, MCS6, 99pc duty cycle)	WLAN	8.73	±9,6
0561	AAE	IEEE 802.11ac WIFI (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.56	±9.6
0562	AAE	IEEE 802.11ac WiFi (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.69	±9.6
0563	AAE	IEEE 802.11ac WIFI (160 MHz, WCS9, 99pc duty cycle)	WLAN	8.77	±9.6
0564	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.25	±9.6
10565	AAA	IEEE 802 11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.45	±9.6
10566	AAA	IEEE 802.11g WFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.13	±9.6
0567	AAA	IEEE 802.11g WIFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	WLAN	8.00	±9.6
10568	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.37	±9.6
10569	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.10	±9.6
10570	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.30	±9;€
10571	AAA	IEEE 802.11b WIFI 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1.99	±9.6
10572	AAA	IEEE 802.11b WIFi 2.4 GHz (DSSS, 2 Mops, 90pc duty cycle)	WLAN	1.99	±9.6
10573	AAA	IEEE 802.11b WIFI 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10574	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10575	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±9.6
10576	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	±9.6
10577	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10578	AAA	IEEE 802,11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10570	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10580	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.6
10581	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	19.6
10582	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±97
10583	AAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±9.6
10584	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	±97
10585	AAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 12 Mbps, 90pp duty cycle)	WLAN	8.70	±9.0
10586	AAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10587	AAD	IEEE 802.11a/h WIFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10588	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.4
10589	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	±9.8
10590	AAD	IEEE 802.11a/h WIFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±97
10591	AAD	IEEE 802.11n (HT Mixed, 20 MHz, MCS0, 90pc duty cycle)	WLAN	8.63	±9.6
10992	AAD	IEEE 802.11n (HT Mixed, 20 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.
10593	AAD	IEEE 802.11n (HT Mixed, 20 MHz, MCS2, 90pc duty cycle)	WLAN	8.64	±9.
10594	AAD	IEEE 802.11n (HT Mixed, 20 MHz, MCS3, 90pc duty cycle)	WLAN	8,74	±9.
10595	AAD	IEEE 802.11n (HT Mixed, 20 MHz, MCS4, 90pc duty cycle)	WLAN	8.74	±9.
10596	AAD	IEEE 802.11n (HT Mixed, 20 MHz, MCS5, 90pc duty cycle)	WLAN	8.71	±9/
10597	AAD	IEEE 802.11n (HT Mixed, 20 MHz, MCS6, 90pc duty cycle)	WLAN	8.72	±9.
10598	AAD	IEEE 802.11n (HT Mixed, 20 MHz, MCS7, 90pc duty cycle)	WLAN	8.50	±9.
0599	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS0, 90pc duty cycle)	WLAN	8.79	±9.
10600	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS1, 90pc duty cycle)	WLAN	8.68	±9.
10601	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS2, 90pc duty cycle)	WLAN	8.82	±9.
10602	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS3, 90pc duty cycle)	WLAN	8,94	±9.
10603	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS4, 90pc duty cycle)	WLAN	9.03	±9.6
10604	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCSS, 90pc duty cycle)	WLAN	8.76	±9.6
10605	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS6, 90pc duty cycle)	WLAN	8.97	±9/
10606	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±9.0
10607	AAD	IEEE 802.11ac WIFI (20 MHz, MCS0, 90pc duty cycle)	WLAN	8.64	±9.0
10608	AAD	IEEE 802.11ac WiFi (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.77	±9.

Certificate No: EX-7679_Aug24

Page 16 of 22



August 22, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	UncE k = 3
10609	AAD	IEEE 802.11ac WiFi (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.57	±9.6
10610	AAD	IEEE 802.11ac WFI (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.78	±9.6
10611	AAD	IEEE 802.11ac WiFi (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	±9.6
10612	AAD	IEEE 802.11ac WIFI (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±9.6
	AAD	IEEE 802.11ac WIFI (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.94	±9.5
0613	200	IEEE 802 11ac WIFI (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.59	±9.6
10614	AAD	The state of the s	WLAN	8.82	±9.6
10615	AAD	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10616	AAD	IEEE 802.11ac WiFi (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.81	±9.6
10817	AAD	IEEE 802.11ac WIFI (40 MHz, MCS1, 90pc duty cycle)		8.58	±9.6
10618	AAD	IEEE 802.11ac WIFI (40 MHz, MCS2, 90pc duty cycle)	WLAN	-	
10619	AAD	IEEE 802.11ac WIFI (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.86	±9.6
10620	AAD	IEEE 802.11ac WiFi (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.87	±9.6
10621	AAD	IEEE 802.11ac WIFI (40 MHz, MCS5, 90pc duty cycle)	WLAN	8:77	±9.6
0622	AAD	IEEE 802.11ac WiFi (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.68	±9.6
10623	AAD	IEEE 802.11ac WIFI (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±9.6
0624	AAD	IEEE 802.11ac W/Fi (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.96	±9.6
0625	AAD	IEEE 802 11ac WIFI (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.96	±9.6
0.626	AAD	IEEE 802,11ac WIFI (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.5
0627	AAD	IEEE 802 11ac WIFI (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	±9.6
manufacture of	AAD	IEEE 802.11ac WiFi (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.71	±9.6
0628	P. S. Sandario	IEEE 802.11ac WIFI (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±9.6
10629	AAD		WLAN	8.72	±9.6
10630	AAD	IEEE 802.11ac WIFI (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.81	19.6
10631	AAD	IEEE 802.11ac WIFI (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.74	±9.6
10632	CAA	IEEE 802.11ac WIFI (80 MHz, MCS6, 90pc duty cycle)		and the second second	
10633	AAD	IEEE 802.11ac WIFI (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.83	19.6
10634	AAD	IEEE 802.11ac WIFI (80 MHz, MCS8, 90pc duty cycle)	WLAN	9.80	19.6
10635	AAD	IEEE 802.11ac WiFi (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±9.6
10636	AAE	IEEE 802.11ac WIFI (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.6
10637	AAE	IEEE 802.11ac WIFI (160 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10638	AAE	IEEE 802.11ac WIFI (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.86	±9.6
10639	AAE	IEEE 802.11ac WIFI (160 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±9.6
10640	AAE	IEEE 802.11ac WIFI (160 MHz, MCS4, 90pc duty cycle)	WLAN	8.98	±9.6
10641	AAE	IEEE 802 11ac WiFi (160 MHz, MCS5, 90pc duty cycle)	WLAN	9.06	±9.6
10642	AAE	IEEE 802.11ac WiFI (160 MHz, MCS6, 90pc duty cycle)	WLAN	9.06	±9.6
10643	AAE	IEEE 802.11ac WiFi (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.89	±9.6
10644	AAE	IEEE 802.11ac WiFi (160 MHz, MCS8, 90pc duty cycle)	WLAN	9.05	±9.6
10645	AAE	IEEE 802.11ac WIFI (160 MHz, MCS9, 90pc duty cycle)	WLAN	9.11	±9.6
10646	AAH	LTE-TDD (SC-FDMA, 1 RB, 5MHz, QPSK, UL Subframe=2.7)	LTE-TOD	11.98	±9.6
10647	AAG	LTE-TDD (SC-FDMA, 1 RB. 20 MHz, QPSK, UL Subframe=2,7)	LTE-TOD	11.96	±9.6
minute and a contract of			CDMA2000	3.45	±9.6
10648	AAA	CDMA2000 (1x Advanced)	The state of the s		-
10652	AAF	LTE-TOD (OFOMA, 5MHz, E-TM 3.1, Clipping 44%)	LTE-TOD	6.91	±9.6
10653	AAF	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TOD	7.42	±9.6
10654	AAE	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	±9.6
10655	AAF	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TOD	7.21	±9.6
10658	AAB	Pulse Waveform (200Hz, 10%)	Test	10.00	19.6
10659	AAB	Pulse Waveform (200Hz, 20%)	Test	6.99	±9.6
10660	AAB	Pulse Waveform (200Hz, 40%)	Test	3.98	±9.6
10861	AAB	Pulse Waveform (200Hz, 60%)	Test	2.22	±9.6
10662	AAB	Pulse Waveform (200Hz, 80%)	Test	0.97	±9.6
10670	AAA	Bluetoath Low Energy	Bluetooth	2.19	±9.6
10671	AAC	IEEE 802.11ax (20 MHz, MCS0, 90pc duty cycle)	WLAN	9.09	±9.6
10672	AAC	IEEE 802,11ex (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.57	±9.6
10673	AAC	IEEE 802.11ax (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.78	±9.6
10674	AAG	IEEE 802.11ax (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.74	19.6
10675	AAG	IEEE 802 11ax (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.90	±9.6
10676		IEEE 802.11ax (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±9.6
0677	-	A CONTROL OF THE PROPERTY OF T	WLAN	8.73	±9.6
and the bisconia	A section of the section of	IEEE 802 11 ax (20 MHz, MCS8, 90pc duty cycle)			
10678	AAG	IEEE 802.11ax (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.78	±9.5
10679	-	IEEE 802.11ax (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.89	±9.6
10680	AAG	IEEE 802.11ax (20 MHz, MCS9, 90pc duty cycle)	WLAN	8.80	±9.6
10681	AAC	IEEE 802.11ax (20 MHz, MCS10, 90pc duty cycle)	WLAN	8.62	±9.6
10682	AAG	IEEE 802.11ax (20 MHz, MCS11, 90pc duty cycle)	WLAN	8.83	±9.6
10683	AAC	IEEE 802-11ax (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.42	±9.6
10684	AAC	IEEE 802.11ax (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.26	±9.6
10685	AAC	IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	±9.6
10686	AAC	IEEE 802.11ax (20 MHz, MCS3, 99pc duty cycle)	WLAN	8.28	±9.6

Certificate No: EX-7679_Aug24

Page 17 of 22



August 22, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unoff k =
10687	AAC	IEEE 802.11ax (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.45	±9.6
0688	AAC	IEEE 802 11ax (20 MHz, MCS5, 99pc duty cycle)	WLAN	8.29	±9.6
0689	AAC	IEEE 802.11ax (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.55	±9.6
0690	AAC	IEEE 802.11ax (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
0691	AAC	IEEE 802 11ax (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.25	±9.6
0692	AAC	IEEE 802.11ax (20 MHz, MCS9, 99pc duty cycle)	WLAN	8.29	±9.6
0693	AAG	IEEE 802.11ax (20 MHz, MCS10, 99pc duty cycle)	WLAN	8.25	±9.6
10694	AAC	IEEE 802.11ax (20 MHz, MCS11, 99pc duty cycle)	WLAN	8.57	±9.6
10696	AAC	IEEE 802.11ax (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.78	±9.6
0696	AAG	IEEE 802 11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.91	±9.6
10697	AAC	IEEE 802.11ax (40 MHz, MCS2, 90pp duty cycle)	WLAN	8.61	±9.6
0698	AAC	IEEE 802.11ax (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.89	±9.6
10699	AAC	IEEE 802 1 tax (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.82	±9.6
10700	AAC	IEEE 802.11sx (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.73	±9.6
auticularies produ	And and the second	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.86	±9.6
10701	AAC		WLAN	8.70	±9.6
10702	AAC	IEEE 802.11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±9.6
10703	AAC	IEEE 802.11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.56	19.6
10704	AAC	IEEE 802.11ax (40 MHz, MCS9, 90pc duty cycle)	The state of the s	8.69	±9.6
10705	AAC	IEEE 802.118x (40 MHz, MCS10, 90pc duty cycle)	WLAN	8.66	-
10706	AAC	IEEE 802:11ax (40 MHz, MCS11, 90pc duty cycle)		107255	19.5
10707	AAC	IEEE 802.11ax (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.32	±9.6
10708	AAC	IEEE 802.11ax (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
10709	AAC	IEEE 802.11ax (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	29.6
10710	AAC	IEEE 802.11ax (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.29	±9.6
10711	AAC	IEEE 802.11ax (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.39	±9.6
10712	AAG	IEEE 802.11ax (40 MHz, MCS5, 99pc duty cycle)	WLAN	8.67	±9.6
10713	AAG	IEEE 802.11as (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.33	±9.6
10714	AAC	IEEE 802.11ax (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.26	±9.6
10715	AAC	IEEE 802.11ax (40 MHz, MCS8, 99pc duty cycle)	WLAN	8,45	±9.6
10716	AAC	IEEE 802.11ax (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.30	±9.6
10717	AAC	IEEE 802.11ax (40 MHz, MCS10, 99pc duty cycle)	WLAN	8.48	±9.6
10718	AAC	IEEE 802.11ax (40 MHz, MCS11, 99pc duty cycle)	WLAN	8.24	±9.6
10719	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.81	±9.6
10720	AAC	IEEE 802.11ax (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.87	太9.6
10721	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.76	±9.6
10722	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.55	±9.6
10723	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	±9.6
10724	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.90	±9.6
10725	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	19.6
10726	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.72	±9.6
10727	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.66	±9.6
10728	AAC	IEEE 802.11ex (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.65	±9.6
10729	AAC	IEEE 802.11ax (80 MHz, MCS10, 90pc duty cycle)	WLAN	8.64	±9.6
10730	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	8.67	±9.6
10731	AAC	IEEE 802.11ax (80 MHz, MCS0, 99pc duty cycle)	WLAN	B.42	±9.6
10732	AAC	IEEE 802.11ax (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.46	±9.6
10733	AAC	IEEE 802.11ax (80 MHz, MCS2, 99pc duty cycle)	WLAN	B.40	±9.6
10734	AAG	IEEE 802.11ax (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.25	±9.6
10735	AAC	IEEE 802.11ax (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.33	±9.8
10736	AAC	IEEE 802.11ax (80 MHz, MGS5, 99pc duty cycle)	WLAN	8.27	±9.6
10737	AAC	IEEE 802.11ax (80 MHz, MCS6, 99pc duty cycle)	WLAN	8.36	±9.6
10738	AAC	IEEE 802 11ax (80 MHz, MCS7, 99pc duty cycle)	WLAN	8.42	±9.6
10739	ANC	IEEE 802.11ax (80 MHz, MCSB, 99pc duty cycle)	WLAN	8.29	±9.6
10740	and an industrial distribution in	IEEE 802.11ax (80 MHz, MCSB, 99pc duty cycle)	WLAN	8.48	±9.6
10741	AAC	IEEE 802.11ax (80 MHz, MCS10, 99pc duty cycle)	WLAN	8.40	±9.6
10742		IEEE 802.11ax (90 MHz, MCS11, 99pc duty cycle)	WLAN	8.43	±9.6
10743	-	IEEE 802.11ax (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.94	±9.6
10744	AAC	IEEE 802.11ax (160 MHz, MCS1, 90pc duty cycle)	2377123		
			WLAN	9.16	±9.6
10745	_	IEEE 802 11ax (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.93	±9.6
10746	MAC	IEEE 802.11ax (160 MHz, MCS3, 90pc duty cycle)	WLAN	9.11	±9.6
10747	AAC	IEEE 802.11ax (160 MHz, MCS4, 90pc duty cycle)	WLAN	9,04	±9.6
10748	-	IEEE 802.11ax (160 MHz, MCS5, 90pc duty cycle)	WLAN	8.93	±9.6
10749	AAC	IEEE 802.11ax (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.90	±9.6
10750	A STATE OF THE PARTY NAMED IN	IEEE 802.11ax (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.79	±9,6
10751	AAC	IEEE 802.11ax (168 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10752	AAC	IEEE 802.11ax (160 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±9.6

Certificate No: EX-7679_Aug24

Page 18 of 22



August 22, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k =
10753	AAC	IEEE 802.11ax (160 MHz, MCS10, 90pc duty cycle)	WLAN	9.00	19.5
0754	AAC	IEEE 802.11ax (160 MHz, MCS11, 90pc duty cycle)	WLAN	8.94	±9,6
0755	AAC	IEEE 802.11ax (160 MHz, MCS0, 99pc duty cycle)	WLAN:	8.64	±9.6
0756	AAC	IEEE 802,11ax (160MHz, MCS1, 99pc duty cycle)	WLAN	8.77	19.6
0757	AAC	EEE 802.11ax (160 MHz, MCS2, 99pc duty cycle)	WLAN	8.77	±9.6
0758	AAC	IEEE 802.11ax (160 MHz, MGS3, 99pc duty cycle)	WLAN	8.69	±9,6
0759	AAC	IEEE 802 11ax (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.58	±9.6
760	AAC	IEEE 802 11ax (160 MHz, MCS5, 99pc duty cycle)	WLAN	8.49	±9.6
1781	AAC	IEEE 802-11ax (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.58	±9.6
	AAC	IEEE 802.11sx (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.49	±9.6
1762	AAC	IEEE 802.11ax (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.53	±9.6
0763	-	IEEE 802.11ax (160 MHz, MCSB, 99pc duty cycle)	WŁAN	8.54	±9.6
0764	AAC	IEEE 802 11ax (160 MHz, MCS10, 99pc duty cycle)	WLAN	8.54	#9.6
0765	AAC	IEEE 802.11ax (160 MHz, MCS11, 99pc duty cycle)	WLAN	8.51	±9.6
766	AAC.	The second control of	5G NR FR1 TDD	7.99	±9.6
0767	AAG	5G NR (CP-OFDM, 1 RB, 5MHz, OPSK, 15kHz)	5G NR FR1 TDD	8.01	±9.6
0768	AAE	SG NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
0769	AAD	5G NR (CP-OFDM, 1 RB, 15MHz, QPSK, 15KHz)	5G NR FR1 TDD	8.02	19.6
0770	AAE	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	\$15000000000000000000000000000000000000		
0771	AAD	5G NR (CP-OFDM, 1 RB, 25MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.02	±9.6
0.772	AAE	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	±9.6
0773	AAF	5G NR (CP-OFDM, 1 R8, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.03	±9.6
0774	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.4
0775	AAF	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	19.6
0776	AAE	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	SG NR FRI TDD	8.30	±9.6
0777	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	SG NR FR1 TDD	8.30	±9.6
0778	AAE	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	SG NR FR1 TDD	8.34	±9.6
0779	AAC	5G NR (CP-OFOM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	±9.6
0780	AAE	5G NR (CP-OFOM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10781	AAF	5G NR (CP-OFOM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10782	AAE	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	53 NR FR1 TDD	8.43	19.6
10783	AAG	5G NR (CP-OFDM, 100% RB, 5MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.31	19.6
10784	AAE	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.29	±9.6
10785	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	50 NR FR1 TD0	8.40	±9.6
10786	AAE	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 KHz)	53 NR FR1 TDD	8.35	±9.6
10787	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.44	±9.6
10788	AAE	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10789	AAF	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	50 NR FR1 TDD	8.37	19.8
10790	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9,6
10791	AAG	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	7.83	±9.6
10792	AAE	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.92	19.6
10793	_	5G NR (CP-OFDM, 1 RB, 15MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	±9.6
10794		5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	19.6
10795	A CARLOTTINE	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	±9.6
10796	AAE	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	19.6
10797	AAF	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.01	194
10798	A STATE OF THE PARTY OF THE PAR	5G NR (CP-OFDM, 1 R8, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10799		5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.6
10801	AAF	5G NR (CP-DFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	7.89	±9.6
10802		5G NR (CP-OFDM, 1 R8, S0 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.87	±9.6
10803	and the second	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FRI TDD	7.93	±9.6
10805	-	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	8.34	±9.6
10806	and the second second	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	±9.0
10809		50 NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	SG NR FR1 TDD	8.34	29.0
10810		5G NR (CP-OFOM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FRI TOD	8.34	_
10812	to describe the second	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	8.35	±9.0
dark-mile	and the later of	The first control of the control of	5G NR FR1 TDD	8.35	-
	AAG	5G NR (CP-OFDM, 100% RB, 5MHz, QPSK, 30kHz) 5G NR (CP-OFDM, 100% RB, 10MHz, QPSK, 30kHz)	NOW, LOUIS CONTROL OF THE CONTROL OF	100000	±9.0
10818			SG NR FR1 TDO SG NR FR1 TDO	8.34	±9.6
10819	-	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 30kHz)	The second secon	8.33	±9.0
10820	or Salvacion & Salvacon	5G NR (CP-OFOM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	19.0
10821	-	5G NR (CP-OFDM, 100% RB, 25MHz, QPSK, 30KHz)	5G NR FR1 TDD	8.41	191
10822	-	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.1
10823	THE REAL PROPERTY.	5G NR (CP-OFDM, 100% R8, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TD0	8.36	±9.6
10824		5G NR (CP-OFOM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	±9.6
10825		5G NR (CP-OFDM, 100% RB, 60MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.41	±9.6
10827	AAF	5G NR (CP-QFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TD0	8.42	±9.6
10828	AAE	5G NR (CP-OFOM, 100% RB. 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	19.6

Certificate No: EX-7679_Aug24

Page 19 of 22

F-TP22-03 (Rev. 06) Page 149 of 364



August 22, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Uno" k =
10829	AAF	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	±9.5
10830	AAE	5G NR (CP-OFOM, 1 RB, 10 MHz, QPSK, 60 kHz)	50 NR FR1 TD0	7.63	±9.6
10831	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	±9.6
0832	AAE	5G NR (CP-OFDM, 1 R8, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	±9.6
0833	AAD	5G NR (CP-OFDM, 1 R8, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
0834	AAE	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	±9.6
0835	AAF	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
0.836	AAE	5G NR (CP-OFDM, 1 R8, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	±9.6
0837	AAF	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	±9.6
0839	AAF	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	50 NR FRt TDD	7.70	±9.6
0840	AAE	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NA FRI TDD	7.67	±9.6
0841	AAF	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	±9.6
0843	AAD	53 NR (CP-OFDM, 56% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.49	±9.6
0844	AAE	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
0846	AAE	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
0854	AAE	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	SG NR FR1 TDD	8.34	±9.6
0855	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60kHz)	5G NR FR1 TDD	8.36	±9.6
0856	AAE	50 NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	SG NR FR1 TDD	8.37	±9.6
replacement to the last	AAD	5G NR (CP-OFDM, 100% R8, 25 MHz, QPSK, 50 kHz)	5G NR FR1 TDD	8.35	±9.6
0857 0858	AAE	5G NR (CP-OFDM, 100% RB, 25MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	19.6
	AAF	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 MHz)	5G NR FR1 TDD	8.34	19.6
0859	AAE	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 KHz)	5G NR FR1 TDD	8.41	±9.6
0880	AAF		5G NR FR1 TDD	8.40	19.6
0881	1.71	SG NA (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 KHz)	5G NR FR1 TDD	B.41	±9.6
0863	AAF	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	194
0864	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9/
0.865	AAF	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)			-
0866	AAF	5G NR (DFT-s-DFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	5.68	±9.6
0868	AAF	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.89	±9,6
0869	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
0870	AAE	5G NR (DFT-s-OFDM, 100% RB, 100MHz, QPSK, 120kHz)	5G NR FR2 TDD	5.86	±9.6
10871	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	5.75	±9.8
10872	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.52	±9.6
0873	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 84QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10874	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	0.65	±9.8
10875	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	#8.5
10876	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.39	±9.6
10877	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	19,6
10878	AAE	5G NR (CP-OFDM, 100% RB, 100MHz, 16QAM, 120kHz)	5G NR FR2 TDD	8.41	±9.6
10879	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 84QAM, 120 kHz)	5G NR FR2 TDD	8,12	19.6
10880	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.38	±9.6
10881	AAE	5G NR (DFT-s-OFOM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10882	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.96	±9.6
10883	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6,57	±9.8
0884	AAE	5G NR (DFT-s-OFDM, 100% R8, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	±9.6
10885	AAE	5G NR (DFT-e-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10886	AAE	5G NR (DFT-s-OFDM, 100% R8, 50MHz, 64QAM, 120kHz)	5G NR FR2 TDD	5.65	±9.6
10887	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TOD	7.78	±9.6
8880	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.35	±9.6
0889	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 18QAM, 120 kHz)	5G NA FR2 TDD	8.02	39.
0890	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.40	±9.0
0891	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 54QAM, 120 kHz)	5G NR FR2 TDD	8.13	±9.
0892	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.5
0897	AAE	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.66	±9.
0898	AAC	5G NR (DFT-e-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	19.
0899	AAB	5G NR (DFT-e-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDO	5.67	±93
0900	AAC	5G NR (DFT-e-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	19.
0901	BAA	SG NR (DFT+s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	53 NR FR1 TD0	5.68	±9.
0902	AAC	5G NR (DFT-a-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDO	5.68	±9.
10903	AAD	5G NR (DFT-e-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	SG NR FR1 TDO	5.68	19
	-	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, OPSK, 30 kHz)	5G NR FR1 TDO	5.68	±9.0
	the second	SG NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TD0	5.68	19.0
10904	0.00		30 NH FH 100	0.00	-
10904 10905	AAD		SG ND CD1 TDO	6:00	4.50
10904 10905 10906	AAD	5G NR (DFT-e-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TD0	5.68	
10904 10905 10906 10907	AAD	5G NR (DFT-e-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz) 5G NR (DFT-e-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	±9.0
10904 10905 10906 10907 10908 10909	AAD	5G NR (DFT-e-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	- International productions have		±9.0 ±9.0 ±9.0

Certificate No: EX-7679_Aug24

Page 20 of 22



UID	Rev	Communication System Name	Group	PAR (dB)	Unat k =
10911	AAB	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10912	AAC	5G NR (DFT-s-OFDM, 50%-RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10913	AAD	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TOD	5.84	±9.6
0914	AAC	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	±9.6
0915	AAD	50 NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6
0916	DAA	5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	SG NR FR1 TDD	5.87	±9.6
10917	DAA	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
0918	AAE	5G NR (DFT-s-OFDM, 100% R8, 5MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10919	AAC	5G NR (DFT-s-OFOM, 100% R8, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10920	AAB	5G NR (DFT-s-OFDM, 100% RB, 15MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10921	AAC	5G NR (DFTs-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	19.6
10922	AAB	5G NR (DFT-s-OFDM, 100% RB, 25MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	±9.6
10923	AAC	5G NR (DFTs-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10924	AAD	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10925	AAC	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.95	19.6
10926	AAD	5G NR (DFT-s-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
0927	AAD	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10928	AAD	5G NR (DFT-s-OFDM, 1 R8, 5MHz, QPSK, 15kHz)	5G NR FR1 FDD	5.52	±9.6
10929	AAD	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
Action to be designed.	AAC	5G NR (DFT-s-OFDM, 1 RB, 15MHz, GPSK, 15MHz)	5G NR FR1 FDD	5.52	±9.6
10930	AAG	5G NR (DFTs-OFDM, 1 RB, 20 MHz, QPSK, 18 kHz)	5G NR FR1 FDD	5.51	±9.6
10932	AAC	5G NR (DFT-s-OFDM, 1 RB, 25MHz, QPSK, 15kHz)	50 NR FR1 FDD	5.51	±9.6
10933	AAC	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	56 NR FR1 FDD	5.51	±9.6
	AAC	5G NR (DFT 6-DFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FRI FDD	5.51	±9.0
10934	AAD	5G NR (DFT-8-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10935	AAD	5G NR (DFT-s-OFDM, 50% RB, 5MHz, GPSK, 15kHz)	SG NR FR1 FDD	5.90	±9.6
-	AAD	5G NR (DFTs-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	±9.6
10937			SG NR FR1 FDD	5.90	±9.6
10938	AAC	5G NR (DFTs-OFDM, 50% RB, 15MHz, QPSK, 15MHz)	5G NR FR1 FDD	5.82	19.6
10939	AAC	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	19.6
10940	AAC	5G NR (DFTs-OFDM, 50% RB, 25MHz, QPSK, 15kHz)	New Control Control		19.6
10941	AAC	5G NR (DFT-e-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD 5G NR FR1 FDD	5.83	±9.6
10942	AAC	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)		5.85	-
10943	AAD	5G NR (DFT-s-OFDM; 50% RB, 50 MHz, QPSK, 15 kHz)	50 NR FR1 FD0	5.95	±9.6
10944	AAD	5G NR (DFT-e-OFDM, 100% RB, 5MHz, QPSK, 15kHz)	5G NR FR1 FDD	5.81	±9.6
10945	AAD	SG NR (DFTs-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10946	AAC	5G NR (DFT-s-OFDM, 100% RB, 15MHz, QPSK, 15kHz)	5G NR FR1 FDD	5.83	19.6
10947	AAC	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	50 NR FR1 FDD	5.87	±9.6
10948	AAC	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10949	AAC	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10950	AAC	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10951	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.92	±9.6
10952	AAA	5G NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 15kHz)	5G NR FR1 FDD	8.25	±9.6
10953	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.15	±9.6
10954	AAA	5G NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz)	5G NR FR1 FDD	8.23	±9.6
10955	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.42	±9.6
10956	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	50 NR FR1 FDD	8.14	±9.6
10957	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.31	±9.6
10958	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	50 NR FR1 FDD	8.61	±9.6
10959	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.33	±9.6
10960	AAE	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.32	1,9,6
10961	AAG	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15kHz)	50 NR FR1 TOD	9.36	±9.6
10962	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.40	±9.6
10963	AAC	SG NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TOD	9.55	±9.6
10964	Acres de la constante de la co	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	50 NR FR1 TDD	9.29	±9.6
10965	AAG	5B NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9,37	±9.6
	in the state of	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	g9.6
10967	- Birthire	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.42	±9.6
10968		5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9,49	±9.6
10972	distant the same	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NA FA1 TDD	11.59	±9.6
10973	Maria de Carriera da La	5G NR (DFTs-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	9.06	±9.6
10974	- Brandwick	5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	50 NR FRI TDD	10.28	19,6
10978	AAA	ULLA BOR	ULLA	1.16	±9.6
10979	AAA	ULLA HDR4	ULLA	8.58	±9.6
10980	AAA	ULLA HDR8	ULLA	10.32	±9.6
10981	AAA	ULLA HDRp4	ULLA	3.19	19.6
10982	AAA	ULLA HDRp8	ULLA	3.43	±9.6

Certificate No: EX-7679_Aug24 Page 21 of 22

F-TP22-03 (Rev. 06) Page 151 of 364



August 22, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unc [®] k = 2
10983	AAC	SG NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.31	±9.6
10984	AAB	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.42	19.5
10985	AAC	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	SG NR FR1 TOD	9.54	±9.6
10986	AAB	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.50	±9.6
10987	AAC	5G NR DL (CP-OFDM, TM 3.1, 60 MHz, 64-QAM, 30 kHz)	5G NR FR1 TOD	9.53	±9,6
10988	AAB	5G NR DL (CP-OFDM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.38	19.6
10989	AAC	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.33	±9.6
10990	AAB	5G NR DL (CP-OFDM, TM 3.1, 90 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.52	±9,6
11003	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	10.24	±9.6
11004	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 TOD	10.73	±9.6
11005	AAA	5G NR DL (CP-OFDM, TM 3.1, 25MHz, 64-QAM, 15kHz)	5G NR FR1 FDD	8.70	±9.6
11006	AAA	5G NR DL (CP-OFDM, TM 3.1, 30MHz, 64-QAM, 15kHz)	50 NR FR1 FDD	8.55	±9.6
11007	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.46	±9.6
11008	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.51	±9.6
11009	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 30 kHz)	50 NR FR1 FDD	8.76	±9.6
11010	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.95	±9.6
11011	AAA	5G NR DL (CP-OFDM, TM 2.1, 40 MHz, 64-QAM, 30 kHz)	50 NR FR1 FDD	8.96	±9.6
11012	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	SG NR FR1 FDD	8.68	±9.5
11013	AAB	EEE 802,11be (320 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9,6
11.014	AAB	IEEE 802.11be (320 MHz, MCS2, 99pc duty cycle)	WLAN	8.45	±9.6
11015	AAB	IEEE 802.11be (300 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	±9.6
11016	AAB	IEEE 802.11be (320 MHz, MCS4, 99pc duty cycle)	WLAN.	8.44	±9.6
11017	AAB	IEEE 802.11be (320 MHz, MCS5, 99pc duty cycle)	WLAN	8.41	±9.6
11018	AAB	IEEE 802.11be (320 MHz, MCS6, 99pc duty cycle)	WLAN	8.40	±9.6
11019	AAB	IEEE 802.11be (320 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
11020	AAH	IEEE 802.11be (320 MHz, MC58, 99pc duty cycle)	WLAN	8.27	±8.6
11021	AAH	IEEE 802.11be (320 MHz, MCS9, 99pc duty cycle)	WLAN	8.46	±9.8
11022	AAB	IEEE 802.11be (320 MHz, MCS10, 99pc duty cycle)	WLAN	8.36	±9.6
11023	BAA	IEEE 802.11be (320 MHz, MCS11, 99pc duty cycle)	WLAN	8.09	±9.6
11024	BAA	IEEE 802.11be (320 MHz, MCS12, 99pc duty cycle)	WLAN	8,42	±9.6
11025	BAA	IEEE 802.11be (320 MHz, MCS13, 99pc duty cycle)	WLAN	8.37	±9.6
11026	AAB	IEEE 802.11be (320 MHz, MCS0, 99pc duty cycle)	WLAN.	8.39	±9.6

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No: EX-7679_Aug24

Page 22 of 22



Calibration Laboratory of Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio sylzzero di taratura

S Swiss Calibration Service

Accreditation No.: SCS 0108

Client

HCT

Gyeonggi-do, Republic of Korea

Calibration Equipment used (M&TE critical for calibration)

Certificate No.

EX-3903 Jul24

CALIBRATION CERTIFICATE

Object EX3DV4 - SN:3903

Calibration procedure(s)

QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6, QA CAL-25.v8

Calibration procedure for dosimetric E-field probes

Calibration certificate documents the traceability to resional standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%.

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	26-Mar-24 (No. 217-04038/04037)	Mar-25
Power sensor NRP-Z91	SN: 103244	26-Mar-24 (No. 217-04036)	Mar-25
OCP DAK-3.5 (weighted)	SN: 1249	05-Oct-23 (OCP-DAK3.5-1249_Oct23)	Oct-24
OCP DAK-12	SN: 1016	05-Oct-23 (OCP-DAK12-1016 Oct23)	Oct-24
Reference 20 dB Attenuator	SN: CC2552 (20x)	26-Mar-24 (No. 217-04046)	Mar-25
DAE4	SN: 660	23-Feb-24 (No. DAE4-660 Feb24)	Feb-25
Reference Probe EX3DV4	SN: 7349	03-Jun-24 (No. EX3-7349 Jun24)	Jun-25

Secondary Standards	ID .	Check Date (in house)	Scheduled Check
Power meter E44198	SN: GB41293874	06-Apr-16 (in house check Jun-24)	In house check: Jun-26
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-24)	In house check: Jun-26
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-24)	In house check: Jun-26
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-24)	In house check: Jun-26
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Certificate No: EX-3903_Jul24

Page 1 of 21



Calibration Laboratory of

Schmid & Partner Engineering AG

Glossary

Zeughausstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 0108

Multilateral Agreement for the recognition of calibration certificates

TSL tissue simulating liquid
NORMx,y,z sensitivity in tree space
ConvF sensitivity in TSL / NORMx,y,z
DCP diode compression point

CF crest factor (1/duty_cycle) of the RF signal modulation dependent linearization parameters

The Swiss Accreditation Service is one of the signatories to the EA

Polarization \(\psi \) \(\psi \) rotation around probe axis

Polarization # ## rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., # = 0 is

normal to probe axis

Connector Angle Information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices – Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz."

Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization θ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvE.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- · PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VFix,y,z; A, B, C, D are numerical linearization parameters assessed based on the data of
 power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum
 calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ±50 MHz to ±100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis).
 No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Certificate No: EX-3903 Jul24 Page 2 of 21

July 31, 2024



EX3DV4 - SN:3903

Parameters of Probe: EX3DV4 - SN:3903

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc $(k=2)$
Norm (μV/(V/m) ²) ^A	0.44	0.59	0.66	±10.1%
DCP (mV) B	102.3	108.1	105.0	±4.7%

Calibration Results for Modulation Response

UID	Communication System Name		A dB	$dB\sqrt{\mu V}$	С	D dB	VR mV	Max dev.	Max Unc ^E k = 2
0.	CW	X	0.00	0.00	1.00	0.00	115.0	±3,5%	±4.7%
MC.	(PEALS)	Y	0.00	0.00	1.00		127.1	355	
		2	0.00	0.00	1.00	1	116.5		
10352	Pulse Waveform (200Hz, 10%)	X	20.00	92.91	21.97	10.00	60,0	±2.7%	±9.6%
		Y	1.61	61.25	7.01		60.0		
		Z	1.57	60.87	6.55		60.0		
10353	Pulse Wayelorm (200Hz, 20%)	X	20.00	94.61	21.88	6.99	80.0	±2.3%	±9.6%
		Y	0.85	60.05	5.31		80.0	1000000	110000
		Z	0.81	60.00	5.02		80.0		
10354	Pulse Waveform (200Hz, 40%)	X	20.00	99.81	23.19	3.98	95.0	±1.7%	±9.6%
A STORY	DEGREE OF TAXOUR IN ACCUMULATION OF THE PARTY OF THE PART	Y	24.00	76.00	9.00	1000000	95.0	ECT MINERS	92350555
		Z	26.00	72.00	7.00		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	20.00	108.04	25.80	2.22	120.0	±1.8%	±9.6%
		Y	11.56	157.35	8.02		120.0		
		Z	11.67	158.58	18.41		120.0		
10387	OPSK Waveform, 1 MHz	X	1.83	66.92	15.68	1.00	150.0	±3.8%	±9.6%
		Y	0.55	63.89	12.31	10000	150.0	25,112	3000
		Z	0.57	63.60	12.36		150.0		
10388	QPSK Waveform, 10 MHz.	X	2.45	69.37	16.42	0.00	150.0	±1.2%	±9.69
	O TO ALCO AND A TO A T	Y	1.34	65.90	13.84	(PEROCE)	150.0	100000	55390390
	- CONTRACTOR OF THE CONTRACTOR	Z	1.35	65.69	13.81	1	150.0		
10396	64-QAM Wavelorm, 100 kHz	X	3.10	71.56	19.20	3.01	150.0	±0.9%	±9.6%
		Y	1.79	65.43	16.32		150.0		
		Z	1.70	64.47	15,78		150.0		
10399	64-QAM Waveform, 40 MHz	X	3.52	67.22	15.84	0.00	150.0	±1.7%	±9.6%
		TY	2.83	66.36	15.07	1000	150.0		30000
		2	2.83	66.21	15.02		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	4.87	65.57	15,46	0.00	150.0	±3.2%	±9.6%
	INVESTIGATE POPULATION AND SECURITY	Y	3.81	66,02	15.23	0.0000000000000000000000000000000000000	150.0	- SEMINAS	111/5/05223
		- 2	3.80	65,86	15.17		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX-3903_Jul24

Page 3 of 21

A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 5).

Linearization parameter uncertainty for maximum specified field strength.

Uncertainty is determined using the max, deviation from finear response applying rectangular distribution and is expressed for the square of the field value.



Parameters of Probe: EX3DV4 - SN:3903

Sensor Model Parameters

	C1 fF	C2 fF	α γ-1	T1 msV-2	T2 ms V ⁻¹	T3 ms	T4 V2	T5 V ⁻¹	T6
×	51.5	374.21	33.94	18.83	0.05	5.10	1.21	0.22	1.01
V	9.7	69.53	32.87	4.53	0.00	4.94	0.60	0.00	1.00
z	9.8	70.38	32.87	3.23	0.00	4.90	0.47	0.00	1.00

Other Probe Parameters

Certificate No: EX-3903_Jul24

Sensor Arrangement	Triangular
Connector Angle	47.2"
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1.mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Messurement distance from surface can be increased to 3–4 mm for an Area Scan job.

F-TP22-03 (Rev. 06) Page 156 of 364

Page 4 of 21



July 31, 2024 EX3DV4 - SN:3903

Parameters of Probe: EX3DV4 - SN:3903

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc ^H (k = 2)
3300	38.2	2.71	6.59	6,85	6.66	0.37	1.27	±13.1%
3500	37.9	2.91	6.52	6.77	6.58	0.38	1,27	±13.1%
3700	37.7	3.12	6.43	6.68	6.49	0.38	1,27	±13.1%
3900	37.5	3.32	6.29	6.53	6.35	0.38	1.27	±13.1%
4100	37,2	3.53	6.22	6.47	6.28	0.38	1.27	±13.1%
5250	35.9	4.71	5,41	5.62	5.46	0.33	1.27	±13.1%
5600	35,5	5.07	4.93	5.12	4.98	0.30	1.27	±13.1%
5750	35.4	5.22	5,02	5.22	5.07	0.28	1.27	±13.1%
5800	35.3	5.27	4.93	5.13	4.98	0.28	1.27	±13.1%

Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4,4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity before 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessed at 5 MHz is 4-8 MHz, and ConvF assessed at 13 MHz is 5-19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

The probes are calibrated using fissue simulating figuids (TSL) that deviate for x and xr by less than ±5% from the target values (typically better than ±3%) and xrs valid for TSL with deviations of up to ±10% if SAR correction is appled.


Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies between 3-6 GHz at any distance larger than half the probe tip claimster from the boundary.

¹⁵ The stated uncertainty is the total calibration uncertainty (k = 2) of Norm-ConvF, This is equivalent to the uncertainty component with the symbol CF in Table 9 of IEC/IEEE 62209-1528:2020.



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide:R22)

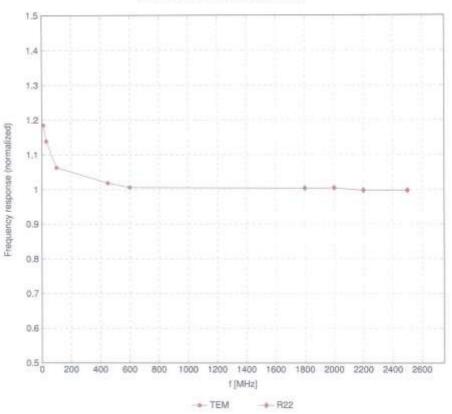


Uncertainty of Frequency Response of E-field: ±6.3% (k»2)

Certificate No: EX-3909_Jul24 Page 6 of 21

F-TP22-03 (Rev. 06) Page 158 of 364



Receiving Pattern (ϕ), $\theta = 0^{\circ}$

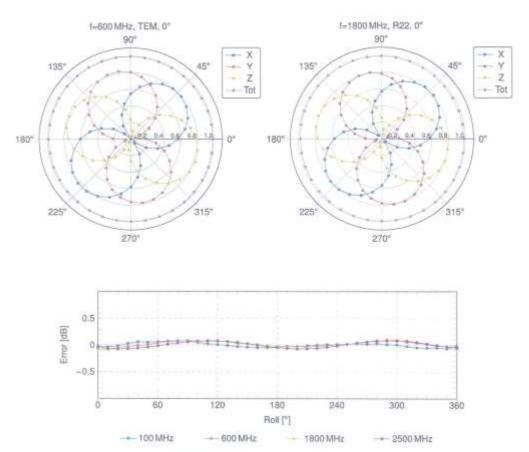

Uncertainty of Axial Isotropy Assessment: ±0.5% (k=2)


Certificate No: EX-3903_Jul24 Page 7 of 21


F-TP22-03 (Rev. 06) Page 159 of 364



Dynamic Range f(SAR_{head})

(TEM cell, f_{eval} = 1900 MHz)

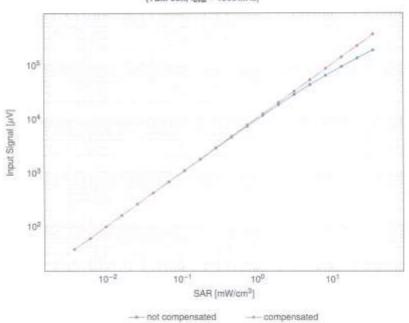

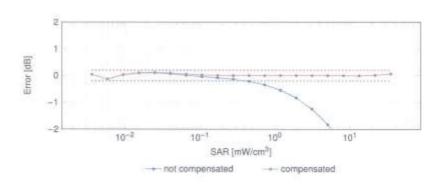

Uncertainty of Linearity Assessment: ±0.6% (k=2)


Certificate No: EX-3903_Jul24

Page 8 of 21

F-TP22-03 (Rev. 06) Page 160 of 364




Conversion Factor Assessment

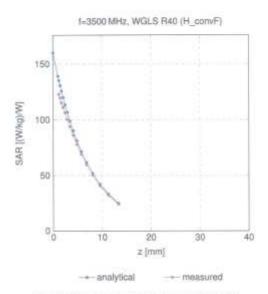

Deviation from Isotropy in Liquid



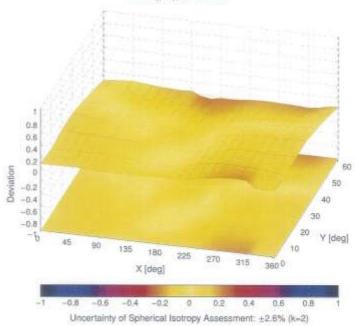

Certificate No: EX-3903 Jul24

Page 9 of 21

F-TP22-03 (Rev. 06) Page 161 of 364



Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc [®] k ≈
0		CW	CW	0.00	±4.7
0010	CAB	SAR Validation (Square, 100 ms, 10 ms)	Test	10,00	±9.6
0011	CAC	UMTS-FDD (WCDMA)	WCDMA	2.91	±9.6
0012	CAB	IEEE 802 11b WFI 2 4 GHz (DSSS, 1 Mbps)	WLAN	1.87	±9,6
	CAB		WLAN	9.46	±9.6
0013	8 - TO 7 TO 1	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps)	GSM	9.39	±9.6
0021	DAG	GSM-FDD (TDMA, GMSK)		9.57	±9.6
0023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	6.56	
0.024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	1000000	±9.6
0025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	±9,6
0.026	DAG	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	±9.6
0027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4,80	±9.6
0028	DAC	GPRS-FDD (TDMA, GMSK, TN II-1-2-3)	GSM	3.55	19.6
0.029	DAG	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	OSM	7.78	±9.6
0030	CAA	IEEE 802,15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	19.5
0031	CAA	IEEE 802,15,1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	±9.6
0032	CAA	IEEE 802,15.1 Bluelooth (GFSK, DH5)	Bluetooth	1,16	±9.6
0833	CAA	IEEE 802-15-1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7,74	±9.6
0034	CAA	IEEE 802.15.1 Blustooth (PV4-DQPSK, DH3)	Bluetooth	4.53	±9.6
0.035	CAA	IEEE 802.15.1 Bluetooth (PV4-DOPSK, DH5)	Bluetooth	3.83	±9.6
0036	CAA	IEEE 802.15.1 Bluetooth (9-0-0-5K, DH1)	Bluetooth	8.01	±9.6
0037	CAA	IEEE 802 15.1 Bluetooth (9-DPSK, DH3)	Bluetoath	4.77	±9.6
	47.77		Blueloath	4.10	±9.6
0038	CAB	IEEE 802.15.1 Bluetooth (8-DPSK, DHS)	CDMA2000	4.57	±9.6
0.038	1111111	COMA2000 (1xRTT, RC1)	The second secon		
0042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PV4-DQPSK, Haffrate)	AMPS	7,78	±9.6
0044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	±9,8
0048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13,80	±9,6
0049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Stot, 12)	DECT	10.79	±9.6
0.056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mops)	TD-SCDMA	11,01	±9.6
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	±9.8
10:059.	CAB	IEEE 802.11b WIFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2,12	±5.6
10060	CAB	IEEE 802,11b WiFi 2.4 GHz (DSSS, 5.6 Mbps)	WLAN	2.83	19.6
10061	CAB	IEEE 802,11b WIFI 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	±9.6
10062	CAE	IEEE 802,11A/h WIFI 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	±9.6
10063	CAE	IEEE 802.11a/h WIFI 5 GHz (OFDM, 8 Mbps)	WLAN	8.63	±9.6
10064	CAE	IEEE 802.11a/h WIFI 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	±9.6
10065	CAE	IEEE 802.11a/h WIFI 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	19.6
10066	CAE	IEEE 802.11a/h WIFI 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	±9.6
10067	CAE	IEEE 802 11a/h WIFI 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	±9.6
10068	CAE	IEEE 802.11a/h WIFI 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	±9.6
10068	CAE	IEEE 802.11a/h WFI 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	±9.6
10071	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	±9.6
-	7447.146		4.000000		
10072	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 12 Mbpe)	WLAN	9,62	±9.6
10073	CAS	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	±9.0
10074	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	±9.6
10075	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 36 Mbps)	WIAN	10.77	19.0
10078	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	±9.6
10077	CAB	IEEE 808.11g WIFI 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	±9.6
10081	CAB	GDMA2000 (1xRTT, RC3)	CDMA2000	3.97	±9,6
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	±9,6
10090	DAC	GPRS-FD0 (TDMA, GMSK, TN 6-4)	GSM	6.56	±9.6
10097	CAC	UMTS-FDO (HSDPA)	WCDMA	3.98	±9.6
10098	CAC	UMTS-FDD (HSUPA, Sublest 2)	WCDMA	3.98	±9.6
0.095	DAC	EDGE-FDO (TOMA, BPSK, TN 0-4)	GSM	9.55	±9.0
0100	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	±9.6
10101	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LYE-FOD	6.42	+9.6
10102	CAF	LTE-FDO (SC-FDMA, 100% RB, 20MHz, 64-QAM)	LTE-FOD	6.60	±9,6
10103	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TOD	9.29	±9.6
10104	CAH			9.29	-
	- AT2-13-7-1	LTE-TDD (SC-FDMA, 100% RB, 20MHz, 16-QAM)	LTE-TOD	100000000000000000000000000000000000000	±9.6
10105	CAH	LTE-TDD (SC-FDMA, 100% RB, 20MHz, 64-QAM)	LTE-TOD	10.01	±9.6
10108	CAH	LTE-FDO (SC-FDMA, 100% RB, 10MHz, QPSK)	LTE-FDD	5.80	±9.6
10109	CAH	LTE-FD0 (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9,6
10110	CAH		LTE-PDD	5.75	±9,6
10111	CAH	LTE-FDO (SC-FDMA, 100% RB, 5MHz, 16-QAM)	LTE-FOD	6.44	±9.6

Certificate No: EX-3903_Jul24

Page 10 of 21



July 31, 2024

CILU	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k =
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 84-QAM)	LTE-FDD	6.50	±9.6
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 54-QAM)	LTE-FDD	6.62	±9.6
10114	CAE	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	±9.6
0115	CAE	IEEE 802,11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8,46	±9.6
0118	CAE	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	±9.6
0117	CAE	(EEE 802,11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	±9.6
0118	CAE	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	±9.6
0119	CAE	IEEE 882,11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	±9,6
0140	CAF	LTE-FDD (SC-FDMA, 100% R8, 15 MHz, 16-QAM)	LTE-FDO	6.49	19.6
0141	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 54-QAM)	LTE-FDD	6.53	±9,6
0142	CAF	LTE-FDD (SC-FDMA, 100% R8, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
0143	CAF	LTE-FDD (BC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	±9.6
0144	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FOD	6.65	±9.6
0145	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FOD	5.76	±9.6
0146	CAG	LTE-FDD (SQ-FDMA, 100% RB, 1,4MHz, 16-QAM)	LTE-FDD	8,41	±9.6
0147	CAG	LTE-FDO (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6,72	±9.6
0149	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6,42	±9.6
0150	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	5.60	±9.6
0.151	GAH	LTE-TOD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TD0	9.28	±9.6
0152	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TOD	9.92	±9.6
0153	CAH	LTE-TDD (SC-FDMA, 50% RB, 29 MHz, 54-QAM)	LTE-TDD	10,05	±9,6
0.154	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDO	5.75	±9.6
0155	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-GAM)	LTE-FDO	6.43	±9.6
0156	CAH	LTE-FDB (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDO	5.79	±9.6
0.157	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FD0	6.49	19.6
10156	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDO	6.62	±9.6
1015#	CAH	LTE-FDD (SG-FDMA, 50% RB, 5MHz, 64-QAM)	LTE-FD0	6.56	±9.6
10160	CAF	LTE-FDD (SC-FDMA, 50% R8, 15 MHz, QPSK)	LTE-FD0	5.82	±9.6
10181	CAF	LTE-FDD (SC-FDMA, 50% RB, 15MHz, 16-QAM)	LTE-FD0	6.43	±9.6
10162	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-GAM)	LTE-FDO	6.58	±9.6
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	±9.6
10167	CAG	LTE-FDD (SC-FDMA, 58% RB, 1.4MHz, 16-QAM)	LTE-FD0	6.21	±9.6
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-F00	6.79	±9.6
10169	CAF	LTE-FDD (SC-FDMA, † RB, 20 MHz, QPSK)	LTE-FDD	5.73	19.6
10170	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±9,8
10171	AAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	±9.6
10172	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9,21	±9,6
10173	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TOD	9.48	±9,6
10174	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TOD	10.25	±9.6
10175	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	±9.6
10176	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-GAM)	LTE-FOD	6.52	±9.6
10177	CAJ	LTE-FDO (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	=9.6
10178	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FOD	6.52	±9.6
10179	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10180	CAH	LTE-FDD (SC-FDMA, 1 RB, 5MHz, 64-QAM)	LTE-FOO	6.50	±9.6
10181	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, QPSK)	LTE-FDD	5.72	±9.6
10182	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FOD	6,52	±9.6
10183	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	6.50	±9.6
10185	CAF	LTE-FOD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	5,70	=9.6
10185	AAF	LTE-FOD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) LTE-FOD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.81	±9,6
10186	CAG	LTE-FDD (SG-FDMA, 1 RB, 3 MHz, 64-QAM) LTE-FDD (SG-FDMA, 1 RB, 1,4 MHz, QPSK)	LTE-FDD	6.50 5.73	±9,6
10188	CAG	the annual property of the first and the contract of the contr	LTE-FDD		±9,6
10188	AAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FOD	6.52	±9,6
10189	CAE	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	5.50 8.09	±9.6
10194	CAE	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	±9.6
0195	CAE	The state of the s			-
10196	CAE	IEEE 802.11n (HT Greenfield, 85 Mbps, 64-QAM) IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.21	±9.6
10197	CAE	IEEE 802,11n (HT Mixed, 5,5 Mbps, 8PSK)	WLAN	8,10	±9.6
10198	CAE	IEEE 802,11n (HT Mixed, 85 Mbps, 19-QAM)			±9.6
10219	CAE	IEEE 802,11n (HT Mixed, 7,2 Mbps, 8PSK)	WLAN	8.27	±9.8
10220	CAE	IEEE 802.11n (HT Mixed, 7,2 Mbps, 9PSK)	WLAN	8.03	±9.8
10221	CAE	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8,13	±9,6
10222	CAE	IEEE 802.11n (HT Mixed, 72.2 Mops, 64-GAW)	WLAN	8.27	±9.6
10223	CAE	IEEE 802,111 (HT Mixed, 15 Mops, 16-QAM)	WLAN WLAN	8,05	±9.5
	507.7%	Total section (1) I make by make 10 central	TELEVIS	0.750	±9,6

Certificate No: EX-3903_Jul24

Page 11 of 21



UID	Rev	Communication System Name	Group	PAR (dB)	Ungt k =
10225	CAC	UMTS-FDD (HSPA+)	WCDMA	5.97	19.5
10226	CAC	LTE-TDD (SC-FDMA, 1 RB, 1,4 MHz, 16-QAM)	LTE-TDD	9.49	±9.6
0227	CAC	LTE-TDD (SC-FDMA, 1 RB, 1,4 MHz, 84-QAM)	LTE-TDD	10.26	±9.6
0228	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TOD	9.22	±9.6
0228	CAE	LTE-TOD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	±9.8
0220	CAE	LTE-TDD (SG-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TOD	10.25	±9.6
0231	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	±9.6
0835	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TOD	9.48	±9.6
0233	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
0234	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	±9.6
0235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 18-GAM)	LTE-TDD	9.48	±9.6
0236	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TOD	10.25	±9.6
0237	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	±9,6
-	CAG	LTE-TOD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	+9.6
0.238	CAG	LTE-TOD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	29.6
0239	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	19.6
	A CONTRACTOR OF THE PARTY OF TH	LTE-TDD (SC-FDMA, 50% RB, 1,4 MHz, 16-QAM)	LTE-TDD	9.82	±9.6
0241	CAC	The state of the s	LTE-TDD	9.86	19.6
0242	CAC	LTE-TDD (SC-FDMA, SON RB, 1 4MHz, 64-QAM)	LTE-TDD	9.46	±9.6
0243	CAC	LTE-TDD (SC-FDMA, 50% R8, 1.4 MHz, QPSK)	LTE-TOD	10.06	±9.6
0244	CAE	LTE-TDD (SC-FDMA, 50%, RB, 3 MHz, 16-GAM)	The second second second		
0245	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TOD	10.06	±9.6
0246	CAE	LTE-TDO (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TOD	9.30	±9.6
0247	CAH	LTE-TDO (SC-FDMA, 50% RB, 5MHz, 16-QAM)	LTE-TOD	9,91	
0248	CAH	LTE-TOO (SC-FDMA, 50% RB, 5MHz, 64-QAM)	LTE-TDD	10,09	±9.6
0249	CAH	LTE-TDD (SC-FDMA, 50% RB, 5MHz, QPSK)	LTE-TDD	9.29	±9,6
0250	CAH	LTE-TOD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.61	±9.0
0.251	CAH	LTE-TOD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TOD	10.17	±9.6
0.252	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9,24	±9.6
0.253	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9,90	±9.6
0254	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TOD	10,14	±9,6
0255	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	±9.6
10258	CAG	LTE-TDD (SC-FDMA, 100% RB, 1,4MHz, 16-QAM)	LTE-TDO	9.96	±9.6
10257	CAC	LTE-TDD (SC-FDMA, 100% RB, 1,4MHz, 64-QAM)	LTE-TOO	10.0#	19.6
0.258	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	±9.6
10259	CAE	LTE-TDD (SC-FDMA, 100% RB, 3MHz, 16-QAM)	LTE-TDD	9.98	±9.6
10260	CAE	LTE-TDD (SC-FDMA, 100% R8, 3 MHz, 64-GAM)	LTE-TOO	9.97	±9.6
10261	CAE	LTE-TDD (SC-FDMA, 100% R8, 3MHz, QPSK)	LTE-TOO	9.24	±9.6
0.565	CAH	LTE-TDD (SC-FDMA, 100% RB, 5MHz, 16-QAM)	LTE-TD0	9.83	±9.6
10263	CAH	LTE-TDD (SC-FDMA, 100% R8, 5MHz, 64-QAM)	LTE-TOO	10.16	19,6
10264	CAH	LTE-TDD (SC-FDMA, 100% RB, 5MHz, QPSK)	LTE-TDD	9.23	±9.6
10265	CAH	LTE-TDD (SC-FDMA, 100% RB, 10MHz, 16-QAM)	LTE-TOD	9.92	±9.6
10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10MHz, 64-QAM)	LTE-TOD	10.07	±9.6
10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TOD	0.30	±9,6
10298	CAG	LTE-TOO (SC-FDMA, 100% RB, 15MHz, 16-QAM)	LTE-TOD	10.06	±9.6
10268	CAG	LTE-TDD (SC-FDMA, 100% RB, 15MHz, 64-QAM)	LTE-TOD	10.13	±9.6
10270	CAG	LTE-TDD (SC-FDMA, 100% RB, 15MHz, QPSK)	LTE-TOD	0.58	±9.6
10274	CAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP Ref8.10)	WCDMA	4.87	±9.6
10275	GAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	=9.5
10277	CAA	PHS (QPSK)	PHS	11.81	±9.6
10278	CAA	PHS (QPSK, BW 884 MHz, Rollott 0.5)	PHS	11.81	±9.6
10279	CAA	PHS (QPSK, BW 884 MHz, Rolloff 0.38)	PHS	12,18	±9.6
10290	AAB	CDMA2000, RC1, B055, Full Rate	CDMA2000	3.91	±9,6
10291	AAB	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	±9:6
0292	AAB	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	±9.6
10293	AAB	COMA2000, RC3, BO3, Full Rate	GDMA2900	3.50	=9.6
0.295		CDMA2000, RC1, SC3, 1/8th Rate 25 fr,	GDMA2000	12,49	±9.6
0297	-	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FOD	5.81	±9:6
0.298	-	LYE-FDD (SC-FDMA, 60% RB, 3 MHz, QPSK)	LTE-FDD	5,72	±9.6
0.299	-	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	+9.6
0300	-	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10301		IEEE 802,16e WMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)	WMAX	12.03	±9.6
10302	managed branches	IEEE 802,16s WMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)	WMAX	12.57	±9.6
10303	A CONTRACTOR	IEEE 802.16a WIMAX (31:15, 5 ms. 10 MHz, 64QAM, PUSC)	WMAX	12.52	±9.6
10304		IEEE 802.16e WIMAX (28:18, 5ms, 10 MHz, 64QAM, PUSC)	WMAX	11.86	±9.6
10305	-	IEEE 802,15e WIMAX (31,15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)	WMAX	15.24	29.6
18000	1000	IEEE 802.16a WMAX (29:18, 10 ms, 10 MHz, 54QAM, PUSC, 18 symbols)	WIMAX	14.67	±9.6

Certificate No: EX-3903_Juli24

Page 12 of 21

F-TP22-03 (Rev. 06) Page 164 of 364



July 31, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^R R ≈
10387	AAA	IEEE 802.18e WIMAX (29:18, 10 ms, 10 MHz, QPSK, PUSC, 18 symbols)	WMAX	14,49	±9.6
0308	AAA	IEEE 802.15e WMAX (29:18, 10 ms. 10 MHz, 15QAM, PUSC)	WIMAX	14.46	±9.6
0339	AAA	IEEE 802,15e WMAX (29:18, 10 ms. 10 MHz, 16QAM, AMC 2x3, 18 symbols)	XAMW	14.58	±9.6
0310	AAA	IEEE 802.16e WIMAX (29:18: 10 ms. 10 MHz, QPSK, AMC 2x3. 18 symbols)	WWAX	14,57	±9.6
0311	AAE	LTE-FDD (SC-FDMA, 100% R8, 15 MHz, GPSK)	LTE-FDD	6.06	±9.8
10313	AAA	IOEN 1:3	IDEN	10.51	±9.6
10314	AAA	IDEN 1:5	IDEN	13,48	±9.6
10315	AAB	IEEE 802,11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	WLAN	1,71	±9,6
10316	AAB	IEEE 802.11g WIFI 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.6
10317	AAE	IEEE 802.11a WIFI 5 GHz (OFDM, 8 Mbps, 96pc duty cycle)	WLAN	8,36	±9.6
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10,00	±9.6
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	±9.6
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	±9.6
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	±9.6
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	±9.6
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	±9.6
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	±9.6
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	±9.6
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	±9.6
10400	AAF	IEEE 802.11ac WiFi (20 MHz. 64-QAM, 99pc duty cycle)	WLAN	8.37	±9.6
10401	AAF	IEEE 802.11ac WIFI (40 MHz. 64-QAM, 99pc duty cycle)	WLAN	5.60	±9.6
10.402	AAF	IEEE 802.11ac WiFi (80 MHz, 54-QAM, 99pc duty cycle)	WLAN	9.52	±9,6
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	±9.6
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	±9.6
10406	AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	±9.6
10410	AAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2.3.4.7.8.9, Subframe Conf-4)	LTE-TDD	7.82	±9.6
10414	AAA	WLAN CCDF 64-QAM, 40 MHz	Generic	8.54	±9.6
10415	AAA	IEEE 802,115 WIFL2.4 GHz (DSSS, 1 Maps, 99pc duty cycle)	WLAN	1.54	+9.6
10416	AAA	IEEE 802,11g WIFI 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	+9.6
10417	AAD	IEEE 802,11a/h WIFI 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10418	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 6 Mbps, 99pc duty cycle, Long preembule)	WLAN	8.14	±9.6
10419	AAA.	IEEE 802.11g WIFL2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preambule)	WLAN	8.19	19.8
10422	AAD	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	19.6
10423	AAD	IEEE 802.11n (HT Greenfield, 43.3 Mbpw, 16-QAM)	WLAN	8.47	±9.6
10424	AAD	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	±9.6
10425	AAD	IEEE 802,11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	±9.6
10426	AAD	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	±9.6
10427	AAD	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	±9.6
10430	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDO	8.28	19.6
10431	AAE	LTE-FDD (OFDMA, 10MHz, E-TM 3.1)	LTE-FDO	8.38	19.6
10432	AAD	LTE-FDD (OFDMA, 15MHz, E-TM 3.1)	LTE-FDD	B.34	19.6
10433	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDO	8.34	19.6
10434	AAB	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	+9.6
10435	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, OPSK, UL Subframe=2.3.4,7.8.9)	LTE-TDD	7.82	19.6
10447	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	±9.6
10448	AAE		LTE-FDD		_
10448	AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%) LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%)	LTE-FOO	7,53	±9.6
10450	AAD	LTE-FDD (OFDMA, 28 MHz, E-TM 3.1, Clipping 44%)	LTE-FOD	7.48	19.6
10451	AAB	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	19.6
10453	AAE	Validation (Square, 10 ms, 1 ms)	Test	10.00	19.6
10458	AAD	IEEE 802.11ac WiFI [160 MHz; 84-QAM, 99pc duty cycle]	WLAN		74714 6 50 50
10456	AAB	The Control of the Co	A CONTRACTOR OF THE PARTY OF TH	8.63	19.5
10457	AAA	UMTS-FDD (DC-HSDPA) CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.62	49.6
10459	AAA	LOS DA CIDADOS DE PORTE DE CONTRACTOR DE CON	The second second second	6.55	±9.6
10459	AAB	CDMA2000 (1xEV-D0, Riev. B, 3 carriers)	COMA2000	8,25	19.6
10461	AAC	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	±9.0
		LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7.82	±9,6
10462	1.00	LTE-TDD (SG-FDMA, 1 R8, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.30	±9.5
10463	_	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe-2,3,4,7,8,9)	LTE-TOD	8.56	±9,6
10464	AAD	LTE-TDO (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subtrame-2,8,4,7,8,9)	LTE-TOD	7.82	±9.6
10465	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe-2,3.4.7.8.9)	LTE-TOD	8.32	±9.0
10466	AAD	LTE-TDO (SG-FDMA, 1 R8, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10467	AAG	LTE-TDD (SC-FDMA, 1 R8, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7.82	±9.6
10468	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.32	生物,在
10469	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe-2,3.4,7,8,9)	LTE-TOD	8.56	±9,6
10470	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7.82	±9.6
10471	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TOD	8.32	±9.6

Certificate No: EX-3903_Jul24

Page 13 of 21



UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E $k=2$
10472	AAG	LTE-TOD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subtrame=2:3.4,7,5.9)	LTE-TDD	8.57	78.6
10473	AAF	LTE-TOD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subhame=2,3.4.7.8.9)	LTE-TDD	7.82	上9.8
10.474	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subtraine=2,3.4,7,8,9)	LTE-TDD	8.32	±9.6
10475	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subtrame=2.3.4,7,8,9)	LTE-TOD	8,57	±9.5
10.477	AAG	LTE-TDD (5C-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.02	±9.6
10478	ENA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subtrame=2.3,4,7,8,9)	LTE-TOD	8.57	±9.6
10479	AAC	LTE-TDD (SC-FDMA, 50% RB. 1.4 MHz, QPSK, UL Subhame=2.3,4,7,8,9)	LTE-TOD	7.74	±9.6
10.480	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7.8,9)	LTE-TDD	8.18	±9.6
10481	AAC	LTE-TDD (SC-FDMA, 50% RB, 1,4MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.45	±9.6
10482	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subtrame=2,3,4,7,8,9)	LTE-TOO	7,71	±9.6
10483	AAD	LTE-TDD (SC-FDMA, 50% RB, 9 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.39	+9.6
10484	AAD	LTE-TDD (SC-FDMA, 50%, RB, 3 MHz, 64-QAM, UL Subframe+2,3,4,7,8,9)	LTE-TD0	8.47	±9.6
10485	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subhame+2,3,4,7,8,9)	LTE-TOD	7.59	±9.6
10486	AAG	LTE-TDD (SC-FDMA, 50% RB, 5MHz, 16-QAM, UL Subframe=2,3,4,7,6,9)	LTE-TDD	8.38	±9.6
10487	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.60	19.6
10488	AAG	LTE-TDD (SC-FDMA, 50% AB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7.70	±9.6
10489	AAG	LTE-TDD (SG-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.31	±9.6
10490	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3.4,7.8.9)	LTE-TDD	8.54	±9.6
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subtrame=2.3,4.7,8,9)	LTE-TOD	7,74	±9.8
10492	AAF	LTE-TOD (SC-FDMA, 50% RB. 15MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.41	±9.6
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-DAM, UL Subtrame=2.3.4.7.8.9)	LTE-TDD	8,55	±9.6
10494	AAG	LTE-TDD (SC-FDMA, 90% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8.9)	LTE-TOD	7,74	±9.6
10495	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subtrame=2,3,4,7,8,9)	LTE-TOD	8,37	±9.6
10.495	AA/3	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subtrame=2,3,4,7,6,9)	LTE-TDD	8.54	±9.6
10497	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±9.6
10488	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4MHz, 16-QAM, UL Subframe=2,3.4,7,8,9)	LTE-TD0	8.40	±9.6
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2.3,4,7.6,9)	LTE-TDD	88,68	±9.6
10500	AAD	LTE-TDD (SC-FDMA, 100% R8, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	TLE-LDD	7.87	±9.6
10501	AAD	LTE-TDD (SC-FDMA, 199% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOO	8,44	±9.6
10502	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe-2,3,4,7,8,9)	LTE-TDO	8.52	±9.6
10503	AAG	LTE-TDD (SC-FDMA, 100% R8, 5MHz, QPSK, UL Subframe=2,3,4,7,6,9)	LTE-TD0	7.72	±9.6
10504	AAG	LTE-TDD (SC-FDMA, 100% RB, 5MHz, 18-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOO	8.31	±9.6
10505	AAG	LTE-TDD (SC-FDMA, 100% RB, 5MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TOO	8.54	±9.6
10506	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7,74	19.6
10507	AAG	LTE-TDD (SC-FDMA, 100% RB, 10MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TD0	8.36	±9,6
10508	AAG	LTE-TDD (SC-FDMA, 100%-RB, 10MHz, 64-QAM, UL Subframe~2,3,4,7,8,9)	LTE-TOO	ft.55	±9.8
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOO	7.99	19.6
10510	AAF	LTE-TDD (SC-FDMA, 100% R8, 15MHz, 16-QAM, UL Subframe=2,3,4,7,6,9)	LTE-TOO	8.49	±9.6
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDO	8.51	±9.6
10512	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, OPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDO	7,74	±9.6
10513	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.42	19.6
10514	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subfreme-2,3,4,7,8,9)	LTE-TD0	8,45	±9,6
10515	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	WLAN	1.58	±9.6
10516		IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mops, 99pc duty cycle)	WLAN	1.57	±9.6
10517	AAA	IEEE 802,116 WIFL2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	WLAN	1.58	±9.6
1051B 1051B	AAD	IEEE 802,11a/h WIFLSGHz (OFDM, 9 Mbps, 99pc duty cycle)	WLAN	9.23	±9.6
10520	AAD	IEEE 802.11a/h WIFI 5 GHz (GFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.39	±9.6
10521	AAD	IEEE 802,11a/h WIFI 5 GHz (OFDM, 18 Mbps, 99pc duty cycle) IEEE 802,11a/h WIFI 5 GHz (OFDM, 24 Mbps, 98pc duty cycle)	WLAN	8,12	±9.6
10522	AAD	IEEE 802,11a/h WIFI 5 GHz (OFDM, 24 N65ps, 98pc duty cycle)	WLAN	7,97	+9.6
10522	AAD	IEEE 802,11a/h WiFLSGHZ (OFDM, 36 Nbps, 99pc duty cycle)	WLAN	8,45	19.6
10524	AAD		- CONTRACT	8,08	±9.6
10525	AAD	IEEE 802,11ah WIFI 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.27	±9.6
10526	AAD	IEEE 802.11ac WIFI (20 MHz, MCS0, 99pc duty cycle) IEEE 802.11ac WIFI (20 MHz, MCS1, 99pc duty cycle)	WLAN	9.36	19.6
10527	AAD	IEEE 802,11ac WFI (20 MHz, MCS1, 98pc duty cycle)	WLAN	8.42 8.21	19.6
10528	AAD	IEEE 802,11ac WiFI (20 MHz, MCS2, 99pc duty cycle)	WLAN	9.21	±9.6
10529	AAD	IEEE 802.11ac WIFI (20 MHz, MCS4, 98oc duly cycle)	WLAN		19.6
10531	AAD	IEEE 802,11sc WIFI (20 MHz, MCS8, 98pc duty cycle)	WLAN	8.36	±9.6
10532	AAD	IEEE 802,11ac WIFI (20 MHz, MCSR, 98pc duty cycle)	WLAN	8.43 8.29	±9.6
10:533	AAD	IEEE 802.11ac WIFI (20 MHz, MCSR, 99pc duty cycle)			±9,6
10534	AAD	IEEE 802,11sp WIFI (40 MHz, MCS0, 98pc duty cycle)	WLAN	9.38	±9.6
10535	AAD	IEEE 802,11ac WIFI (40 MHz, MCS1, 99pc duty cycle)	77.77.77	8.45	±9.6
10536	AAD	IEEE 802.11ac WIFI (40 MHz, MCS2, 98pc duty cycle)	WLAN	8.45	±9.6
10537	AAD	IEEE 802,11ac WIFI (40 MHz, MCS2, 99bc duty cycle)	WLAN	8.32	±9.6
10538	AAD	IEEE 802.11ac WIFL (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.44	±9.6
10.540	AAD	The state of the s	WLAN	8,54	±9,6
1912/10	1000	IEEE 802,11ac WiFi (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.39	±9.6

Certificate No: EX-3903_Jul24

Page 14 of 21

F-TP22-03 (Rev. 06) Page 166 of 364



UID	Rev	Communication System Name	Group	PAR (dB)	Unce k = 2
10541	AAD	IEEE 802.11ac WiFi (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.46	±9.6
10542	AAD	IEEE 802.11ac WiFi (40 MHz. MCS8, 99pc duty cycle)	WLAN	8.65	±9.6
10543	AAD	IEEE 802.11ac WiFi (40 MHz, MC59, 99pc duty cycle)	W.AN	8.65	3.9.6
10544	AAD	IEEE 802.11ac WIFI (80 MHz, MCS0, 99pc duty cycle)	WLAN	B.47	±9,6
10545	AAD	IEEE 802,11ac WIFI (80 MHz. MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
10546	AAD	IEEE 802.11an WiFi (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.35	±9.6
10547	CAA	(EEE 802.11ac WIFI (80 MHz. MCS3, 99pc duty cycle)	WLAN	8.49	±9.6
10548	AAD	IEEE 802,11ac WiFi (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.37	±9.6
10550	AAD	IEEE 802.11ac WIFI (80 MHz, MCS8, 98pc duty cycle)	WLAN	8.38	±9.6
10551	AAD	IEEE 802,11ac WIFI (80 MHz, MCS7, 99pc duty cycle)	WLAN	H.50	±9.6
10552	AAD	IEEE 882,11ac WFi (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.42	±9.6
10553	AAD	IEEE 802.11ac WIF-(80 MHz, MCS9, 98pc duty cycle)	WLAN	8.45	±9.6
10554	AAE	IEEE 802.11ac WiFI (160 MHz, MCS0, 89pc duty cycle)	WLAN	8.48	±9.6
10558	AAE	IEEE 802,11ac WIFI (190 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9.6
10556	AAE	IEEE 802,11ac WiFi (160 MHz, MCS2, 89pc duty cycle)	WLAN	8.50	±9.6
10557	AAE	IEEE 802,11ac WiFl (160 MHz, MCS3, 99pc duty cycle)	WLAN	8.52	±9.8
10558	AAE	IEEE 802,11ac WiFi (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.61	±9.5
	AAE	IEEE 802,11ac WiFi (160 MHz, MCS6, 99pc duty cycle)	WLAN	8.73	19.6
10560		IEEE 802 11ac WiFI (160 MHz, MCS1, 96pc duty cycle)	WLAN	8.56	±9.6
10561	AAE	The state of the s	WLAN	8.69	±9.6
10562	AAE	IEEE 802,11sc WiFi (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.77	±9.6
10563	AAE	IEEE 802.11ac WiFI (160 MHz, MCS8, 99pc duty cycle)	The state of the s	8.25	±9.6
10564	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.45	the second second
10565	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8,45	±9.6
10566	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)			
10567	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	WLAN	9.00	±9,6
1056B	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.37	±9,6
10569	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.10	±9.6
10570	AAA	IEEE 802.11g WIFL2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.30	±9,6
10:571	AAA	IEEE 802.11b WIFI 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1,99	±9.6
10572	AAA	IEEE 802.11b WIFI 2.4 GHz (DSSS, 2Mbps, 90pc duty cycle)	WLAN	1,99	19.6
10573	AAA	IEEE 802.11b WIFI 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10574	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10575	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	WLAN	fl.59	±9.6
10576	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.50	±9.6
10577	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-QFDM, 12 Mbps: 90pc duty cycle)	WLAN	8.70	19.6
10578	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8,49	±9.6
10579	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10580	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 96Mbps, 90pc duty cycle)	WLAN	8.76	±9,6
10581	AAA:	IEEE 802,11g WIFI 2,4 GHz (DSSS-OFDM, 48 Mbgs, 90pc duty cycle)	WLAN	8.35	±9.6
10582	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10583	AAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±9.6
10584	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	19.5
10585	AAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10586	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10587	AAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10588	AAD.	IEEE 802.11a/h WIFI 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.6
10589	AAD	IEEE 802,11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	WLAN	6.36	±9.6
10590	AAD	IEEE 802,11a/h WiFi 5 GHz (OFDM, 54Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10891	AAD	IEEE 802,11n (HT Mixed, 20 MHz, MCS0, 90pc duty cycle)	WLAN	8,63	±9.6
10592	AAD	IEEE 802,11n (HT Mixed, 20 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10593	AAD	IEEE 802,11n (HT Mixed, 20 MHz, MCS2, 90pc duty cycle)	WLAN	8,64	±9.6
10594	AAD	IEEE 802,11n (HT Mixed, 20 MHz. MCS3, 90pc duty cycle)	WLAN	8.74	±9.6
10585	AAD	IEEE 802.11n (HT Mixed: 20 MHz; MCS4, 90pc duty cycle)	WLAN	8.74	19.6
10596	AAD	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	WLAN	8.71	±9.6
10597	AAD	IEEE 802,11n (HT Mixed, 20 MHz, MCS6, 90pc duty rycle)	WLAN	8.72	±9.6
10598	AAD	IEEE 802.11n (HT Mixed, 20 MHz, MC57, 90pc duty sycle)	WLAN	8.50	±9,6
10599	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS0, 90pc duty cycle)	WLAN	8.79	±9.6
10600	AAD	IEEE 802,11n (HT Mixed, 40 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	19.6
10801	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS2, 90pc duty cycle)	WLAN	8.82	±9.8
10668	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS3, 90pc duty cycle)	WLAN	8.94	±9.6
10603	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS4, 90pc duty cycle)	WLAN	9.03	±9.6
10604	AAD	IEEE 862.1 tn (HT Mixed, 40 MHz, MCSS, 90pc duty cycle)	WLAN	8,76	±9.6
10605	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS6, 90pc duty cycle)	WLAN	8.97	±9.6
10806	AAD.	IEEE 802.11n (HT Mixed, 40 MHz, MGS7, 90pc duty cycle)	WLAN	8.82	19.6
11000		IEEE 802.11ac WFI (20 MHz, MCS0, 90pc duty cycle)	WLAN	8.64	±9.6
10607	AAD				

Certificate No: EX-3903_Jul24

Page 15 of 21

F-TP22-03 (Rev. 06) Page 167 of 364



July 31, 2024

UID	Hev	Communication System Name	Group	PAR (dB)	Unch k =
10609	AAD	IEEE 802,11ac WiFi (20 MHz, MCS2, 90pc duty cycle)	WLAN	8,57	±9.6
10610	AAD	IEEE 802.11ab WIFI (20 MHz, MCS3, 90pc duly cycle)	WLAN	8,78	±9.6
0611	AAD	IEEE 802,11ac WIFI (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	±9.6
0612	AAD	IEEE 802.11ac WiFi (20 MHz, MGS5, 90pc duty cycle)	WLAN	8.77	±9.6
0613	AAD	IEEE 802,11ac WiFi (20 MHz, MCS6, 96pc duty cycle)	WLAN	8.94	±9.6
0514	AAD	IEEE 802 11ac WIFI (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.59	±9.6
0815	AAD	IEEE 802,11ac WIFI (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10616	AAD	IEEE 802 11ac WIFI (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.82	±9.6
	AAD	The state of the s	WLAN	8.81	±9.6
10617	Accessed to the same	IEEE 802.11ac WiFi (40 MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.58	±9.6
10618	AAD		WLAN	8.86	±9.6
10619	AAD	IEEE 802,11ac WIFI (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.87	±9,6
0.620	CAA	IEEE 802.11ac WiFi (40 MHz, MCS4, 90pc duty cycle)	W.AN	8.77	19.6
10621	AAD	IEEE 802.11ac WiFi (40 MHz, MCSS, 90pc duty cycle)		CONTRACT LAND	
10.655	AAD	IEEE 802,11ac WiFi (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.68	±9.6
10623	AAD	IEEE 802,11ac WIFI (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±9,6
10-824	AAD	IEEE 802.11ac WIFi (40 MHz, MCS8, 90pc duty cycle)	WLAN	8,96	±9.6
10825	AAD	IEEE 802,11ac WIFI (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.96	±9.6
10628	AAD	IEEE 802.11ac WiFi (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.6
10627	AAD	IEEE 802.11ac WiFi (80 MHz, MCS1, 90pc duty cycle)	WLAN	6.88	19.6
10828	AAD	IEEE 802.11ac WIFI (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.71	19.6
10629	AAD	IEEE 802.11ac WiFi (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±9.6
0830	AAD.	IEEE 802.11sc WIFI (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.72	±9,6
10831	AAD	IEEE B02.11ac WIFI (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.81	±9.5
10632	AAD	IEEE 802.11ac WIFI (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	19.6
10633	AAD	IEEE 802 11sc WIFI (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.83	±9.8
10634	AAD	IEEE 802.11ac WiFi (90 MHz, MCS8, 90pc duty cycle)	WLAN	8.80	±9.6
10835	AAD	IEEE 802, 11ac WiFi (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.81	±9.6
10636	AAE	IEEE 802 11ac WIFI (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.6
	AAE	The second secon	WLAN	8.79	±9,6
10637		IEEE 802.11ac WIFI (160 MHz, MCS1, 90pc duty cycle)	7.75.75.150	-	
10638	AAE	IEEE 802.11ac WiFI [160 MHz, MCS2, 90pc duty cycle)	WLAN	8,86	±9,6
10639	AAE	IEEE 802.11ac WIFI (160 MHz, MCS3, 90pc duty cycle)	WLAN	5.85	±9,6
10840	AAE	IEEE 802.11ac WIFI (160 MHz, MCS4, 90pc duty cycle)	WLAN	8.98	±9.6
10541	AAE	IEEE 802,11ac WIFI (160 MHz, MCSS, 90pc duty cycle)	WLAN	9.06	±9.8
10542	AAE	IEEE 802,11ac WiFi (160 MHz, MCS8, 90pc duty cycle)	WLAN	9.06	±9,6
10543	AAE	IEEE 802,11ac WIFI (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.89	±9.6
10644	AAE	HEEE 802,11ac WiFI (160 MHz, MCS8, 90pc duty cycle)	WLAN	9:05	±9.8
10645		IEEE 802.11ac WIFI [160 MHz, MCS9, 90pc duty cycle)	WLAN	9.11	±9.6
10548	AAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	LTE-TOD	11.96	±9.6
10547	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11,96	±9.6
10648	AAA	CDMA2000 (1x Advanced)	CDMA2000	3.45	±9.6
10652	AAF	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6,91	±9.6
10653	AAF	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	±9.6
10654	AAE	LTE-TOD (OFDMA, 15 MHz, E-TM 3.1, Olipping 44%)	LTE-TOD	6,96	±9.8
10655	AAF	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7,21	±9.6
10858	AAB	Pulse Wavetonn (200Hz, 10%)	Test	10.00	=9.6
10659	AAB	Pulse Wavelorm (200Hz, 20%)	Test	6.99	±9.6
10660	AAB	Pulse Waveform (200Hz, 40%)	Test	3.98	±9.6
10651	AAB	Pulse Wavelorm (200Hz, 60%)	Test	2.22	
10862	AAB	Pulse Wayetorm (200Hz, 80%)		The second secon	±9.6
10670	AAA	The second secon	Test	0.97	±9.6
		Bluetooth Low Energy	Bluetoath	2,19	±9.6
10671	AAC	(EEE 802.11ax (20 MHz, MCS0, 90pc duty cycle)	WLAN	9.09	g9.6
10672	AAC	IEEE 802,11ax (20 MHz; MCS1, 90pc duty cycle)	WLAN	8,57	±9,6
10673	AAC	IEEE 802.11ax (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.78	±9.6
10674	AAC	IEEE 802.11ax (20 MHz, MC83, 90pc duty cycle)	WLAN	8.74	±9,5
0675	AAC	IEEE 802.11sx (20 MHz, MGS4, 90pc duty cycle)	WLAN	8,90	±9.6
10676		IEEE 802.11ax (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±9.8
0677		IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.73	±9.6
0678		IEEE 802.11ax (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.78	±9.6
10679	AAC	IEEE 802,11ax (20 MHz, MCS8, 90pc duty cycle)	WLAN	8,89	=9,6
10680	AAC	IEEE 802.11ax (20 MHz, MCS9, 90pc duty cycle)	WLAN	8.80	±9.6
10681	AAC	IEEE 802.11ax (20 MHz, MCS10, 90pc duty cycle)	WLAN	8.62	±9.6
10682	10000	IEEE 802.11ax (20 MHz, MCS11, 90pc duty cycle)	WLAN	8.83	=9.6
10683		IEEE 802.11as (20 MHz, MCS0, thipc duty cycle)	WLAN	8,42	±9.6
10684	ordinate Adapt Commission	IEEE 802.11ax (20 MHz, MCS1, 98pc duty cycle)	WLAN	8,26	±9.6
10885	-	IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle)	WLAN		
10686	-	IEEE 802.11ax (20 MHz, MCS3, 99pc duty cycle)		8,33	±9.6
10000	Line.	The base of the few wire, whose, water druk cycle)	WLAN	8.28	±9.6

Certificate No: EX-3903_Jul24

Page 16 of 21



July 31, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k =
0687	AAG	IEEE 802.11ax (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.45	±9.6
8880	AAC	IEEE 802,11ax (20 MHz, MCS5, 99pc duty cycle)	WLAN	8.29	±9.6
0.689	AAC	IEEE 802.11ax (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.55	±9.6
0.690	AAC	IEEE 802.11ax (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.5
0691	AAC	IEEE 802,11ax (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.25	±9.8
0692	AAC	IEEE 802,11an (20 MHz, MCS9, 99pc duty cycle)	WLAN	8.29	±9,6
10000000		IEEE 802,11ex (20 MHz. MCS10, 99pc duty cycle)	WLAN	8.25	±9.6
0693	AAC		WLAN	8.57	±9.6
0894	AAG	EEE 802.11ax (20 MHz, MCS11, 99pc duty cycle)	WLAN	8,78	±9.6
0685	AAC	IEEE 802.11ax (40MHz, MCS0, 90pc duty cycle)	WLAN	8.91	=9.8
0.696	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.61	±9.6
0.697	AAC	(EEE 802,11ex (40 MHz, MCS2, 90pc duty cycle)		8.89	±9.6
0.698	AAC	IEEE 802.11ax (40 MHz, MCS3, 90pc duly cycle)	WLAN	and relief to the contract of	
0.699	,AAD	JEEE 802.11ax (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.82	±9,6
0.700	AAC	IEEE 802.11ax (40 MHz, MCS5, 90pc duty cycle)	WCAN	8,73	±9,6
10701	AAC	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.86	±9,6
0.702	AAC	IEEE 802.11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.70	±9.6
10703	AAC	IEEE 802,11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10704	AAC	IEEE 802,11ax (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.56	±9.6
10705	AAC	IEEE 802.11ax (40 MHz, MCS10, 90pt duty cycle)	WLAN	8.69	±9.6
10706	AAC	IEEE 802.11ax (40 MHz, MCS11, 90pc duty cycle)	WLAN	8.66	±9.6
10707	AAC	IEEE 802,11ax (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.32	±9,6
10708	AAC	IEEE 802.11ax (40 MHz, MCS1, 98pc duty cycle)	WLAN	8.55	±9.6
10709	AAC	IEEE 802.11ax (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	±9.0
		The state of the s	WLAN	8.29	±9.6
10710	AAC	IEEE 802.11ax (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.39	=9.6
10711	AAC	IEEE 802.11ax (40 MHz, MCS4, 98pc duty cycle)	WLAN	8,67	=9,6
10712	AAC	IEEE 802.11 mx (40 MHz, MCSS, 99pc duty cycle)	2000	8.33	±9,6
10713	AAC	IEEE 802.11as (40 MHz, MCS6, 99pc duty cycle)	WLAN		
10714	AAC	IEEE 802,11ax (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.26	±9.6
10715	AAC	IEEE 802.11ax (40 MHz, MCS8, 99pc duty cycle)	WLAN	8,45	±9,6
10715	AAC	IEEE 802.11ax (40 MHz, MCS8, 99pc duty cycle)	WLAN	8,30	±9,6
10717	AAC	IEEE 802.11ax (40 MHz, MCS10, 99pc duty cycle)	WLAN	8,48	±9.5
10718	AAC	IEEE 802,11ax (40 MHz, MCS11, 99pc duty cycle)	WEAN	8.24	±9.6
10719	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc duty cycle)	WLAN	18.8	±9.6
10720	AAC	IEEE 802,11ax (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.87	±9.5
10721	AAG	IEEE 802.11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.76	+9.6
10722	AAC	IEEE 802,118x (80 MHz, MCS3, 90pc duty cycle)	WEAN	8.55	±9.0
10723	AAC	IEEE 802,11ax (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	+9.0
10724	ANC	IEEE 802,11ax (80 MHz, MCSS, 90pc duty cycle)	WLAN	8.90	15.6
10725	AAC	IEEE 802,11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	±9.6
10726	AAC	IEEE 802,11ax (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.72	±9.6
10727	AAG	IEEE 802.11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.66	19.6
10728	AAC		WLAN	8.65	±9.6
		EEE 802.11ax (80 MHz, MCS9, 90pc duty cycle)	The Contract of the Contract o		-
10729	AAC	EEE 802.11ax (80MHz, MCS10, 90pc duty cycle)	WLAN	8.64	+9.8
10730	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	8.67	+9.6
10731	AAC	IEEE 802.11sx (80 MHz, MCS0, 99pc duty cycle)	WLAN	8.42	±9.6
10732	AAC	IEEE 802,11ax (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.46	±9.6
10733	AAG	IEEE 802.11ax (80 MHz, MCS2, 99pc duty cycle)	WLAN	8,40	±9.6
10734	AAC	IEEE 802.11ax (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.25	±9.0
10735	AAC	IEEE 802.11ax (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.33	±9.6
10736	AAC	IEEE 802,11ax (80 MHz, MCS5, 99pc duty cycle)	WLAN	8.27	±9.5
10737	AAC	IEEE 802.11ax (80 MHz, MCS6, 99pc duty cycle)	WLAN	8.36	±9.6
10738	AAC	IEEE 802,11ax (80 MHz, MCS7, 99pc duty cycle)	WLAN	8,42	±9.0
10739	AAC	IEEE 802,11ax (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.29	+9.5
10740	AAC	IEEE 802.11ax (80 MHz, MCS9, S9pc duty cycle)	WLAN	8,48	±9.
10741	AAC	IEEE 802,11ax (80 MHz, MCS10, 99pc duty cycle)	WLAN	8.40	±9.
10742	AAC	IEEE 802.11ax (80 MHz, MCS11, 99pc duty cycle)	WLAN	8.43	±9.
10743	AAC	IEEE 802.11ax (160 MHz, MCS0, 90pc duty cycle)	WLAN	8,94	+9.1
10744	AAC	IEEE 802.11ax (160 MHz, MCS1, 90pc duty cycle)	WLAN	9.16	±9.5
10745	AAC	IEEE 802.11ax (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.93	
-	-		1000000		±9.6
10746	AAC	IEEE 802,11ax (160 MHz, MCS3, 90pc duty cycle)	WLAN	9.11	±00
10747	AAC	IEEE 802,11ax (160 MHz, MGS4, 90pc duty cycle)	WLAN	9.04	+9.5
10748	AAC	IEEE 802,11ax (160 MHz, MCS5, 90pc duty cycle)	WLAN	8.99	±9.8
10749	AAC	IEEE 802,11ax (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.90	±9.6
10750	AAG	IEEE 802.11ax (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.79	+9.6
10751	AAC	IEEE 802.11ax (160 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.
10752	AAC	IEEE 802,11ax (160 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±9.5

Certificate No: EX-3903_Jul24

Page 17 of 21



July 31, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	UncE k =
10753	AAC	SEEE 802,11ax (160 MHz, MCS10, 90pc duty cycle)	WLAN	9.00	±9.6
10754	AAC	IEEE 802.11ax (160 MHz, MCS11, 90pc duty cycle)	WLAN	8.94	±9.6
0755	AAC	IEEE 802.11ax (160 MHz, MCSO, 99pc duty cycle)	WLAN	8.64	19.6
0756	AAC	IEEE 802.11ax (160 MHz. MCS1, 99pc duty cycle)	WLAN	8,77	±9.6
0757	AAG	IEEE 802.118x (160 MHz, MCS2, 99pc duty cycle)	WLAN	8,77	±9.6
0758	AAC	IEEE 802,11ax (160 MHz, MCB3, 99pc duty cycle)	WLAN	8.69	±9.6
0798	AAG	IEEE 802.11ax (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.58	±9.6
0760	AAC	IEEE 802, 11ax (160 MHz, MCS5, 99pc duty cycle)	WLAN	8,49	±9.6
	AAG	IEEE 802.11ax (160 MHz, MC56, 99pc duty cycle)	WLAN	8.58	±9.6
10761	11,750,170	IEEE 802.11ax (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.49	±9.6
10762	AAC	IEEE 802,118x (180 MHz, MCSB, 99pc duty cycle)	WLAN	8.53	±9.6
0.763	AAC	IEEE 802,11ax (160 MHz, MCS9, 99pc duty cycle)	WLAN	8.54	±9,6
0764	AAC		WLAN	8,54	±9.6
0.765	AAC	IEEE 802.11ax (160 MHz, MCS10, 99pc duty cycle)	WLAN	9.51	±9.6
0.768	AAC	IEEE 802.11ax (160 MHz, MCS11, 99pc duty cycle)	SG NR FR1 TDD	7.99	±9.6
0767	AAG	SG NR (CP-OFDM, 1 RB, 5MH≥, QPSK, 15kHz)	5G NR FRI TOD	8.01	19.6
0.768	AAE	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)			±9.6
0.769	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, OPSK, 15 kHz)	5G NR FR1 TDD	10.5	-
0.770	AAE	5G NA (CP-OFDM, 1 RB, 20 MHz; QPSK, 15 kHz)	SG NR FR1 TDD	8.02	±9,6
0.771	AAD	5G NR (CP-OFDM, 1 R8, 25MHz, QPSK, 15kHz)	SG NR FRI TDD	8.02	±9.8
0772	AAE	5G NR (CP-OFDM, 1 RB, 36MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.23	±9.6
0.773	AAF	5G NR (CP-DFDM, 1 R8, 40 MHz, QPSK, 15 kHz)	SG NR FR1 TDD	8.03	±9.6
0.774	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	50 NR FR1 TDD	8,02	±9.6
0775	AAF	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
0775	AAE	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TD0	8:30	±9,6
0.777	AAC	5G NR (CP-OFDM, 50% R8, 15MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.30	±9.6
0.77B	AAE	5G NR (CP-OFDM, 50% R8, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	±9,6
0779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TD0	8.42	±9.6
0780	AAE	6G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	50 NR FR1 TDD	8.38	±9.6
0781	AAF	5G NR (CP-OFDM, 50% R8, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.8
0782	AAE	5G NR (CP-OFDM, 50% RB, 50MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.43	±9.6
0.783	AAG	5G NR (CP-OFDM, 100% RB, 5MHz, QPSK, 15kHz)	56 NR FR1 TDD	8.31	±9.6
0.784	-	5G NR (CP-OFDM, 100% RB. 10 MHz, QPSK, 15 kHz)	5G NR FR1 TOD	8.29	±9.6
0785	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, GPSK, 15 kHz)	5G NR FR1 TDD	8.40	±9.6
0.786	AAE	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FRI TOD	8.35	±9.6
0787	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, GPSK, 15 kHz)	5G NR FR1 TDD	8.44	19.5
10768	AAE	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10785	-	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TOD	8.37	±9.6
10790	AAE	5G NR (CP-DFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10791	AAG	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TOD	7.83	±9.6
10792	AAE	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.92	±9.6
10793	AAD	5G NR (CP-OFDM, 1 RB, 15MHz, CPSK, 30kHz)	5G NR FR1 TDD	7.95	±9.6
10794	and the second design	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10.795		5G NR (CP-OFDM, 1 RB, 25 MHz, CPSK, 30 MHz)	5G NR FR1 TDD	7.84	±9.0
0798	_	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
0797	_	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.01	±9.6
	CONTRACTOR OF THE PARTY OF	A CONTRACTOR OF THE PROPERTY O		7,89	
0.798		SG NR (CP-OFDM, 1 RB 50 MHz, CPSK, 30 kHz)	5G NR FR1 TD0	7.93	±9,6
0799	AAF	5G NR (CP-OFDM, 1 RB. 60 MHz, CPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
0.801	_	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	50 NR FR1 TD0		±9.6
0.002		5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TD0	7,87	±9.6
0803	-	5G NR (CP-OFDM, 1 RB, 100 MHz, OPSK, 30 kHz)	5G NR FR1 TDD	7,93	±9,6
0805		SG NR (CP-OFDM, SO% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDO	8.34	±9;6
0808	_	5G NR (CP-OFDM, 50% R8, 15MHz, QPSK, 30kHz)	SG NR FR1 TDD	8.37	±9.6
0809	-	SG NR (CP-OFDM, 50% RB, 30 MHz, GPSK, 30 kHz)	5G NR FR1 TD0	8.34	±9.6
0810		5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.8
0812		5G NR (CP-OFDM, 50% R8, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDO	8.35	±9.6
0817	_	5G NR (CP-OFOM, 100% RB, 5 MHz, QPSK, 30 kHz)	SG NR FR1 TDD	8.35	±9.6
0818	market and sharp be	5G NR (CP-OFOM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
0819		5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	±9.6
0820		5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	±9.6
0.821	-	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8,41	±9.6
0.822	AAE	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	9.41	±9.6
0.823	AAF	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 NHz)	5G NH FR1 TDD	8.36	±9.6
10.824	AAE	5G NR (CP-OFOM, 100% RB, 50 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	8.39	±9.6
10825	AAF	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±8.6
10827	AAP	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	9G NR FR1 TOD	8.42	±9.6
10828	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	+9.6

Certificate No: EX-3903_Jul24

Page 18 of 21



EX3DV4 - SN:3903 July 31, 2024

TUID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E R =
10829	AAF	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	±9.6
0830	AAE	5G NR (CP-OFDM, 1 RB, 10 MHz, CPSK, 50 kHz)	5G NR FR1 TDD	7.83	±9.6
-		SG NR (CP-OFDM, 1 PB, 15MHz, QPSK, 60 kHz)	5G NR FR1 TOD	7,73	±9.6
1880	AAD		5G NR FR1 TDD	7,74	±9.6
0832	AAE	5G NR (CP-OFDM, 1 RB, 20MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7,70	±9,6
0833	AAD	SG NR (CP-OFDM, 1 R8, 25MHz, QPSK, 60xHz)	5G NR FRI TOD	7.75	±9.6
0834	AAE	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 KHz)	The second secon		±9.6
0835	AAF	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 50 kHz)	5G MR FR1 TDD	7.70	
0836	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 50 kHz)	5G NR FR1 TDD	7.66	±9.6
0837	AAF	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TOD	7:68	±9.6
0.839	AAF	5G NR (CP-OFDM, 1 RB, 80 MHz, CPSK, 50 kHz)	5G NR FR1 TDD	7.70	±9.6
0840	AAE	5G NR (CP-OFCM, 1 RB, 90 MHz, OPSK, 60 kHz)	5G NR FR1 TDD	7.67	±9,6
0841	AAF	5G NR (CP-OFOM, 1 RB, 100 MHz, QPSK, 60 MHz)	50 NR FR1 TOD	7,71	±9.6
0843	AAD	SG NR (CP-OFDM, 50% RB, 15MHz, QPSK, 60kHz)	5G NA FR1 TOO	8.49	±9.6
0844	AAE	5G NR (CP-OFDM, 50% RB, 20MHz, QPSK, 60NHz)	5G NR FR1 TOD	8.34	±9.6
0846	AAE	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10854	AAE	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.8
10855	AAD	SG NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	SG NR FR1 TDD	8.36	±9.6
		5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 80 KHz)	SG NR FR1 TDD	8.37	±9.6
10856	AAE		5G NR FR1 TDD	8.35	±9,6
10857	AAD	5G NR (CP-OFDM, 100% RB; 25 MHz; QPSK, 60 kHz)	A STATE OF THE PARTY OF T	8.36	±9.6
10858	AAE	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	A STATE OF THE PARTY OF THE PAR	
10859	A,A,F	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	#B.5
10860	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TD0	8.41	±9,6
10861	AAF	5G.NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.40	±9.0
10.863	AAF	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10864	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TOD	8.37	±9.6
10865	AAF	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TOD	8,41	±9.6
10866	AAF	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	15 NR FR1 TDD	5.68	19.6
10888	AAF	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	6.89	±9.6
10869	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	50 NR FR2 TOO	5.78	+9.6
10870	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TOD	5.88	±9.6
10871	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TOD	5.75	±9.0
10872	AAE	5G NR (DFTs-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	50 NR FR2 TOD	6.52	±9.6
10873	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 KHz)	5G NR FR2 TOD	6.61	±9.0
		The second of th	5G NR FR2 TOD	6.65	±9.5
10874	AAE	5G NR (DFT-8-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD		-
10875	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	The state of the s	7,78	±9.6
10876	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz; QPSK, 120 kHz)	SO NR FR2 TOD	8.39	±9.5
15877	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7,95	±9,6
10878		5G NR (CP-OFDM, 100% RB, 100 MHz, 18QAM, 120 kHz)	SG NR FR2 TOD	8.41	±9.6
10879		5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	SG NR FR2 TDD	8,12	±9,6
10880	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TOD	8.38	±9.6
10881	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10882	AAE	5G NR (DFT-e-DFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.98	±9.6
10883	AAE	5G NR (DFT-s-OFDM, 1 R8, 58 MHz, 16QAM, 128 kHz)	SG NA FR2 TDD	6.57	±83
10884	AAE	5G NR (DFTs-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	±9.6
10885	A CONTRACTOR OF THE PARTY OF TH	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TOD	6.61	±9.5
10888	AAE	50 NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	SG NR FR2 TOD	6.65	±9.6
10887	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TOD	7.78	±9.6
10888	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TOD	8.35	±9.3
10889	AAE	the street, and the Contraction of the contraction	The second secon		±93
		5G NR (CP-OFDM, 1 RB, 50MHz, 18QAM, 120MHz)	5G NR FR2 TDD	8,00	
10890	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NA FR2 TDD	8.40	±9,
10891	AAE	5G NR (CP-OFDM, 1 RB, 50MHz, 64QAM, 120 kHz)	5G NA FR2 TDD	8,13	±93
10892	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8,41	±9.
10897	A CONTRACTOR OF THE PARTY OF TH	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NA FR1 TDD	5,66	±9.
10898		SG NR (DFT-6-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NA FR1 TDD	5.67	±9.
10899		5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.
18800	AAC	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 NHz)	50 NR FR1 TOD	5.68	±9.
10901	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR: TDD	5,68	±9.
10902	AAC	5G NR (DFT-e-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5,68	±9.
10903		5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5,68	±9.
10904	-	5G NR (DFTs-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	SG NR FR1 TDD	5.68	±9,
10905	- British Colores	5G NR (DFT-6-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±0.
10906		5G NR (DFTs-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.5
				The state of the s	
10907	AAE	5G NR (DFF-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	±9,
10908		5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QFSK, 36 kHz)	5G NR FR1 TDD	5.93	±9.6
10909		5G NR (DFT-6-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NA FR1 TOD	5.96	±9.6
10910	AAC	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5,83	±9,

Certificate No: EX-3903_Jul24

Page 19 of 21

F-TP22-03 (Rev. 06) Page 171 of 364



EX3DV4 - SN:3903 July 31, 2024

1991 AAC 50 NR (PFF-0-CPM, 50% RB, 25MHz, CPSK, 30MHz)	dit.	Rev	Communication System Name	Group	PAR (dB)	UncE k = 2
109112 AAC SG NR (DFF-0FDM, 50% RB, 30MHz, OFSK, 30MHz) SG NR FFRI TOO 5.84		Annual Control of the Party of		5G NR FR1 TDD	5.93	19.5
109191 AAD GR NR (DFT-4-OFFOM, 50% RB, 40MHz, CPSK, 50MHz) 109194 AAD GR NR (DFT-4-OFFOM, 50% RB, 40MHz, CPSK, 50MHz) 109194 AAD GR NR (DFT-4-OFFOM, 50% RB, 80MHz, CPSK, 50MHz) 109195 AAD GR NR (DFT-4-OFFOM, 50% RB, 80MHz, CPSK, 50MHz) 109196 AAD GR NR (DFT-4-OFFOM, 50% RB, 80MHz, CPSK, 50MHz) 109197 AAD GR NR (DFT-4-OFFOM, 50% RB, 80MHz, CPSK, 50MHz) 109197 AAD GR NR (DFT-4-OFFOM, 50% RB, 80MHz, CPSK, 50MHz) 109197 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 109197 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 109197 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 109197 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAB GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10921 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10922 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10923 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10924 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10925 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10926 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10927 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10928 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10929 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% RB, 50MHz, CPSK, 50MHz) 10920 AAD GR NR (DFT-4-OFFOM, 100% R	-			50 NR FR1 TOD	5,84	19.6
10915 AAC SG NR (DPF4-0PDM, 509 MB, 50 MB, CPRK, 200442)	Company of the Compan	-		5G NR FR1 TDD	5.84	±9.6
19915 AAD SG NR (DFT-6-OFM), 50% RB, 60Met. QPSK, 30Met) SG NR FRI TDD 5.87		100000		5G NR FR1 TDD	5.85	19.6
1991 AAD GE NR (DFT-GOTM, 50°K, RR, 1904-E., DPSK, 3004-E.) SS NR FRI TDD S.B.			Control of the contro	50 NR FR1 T00	5.83	±9.6
1991 AAD SO NR (DFT-6-OFDM, 190K RB, 190MHz, OFSK, 390Hz)		and the latest terminal termin			5.87	±9.6
1988 AAE SC NR (DFF-0/DM, 109%, RB, 19MHz, 0/DRK, 39MHz) SS NR FRI TDD 5.86				5G NR FR1 TOD	5.94	19.6
10981 AAC SQ INR (DEFG-CPOM, 100% RB, 10MHz, CPSK, 30MHz) SS MB FRI TDD S.87	-				and the second second second	19.6
10921 AAC SG NR (DFTe-CPDM, 100% RB, 15MM2, CPSK, 30M42) SG NR FRI TOD S.47	2000	7/1/// A		the first and the section below the first and an extra de-		±9.6
10927 AAC SG NR (DFTe-OFDM, 100% RB, 20 Met, OPSK, 30 Met) SG NR FRI TOD S.54	CALL PROPERTY.					±9,6
10922 AAB SQ NR DPT-6-CPDM, 100% RB, 25MHz, CPSK, 204-bl) SG NR FRI TDD SAB SAB SQ NR DPT-6-CPDM, 100% RB, 30MHz, CPSK, 30MHz) SG NR FRI TDD SAB SAB SQ NR DPT-6-CPDM, 100% RB, 30MHz, CPSK, 30MHz) SG NR FRI TDD SAB SAB SQ NR DPT-6-CPDM, 100% RB, 30MHz, CPSK, 30MHz) SG NR FRI TDD SAB SQ NR DPT-6-CPDM, 100% RB, 30MHz, CPSK, 30MHz) SG NR FRI TDD SAB SQ NR SQ NR DPT-6-CPDM, 100% RB, 30MHz, CPSK, 30MHz) SG NR FRI TDD SAB SQ NR		All the lateral works				±9.6
DSB21 AAC SG NR IDFT-GFDM, 100% RB, 30MHz, GPSK, 30MHz)	-			And the last professional and the last profe		±9.6
10929				The second secon	and the second second	±9.6
10925 ARC SG NR DFTs-OFDM, 100% RB, 50MHz, QPSK, 30MHz SG NR FRI TDD 5.95	A SALE STREET			The state of the s		±9.8
10926 AAD SG NR DFFs-OFDM, 109% PB, 60 MHz, OPSK, 30 MHz SG NR FRI TDD 5.94		minimum to di				±9.6
10927 AAD 3G NR [DPT-G-OFDM, 100% FB, 30 MHz, QPSK, 30 MHz]	-				and the second second second second	
10928 AAD SG NR (DPTs-OFDM, 1 RB, 5MHz, QP5K, 15NHz) SG NR FR1 FDD 5.52	mineral wilders	and the last of the last				±9,6
1999 AAC SG NR (DFTs-OFDM, 1 RB, 10 MHz, GPSK, 15 MHz) SG NR FR1 FDD 5.52		and the second		The second secon		±9,6
10930 AAC SG NR (DFT-I-OFDM, 1 RB, 15 MHz, QPSK, 15 MHz) SG NR FR1 FDD 5.52	0928	AAD				±9.6
1993 AAC SG NR (DFT=-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.51	0929	AAD	SG NR (DFT-p-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)			19,9
10932 AAC SG NR (DFTa-OPDM, 1 RB, 25 MHz, OPSK, 15 KHz)	0930	AAC		and the first terminal transfers to the first terminal transfe		#9.6
10933 AAC SG NR DFTq-OFDM, 1 RB, 30 MHz, OPSK, 15 kHz SG NR FR1 FDD S.51	0931	AAC	5G NR (DFT-e-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	58 NR FR1 FDD	5.51	±9,6
10834 AAC 3G NR DFT=-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz SG NR FR1 FDD 5.51	0.935	AAC	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	The Parties Contract Street And September 1997		±9.8
10935 AAD SG NR (DFT-G-CPDM, 1 RB, 50 MHz, QPSK, 15 MHz) SG NR FR1 FDD 5.51	0933	AAC.	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	50 NR FR1 FOD	5.51	±9.0
10936 AAD SG NR	0934	AAC	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10986 AAD SG NR DETI-LOFEIM, 50% RB, 55 MHz, CPSK, 15 MHz SG NR FRI FDD 5.77	0935	AAD	SG NR (DFT-a-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FOD	8.51	±9.6
10937 AAD 50 NR DPT-6-OFDM, 50% RB, 10 MHz, OPSK, 15 MHz 50 NR FR1 FDD 5.97	0936	AAD		50 NR FR1 F00	5.90	±9.6
10838 AAC SG NR (DFTs-OFDM, 50% RB, 15MHz, OPSK, 15KHz) SG NR FRI FDD 5.90		AAD	5G NR (DFT-e-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	±9.6
10899 AAC SG NR (DFTs-OFDM, 50% RB, 29MHz, OPSK, 15 kHz) SG NR FR1 FDD 5.82	0938	AAC	5G NR (DFT-s-OFDM, 50% RB, 15MHz, QPSK, 15kHz)	5G NR FR1 FDD	5.90	±9,6
10940 AAC 5G NR (DFT-s-OPDM, 50% RB, 25 MHz, OPSK, 15 kHz) SG NR FR1 FDD 5,89	and the latest state of th	inches de la la constitución de		5G NR FR1 FDD	5.82	±9,6
10941 AAC 5G NR (DFTs-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5,85				50 NR FR1 FDD	5.89	±9,6
10942 AAC SG NR (DFTs-OFDM, 50% RB, 40 MHz, QPSK, 15 HHz) SG NR FR1 FDD 5.95			A STATE OF THE PARTY OF THE PAR		5.80	±9.6
10943 AAD SG NR (DFTs-OFDM, 50% RB, 50 MHz, OPSK, 15 kHz) SG NR FR1 FDD 5.85 10944 AAD SG NR (DFTs-OFDM, 100% RB, 5 MHz, OPSK, 15 kHz) SG NR FR1 FDD 5.81 10945 AAD SG NR (DFTs-OFDM, 100% RB, 5 MHz, OPSK, 15 kHz) SG NR FR1 FDD 5.85 10946 AAC SG NR (DFTs-OFDM, 100% RB, 15 MHz, OPSK, 15 kHz) SG NR FR1 FDD 5.83 10947 AAC SG NR (DFTs-OFDM, 100% RB, 20 MHz, OPSK, 15 kHz) SG NR FR1 FDD 5.87 10948 AAC SG NR (DFTs-OFDM, 100% RB, 20 MHz, OPSK, 15 kHz) SG NR FR1 FDD 5.87 10949 AAC SG NR (DFTs-OFDM, 100% RB, 20 MHz, OPSK, 15 kHz) SG NR FR1 FDD 5.87 10949 AAC SG NR (DFTs-OFDM, 100% RB, 30 MHz, OPSK, 15 kHz) SG NR FR1 FDD 5.87 10950 AAC SG NR (DFTs-OFDM, 100% RB, 40 MHz, OPSK, 15 kHz) SG NR FR1 FDD 5.94 10951 AAD SG NR (DFTs-OFDM, 100% RB, 40 MHz, OPSK, 15 kHz) SG NR FR1 FDD 5.92 10952 AAA SG NR (DFTs-OFDM, 100% RB, 40 MHz, OPSK, 15 kHz) SG NR FR1 FDD 5.92 10953 AAA SG NR (D, CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.25 10954 AAA SG NR (D, CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.15 10955 AAA SG NR (D, CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.42 10956 AAA SG NR (D, CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10957 AAA SG NR (D, CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR (D, CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10959 AAA SG NR (D, CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.32 10959 AAA SG NR (D, CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 8.32 10959 AAA SG NR (D, CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) SG NR FR1 TDD 8.32 10959 AAA SG NR (D, CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.35 10959 AAC SG NR (D, CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.35 10959 AAC SG NR (D, CP-OFDM, TM 3.1, 15 M			The state of the second control of the secon			±9.6
10944 AAD SG NR (DFT-6-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5,81	and the same of	-		and the second s	Account to the Comment of the Commen	±9.5
10945 AAD SG NR (DFTs-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.85 10948 AAC SG NR (DFTs-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.87 10949 AAC SG NR (DFTs-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.87 10949 AAC SG NR (DFTs-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.94 10949 AAC SG NR (DFTs-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.94 10949 AAC SG NR (DFTs-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.94 10949 AAC SG NR (DFTs-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.94 10951 AAD SG NR (DFTs-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.94 10952 AAA SG NR DL (CP-OFDM, TM 3.1, 5 MHz, GPSK, 15 kHz) SG NR FR1 FDD 5.92 10953 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.25 10954 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.26 10955 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.26 10956 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10957 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10959 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10959 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10959 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.33 10959 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.38 10959 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.56 10959 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.56 10959 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.56 10959 AAC SG NR DL (CP-OFDM, TM 3.1	Control or Section 1	mild an expense				±9.6
10948 AAC SG NR (DFFs-OFDM, 100% RB, 15MHz, QPSK, 15kHz) SG NR FR1 FDD 5.83 10947 AAC SG NR (DFFs-OFDM, 100% RB, 20MHz, QPSK, 15kHz) SG NR FR1 FDD 5.87 10948 AAC SG NR (DFFs-OFDM, 100% RB, 20MHz, QPSK, 15kHz) SG NR FR1 FDD 5.94 10949 AAC SG NR (DFFs-OFDM, 100% RB, 30MHz, QPSK, 15kHz) SG NR FR1 FDD 5.94 10950 AAC SG NR (DFFs-OFDM, 100% RB, 30MHz, QPSK, 15kHz) SG NR FR1 FDD 5.94 10951 AAD SG NR (DFFs-OFDM, 100% RB, 90MHz, QPSK, 15kHz) SG NR FR1 FDD 5.94 10952 AAA SG NR DL (CP-OFDM, 100% RB, 90MHz, QPSK, 15kHz) SG NR FR1 FDD 5.92 10953 AAA SG NR DL (CP-OFDM, 13.1, 5MHz, 64-QAM, 15kHz) SG NR FR1 FDD 8.25 10954 AAA SG NR DL (CP-OFDM, 13.1, 10MHz, 84-QAM, 15kHz) SG NR FR1 FDD 8.25 10955 AAA SG NR DL (CP-OFDM, 13.1, 10MHz, 64-QAM, 15kHz) SG NR FR1 FDD 8.25 10956 AAA SG NR DL (CP-OFDM, 13.1, 15MHz, 64-QAM, 15kHz) SG NR FR1 FDD 8.25 10957 AAA SG NR DL (CP-OFDM, 13.1, 15MHz, 64-QAM, 30kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, 13.1, 15MHz, 64-QAM, 30kHz) SG NR FR1 FDD 8.31 10959 AAA SG NR DL (CP-OFDM, 13.1, 15MHz, 84-QAM, 30kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, 13.1, 15MHz, 84-QAM, 30kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, 13.1, 15MHz, 84-QAM, 30kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, 13.1, 15MHz, 84-QAM, 30kHz) SG NR FR1 FDD 8.32 10959 AAC SG NR DL (CP-OFDM, 13.1, 15MHz, 84-QAM, 30kHz) SG NR FR1 TDD 9.32 10959 AAC SG NR DL (CP-OFDM, 13.1, 15MHz, 84-QAM, 30kHz) SG NR FR1 TDD 9.35 10959 AAC SG NR DL (CP-OFDM, 13.1, 15MHz, 84-QAM, 30kHz) SG NR FR1 TDD 9.36 10959 AAC SG NR DL (CP-OFDM, 13.1, 15MHz, 84-QAM, 30kHz) SG NR FR1 TDD 9.36 10959 AAC SG NR DL (CP-OFDM, 13.1, 15MHz, 84-QAM, 30kHz) SG NR FR1 TDD 9.35 10959 AAC SG NR DL (CP-OFDM, 13.1, 15MHz, 84-QAM, 30kHz) SG NR FR1 TDD 9.35 10959 AAC SG NR			The state of the s		_	±9.6
10947 AAC SG NR (DFTs-OFDM, 100% RB, 20 MHz, QPSK, 15 HHz) SG NR FR1 FDD 5,87 10948 AAC SG NR (DFTs-OFDM, 100% RB, 25 MHz, QPSK, 15 HHz) SG NR FR1 FDD 5,94 10949 AAC SG NR (DFTs-OFDM, 100% RB, 30 MHz, QPSK, 15 HHz) SG NR FR1 FDD 5,97 10950 AAC SG NR (DFTs-OFDM, 100% RB, 40 MHz, QPSK, 15 HHz) SG NR FR1 FDD 5,94 10951 AAD SG NR (DFTs-OFDM, 100% RB, 40 MHz, QPSK, 15 HHz) SG NR FR1 FDD 5,94 10952 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 HHz) SG NR FR1 FDD 8,25 10953 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 HHz) SG NR FR1 FDD 8,15 10954 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 HHz) SG NR FR1 FDD 8,29 10955 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 HHz) SG NR FR1 FDD 8,42 10956 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 HHz) SG NR FR1 FDD 8,14 10957 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 HHz) SG NR FR1 FDD 8,31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 HHz) SG NR FR1 FDD 8,31 10959 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 HHz) SG NR FR1 FDD 8,31 10959 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 Hz) SG NR FR1 FDD 8,31 10959 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 Hz) SG NR FR1 FDD 8,32 10950 AAE SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 Hz) SG NR FR1 TDD 9,36 10951 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 Hz) SG NR FR1 TDD 9,36 10958 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 Hz) SG NR FR1 TDD 9,56 10959 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 Hz) SG NR FR1 TDD 9,56 10959 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 Hz) SG NR FR1 TDD 9,56 10959 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 Hz) SG NR FR1 TDD 9,56 10959 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 Hz) SG NR FR1 TDD 9,56 10959 AAC SG NR DL (CP-OFDM, TM 3.1		-		The second community and the second community		±9.6
10948 AAC SG NR (DFTs-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5,94 10949 AAC SG NR (DFTs-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.97 10950 AAC SG NR (DFTs-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.97 10951 AAD SG NR (DFTs-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.92 10952 AAA SG NR (DFTs-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.92 10953 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 kHz) SG NR FR1 FDD 8.15 10954 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 kHz) SG NR FR1 FDD 8.29 10955 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 kHz) SG NR FR1 FDD 8.40 10956 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 FDD 8.14 10957 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 FDD 8.31 10959 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 FDD 8.31 10959 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 FDD 8.32 10959 AAS SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 kHz) SG NR FR1 TDD 8.32 10959 AAS SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 kHz) SG NR FR1 TDD 9.36 10959 AAS SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 kHz) SG NR FR1 TDD 9.36 10959 AAS SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 kHz) SG NR FR1 TDD 9.36 10959 AAS SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 kHz) SG NR FR1 TDD 9.36 10959 AAS SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 TDD 9.36 10959 AAS SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 TDD 9.36 10959 AAS SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 TDD 9.56 10959 AAS SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 TDD 9.56 10959 AAS SG NR DL (CP-OFD		and the latest section in the latest section				±9,6
10949 AAC SG NR (DFTs-OFDM, 100% RB, 30 MHz, QPSK, 15 MHz) SG NR FR1 FDD 5.97		arractation been				±9.6
10950 AAC SG NR (DFTs-OFDM, 100W RB, 40 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.94 10951 AAD SG NR (DFTs-OFDM, 100W RB, 50 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.92 10952 AAA SG NR DL (DP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.25 10953 AAA SG NR DL (DP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.15 10954 AAA SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.25 10955 AAA SG NR DL (CP-OFDM, TM 3.1, 12 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.20 10956 AAA SG NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.14 10957 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 FDD 8.32 10960 AAE SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 TDD 9.32 10961 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 kHz) SG NR FR1 TDD 9.36 10962 AAB SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 kHz) SG NR FR1 TDD 9.36 10963 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 kHz) SG NR FR1 TDD 9.36 10964 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 TDD 9.36 10965 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 TDD 9.37 10966 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 TDD 9.56 10967 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 kHz) SG NR FR1 TDD 9.56 10968 AAB SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 84-QAM, 30 kHz) SG NR FR1 TDD 9.56 10968 AAC SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 84-QAM, 30 kHz) SG NR FR1 TDD 9.56 10968 AAC SG NR DL (CP-OFDM, TM 3.1, 20 MHz, 84-QAM, 30 kHz) SG NR		1000		The state of the s		-
10951 AAD SG NR (DFTs-OFDM, 100% RB, 90 MHz, QPSK, 15 kHz) SG NR FR1 FDD 5.92 10952 AAA SG NR DL (DP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.25 10853 AAA SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.15 10954 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.29 10955 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) SG NR FR1 FDD 8.42 10956 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10957 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10959 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10959 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 FDD 8.31 10959 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) SG NR FR1 TDD 9.32 10950 AAB SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) SG NR FR1 TDD 9.36 10950 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) SG NR FR1 TDD 9.40 10950 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) SG NR FR1 TDD 9.56 10960 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.56 10960 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.56 10960 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.56 10960 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.56 10960 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.56 10960 AAC SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.56 10960 AAC SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.56 10960 AAC SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz) SG NR FR1 TDD 9.56 10960 AAC SG NR DL						±9,6
10952 AAA SG NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 15kHz) SG NR FR1 FDD 8.25 10953 AAA SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz) SG NR FR1 FDD 8.15 10954 AAA SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz) SG NR FR1 FDD 8.23 10955 AAA SG NR DL (CP-OFDM, TM 3.1, 25MHz, 64-QAM, 36kHz) SG NR FR1 FDD 8.42 10956 AAA SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 36kHz) SG NR FR1 FDD 8.31 10957 AAA SG NR DL (CP-OFDM, TM 3.1, 15MHz, 54-QAM, 30kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 25MHz, 54-QAM, 30kHz) SG NR FR1 FDD 8.31 10959 AAE SG NR DL (CP-OFDM, TM 3.1, 25MHz, 64-QAM, 55kHz) SG NR FR1 TDD 8.32 10961 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz) SG NR FR1 TDD 9.36 10962 AAB SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz) SG NR FR1 TDD 9.40 10963 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz) SG NR FR1 TDD 9.55 10964 <td< td=""><td></td><td></td><td>The Contract of the Contract o</td><td>The state of the s</td><td></td><td>±9.6</td></td<>			The Contract of the Contract o	The state of the s		±9.6
10953 AAA 50 NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz) 53 NR FR1 FDD 8.15 10954 AAA 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) 56 NR FR1 FDD 8.29 10955 AAA 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) 56 NR FR1 FDD 8.41 10957 AAA 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz) 56 NR FR1 FDD 8.31 10958 AAA 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 54-QAM, 30 kHz) 56 NR FR1 FDD 8.31 10959 AAA 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 54-QAM, 30 kHz) 56 NR FR1 FDD 8.31 10959 AAA 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 54-QAM, 30 kHz) 56 NR FR1 FDD 8.32 10950 AAA 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) 56 NR FR1 TDD 9.32 10951 AAC 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 54-QAM, 15 kHz) 56 NR FR1 TDD 9.40 10952 AAB 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 54-QAM, 15 kHz) 56 NR FR1 TDD 9.56 10953 AAC 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 54-QAM, 15 kHz) 56 NR FR1 TDD 9.56 10954 AAC 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 54-QAM, 30 kHz) 56 NR FR1 TDD 9.57 10955 AAC 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 54-QAM, 30 kHz) 56 NR FR1 TDD 9.58 10956 AAC 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 54-QAM, 30 kHz) 56 NR FR1 TDD 9.59 10957 AAC 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 54-QAM, 30 kHz) 56 NR FR1 TDD 9.59 10958 AAB 56 NR DL (CP-OFDM, TM 3.1, 15 MHz, 54-QAM, 30 kHz) 56 NR FR1 TDD 9.59 10958 AAC 56 NR DL (CP-OFDM, TM 3.1, 10 MHz, 54-QAM, 30 kHz) 56 NR FR1 TDD 9.49 10957 AAC 56 NR DL (CP-OFDM, TM 3.1, 10 MHz, 54-QAM, 30 kHz) 56 NR FR1 TDD 9.49 10958 AAC 56 NR DL (CP-OFDM, TM 3.1, 20 MHz, 54-QAM, 30 kHz) 56 NR FR1 TDD 9.49 10957 AAC 56 NR DL (CP-OFDM, TM 3.1, 20 MHz, 54-QAM, 30 kHz) 56 NR FR1 TDD 9.49 10957 AAC 56 NR DL (CP-OFDM, TM 3.1, 20 MHz, 54-QAM, 30 kHz) 56 NR FR1 TDD 9.49 10957 AAC 56 NR DL (CP-OFDM, TM 3.1, 20 MHz, 54-QAM, 30 kHz) 56 NR FR1 TDD 9.49 10957 AAC 56 NR	a Train I i and	and the second		and the second section of the sectio		±9.6
10954 AAA SG NR DL (CP-OFDM, TM 3.1, 18 MHz, 64-QAM, 18 kHz) SG NR FR1 FDD 8.23 10955 AAA SG NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 Hz) SG NR FR1 FDD 8.41 10957 AAA SG NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 Hz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 Hz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 Hz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 Hz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 Hz) SG NR FR1 FDD 9.32 10961 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 Hz) SG NR FR1 FDD 9.36 10962 AAS SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 Hz) SG NR FR1 TDD 9.40 10953 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 Hz) SG NR FR1 TDD 9.55 10964 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 15 Hz) SG NR FR1 TDD 9.56 10965 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 Mz) SG NR FR1 TDD 9.56 10966 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 Mz) SG NR FR1 TDD 9.56 10967 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 Mz) SG NR FR1 TDD 9.56 10968 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 Mz) SG NR FR1 TDD 9.56 10969 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 30 Mz) SG NR FR1 TDD 9.56 10969 AAC SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 84-QAM, 30 Mz) SG NR FR1 TDD 9.56 10969 AAC SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 84-QAM, 30 Mz) SG NR FR1 TDD 9.56 10969 AAC SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 84-QAM, 30 Mz) SG NR FR1 TDD 9.56 10969 AAC SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 84-QAM, 30 Mz) SG NR FR1 TDD 9.48 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 84-QAM, 30 Mz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 84-QAM, 30 Mz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 1	1.1.277					±9.6
10955 AAA SG NR DL (CP-OFOM, TM 3.1, 20MHz, 64-QAM, 15HHz) SG NR FR1 FDD 8,42 10956 AAA SG NR DL (CP-OFOM, TM 3.1, 5MHz, 64-QAM, 30HHz) SG NR FR1 FDD 8,14 10957 AAA SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 30HHz) SG NR FR1 FDD 8,31 10958 AAA SG NR DL (CP-OFOM, TM 3.1, 15MHz, 84-QAM, 30HHz) SG NR FR1 FDD 8,32 10960 AAE SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 15HHz) SG NR FR1 TDD 9,32 10961 AAC SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 15HHz) SG NR FR1 TDD 9,38 10962 AAB SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 15HHz) SG NR FR1 TDD 9,40 10963 AAC SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 15HHz) SG NR FR1 TDD 9,56 10964 AAE SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 30HHz) SG NR FR1 TDD 9,56 10965 AAC SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 30HHz) SG NR FR1 TDD 9,29 10966 AAB SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 30HHz) SG NR FR1 TDD 9,29 10967 AAC SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 30HHz) SG NR FR1 TDD 9,56 10968 AAB SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 30HHz) SG NR FR1 TDD 9,59 10969 AAC SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 30HHz) SG NR FR1 TDD 9,59 10969 AAC SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 30HHz) SG NR FR1 TDD 9,59 10969 AAC SG NR DL (CP-OFOM, TM 3.1, 15MHz, 64-QAM, 30HHz) SG NR FR1 TDD 9,59 10969 AAC SG NR DL (CP-OFOM, TM 3.1, 10MHz, 64-QAM, 30Hz) SG NR FR1 TDD 9,49 10972 AAC SG NR DL (CP-OFOM, TM 3.1, 10MHz, 64-QAM, 30Hz) SG NR FR1 TDD 9,49 10972 AAC SG NR DL (CP-OFOM, TM 3.1, 10MHz, 64-QAM, 30Hz) SG NR FR1 TDD 9,49 10972 AAC SG NR DL (CP-OFOM, TM 3.1, 10MHz, 64-QAM, 30Hz) SG NR FR1 TDD 9,49 10972 AAC SG NR DL (CP-OFOM, TM 3.1, 20MHz, 64-QAM, 30Hz) SG NR FR1 TDD 9,49 10972 AAC SG NR DL (CP-OFOM, TM 3.1, 20MHz, 64-QAM, 30Hz) SG NR FR1 TDD 9,49 10972 AAC SG NR DL (CP-OFOM, TM 3.1, 20MHz, 64-QAM, 30Hz) SG NR F					-	±9.8
10956 AAA SG NR DL (CP-OFDM, TM 3.1, 5MHz, 64-OAM, 30NHz) SG NR FR1 FDD 8.14 10957 AAA SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-OAM, 30NHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-OAM, 30NHz) SG NR FR1 FDD 8.51 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-OAM, 50NHz) SG NR FR1 FDD 8.32 10960 AAE SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-OAM, 15NHz) SG NR FR1 TDD 9.32 10961 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-OAM, 15NHz) SG NR FR1 TDD 9.36 10962 AAB SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-OAM, 15NHz) SG NR FR1 TDD 9.56 10963 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.56 10964 AAE SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.37 10965 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.37 10968 AAB SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.57 10967 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.58 10968 AAB SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.59 10968 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.49 10968 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-OAM, 30NHz) SG NR FR1 TDD 9.49 10972 AAC SG NR D	-			The state of the s	A STATE OF THE PARTY OF T	±9.8
10957 AAA SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 30kHz) SG NR FR1 FDD 8.31 10958 AAA SG NR DL (CP-OFDM, TM 3.1, 15MHz, 54-QAM, 30kHz) SG NR FR1 FDD 8.51 10959 AAA SG NR DL (CP-OFDM, TM 3.1, 15MHz, 54-QAM, 30kHz) SG NR FR1 FDD 8.32 10960 AAE SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz) SG NR FR1 TDD 9.32 10961 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz) SG NR FR1 TDD 9.38 10962 AAB SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz) SG NR FR1 TDD 9.56 10963 AAC SG NR DL (CP-OFDM, TM 3.1, 25MHz, 64-QAM, 15kHz) SG NR FR1 TDD 9.56 10964 AAE SG NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 30kHz) SG NR FR1 TDD 9.29 10965 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz) SG NR FR1 TDD 9.37 10968 AAB SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz) SG NR FR1 TDD 9.59 10967 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz) SG NR FR1 TDD 9.59 10968 AAB SG NR DL (CP-OFDM, TM 3.1, 15MHz, 54-QAM, 30kHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30kHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30kHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30kHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30kHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30kHz) SG NR FR1 TDD 11.59	- Annie	mining and a second	the state of the first of the state of the s			±9.6
10958 AAA	3. 1. (2.) (3.)					±9.6
10959 AAA SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30NHz) SG NR FR1 FDD 8,33 10960 AAE SG NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 15NHz) SG NR FR1 TDD 9,32 10961 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15NHz) SG NR FR1 TDD 9,40 10962 AAB SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15NHz) SG NR FR1 TDD 9,40 10963 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 15NHz) SG NR FR1 TDD 9,55 10964 AAE SG NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9,29 10965 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9,37 10968 AAB SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9,55 10969 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9,42 10968 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9,42 10968 AAC SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9,42 10968 AAC SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9,49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9,49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, CPSK, 15 NHz) SG NR FR1 TDD 11,58 10972 AAC SG NR (CP-OFDM, TM 3.1, 20MHz, CPSK, 15 NHz) SG NR FR1 TDD 11,58 10972 AAC SG NR (CP-OFDM, TM 3.1, 10MHz, CPSK, 15 NHz) SG NR FR1 TDD 11,58 10972 AAC SG NR CP-OFDM, TR B, 20MHz, CPSK, 15 NHz) SG NR FR1 TDD 11,58 10972 AAC SG NR CP-OFDM, TR B, 20MHz, CPSK, 15 NHz) SG NR FR1 TDD 11,58 10972 AAC SG NR CP-OFDM, TR B, 20MHz, CPSK, 15 NHz) SG NR FR1 TDD 11,58 10973 AAC SG NR CP-OFDM, TR B, 20MHz, CPSK, 15 NHz) SG NR FR1 TDD 11,58 10974 AAC SG NR CP-OFDM, TR B, 20MHz, CPSK, 15 NHz) SG NR FR1 TDD 11,58 10975 AAC SG NR CP-OFDM, TR B, 20MHz, CPSK, 15 NHz) SG NR FR1 TDD 11,58 10976 AAC SG NR CP-OFDM, TR B, 20MHz, CPSK, 15 NHz) SG NR FR1 TDD 11,58 10977 AAC SG NR CP-OFDM, TR B, 20MHz, CPSK, 15 NHz) SG NR FR1 TDD	-			The state of the s		±9.6
10960 AAE SG NR DL (CP-OFDM, TM 3.1, 5MHz, 84-QAM, 15kHz) 5G NR FR1 TDD 9.32 10961 AAC SG NR DL (CP-OFDM, TM 3.1, 10MHz, 84-QAM, 15kHz) 5G NR FR1 TDD 9.36 10962 AAB SG NR DL (CP-OFDM, TM 3.1, 15MHz, 84-QAM, 15kHz) 5G NR FR1 TDD 9.40 10963 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 84-QAM, 15kHz) 5G NR FR1 TDD 9.56 10994 AAE SG NR DL (CP-OFDM, TM 3.1, 5MHz, 84-QAM, 30kHz) 5G NR FR1 TDD 9.29 10965 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz) 5G NR FR1 TDD 9.37 10968 AAB SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz) 5G NR FR1 TDD 9.56 10969 AAC SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz) 5G NR FR1 TDD 9.49 10969 AAC SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30kHz) 5G NR FR1 TDD 9.49 10968 AAC SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 30kHz) 5G NR FR1 TDD 9.49 10972 AAC SG NR CCP-OFDM, TM 3.1, 10MHz, GPSK, 15kHz) 5G NR FR1 TDD 11.59 10972 AAC SG NR (CP-OFDM, TM 3.2, 0MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10973 AAC SG NR CCP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10974 AAC SG NR (CP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10975 AAC SG NR (CP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10976 AAC SG NR (CP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10977 AAC SG NR CCP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10978 AAC SG NR CCP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10978 AAC SG NR CCP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10978 AAC SG NR CCP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10978 AAC SG NR CCP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10978 AAC SG NR CCP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10978 AAC SG NR CCP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10978 AAC SG NR CCP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1 TDD 11.59 10978 AAC SG NR CCP-OFDM, TR B, 20MHz, CPSK, 15kHz) 5G NR FR1		-	Let and the complete of the co	The state of the s	A CONTRACTOR OF THE PARTY OF TH	±9.6
10961 AAC SG NR DL (CP-GFDM, TM 3.1, 10MHz, 64-QAM, 15NHz) SG NR FR1 TDD 9.38 10962 AAB SG NR DL (CP-GFDM, TM 3.1, 15MHz, 64-QAM, 15NHz) SG NR FR1 TDD 9.40 10963 AAC SG NR DL (CP-GFDM, TM 3.1, 20MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9.55 10964 AAE SG NR DL (CP-GFDM, TM 3.1, 5MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9.29 10965 AAC SG NR DL (CP-GFDM, TM 3.1, 15MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9.37 10968 AAB SG NR DL (CP-GFDM, TM 3.1, 15MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9.55 10967 AAC SG NR DL (CP-GFDM, TM 3.1, 15MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-GFDM, TM 3.1, 10MHz, 64-QAM, 30NHz) SG NR FR1 TDD 9.49 10972 AAC SG NR (CP-GFDM, TM 3.1, 10MHz, GPSK, 15NHz) SG NR FR1 TDD 11.59 10972 AAC SG NR (CP-GFDM, TM 3.1, 10MHz, GPSK, 15NHz) SG NR FR1 TDD 11.59 10972 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 11.59 10973 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 11.59 10974 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 11.59 10975 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 11.59 10976 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 11.59 10977 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 11.59 10978 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 10978 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 10978 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 10978 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 10979 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 10979 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 10970 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 10970 AAC SG NR (CP-GFDM, TM 3.2, MHz, GPSK, 15NHz) SG NR FR1 TDD 10970 AAC SG NR (CP-GFDM, TM 3.2, MHz	industrial and	stational property	A STATE OF THE PARTY OF THE PAR			±9,6
10962 AAB 5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz) 5G NR FR1 TDD 9,40					9.32	±9.6
10963 AAC SG NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 MHz) SG NR FR1 TDD 9.55 10964 AAE SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 9.29 10965 AAC SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 9.37 10968 AAB SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 9.45 10967 AAC SG NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 9.49 10972 AAC SG NR (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 11.59 10972 AAC SG NR (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 11.59 10973 AAC SG NR (CP-OFDM, TR B, 20 MHz, CPSK, 15 MHz) SG NR FR1 TDD 11.59 10974 AAC SG NR (CP-OFDM, TR B, 20 MHz, CPSK, 15 MHz) SG NR FR1 TDD 11.59 SG NR SG NR CP-OFDM, TR B, 20 MHz, CPSK, 15 MHz) SG NR FR1 TDD 11.59 SG NR SG NR CP-OFDM, TR B, 20 MHz, CPSK, 15 MHz) SG NR S					9.38	±9,6
10984 AAE SG NR DI, (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 30kHz) SG NR FRI TDD 9.29 10985 AAC SG NR DI, (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 30kHz) SG NR FRI TDD 9.37 10988 AAB SG NR DI, (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz) SG NR FRI TDD 9.49 10987 AAC SG NR DI, (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30kHz) SG NR FRI TDD 9.49 10988 AAD SG NR DI, (CP-OFDM, TM 3.1, 100MHz, 64-QAM, 30kHz) SG NR FRI TDD 9.49 10972 AAC SG NR (CP-OFDM, TM 3.1, 100MHz, 64-QAM, 30kHz) SG NR FRI TDD 11.59 10972 AAC SG NR (CP-OFDM, TM 3.1, 100MHz, 64-QAM, 30kHz) SG NR FRI TDD 11.59 10973 AAC SG NR (CP-OFDM, TR B, 20MHz, CPSK, 15kHz) SG NR FRI TDD 11.59 SG NR SC NR (CP-OFDM, TR B, 20MHz, CPSK, 15kHz) SG NR FRI TDD 11.59 SG NR SC NR (CP-OFDM, TR B, 20MHz, CPSK, 15kHz) SG NR SC NR S	the latest transfer	ment to be a secured to	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDO	9,40	±9.6
10965 AAC SG NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 9.37 10968 AAB SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 9.59 10967 AAC SG NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 9.49 10972 AAC SG NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 9.49 10972 AAC SG NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 KHz) SG NR FR1 TDD 11.59 10973 AAC SG NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 KHz) SG NR FR1 TDD 11.59 10974 AAC SG NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 KHz) SG NR FR1 TDD 11.59 SG NR FR1 TDD 11.59 10975 AAC SG NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 KHz) SG NR FR1 TDD 11.59 SG NR SG	A SANCE OF THE PARTY OF THE PAR		5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	50 NR FR1 TDD	9.56	±9.6
18968 AAB SG NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 8.55 18967 AAC SG NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 8.42 18968 AAD SG NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 MHz) SG NR FR1 TDD 9.48 18972 AAC SG NR (CP-OFDM, 1 RB, 20 MHz, CPSK, 15 kHz) SG NR FR1 TDD 11.59	0994	AAE	5G NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 30MHz)	5G NA FR1 TD0	9.29	±9.6
10967 AAC 5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 54-QAM, 30 kHz) 5G NR FR1 TDO 9.42 10988 AAO 5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz) 5G NR FR1 TDO 9.48 10972 AAC 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) 5G NR FR1 TDO 11.59	0.965	AAC		5G NR FR1 TDD	9.37	±9.6
10967 AAC 5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 54-QAM, 30 kHz) 5G NR FR1 TDO 9.42 10988 AAO 5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz) 5G NR FR1 TDO 9.48 10972 AAC 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) 5G NR FR1 TDO 11.59	8968	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	±9.6
10988 AAD 5G NR DL (CP-OFDM, TM 3.1, 100MHz, 64-QAM, 30Hz) 5G NR FRI TDO 9.49 10972 AAC 5G NR (CP-OFDM, 1 RB, 20MHz, QPSK, 15 kHz) 5G NR FRI TDO 11.59	0.967	AAC		5G NR FR1 TDD	9:42	±9.6
10972 AAC 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) 5G NR FR1 TDO 11.59		AAD				±9.6
		AAC				±9.6
10973 AAD 5G NR (DFT-e-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) 5G NR FR1 TDD 8:06		CAA	5G NR (DFT-e-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	50 NR FR1 TD0	0.06	±9.6
10974 AAD 5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz) 5G NR FR1 TDO 10.28						±9.6
10978 AAA ULLABDR ULLA BDR ULLA BDR ULLA 1,16						±9.6
10979 AAA ULLA HDR4 LILIA 8.58						±9.6
10980 AAA ULLA HORE ULLA 1032						±9.6
1000 10	_	and the format of the last	A CONTRACTOR OF THE CONTRACTOR		-	1000000
10981 AAA ULLA HDRp4 ULLA 3,19 10982 AAA ULLA HDRp8 ULLA 3,43		makinkan kanan			the state of the s	±9.6

Certificate No: EX-3903_Jul24 Page 20 of 21

F-TP22-03 (Rev. 06) Page 172 of 364



July 31, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E N = 2
10983	AAG	5G NR DL (CP-OFDM, TM 3.1, 46 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.31	±9.6
10984	AAB	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.42	±9.6
10985	AAC	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	50 NR FR1 TDD	9,54	19.6
10986	AAB	5G NR DL (CP-OFDM, TM 1.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.50	±9.6
10987	AAC	5G NR DL (CP-OFDM, TM 3.1, 60 MHz, 64-QAM, 30 kHz)	56 NR FR1 TOD	9,53	±9.6
10988	AAB	5G NR DL (CP-OFDM, TM 3.1, 70 MHz, 54-QAM, 30 kHz)	50 NR FR1 TOD	9.38	19.6
10989	AAC	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TOD	9.33	±9.0
10990	AAB	5G NR DL (CP-OFDM, TM 3.1, 90 MHz, 64-QAM, 30 kHz)	SG NR FR1 TDD	9.52	±9.6
11003	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 TOD	10.24	±9.6
11004	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	10.73	±9.6
11005	AAA	5G NR DL (OP-OFDM, TM 3.1, 25 MHz, 64-QAM, 15 kHz)	5G NR FR1 FD0	8.70	±9.6
11006	AAA	5G NR DL (GP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.55	±9,6
11007	AAA	SG NR DL (CP-DEDM, TM 3.1, 40 MHz, 64-GAM, 15 kHz)	5G NR FR1 FDD	8.45	±9.6
11008	AAA	5G NR DL (CP-OFOM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.51	±9.6
11009	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.76	±9.6
11010	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NA FR1 FD0	8.95	±9,6
11011	AAA	5G NR Dt. (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.96	±9.6
11012	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8,68	±9.6
11013	AAB	IEEE 802,11be (320 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9.6
11014	AAB	EEE 802,11be (320 MHz, MCS2, 99pc duty cycle)	WLAN	8.45	±9.6
11015	AAB	IEEE 802.11be (320 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	1,9.6
11015	AAB	IEEE 802.11be (320 MHz, MCS4, 98pc duty cycle)	WLAN	8.44	±9.6
11017	AAB	JEEE 802 11be (320 MHz, MCSS, 99pc duty cycle)	WLAN	8.41	±9.6
11018	AAB	(EEE 802 11be (320 MHz, MCS6, 99pc duty cycle)	WLAN	8.40	≥9.6
11019	AAB	IEEE 802.11be (320 MHz, MCS7, 89pc duty cycle)	WLAN	8.29	=9.6
11020	AAB	IEEE 802,11bii (320 MHz, MCS8, 99pc duty cycle)	WLAN	8,27	±9.6
11.021	AAB	IEEE 802.11be (320 MHz, MCS9, 99pc duty cycle)	WLAN	8.46	±9:6
11022	AAB	IEEE 892,11be (320 MHz, MCS10, 98pc duty cycle)	WLAN	9.36	±9.6
11023	AAB	IEEE 802,11be (320 MHz, MCS11, 99pc duty cycle)	WLAN	8.09	19.6
11024	AAB	IEEE 802.11be (320 MHz, MCS12, 99pr; duty cycle)	WLAN	8,42	±9.6
11025	AAB	IEEE 802,11be (320 MHz, MCS13, 99pc duty cycle)	WLAN	8.37	±9.5
11026	AAB	IEEE 802 11be (320 MHz, MCS0, 99cc duty cycle)	WLAN	8.39	±9.6

E Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No: EX-3903_Jul24

Page 21 of 21



Calibration Laboratory of Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland





- Schweizerischer Kalibrierdienst Service suisse d'étalonnage
- C Servizio svizzero di taratura
- Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

HCT

Gyeonggi-do, Republic of Korea

Certificate No.

EX-7309_Jun24

CALIBRATION C	ERTIFICATE	리	당 당 것	의 연 작		
Object	EX3DV4 - SN:7309	. 제. 제 제 제 제 제	Shully 2024 16:27	ET 1274 2974 16.20		
Calibration procedure(s)	QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6, QA CAL-25.v8 Calibration procedure for dosimetric E-field probes					
Calibration date	June 19, 2024					
	currents the traceability to national standard incertainties with confidence probability are					
All calibrations have been co	nducted in the closed laboratory facility: env	rironment temperatu	re (22 ± 3) °C and hum	hidity < 70%.		
Calibration Equipment used	A FACTOR - AND					

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	26-Mar-24 (No. 217-04038/04037)	Mar-25
Power sensor NRP-Z91	SN: 103244	26-Mar-24 (No. 217-04036)	Mar-25
OCP DAK-3.5 (weighted)	SN: 1249	05-Oct-23 (OCP-DAK3,5-1249_Oct23)	Oct-24
OCP DAK-12	SN: 1016	05-Oct-23 (OCP-DAK12-1016_Oct23)	Oct-24
Reference 20 dB Attenuator	SN: CC2552 (20x)	26-Mar-24 (No. 217-04046)	Mar-25
DAE4	SN: 660	23-Feb-24 (No. DAE4-660_Feb24)	Feb-25
Reference Probe EX3DV4	SN: 7349	03-Nov-23 (No. EX3-7349_Nov23)	Nov-24
	7	- Value	
Secondary Standards	ID:	Check Date (in house)	Scheduled Check
Photography of a supple	COLUMN CONTRACTOR CONT	NO. No. of Contract of the Con-	The second secon

Power meter E44198	SN: GB41293874	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

	Name	Function	Signature
Dalibrated by	Joanna Lleshaj	Laboratory Technician	Halley
Approved by	Sven Kühn	Technical Manager	1. Aleda
		full without written approval of the labo	Issued: June 19, 2024

Certificate No: EX-7309_Jun24

Page 1 of 21



Calibration Laboratory of

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland





S

- Schweizerischer Kalibrierdienst Service suisse d'étalonnage
- C Service suisse d'étalonnage Servizio svizzero di taratura S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Glossary

TSL NORMx,y,z ConvF tissue simulating liquid sensitivity in tree space sensitivity in TSL / NORMx,y,z diode compression point

DCP CF

crest factor (1/duty_cycle) of the RF signal modulation dependent linearization parameters

A, B, C, D Polarization @

φ rotation around probe axis

Polarization ()

 θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is

normal to probe axis

Connector Angle Information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices – Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization ∂ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(t)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of Com/F.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ±50 MHz to ±100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis).
 No tolerance required.
- · Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Certificate No: EX-7309 Jun24

Page 2 of 21



Parameters of Probe: EX3DV4 - SN:7309

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm (μV/(V/m) ²) A	0.53	0.58	0.66	±10.1%
DCP (mV) B	102.2	103.6	106.2	±4.7%

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB√μV	С	dB	WR mV	Max dev.	Max Unc ^E k = 2
0	CW	X	0.00	0.00	1.00	0.00	124.6	±0.9%	±4.7%
		Y	0.00	0.00	1.00		147.9		
		Z	0.00	0.00	1.00		118.6		
10352	Pulse Waveform (200Hz, 10%)	X	20.00	87.51	18.63	10.00	60.0	±2.7%	±9.6%
		Y	1,41	60.00	5.79		60.0	PARTE NOVA	
		Z	1.54	60.66	6,34		60.0		
10353	Pulse Waveform (200Hz, 20%)	X	20.00	88.80	18.35	6.99	80.0	±2.1%	±9.6%
	The same and the s	Y	0.78	60,00	4,46		80.0		
		Z	0.83	60.00	4.91		80.0		
10354	Pulse Waveform (200Hz, 40%)	X	20.00	94.36	19.96	3.98	95.0	±1.7%	±9.6%
		Y	0.08	130.62	0.70	7.11	95.0		
		Z	0.47	60.00	3.66		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	20.00	108.66	25.51	2.22	120.0	±1.5%	±9.6%
	(Anthony Holes (Mark Mark Holes (Mark Mark 1)	Y	0.09	157.41	3.65	(0.0.00-0	120.0	1000000	1.65000
		2	8.92	82.78	0.25		120.0		
10387	QPSK Waveform, 1 MHz	X	2.10	70.07	17.70	1.00	150.0	±3.5%	±9.6%
		Y	1.93	81.34	20.30		150.0		
		Z	0.70	66.98	14.36		150.0		
10388	QPSK Waveform, 10 MHz	X	3.00	73.47	18.67	0.00	150.0	±1.2%	±9.6%
		Y	1.89	71.19	17.20	100.00	150.0		355.000
		Z	1.50	67.59	15.03		150.0		
10396	64-QAM Waveform, 100 kHz	X	3.95	77.23	22.01	3.01	150.0	±0.9%	±9.6%
	HACKMISSER FOR SECONDARY SEED AND CONTRACT	Y	1,72	65.83	17.08		150.0	HILL COLUMN TO THE	0.000
		Z 1.73 65.11 16.12	150.0						
10399	64-QAM Waveform, 40 MHz	X	3.85	69.11	17.01	0.00	150.0	±1.6%	±9.6%
		Y	3.11	67.83	16.23		150.0		
		Z	2.91	66.83	15.45		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	4,95	66.04	15.89	0.00	150.0	±2.9%	±9.6%
	ROBERT STATES AND	Y	4.13	66.80	16.04	10000	150.0	- 2203	
		Z	3.88	66.22	15.46		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX-7309 Jun24

Page 3 of 21

A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 5).

B Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Parameters of Probe: EX3DV4 - SN:7309

Sensor Model Parameters

	C1 fF	C2 fF	α V ⁻¹	T1 msV ⁻²	T2 ms V ⁻¹	T3 ms	T4 V-2	T5 V-1	Т6
х	52.7	381.52	33.99	18.24	0.00	5.05	1.95	0.09	1.01
y	12.2	89.18	34.14	1.40	0.00	4,90	0.38	0.00	1.00
z	10.3	73.44	32.53	3.87	0.00	4.90	0.57	0.00	1.00

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	-22,3"
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

Certificate No: EX-7309_Jun24 Page 4 of 21



Parameters of Probe: EX3DV4 - SN:7309

Calibration Parameter Determined in Head Tissue Simulating Media

t (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc ^H (k = 2)
3300	38.2	2.71	6.58	6.03	6.96	0.36	1,27	±13.1%
3500	37.9	2.91	6.68	6.12	7.06	0.37	1.27	±13.1%
3700	37.7	3.12	6.63	6.07	7.01	0.37	1.27	±13.1%
3900	37.5	3.32	6.50	5.95	6.87	0.37	1,27	±13.1%
4100	37.2	3.53	6.42	5.88	6.79	0.37	1,27	±13.1%
5250	35.9	4.71	5,54	5.07	5,86	0.33	1.27	±13.1%
5600	35.5	5.07	5.04	4.62	5.33	0.29	1.27	±13.1%
5750	35.4	5,22	5.04	4.62	5,33	0.28	1.27	±13.1%
5800	35.3	5.27	5.05	4.62	5.34	0.27	1.27	±13.1%

C Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4.4 and higher (see Page 2), also it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessed at 6 MHz is 4–9 MHz, and ConvF assessed at 13 MHz is 9–19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

The probes are calibrated using tissue simulating liquid (TSL) that deviate for z and or by less than ±5% from the target values (typically better than ±3%) and are valid for TSL, with deviations of up to ±10% in SAR correction is applied.

G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies belowed as GHz at any distance larger than half the probe by claimater from the boundary.


The proper forms the proper to the proper to the uncertainty is the trade in abstraction of the uncertainty.

^{**} The stated uncertainty is the total calibration uncertainty (k = 2) of Norm ConvF. Therefore, The uncertainty stated is equivalent to the uncertainty. component with the symbol CF in Table 9 of IEC/IEEE 62209-1528-2020.



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide:R22)

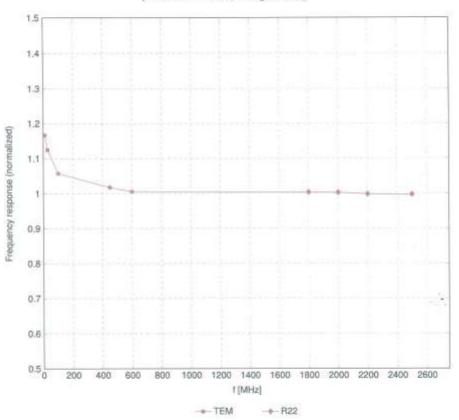


Uncertainty of Frequency Response of E-field: ±6.3% (k=2)


Certificate No: EX-7309_Jun24 Page 6 of 21

F-TP22-03 (Rev. 06) Page 179 of 364



Receiving Pattern (ϕ), $\theta = 0^{\circ}$

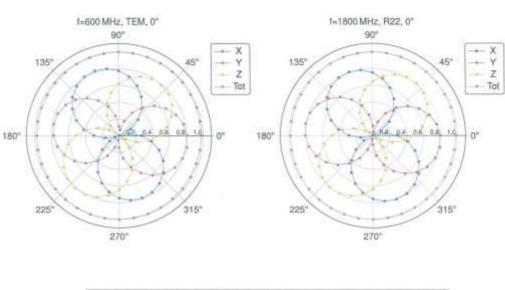

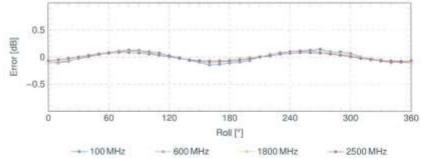

Uncertainty of Axial Isotropy Assessment: ±0.5% (k=2)

Certificate No: EX-7309_Jun24


Page 7 of 21


F-TP22-03 (Rev. 06) Page 180 of 364



Dynamic Range f(SARhead)

(TEM cell, f_{eval} = 1900 MHz)

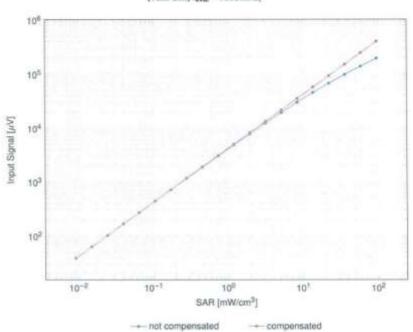

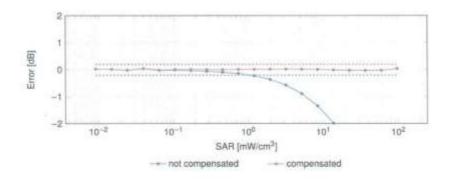

Uncertainty of Linearity Assessment: ±0.6% (k=2)


Certificate No: EX-7309_Jun24

Page 8 of 21

F-TP22-03 (Rev. 06) Page 181 of 364




Conversion Factor Assessment

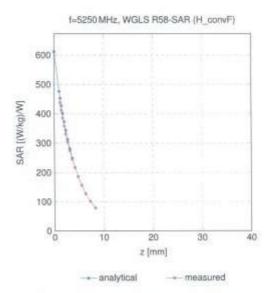

Deviation from Isotropy in Liquid



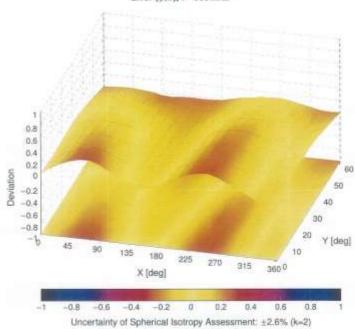

Certificate No: EX-7309_Jun24

Page 9 of 21

F-TP22-03 (Rev. 06) Page 182 of 364



Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	UncE k = 2
0		CW	CW	0.00	14.7
10010	CAB	SAR Validation (Square, 100 ms, 10 ms)	Test	10.00	±9.6
0011	CAC	UMTS-FDD (WCDMA)	WCDMA	2.91	±9.6
10012	CAB	IEEE 802,11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	±9.6
10013	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	±9.6
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	±9,6
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	+9.6
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	19.6
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	±9.6
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	±9.6
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	±9.8
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	±9.6
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	±9.6
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	±9.6
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	19.6
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1,16	±9.6
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	±9.6
10034	CAA	IEEE 802,15.1 Bluetooth (PV4-DOPSK, DH3)	Bluetooth	4.53	±9.6
10035	CAA	IEEE 802,15.1 Bluetooth (PV4-DQPSK, DH5)	Blustooth	3.83	±9.6
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	±9.6
10037	CAA	IEEE 802.15,1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	±9.6
10038	CAA	IEEE 802,15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	±9.6
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	±9.6
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM: PI/4-DQPSK; Halfrate)	AMPS	7,78	±9.6
10044	CAA	IS-91/EIA/TIA-653 FDO (FDMA, FM)	AMPS	0.00	±9.6
10048	CAA	DEGT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	±9.6
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	±9.6
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	±9.6
10058	DAC	EDGE-FOD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	19.6
10059	CAB	IEEE B02.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	±9.6
10060	CAB	IEEE 802.11b WIFI 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	19.6
10061	CAB	IEEE 802.116 WIFI 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	±9.6
10062	CAE	IEEE 802.11a/h WIFI 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	±9,6
10062	CAE	IEEE 802.11a/h WIFI 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	±9.6
10064	CAE	IEEE 802,11ah WFI 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	±9.6
10065	CAE	EEE 802.11a/h WFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	±9.6
10086	CAE	EEE 802.11a/h WFI 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	±9.6
10067	CAE	IEEE 802.11a/h WIFI 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	±9.6
10068	CAE	IEEE 802.11a/h WIFI 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	±0.6
10069	CAE	IEEE 802.11ah WIFI 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	±9.6
10009	CAB	IEEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	+9.6
10072	CAB	IEEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	19.6
10072	CAB	IEEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.94	±9.6
10074	CAB	IEEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 16 Mbps)	WLAN	10.30	19.6
	CAB	IEEE 802,11g WF1 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	+9.6
10075	CAB	IEEE 802,11g WFI 2.4 GHz (DSSS/OFDM, 36W0ps)	WLAN	10.94	19.6
10076	CAB	EEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 46 Mbps)	WLAN	11.00	19.6
10077	CAB	CDMA2000 (1xRTT, RC3)	COMA2000	3.97	19.6
10081	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PV4-DQPSK, Fulkate)	AMPS	4,77	±9.6
10092	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	19.6
10097	CAG	UMTS-FDD (HSDPA)	WCOMA	3.98	19.6
10097	GAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	19,6
10098	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	19.6
10100	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FOD	5.67	±9.6
10100	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10 102	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10102	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TOD	9.29	±9.6
10103	CAH	LTE-TDD (SC-FDMA, 100% RB, 20MHz, GF3K)	LTE-TOD	9.97	±9.6
10104	CAH	LTE-TOD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TOD	10.01	±9,6
10108	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FOO	5.80	±9.6
10108	GAH	LTE-FDD (SC-FDMA, 100% RB, 10MHz, QFSK)	LTE-FOD	6.43	±9.6
	Contract Contract	LTE-FDD (SC-FDMA, 100% RB, 10MHz, 18-GAW)	LTE-FOO	5.75	±9.6
10110					

Certificate No: EX-7309_Jun24

Page 10 of 21

F-TP22-03 (Rev. 06) Page 183 of 364



June 19, 2024

UND	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k =
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	19.6
0113	CAH	LTE-FDD (SG-FDMA, 100% RB, 5MHz, 64-QAM)	LTE-F00	6.62	±9.6
0114	CAE	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	19.6
0115	CAE	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	±9.6
0116	CAE	IEEE 802.11n (HT Greenfield, 135 Mbps. 64-QAM)	WLAN	8.15	±9.6
0117	CAE	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	±9,6
0118	CAE	IEEE 802.11n (HT Mixed, 61 Mops, 16-QAM)	WLAN	8.59	±9.6
0119	CAE	IEEE 802,11n (HT Mised, 135 Mbps, 64-QAM)	WLAN	0.13	±9.6
0140	CAF	LTE-F00 (SC-F0MA, 100% RB, 15MHz, 16-QAM)	LTE-FDD	6.49	±9.6
0141	CAF	LTE-FDD (SC-FDMA, 100% RB, 15MHz, 64-QAM)	LTE-FDD	8.53	19.6
0142	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-PDD:	5.79	±9.6
0143	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 15-QAM)	LTE-FDD	6.35	±9.6
0144	CAF	LTE-FDD (SC-FDMA, 100% RB, 3MHz, 64-QAM)	LTE#DD	6.65	±9,6
0.145	CAG	LTE-FOD (SC-FOMA, 100% RB, 1.4MHz, QPSK)	LTE-FOD	5.76	±9.6
0146	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FOD	6,41	±0.0
0147	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	±9.6
0149	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	fi.42	±9.6
0150	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
0151	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TOO	9.28	±9.6
0152	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	±9,6
0.153	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TOD	10.05	±9:6
0154	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	±9.6
0.155	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
0156	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FD0	5.79	±9.6
0157	CAH	LTE-FOD (SC-FDMA, 50% RB, 5MHz, 16-QAM)	LTE-FDD	6.49	±9.6
0158	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
0189	CAH	LTE-FDD (SC-FDMA, 50% RB, 5MHz, 64-QAM)	LTE-FDD	6.56	±9.6
0160	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	19.6
0161	CAF	LTE-FOD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FD0	6.43	±9.6
0162	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	±9,6
0166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.40	±9.6
0167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	±9.6
0168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 54-QAM)	LTE-FOD	6.79	±9.6
0169	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	±9.6
0170	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
0171	AAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	±9.6
0172	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	±9.6
0173	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TOD	9.48	±9.6
0174	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	+9.6
0175	CAH	LTE-FDD (SC-FDMA, 1 BB, 10 MHz, QPSK)	LTE-FDO	5.72	±9.6
0176	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FD0	6.52	±9.6
0177	CAL	LTE-FDD (SC-FDMA, 1 R8, 5 MHz, QPSK)	LTE-FDO	5.73	±9.6
0178	CAH	LTE-FDD (SC-FDMA, 1 RB, 5MHz, 16-QAM)	LTE-FDD	6.52	19.6
0179	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	+9.6
10180	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10181	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	±9.6
0182	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10183	-Access	LTE-FDD (SC-FDMA, 1 RB, 15MHz, 64-QAM)	LTE-FDD	6.50	19.6
0184	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LYE-PDD	5.70	±9.6
0185	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	±9.6
0186	AAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	+9.6
0187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	±93
0188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4MHz, 16-QAM)	LTE-FOD	6.52	±9.6
0189	AAG	LTE-F00 (SC-F0MA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FOD	6.50	19.6
0193	_	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	6.09	±9.6
0194	+	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	+9.6
0195	-	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	±9.6
0196	office between		WLAN	8.10	±9.6
0197	-	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	±9.6
0198	-	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	±9.6
0219	Charles Assessed	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	±9.6
10220	-	IEEE 802,11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	±9.6
10221	CAE	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	19.6
10222	risking Aldrich	IEEE BOZ, I'm (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	±9.6
	-	IEEE 802.11n (HT Mixed, 15 Mbps, 16-QAM)	WLAN	8.48	±9.6
10223			1 447.544		

Certificate No: EX-7309 Jun24

Page 11 of 21



UID	Rev	Communication System Name	Group	PAR (dB)	UncE k =
10225	CAG	UMTS-FDD (HSPA+)	WGDMA	5.97	±9,6
0.226	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TOD	9.49	±9.6
10227	CAC	LTE-TDD (SC-FDMA, 1 RB; 1.4MHz, 64-QAM)	LTE-TDD	10.26	±9.6
0.228	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	±9.6
0.558	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TOO	9.48	±9,6
0.230	CAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10231	CAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK)	LTE-TOD	9.19	±9.6
0232	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 18-QAM)	LTE-TDD	9.48	±9.6
10233	CAH	LTE-TOD (SC-FOMA, 1 RB, 5 MHz, 64-QAM)	LTE-TOD	10.25	±9.5
10234	CAH	LTE-TOD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	±9.6
10235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TOD	9.48	±9.6
10236	CAH	LTE-TOD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TOD	10.25	±9.6
10237	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TOD	9,21	19.6
10238	CAG	LTE-TDD (SC-FDMA, 1 R8, 15MHz, 16-QAM)	LTE-TOD	9.48	±9.6
10239	CAG	LTE-TDD (SC-FDMA, 1 R8, 15MHz, 64-QAM)	LTE-TOD	10.25	±9.6
10240	CAG	LTE-TDD (SC-FDMA, 1 RB, 15MHz, QPSK)	LTE-TDD	0.21	±9.6
10241	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4MHz, 16-QAM)	LTE-TDD	9.82	±9.6
10242	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4MHz, 64-QAM)	LTE-TDD	9.86	±9.6
10243	CAC	LTE-TDD (SC-FDMA, 50% R8, 1.4MHz, QPSK)	LTE-TDD	9.46	±9.6
10244	CAE	LTE-TOD (SC-FDMA, 50% RB, 3MHz, 16-QAM)	LTE-TOD	10.08	±9.6
10245	CAE	LTE-TOD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	±9.6
10246	CAE	LTE-TOD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TOD	9.30	19.6
10247	CAH	LTE-TDD (SC-FDMA, 50% RB, 5MHz, 16-QAM)	LTE-TDD	9.91	±9,6
10248	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TOB	10.09	19.6
10249	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	19.6
10250	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	±9,6
10251	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz; 64-QAM)	LTE-TOD	10,17	±9.6
10252	CAH	LTE-TOD (SC-FDMA, 50% RB, 10 MHz; QPSK)	LTE-TOD	9,24	49,6
10253	CAG	LTE-TDD (SC-FDMA, 50% RB, 15MHz, 18-QAM)	LTE-TDD	9.90	±9.6
10254	CAG	LTE-TDD (SC-FDMA, 50% RB, 15MHz, 64-QAM)	LTE-TDD	10.14	±9.6
10255	CAG	LTE-TDD (SC-FDMA, 50% RB, 15MHz, QPSK)	LTE-TOD	9.20	±9.6
10256	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TOO	9.96	±9.6
10257	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	±9.6
10258	CAC	LTE-TDD (SC-FDMA, 100% R8, 1.4MHz, QPSK)	LTE-TDO	9.34	±9.6
10259	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDO	9.98	±9.6
10260	CAE	LTE-TOD (SC-FDMA, 100% RB, 3MHz, 64-QAM)	LTE-TOO	9,97	±9.6
10261	CAE	LTE-TOD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TOD	9,24	±9.6
10262	CAH	LTE-TOD (SC-FDMA, 100% RB, 5MHz, 16-QAM)	LTE-TOD	9.83	±9.6
10263	CAH	LTE-TDD (SC-FDMA, 100% RB, 5MHz, 64-QAM)	LTE-TOD	10.16	-
10284	CAH	LTE-TOD (SC-FDMA, 100% RB, 5MHz, QPSK)	LTE-TOD	9.82	±9.6
10265	CAH	LTE-TOD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	The second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a section in the second section in the section is a section in the section in the section is a section in the section in the section is a section in the section in the section is a section in the section in the section in the section is a section in the section	10.07	19.6
10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 84-GAM)	LTE-TOD	9,30	±9.6
10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TOD		
10268	CAG	LTE-TOD (SC-FOMA, 100% RB, 15 MHz, 16-QAM)	LTE-TOD	10.06	±9.6
10269	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TOD	9.58	±9.6
10270	CAG	LTE-TDD (SC-FDMA, 100% RB, 15MHz, QPSK)	WCDMA	4.87	±9.6
10274	and the contraction of the contr	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	±9.6
10275	CAG	PHS (QPSK)	PHS	11.81	±9.6
10277	CAA		PHS	11.81	±9.6
10278	CAA	PHS (QPSK, 8W 884 MHz, Rolloff 0.5) PHS (QPSK, 8W 884 MHz, Rolloff 0.38)	PHS	12.18	±9.6
10279	AAB	I SERVICE AND THE PERSON OF TH	GDMA2000	3.91	±9.6
Company (molecule	the state of the last	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.46	±9.6
10291	AAB	CDMA2000, RC3, SO55, Full Rate CDMA2000, RC3, SO32, Full Rate	GDMA2000	3.39	±9.6
-	AAB		CDMA2000	3.50	±9.6
10293	-	CDMA2000, RC3, SO3, Full Rate CDMA2000, RC1, SO3, 19th Base 25 tr		407.40	-0.0
10295	AAE	I BE THE TAX OF THE PARTY OF TH	CDMA2000 LTE-FDD	5.81	±9.6
10297	AAE	LTE-FDD (SC-FDMA, 50% RB, 3MHz, QPSK)	LTE-FDD	5.72	±9.6
10298	AAE	LTE-FDD (SC-FDMA, 50% RB, 3MHz, GFSN) LTE-FDD (SC-FDMA, 50% RB, 3MHz, 16-QAM)	LTE-FDD	6.39	±9.6
7.70.00	AAE	LTE-FOD (SC-FOMA, 50% FIB. 3 MHz, 16-QAM)	LTE-FDD	6.60	±9.6
10300		The state of the s	WMAX	12.03	±9.6
10301	AAA	IEEE 802.15e WMAX (29:18, 5ms, 10MHz, OPSK, PUSC)	WMAX	12.03	
10302	AAA	IEEE 802.15e WIMAX (29:16, 5 ms, 10 MHz, QPSK, PUSC, 3 C7RL symbols)	WMAX	12.57	±9.6
10303	AAA	IEEE 802.16e WIMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)			-
10304	-	IEEE 802,15e WIMAX (29:18, 5ms, 10 MHz, 64 QAM, PUSC)	XAMW	11.88	±9.6
10305	AAA	IEEE 802,16e WIMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)	WIMAX	15.24	±9.6

Certificate No: EX-7309_Jun24 Page 12 of 21

F-TP22-03 (Rev. 06) Page 185 of 364



UID	Rev	Communication System Name	Group	PAR (dB)	Unc $E k = 2$
10307	AAA	IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, QPSK, PUSC, 18 symbols)	WMAX	14,49	±9.6
10308	AAA	IEEE 802.16e WIMAX (29:16, 10 ms, 10 MHz, 16QAM, PUSC)	WMAX	14.46	19.6
10300	AAA	IEEE 802.15e WIMAX (29:18, 10 ms, 10 MHz, 16QAM, AMC 2x3, 18 symbols)	WIMAX	14,58	±9.6
10310	AAA	IEEE 802,16e WIMAX (29:18, 10:ms, 10 MHz, QPSK, AMC 2x3, 18 symbols)	WMAX	14,57	±9.6
10311	AAE	LTE-FOD (SC-FDMA, 190% RB, 15 MHz, QPSK)	LTE-FDD	6.06	±9.6
10313	AAA	IDEN 1:3	IDEN	10.51	19.6
10314	AAA	IDEN 1:6	IDEN	13.48	19.6
10315	BAA	IEEE 802,11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	WLAN	1.71	19.6
10316	AAB	IEEE 802.11g WIFI 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	19.6
10317	AAE	IEEE 802.11a WIFI 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	19.6
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	19.6
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	±9.6
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	±9.8
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2,32	±9.6
10356	AAA	Pulse Wavelorm (200Hz, 80%)	Generic	0.97	±9.6
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	±9.6
10388	AAA	OPSK Wayeform, 10 MHz	Generic	5.22	±9.6
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	#9.6
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	±9.6
and the state of the state of		A DECEMBER OF THE PARTY OF THE			and the second second
10400	AAF	IEEE 802.11ac WIFI (20 MHz, 64-OAM, 99pc duty cycle)	WLAN	8.37 8.60	±9.6
10401	AAF	IEEE 802,11ac WFI (40 MHz, 64-QAM, 99pc duty cycle)	WLAN	The second secon	
10402	AAF	IEEE 802.11ac WiFi (80 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.53	±9.6
10403	AAB	CDMA2000 (1xEV-DO, Rex. 0)	CDMA2000	3.76	±9.6
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	+9.6
10406	AAB	CDMA2000, RC3, SC32, SCH0, Full Rate	CDMA2000	5.22	±9.6
10410	AAH	LTE-TDD (SC-FDMA, 1 R8, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	LTE-TOD	7,82	±9.6
10414	AAA	WLAN CCDF, 64-QAM, 40 MHz	Generic	8.54	±9.6
10415	AAA.	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mops, 99pc duty cycle)	WLAN	1.54	±9.6
10416	AAA	IEEE 802.11g WIFI 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8,23	±9.6
10417	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	WEAN	8.23	±9.6
10418	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preambule)	WLAN	8.14	±9.6
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Shart preembule)	W.AN	8.19	±9.6
10422	AAD	IEEE 802,11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	±9.6
10423	AAD	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	#9.6
10424	AAD	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	±9.6
10425	AAD	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8,41	±9,6
10426	AAD	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8,45	±9.6
10427	AAD	IEEE 802,11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8,41	±9.6
10430	AAE	LTE-FDD (OFDMA, 5MHz, E-TM 3.1)	LTE-FDD	8.28	±9.6
10431	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FOD	8.38	±9.6
10432	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FOD	8.34	±9.6
10433	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	+9.6
10434	AAB	W-COMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	±9.6
10435	AAG	LTE-TDD (SC-FDMA, 1 RB, 20MHz, QPSK, UL Subframe=2,3,4,7,8.9)	LTE-TOD	7.82	±9.6
10447	AAE	LTE-FDD (OFDMA, 5MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	±9.6
10448	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%)	LTE-FDD	7,53	±9.6
10449	AAD	LTE-FDD (OFDMA, 15MHz, E-TM 3.1, Cliping 44%)	LTE-FDD	7.51	±9.8
10450	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	±9.6
10451	AAB	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	±9.6
10453	AAE	Validation (Square, 10 ms, 1 ms)	Test	10.00	±9.6
10456	AAD	IEEE 802.11ac WiFI (160 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.63	±9.6
10457	AAB	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	19.6
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	+9.6
10458	AAA	CDMA2000 (1xEV-DC, Hev. B, 2 carriers)	CDMA2000	8.25	±9.6
10460	AAB	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	±9.6
-	-	The contract of the contract o	The second second	7.82	±9.6
10461	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4MHz, QPSK, UL Subtrame=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 1.4MHz, 16-QAM, UL Subtrame=2,3,4,7,8,9)	LTE-TOD	8.30	
10462	-				±9.6
10463	AAC		LTE-TOD	8.58	±9.6
10464	AAD	A CONTRACT OF THE PROPERTY OF	LTE-TOD	7.82	±9.6
10465		LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOO	8.32	±9,6
10466	AAD		LTE-TOD	8.57	±9,6
10467	AAG		LTE-TDD	7.82	±9.6
10.468	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subtrame=2.3.4,7.8.9)	LTE-TDD	8,32	±9.6
10469	AAG		LTE-TDD	8.56	±9.6
10470	AAG		LTE-TOD	7.82	±9.6
10471	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TOO	8.32	±9.6

Certificate No: EX-7309_Jun24

Page 13 of 21

F-TP22-03 (Rev. 06) Page 186 of 364



June 19, 2024

URD	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10472	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe<2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10473	AAF	LTE-TDD (SC-F0MA, 1 RB, 16 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7.82	±9.6
10474	AAF	LTE-TOD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3.4,7.8,9)	LTE-TDD	8.32	±9.6
10475	AAF	LTE-TDD (SC-FDMA, 1 RB, 15MHz, 64-QAM, UL Subhame-2,3,4,7,8,9)	LTE-TOD	8.57	±9.6
10477	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3.4,7,8,9)	LTE-TDD	8.32	±9.6
10478	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subhame+2,3.4,7.8.9)	LTE-TDD	8.57	±9.6
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2.3,4,7,8.9)	LTE-TOD	7.74	±9.6
10.480	AAC	LTE-TDD (SC-F0MA, 50% RB, 1.4 MHz, 16-QAM, UI. Subtrame=2,3,4,7,8.9)	LTE-TOD	8,18	±9.6
10481	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TOD	8.45	19.6
10482	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.71	±9.6
10483	DAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.39	±9.6
10484	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7.8.9)	LTE-TOD	8,47	±9.6
10485	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2.3.4,7.8,9)	LTE-TDD	7.50	+9.6
10486	AACL	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3.4,7.8,9)	LTE-TOD	#.38	±9.6
10487	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.60	±9.6
10488	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,9,9)	LTE-TDD	7.70	±9.6
10489	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe-2,3,4,7,8,9)	LTE-TOD	8.31	±9.6
10490	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe-2,3.4,7,8.9)	LTE-TOD	8.54	#9.6
10491	AAF	LTE-TOD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3.4,7.8.9)	LTE-TOD	7.74	±9.6
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15MHz, 16-QAM, UL Subtrame-2,3.4.7.8.9)	LTE-TOD	8,41	19.6
10493	AAF	LTE-TOD (SC-FOMA, 50% RB, 15 MHz, 64-QAM, UL Subtrame+2,3.4,7.8.9)	LTE-TOD	8,55	19.6
10494	AAG	LTE-TOD (SC-FOMA, 50%, RB, 20 MHz, QPSK, UL Subhame=2.3.4,7.8,9)	LTE-TOD	7,74	±9,6
10495	AAG	LTE-TOD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe-2,3.4,7.8.9)	LTE-TOD	8,37 8,54	±9.6
10496	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subtrame=2,3.4,7,8,9)	The second second second second		
10497	AAC	LTE-TDD (SC-FDMA, 100% RB, 1,4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7,87	±9.6
10498	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subfrane=2.3,4,7,8,9) LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subfrane=2.3,4,7,8,9)		8.68	19.6
	AAC		LTE-TOO	7.67	±9.6
10500	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDO	8.44	±9.6
10:501	AAD		Company of a facilities	10110000000	19.6
10502	AAD	LTE-TDD (SC-FDMA, 100% R8, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOO	7.72	±9.6
10503	AAG	LTE-TOD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.31	±9.6
10504	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8.9)		8.54	19.6
10505	AAG	LTE-TDD (SC-FDMA, 199% RB, 5MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7.74	19.6
10506	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subtrame=2.3.4,7.8.9) LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subtrame=2.3.4,7.8.9)	LTE-TOD	8.36	19.6
10507	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-GAM, UL Subhame=2,1.4.7.8.9)	LTE-TOD	8.55	19.6
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subhame=2.3.4.7.8.9)	LTE-TOD	7.99	±9.6
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe-2.3.4.7.6.9)	LTE-TOD	8.49	19.6
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2.3.4,7,8,9)	LTE-TOD	8.51	±9.6
10512		LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2.3.4,7.8,9)	LTE-TOD	7.74	19.6
10513	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2.3.4,7,8,9)	LTE-TDD	8.42	19.6
10514	-	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 84-QAM, UL Subframe=2.3.4,7.8.9)	LTE-TDD	8.45	±9.6
10515		IEEE 802.116 WIFI 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	WLAN	1.58	+9.6
10516		EEE 802.11b WIFI 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	WLAN	1,57	±9.6
10517	and the state of t	IEEE 802.11b WFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	WLAN	1.58	±9.6
10518	-	IEEE 802.11ah WIFI 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10519	which the property interests.	IEEE 802.11a/h WIFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.39	±9.6
10520	AAD	IEEE 802,11a/h WFI 5 GHz (OFDM, 18 Mbps, 199c duty cycle)	WLAN	8.12	±9.6
10521	AAD	IEEE 802.11a/h W/Fi 5 GHz (OFOM, 24 Mbps, 99pc duty cycle)	WLAN	7.97	±9.6
10.522	the second second	IEEE 802,11a/h WFi 5 GHz (OFOM, 38 Mbps, 98pc duty cycle)	WLAN	8.45	±9.6
10523	AAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 48 Mbps, 98pc duty cycle)	WLAN	8.08	±9.6
10524	marketika kalendari	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duly cycle)	WLAN	8.27	±9.6
10525	-	IEEE 802,11ac WFF (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.36	+9.6
10526	ering between the delication the	IEEE 802.11ac WIF (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.42	±9.6
10527	and the second	IEEE 802.11ac WIFI (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.21	±9.6
10528			WLAN	8.36	19.6
10529	-		WLAN	8.36	±9.6
10531	endrana in come		WLAN	8.43	±9.0
10532			WLAN	8.29	±9.6
10533			WLAN	8.38	±9.6
10534	sandaramana Antonia	IEEE 802.11ac WIFI (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.45	±9.6
10535	_		WLAN	8.45	19.6
10536		IEEE 802,11ac WiFi (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.32	±9.6
10537	A STATE OF THE PARTY NAMED IN	IEEE 802 11ac WIFI (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	19.5
10538	the second		WLAN	B.54	±9.6
	AAD		WLAN	8.39	19.6

Certificate No: EX-7309_Jun24

Page 14 of 21



June 19, 2024

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k =
10541	AAD	IEEE 802.11ac WIFI (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.46	±9.6
0542	AAD	IEEE 802.11ac WiFi (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.65	±9.6
0543	AAD	IEEE 802,11ac WiFi (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.65	±9.6
0544	AAD	IEEE 802.11ac WIFI (80 MHz, MC50, 99pc duty cycle)	WLAN	8,47	±9.6
0545	AAD	IEEE 802,11ac WiFi (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
0546	AAD	IEEE 802,11ac WIFI (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.35	19.6
0547	AAD	EEE 802.11ac WIFI (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.49	±9.6
-	AAD		WLAN	8.37	±9.6
0548		IEEE 802.11ac WIFI (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.38	±9.6
0550	CAA	EEE 802.11ac WiFI (80 MHz, MCS6, 99pc duty cycle)	The state of the s	and the last of th	
0551	AAD	IEEE 802.11ac WIFI (80 MHz, MCS7, 99pc duty cycle)	WLAN	8.50 8.42	±9.6
0552	AAD	IEEE 802.11ac WiFi (80 MHz, MCS8, 99pc duty cycle)	WLAN		±9,6
0553	AAD	IEEE 802.11 No WIFI (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.45	±9.6
0554	AAE	IEEE 802.11ac WiFI (160 MHz, MCS0, 99pc duty cycle)	WLAN	8,48	±9.6
0555	AAE	IEEE 802.11ac WIFI (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9.0
0.556	AAE	IEEE 802.11sic WiFi (160 MHz, MCS2, 99pc duty cycle)	WLAN	8.50	±9.5
0.657	AAE	IEEE 802.11ac WIFI (160 MHz, MCS3; 89pc duty cycle)	WLAN	8.62	±9.6
0658	AAE	IEEE 802.11ac WIFI (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.61	±8.6
0.560	AAE	IEEE 902,11ac WiFi (160 MHz, MC56, 99pc duty cycle)	WLAN	8.73	±9.6
0561	AAE	IEEE 802.11ac WiFi (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.56	±9.6
0.562	AAE	IEEE 802.11ac WiFi (160 MHz, MCS8, 89pc duty cycle)	WLAN	8.69	19.6
0563	AAE	IEEE 802.11ac WiFI (160 MHz, MCSS, 99pc duty cycle)	WLAN	8,77	±9.6
0564	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.25	±9.6
0565	AAA	IEEE 802.11g WFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duly cycle)	WLAN	8.45	+9.6
0.566	AAA	IEEE 802.11g W/Fi 2.4 GHz (DSSS-QFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.13	±9.6
0.567	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	WLAN	8.00	±9.6
	AAA	IEEE 802.11g WIF1 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.37	±9.6
0566	Annual Inches		WLAN	8.10	19.6
0569	AAA	IEEE 802,11g WiFi 2,4 GHz (OSSS-OFDM, 48 Mbps, 99pc duty cycle)		8.30	
10570	AAA	IEEE 802,11g WiFi 2,4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	WLAN	and the second section is a basic or	+9.6
0571	AAA	IEEE 802,11b WIFI 2,4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1.99	±9.6
0572	AAA	IEEE 802.11b WIFI 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	WLAN	1.99	±9.6
0573	AAA	IEEE 802.11b WIFI 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
0574	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
0575	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8,59	±9.6
10576	AAA	IEEE 862.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	±9,6
10577	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10578	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9,6
10579	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10.580	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.6
10581	AAA	IEEE 802.11g WiFl 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	±9.6
10582	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10583	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±9.6
10584	AAD	IEEE 882,11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	+9.6
0585	AAD	IEEE 802.11a/h WIFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10586	-	IEEE 802.11a/h WiFl 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	6.49	±9.6
10.587	_	IEEE 802.11a/h WiFl 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10588	AAD	IEEE 802,11ah WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.6
10589	combasses below to	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	19.6
	81.400.000		WLAN	8.67	+9.6
10590	to distribution to	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	The second secon		
10501	AAD	IEEE 802.11n (HT Mixed, 20 MHz, MCS0, 90pc duty cycle)	WLAN	8.63	195
10592	-	IEEE 802,11n (HT Mixed, 20 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10583	and the second	IEEE 802.11n (HT Mixed, 20 MHz, MCS2, 90pc duty cycle)	WLAN	8,64	±9,6
10594	office benefit before	IEEE 802,11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	WLAN	8.74	19,
0.595	-	IEEE 802.11n (HT Mixed: 20 MHz, MCS4, 90pc duty cycle)	WLAN	8.74	±9.5
10596	and the later of t	IEEE 802.11n (HT Mixed, 20 MHz, MC85, 90pc duty cycle)	WLAN	8.71	±9.6
0597	AAD	IEEE 802.11n (HT Mixed, 20 MHz, MCS6, 90pc duty cycle)	WLAN	8.72	±9.
0.598		IEEE 802.11n (HT Mixed, 20 MHz, MCS7, 90pc duty cycle)	WLAN	8.50	±93
0.559	AAD	IEEE 902.11n (HT Mixed, 40 MHz, MCS0, 90pc duty cycle)	WLAN	8.79	±9.8
0600	AAD	IEEE 802.11n (HT Mixed, 40 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	±9.0
10801	_	The state of the s	WLAN	8.82	±9.6
10602	the state of the latest terminal to the latest terminal t		WLAN	8.94	±0.6
10603	- Acceptable	The first of the f	WLAN	9.00	±9.6
10604		IEEE 802.11n (HT Mixed, 40 MHz, MCS5, 90pc duty cycle)	WLAN	8.76	±9.6
10 605	da la francisco de la francisc	IEEE 802,11n (HT Mixed, 40 MHz, MCS6, 90pc duty cycle)	WEAN	8.97	±9,0
10000	-		WLAN	8.82	±9.5
10607	_		WLAN	8.64	±9.6
- 1/44/1	MARCO	IEEE 802,11ac WH (20 MHz, MCSI, 90pc duty cycle)	WLAN	8.77	±9.

Certificate No: EX-7309_Jun24

Page 15 of 21



June 19, 2024

URD	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k =
10809	AAD	IEEE 802,11ac WiFi (20 MHz, MCS2, 90pc duty cycle)	WLAN	8,57	±9.8
0610	AAD	IEEE 802,11ac WiFi (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.78	±9.6
0611	AAD	IEEE 802.11ac WiFI (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	±9.6
0612	AAD	IEEE 802,11ac WIFI (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	89.6
0613	AAD	IEEE 802.11ac WiFi (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.94	±9.6
0614	CIAA	IEEE 802,11ac WiFi (20 MHz, MCS7, 90pc duty cycle)	WLAN:	8.59	±9.6
10615	AAD	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
0616	CAA	IEEE 802.11ac WIFI (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.82	±9.6
10617	AAD	IEEE 802.11ac WiFi (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.81	19.6
10818	AAD	IEEE 802.11ac WIFI (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.58	19.6
10619	AAD	IEEE 802.11ac WIFI (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.86	19.6
10620	AAD	IEEE 802.11ac WIFI (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.87	±9,6
10621	AAD	IEEE 802,11ac WIFF (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±9.6
10622	AAD	IEEE 802.11ac WIFI (40 MHz. MCS6, 90pc duty cycle)	WLAN	8.68	±9.6
10.099			WLAN	8.82	±9.0
10623	AAD	IEEE 802.11ac WIFI (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.96	±9.6
10624	AAD	IEEE 882.11ac WiFi (46 MHz, MCS8, 90pc duty cycle)	1000000000	20070	±9.6
10625	AAD	IEEE 802.11ac WiFI (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.96	
10626	AAD	IEEE 802.11sc WiFi (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.6
10827	AAD	EEE 802,11ac WiFI (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	±9.6
10628	AAD	IEEE 802.11ac WiFI (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.71	±9.6
10.629	AAD	IEEE 802.11ac WiFi (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±9.6
10630	AAD	IEEE 802.11ac WiFt (80 MHz, MCS4, 90pc duty cycle)	WLAN:	8.72	±9.6
10631	AAD	IEEE 802.11ac WiFi (80 MHz, MCSS, 90pc duty cycle)	WLAN	8.81	±9.8
10632	AAD	IEEE 802.11ac WiFI (80 MHz, MCS6, 90pc duty cycle)	WLAN	8,74	±9.6
10633	AAD	IEEE 802,11ac WiFi (80 MHz, MCS7, 90pc duty cycle)	WLAN:	8.83	±9.8
10634	AAD	IEEE 802,11ac WiFi (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.80	19.6
10635	AAD	IEEE 802.11ac WiFi (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±9.6
10638	AAE	IEEE 802.11ac WiFi (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.6
10637	AAE	IEEE 802.11ac WIFI (160 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10638	AAE	IEEE 802.11ac WIFI (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.86	±9.6
10639	AAE	IEEE 802.11ac WIFI (160 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±9.6
10640	AAE	IEEE 802,11pc WFi (160 MHz, MCS4, 90pc duty cycle)	WLAN	8.98	±9.6
10641	AAE	IEEE 802,11ac WIFI (160 MHz, MCS5, 90pc duty cycle)	WLAN	9.06	±9.6
10642	AAE	IEEE 802,11ac WiFi (160 MHz, MCS6, 90pc duty cycle)	WLAN	9.06	±9.6
10843	AAE	The state of the s	WLAN	8.89	±9.6
	AAE	IEEE 802,11ac WiFI (160 MHz, MCS7, 90pc duty cycle) IEEE 802,11ac WiFI (160 MHz, MCS8, 90pc duty cycle)	WLAN	9.05	19.6
10844		The state of the s	WLAN	9.11	±9.6
10845	AAE	IEEE 802.11ac WiFi (160 MHz, MCS9, 90pc duty cycle)	And the second s	11.96	±9.6
10646	HAA	LTE-TDD (SC-FDMA, 1 RB, 5MHz, QPSK, UL Subframe=2,7)	LTE-TOD		±9.6
10647	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UI, Subframe=2.7)	LTE-TOD	11.96	
10648	AAA	COMA2000 (1x Advanced)	CDMA2000	3.45	±9.6
10682	AAF	LTE-TDD (OFDMA, 5 MHz, E-7M 3.1, Clipping 44%)	LTE-TDD	6,91	±9,6
10653	AAF	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7,42	±9,6
10654	AAE	LTE-TDD (OFDMA, 15MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	±9.6
10655	AAF	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	±9.6
10658	AAB	Pulse Waveform (200Hz, 10%)	Test	10.00	#9.6
10659	AAB	Pulse Waveform (200Hz, 20%)	Test	6.99	±9.6
10660	AAB	Pulse Waveform (200Hz, 40%)	Test	3.98	±9.6
10661	AAB	Pulse Waveform (200Hz, 60%)	Test	2,22	±9.6
10662	AAB	Pulse Waveform (200Hz, 80%)	Test	0.97	±9.6
10670	AAA	Bluetooth Low Energy	Bluetooth	2,19	±9.6
10671	AAC	IEEE 802.11ax (20 MHz. MCS0, 90pc duty cycle)	WLAN	9,09	19.6
10672	AAC	IEEE 802.11ax (20 MHz, MCS1, 90pc duty cycle)	WLAN	8,57	+9.6
10673		IEEE 802,11ax (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.78	19.6
10674	AAC	IEEE 802,11ax (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.74	±97
10675	A CARLOTTER	IEEE 802.11ax (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.90	19.
10676	-	A STATE OF THE PARTY OF THE PAR	WLAN	8.77	±93
10677		IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)	WLAN	8,73	±9.0
and the second	- Berlinder of the State of the		WLAN	8.78	±9.
10678	-	The state of the s	WLAN	8.89	±8.0
10679	no Bracia e televisioni	IEEE 802.11ax (20 MHz, MCS8, 90pc duty cycle)			
10680		IEEE 802.11ax (20 MHz, MCS9, 90pc duty cycle)	WLAN	8.80	±9.6
10681		IEEE 802.11ex (20 MHz, MCS10, 90pc duty cycle)	WLAN	8.62	±93
10682	display had paid to	IEEE 802.11ax (20 MHz, MCS11, 90pc duty cycle)	WLAN	8.83	#9.
10683	-	IEEE 802,11ax (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.42	±93
10664	and the second	IEEE 802.11ax (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.26	±9.6
10685	AAC	IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	±9.
10,686	AAC	IEEE 802.11ax (20 MHz, MCS3, 99pc duty cycle)	WLAN	8.28	±9.

Certificate No: EX-7309_Jun24

Page 16 of 21



UID	Rev	Communication System Name	Group	PAR (dB)	Unc [®] k = 2
10687	AAC	IEEE 802.11ax (20 MHz, MCS4, 99pc duty cycle)	WLAN	8,45	±9.6
10688	AAC	IEEE 802.11ax (20 MHz, MCS5, 99pc duty cycle)	WLAN	8.29	±9.6
10689	AAC.	IEEE 802.11ax (20 MHz, MCS6, 99pc duty cycle)	WLAN	8,55	±9.6
10690	AAC	IEEE 802.11ax (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.0
10691	AAC	IEEE 802.11ax (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.25	±9.6
10690	AAC	IEEE 802,11ax (20 MHz, MCS9, 99pc duty cycle)	WLAN	8.29	±9.6
10693	AAC	IEEE 802.11ax (20 MHz. MCS10, 99pc duty cycle)	WLAN	9.25	±9.0
10694	AAC	IEEE 802.11ax (20 MHz, MCS11, 99pc duty cycle)	WLAN	8.57	±9.6
10695	AAC	IEEE 802.11ax (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.78	19.6
10696	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.91	±9.6
10697	AAC	IEEE 802,11ax (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.61	19.5
10.698	AAC	IEEE 802.11ax (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.89	±9.6
10099	AAC	IEEE 802.11ax (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.82	±0.6
10700	AAC	IEEE 802.11ax (40 MHz, MCSS, 90pc duty cycle)	WLAN	8.73	±9.6
10701	AAG	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.86	±9.0
10702	AAC	IEEE 802.11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.70	±9.6
10700	AAC	IEEE 802.11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.0
10704	AAC	IEEE 802.11ax (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.56	±9.6
10705	AAC	IEEE 802.11ax (40 MHz, MCS10, 90pc duty cycle)	WLAN	8.69	±9.6
10706	AAG	IEEE 802.11ax (40 MHz, MCS11, 90pc duty cycle)	WLAN	8.66	19.6
10707	AAC	IEEE 802,11ax (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.32	±9.6
10708	AAC	IEEE 802,11ax (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
and the second second second	AAC		WLAN	8.33	±9.6
10709	AAC	EEE 802.11ax (40 MHz, MCS2, 99pc duty cycle) EEE 802.11ax (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.29	±9.6
	AAC		WLAN	8.39	±9.6
10711	AAC	IEEE 802.11ax (40 MHz, MCS4, 99pc duty cycle) IEEE 802.11ax (40 MHz, MCS5, 99pc duty cycle)	WLAN	8.67	19.6
10712	AAC	A STATE OF THE PARTY OF THE PAR	WLAN	8.33	19.6
	and the second	IEEE 802.11ax (40 MHz, MCS6, 99pc duty cycle) IEEE 802.11ax (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.26	±9.6
10714	AAC		WLAN	8.45	±9.6
10715	AAC	IEEE 802.11ax (40 MHz, MCS8, 99pc duly cycle)	WLAN	8.30	±9.0
10716	AAC	IEEE 802.11ax (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.48	±9.6
10717	AAC	IEEE 902.11ax (40 MHz, MCS10, 99pc duty cycle)			
10718	AAC	IEEE 802.11ax (40 MHz, MCS11, 99pc duty cycle)	WLAN WLAN	8.24	±9.6
10719	AAC	IEEE 802.11ax (80 MHz. MC50, 90pc duty cycle)	- contains	8.87	
10720	AAC	IEEE 802.11as (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.76	±9.6
10721	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.55	19.6
10722	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc duty cycle)	The state of the s		-
10723	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.90	19.5
10724	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc duty cycle)	WLAN		±9,6
10725	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	19.6
10728	AAC	IEEE 802,11ax (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.72	±9.6
10727	AAC	IEEE 802,11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.66	±9.6
10728	AAC	IEEE 802.11ax (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.65	±9.6
10729	AAC	IEEE 802.11ax (80 MHz, MGS10, 90pc duty cycle)	WLAN	8.64	±9.6
10730	-	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	0.07	±0.0
10731	AAC	IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle)	WLAN	8.42	±9.6
10732	AAC	IEEE 802.11ax (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.46	±9.6
10733		IEEE 802.11ax (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.40	±9.6
10734		IEEE 802.11ax (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.25	±9.6
10735		IEEE 802.11ax (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.33	±9.6
10736		IEEE 802.11ax (80 MHz, MGS5, 99pc duty cycle)	WLAN	8.27	±9.6
10737	والمعدل التباركيات	IEEE 802.11ax (80 MHz, MCS6, 99pc duty cycle)	WLAN	8.36	1.9.6
10738		IEEE 802.11ax (80 MHz, MCS7, 99pc duty cycle)	WLAN	8.42	39.6
10739		IEEE 802.11an (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.29	19.6
10740	100000	IEEE 802.11ax (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.48	19.6
10741		IEEE 802.11au (80 MHz, MCS10, 99pc duty cycle)	WLAN	8.40	±9.6
10742	AAC	IEEE 802.11ax (80 MHz, MCS11, 99pc duty cycle)	WLAN	8.43	±9.6
10743		IEEE 802.11ax (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.04	±9.6
10.744	AAG	IEEE 802.11ax (160 MHz, MCS1, 90pc duty cycle)	WLAN	9.16	±9.6
10.745		IEEE 802.11ax (168 MHz, MCS2, 90pc duty cycle)	WLAN	8.93	±9.6
10746	AAC	IEEE 802.11ax (168 MHz, MCS3, 90pc duty cycle)	WLAN	9,11	±9.6
10747	AAC	IEEE 802,11ax (160 MHz, MCS4, 90pc duty cycle)	WLAN	9:04	±9.6
10748	AAC	IEEE 802.11as (160 MHz, MCSS, 90pc duty cycle)	WLAN	8.93	±9.6
10749	AAC	IEEE 802.11ax (160 MHz, MCS6, 90pc duty cycle)	WLAN	8,90	±9.6
10750	AAC	IEEE 882.11ax (160 MHz, MCS7, 90pc duty cycle)	WLAN	8,79	±9.6
10751	AAC	IEEE 802.11ax (160 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10752	AAC	IEEE 802.11ax (160 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	+9.6
-					

Certificate No: EX-7309_Jun24

Page 17 of 21



UID	Rev	Communication System Name	Group	PAR (dB)	Unce k =
10.753	AAC	IEEE 802.11ax (160 MHz, MCS10, 90pc duty cycle)	WLAN	9.00	±9.6
0754	AAC	IEEE 802,11ax (160 MHz, MCS11, 90pc duty cycle)	WLAN	8.94	±9.6
0.755	AAC.	IEEE 802,11ax (160 MHz, MCS0, 99pc duty cycle)	WLAN	8,64	±9.6
0756	AAC	IEEE 802.11ax (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.77	±9.6
0757	AAC	IEEE 802.11ax (160 MHz, MCS2, 99pc duty cycle)	WLAN	9.77	±9.6
0.758	AAC	IEEE 802,11ax (160 MHz; MCS3, 99pc duty cycle)	WLAN	8.69	±9.6
0759	AAC	IEEE 802,11ax (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.58	±9.6
0760	AAC	IEEE 802.11ax (160 MHz, MCS5, 99pc duty cycle)	WLAN	8.49	19.6
0.761	AAC.	IEEE 802.11ax (160 MHz, MCS6, 99pc duty cycle)	WLAN	8.58	±9:fi
0782	AAC	IEEE 882.11ax (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.49	±9.6
0763	AAG	IEEE 802.11ax (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.53	±9.6
0.764	AAC	IEEE 802.11mx (160 MHz, MCS9, 99pc duty cycle)	WLAN	8.54	±9.6
0785	AAC	IEEE 802,11ax (160 MHz, MCS10, 99pc duty cycle)	WLAN	8.54	±9.8
0.766	AAC	IEEE 802,11ax (160 MHz, MC511, 99pc duty cycle)	WLAN	8.51	±9.6
0767	AAG	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	7.99	±9.6
0768	AAE	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz).	5G NR FR1 TDD	8,01	±9.6
0.769	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8,01	±9.6
0770	AAE	5G NR (CP-OFDM, 1 RB, 20 MHz, OPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
0771	AAD	5G NR (CP-OFDM, 1 RB, 25MHz, QPSK, 15kHz)	5G NA FR1 TDD	8.02	±9.6
0772	AAE	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	±9.6
0773	AAF	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDO	8.03	1,9,6
0.774	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	1.9.6
0775	AAF	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
0776	AAE	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.50	±9.6
0777	AAC	5G NR (CP-OFDM, 50% R8, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	+9.6
0778	AAE	5G NR (CP-OFDM, 50% RB, 20MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	29,6
10779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	±9.6
10780	AAE	5G NR (CP-QFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.8
10781	AAF	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	#9.6
10782	AAE	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.43	19.0
10.783	AAG	5G NR (CP-QFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	SG NR FR1 TDD	8.31	±9.6
10784	AAE	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	0.29	194
10785	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	SG NR FR1 TDD	8.40	19.6
10786	AAE	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	±9.6
10787	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TOD	8.44	±9.6
10788	AAE	50 NR (CP-OFDM, 100% RB, 36 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8,39	±9.0
10789	AAF	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TOD	8.37	±9.6
10790	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TOD	8.39	±9.€
10791	AAG	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7,83	±9.6
10792	AAE	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FRI TOD	7,92	±0.0
10793	CAA	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	56 NR FR1 TDD	7,95	±9.6
10794	AAE	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	SG NR FR1 TDD	7,82	#9.6
10795	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	±9.6
10796	AAE	5G NR (CP-OFDM, 1 RB; 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7,82	±9.6
10797	AAF	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8,01	±9.6
10798	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	SG NR FR1 TDD	7,89	19.6
10799	AAF	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 HHz)	5G NR FR1 TDD	7,93	千色%
10:601	AAF	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7,89	±9.6
10802	AAE	5G NR (CP-OFDM, 1 RB, 90MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7,87	±9.
10803	AAF	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.5
10805	AAE	50 NR (CP-0F0M, 50% RB, 18 MHz, QPSK, 38 kHz)	5G NR FR1 TOO	8.34	±9.
10806	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	±9
10809	AAE	5G NR (CP-DEDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NA FR1 TDD	8.34	19.
10810	AAF	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	SG NR FR1 TD0	11.34	±9/
10812	117.71	5G NR (CP-DFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±0.
10817	AAG	5G NR (CP-OFDM, 100% RB, SMHz, QPSK, 30 kHz)	SG NR FR1 TDD	8.35	19
10818		5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9/
10819	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 30 kHz)	SG NR FR1 TDD	8.33	±9,
10820	AAE	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	±9.
10821	AAD	5G NR (CP-OFOM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	市,41	±9.
10822	AAE	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	SG NR FR1 TOD	8.41	+.0.
10823	AAF	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	50 NR FRI TDD	8.36	±9.0
10824	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	±9.
10825	AAF	5G NR (CP-OFOM, 100% RB, 60 MHz, QPSK, 30 kHz)	SG NR FR1 TDD	8.41	±9.
10827	AAF	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FRI TOD	8.42	89.
10828	and a service to the first	5G NR (CP-OFDM, 100% RB, 90 MHz, CPSK, 30 kHz)	5G NR FR1 TDD		±9.

Certificate No: EX-7309_Jun24

Page 18 of 21



June 19, 2024

alu	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k =
0829	AAF	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	SG NR FR1 TDD	8.40	±9.6
0830	AAE	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.63	±9.6
0831	CAA	SG NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7,73	±9.8
0832	AAE	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7,74	±9.6
3833	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7,70	±9.6
3834	AAE	5G NR (CP-OFDM, 1 R8, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7,75	±9.6
0835	AAF	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 80 W/z)	SG NR FR1 TDD	7.70	19.6
0.636	AAE	5G NR (CP-OFDM, 1 R8, 50 MHz, QPSK, 60 kHz)	5G NA FA1 TOD	7.66	±9.6
0837	AAF	5G NR (CP-OFDM, 1 R8, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	±9.6
3839	AAF	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7,70	±9.6
0840	AAE	5G NR (CP-OFDM, 1 R8, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	±9.6
0841	AAF	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	±9.6
0843	AAD	5G NR (CP-OFDM, 50% RB, 15MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8,49	±9,6
0.844	AAE	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8,34	±9,6
0.846	AAE	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FRI TDD	B.41	±9.6
0854	AAE	5G NR (CP-OFCM, 100% RB, 10 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.34	±9.6
0855	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 603Hz)	5G NR FR1 TDD	8.36	±9.6
0856	AAE	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
0857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	±9.6
0858	AAE	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
0859	AAF	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	19.6
0880	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
0861	AAF	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 66 kHz)	5G NR FR1 TDD	8.40	±9.6
0.863	AAF	5G NR (CP-OFDM, 100% RB, 80 MHz, GPSK, 60 kHz)	5G NR FR1 TOD	8,41	±9.6
0864	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
0865	AAF	SG NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9,6
0866	AAF	5G NR (DFT-6-OFDM, 1 RB, 100 MHz; QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
0868	AAF	SG NR (DFT-6-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)		5.89	±9.6
0869	AAE	5G NR (DFT-e-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TOD	5.75	±9.6
0870	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.86	±9.6
0871	AAE	5G NR (DFT-e-OFDM, 1 RB, 100 MHz, 19QAM, 120 kHz)			±9.6
0872	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	SG NR FR2 TD0 SG NR FR2 TD0	6.52	19.6
10873	AAE	5G NR (DFT-a-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
0.874	AAE	5G NR (DFT-6-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz) SG NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	SG NR FR2 TDD	7.78	±9.6
10875	AAE		5G NR FR2 TDD	8.39	19.6
10876	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz) 5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	19.6
industrial in the last of the	AAE	56 NR (CP-GFDM, 100% RB, 100 MHz, 16QAM, 120 KHz)	5G NR FR2 TDD	8.41	19.6
10878	AAE	56 NR (CP-CFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	19.6
10880	AAE	5G NR (CP-OFDM, 190% RB, 100 MHz, 64QAM, 120 KHz)	50 NR FR2 TDD	8.38	±9.6
10881	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.79	±9.6
10882	AAE	5G NR (DFT=OFDM, 190% RB, 50 MHz, OPSK, 120 kHz)	5G NR FR2 TOD	5.96	±9.6
10883	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FRZ TDD	6,57	±9.6
10884	AAE	SG NR (DFT-s-OFDM, 100% RB, 50 MHz, 18QAM, 120 kHz)	5G NR FR2 TDD	6.53	±9.6
10885	AAE	SG NR (DFT-s-OFDM, 1 RB, 50 MHz, 64 QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10886	AAE	SG NR (DFT-6-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10887	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, GPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10888	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	SG NR FR2 TDD	8.35	±9.6
10889	AAE	5G NR (CP-OFDM, 100% NB, 50 MHz. 16QAM, 120 kHz)	5G NR FR2 TOD	8.02	19.6
10890	A Contract of the Contract of	5G NR (CP-OFOM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8,40	±9.0
10891	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.13	+9.6
10892	AAE	5G NR (CP-OFOM, 1985, 50 MHz, 64QAM, 120 MHz)	SG NR FR2 TDD	8.41	19.6
10897	AAE	50 NR (DFT-s-OFDM, 1 RB, 5MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.66	±9.6
10898	AAC	5G NR (DFT-e-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.0
0899	Charles Comme	50 NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TOD	5.67	±0.6
0900	11777	5G NR (DFTs-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	50 NR FR1 TDO	5.68	±9.6
10901	Andrew Selection Co.	THE PARTY OF THE P	5G NR FR1 TDD	5.68	±9.6
10902	-	5G NR (DFT-e-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	SG NR FR1 TDD	5.68	±0.6
0903	-	SG NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10904	-	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	SG NR FR1 TDD	5.68	±9.6
10,905	-	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	19.6
10906	t de de décember décembre	SG NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	19.6
10907		5G NR (DFT-a-OFDM, 1 NS, 50 MHz, GPSK, 30 kHz)	5G NR FR1 TDD	5.78	±9.6
10908	-	SG NR (DFT-e-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	19.6
10909		5G NR (DFT-s-OFDM, 50% RB, 15MHz, QPSK, 30kHz)	5G NR FR1 TDD	5.96	19.6
- N. STATE	1 10 100	SG NR (DFTs-OFDM, 50% RB, 20MHz, QPSK, 30kHz)	5G NR FR1 TDD	5.83	19.6

Certificate No: EX-7309_Jun24

Page 19 of 21



URD	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 3
10911	AAB	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9,6
10912	AAC	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5,84	±9.6
0913	AAD	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9,6
0914	AAC	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	±9.6
0915	(DAA)	5G NR (DFT-s-DFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6
0916	AAD	5G NR (DFT & OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5,87	±9.6
0917	AAD	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
8160	AVE	5G NR (DFT-s-OFDM, 100% RB, 5MHz, QPSK, 30 kHz)	SG NR FR1 TDD	5,86	±9.6
0919	AAC	5G NR (DFT-s-OFDM, 100% RB, 10MHz, QPSK, 38kHz)	5G NR FR1 TDD	5,86	±9.6
0920	BAA	5G NR (DFT-s-OFDM, 100% RB, 15MHz, QPSK, 30MHz)	5G NR FR1 TDD	5.87	±9.€
10921	AAC	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
0922	BAA	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	±9.6
0923	AAC	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
0924	AAD	5G NR (DFT-6-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9,6
0925	AAC	5G NR (DFT/s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.95	±9.6
0926	AAD	5G NR (DFT-e-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
0927	AAD	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
0928	AAD-	5G NR (DFT-s-OFDM, 1 RB, 5MHz, QPSK, 15kHz)	5G NR FR1 FDD	5.52	±9.6
0929	AAD	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15kHz)	5G NR FR1 FDD	5.52	±9.6
0930	AAC	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	SG NR FR1 FDD	5.52	±9.6
0931	AAC	SG NR (DFTs-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
0932	AAC	5G NR (DFT+s-DFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
0933	AAC	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FD0	5,51	±9.6
0934	AAC	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10935	CAA	5G NR (DFT-s-GFDM, 1 RB, 50 MHz, QPSK, 15 NHz)	5G NR FR1 FDD	5.51	±9.6
10936	AAD	5G NR (DFT-s-OFDM, 59% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FD0	5.90	±9.6
10937	AAD	5G NR (DFT-8-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	19.6
10938	AAC	5G NR (DFTs-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10939	AAC	5G NR (DFT-8-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	±9.6
10.940	AAC	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	±9.6
10941	AAG	5G NR (DFT-e-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	SG NR FR1 FOD	5.83	±9.6
10942	AAC	5G NR (DFT-6-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10943	AAD	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.95	±9.6
10944	AAD	5G NR (DFT-8-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	SG NR FR1 FDD	5.81	±9.6
10945	AAD	SG NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10946	AAG	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	53 NR FR1 FOD	5.83	±9.6
10947	AAC	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5,87	±9.6
10948	AAC	5G NR (DFT-s-GFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	19.6
10949	AAC	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	56 NR FR1 FDD	5.87	±9.6
10950	AAC	5G NR (DFT-e-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10951	AAD	SG NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.92	±9.6
10952	AAA	5G NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 15kHz)	5G NR FR1 FDD	8.25	±9.6
10953	AAA.	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.15	土9.在
10954	AAA	5G NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz)	5G NR FR1 FDD	8.23	±9.6
10.966	AAA	SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.42	±9.6
10956	AAA	5G NR DL (CP-OFDM, TM 3.1; 5MHz, 64-QAM, 30 kHz)	50 NR FR1 FDD	8.14	±9:6
10957	AAA	5G NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 30kHz)	5G NR FR1 FDD	8.31	±9.6
10958	AAA	5G NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz)	5G NR FR1 FDD	8.61	±9.6
10959	AAA.	SG NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.33	±9.6
10960	AAE	5G NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 15kHz)	5G NR FR1 TDD	9,32	±9,6
10961	AAC	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.36	±9.6
10962	BAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	SG NR FR1 TDD	9,40	±9.6
0963	AAC	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 84-QAM, 15 kHz)	5G NR FR1 TDD	9.55	±9.6
10964	AAE	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.29	±9.6
0965	AAC	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	SG NA FR1 TDD	9.37	±9.6
_	AAB		SG NR FR1 TDD	9.58	±9.6
0967	AAC	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	SG NR FR1 TDD	9.42	±9.6
0968	AAD	5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9:49	±9.6
0972	AAC	5G NR (GP-OFDM, 1 RB, 29 MHz, QPSK, 15 kHz)	5G NR FR1 TD0	11.59	±9.6
0973	AAD	SG NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDO	9.06	±9.6
10974	AAD	5G NR (GP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	5G NR FR1 TDD	10.28	±9.6
10978	AAA	ULLA BDR	ULLA	1.16	±9.6
10979	AAA	ULLA HDR4	ULLA	9.58	±9.6
10980	AAA	ULLA HDR8	ULLA	10.32	±9.6
10981	AAA	ULLA HDRp4	ULLA	3.19	±9.6
10982	AAA	ULLA HDRo8	ULLA	3.43	±9.6

Certificate No: EX-7309_Jun24

Page 20 of 21

F-TP22-03 (Rev. 06) Page 193 of 364



June 19, 2024

UID	Rev.	Communication System Name	Group	PAR (dB)	UncE k = 2
10983	AAO	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15kHz)	5G NR FR1 TDD	9.31	±9.6
10964	AAB	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 TOD	9.42	±9.6
10985	AAC.	SG NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.54	±9.6
10986	BAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.50	±9.6
10987	AAC	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.53	±9.0
10988	BAA	SG NR DL (CP-OFDM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9,38	19.5
10989	AAC	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.33	19.6
10990	BAA	5G NR DL (CP-OFDM, TM 3.1, 90 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.52	19.6
11003	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15kHz)	SG NR FR1 TDD	10.24	±9.6
11004	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	SG NR FR1 TDD	10.73	±9.6
11005	AAA.	5G NR DL (CP-OFDM, TM 3.1, 25MHz, 64-QAM, 15kHz)	5G NR FR1 FDD	8.70	19.6
11006	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15kHz)	5G NR FR1 FDD	8.55	19.5
11.007	AAA,	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	SG NR FR1 FDD	8.46	19.0
11008	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.51	19.6
11009	AAA:	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 30 kHz)	50 NR FR1 FDD	8.76	±9.6
11010	AAA	5G NR DL (CP-OFDM, TM 3.1, 36 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDO	8.95	±9.0
11011	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.96	±9.6
11012	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.68	±9.5
11013	AAB	IEEE 802.11be (320 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9.6
11014	AAB	IEEE 902.11be (320 MHz, MCS2, 99pc duty cycle)	WLAN	8.45	±9.6
11015	BAA	IEEE 802.11be (320 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	±9.6
11016	AAB	IEEE 802.11be (320 MHz, MCS4, 99pc duty cycle)	WLAN	8.44	±9.6
11017	AAB	IEEE 802,11be (320 MHz, MCS5, 99pc duty cycle)	WLAN	8,41	19.6
11018	BAA	IEEE 802,11be (320 MHz, MCS6, 99pc duty cycle)	WLAN	8.40	±9.0
11019	BAA	IEEE 802,11be (320 MHz, MCS7, 99pc duty cycle)	WLAN	6.29	±9.6
11020	AAB	IEEE 802.11be (220 MHz, MCS8, 99pc duty cycle)	WLAN	8.27	±9.6
11021	AAB	IEEE 802.11be (320 MHz, MCS9, (rispo duty cycle)	WLAN	8.46	±9.6
11022	AAB	IEEE 802,11be (320 MHz, MCS10, 99pc duty cycle)	WLAN	8.36	±9.6
11023	AAB	(EEE 802.11be (320 MHz, MCS11, 99pc duty cycle)	WLAN	8.09	±9.8
11024	. AAB	IEEE 802.11be (320 MHz, MCS12, 99pc duty cycle)	WLAN	8.42	±9.6
11025	BAA	IEEE 802.11be (320 MHz, MCS13, 99pc duty cycle)	WLAN	8.37	±9.6
11026	AAB	IEEE 802.11be (329 MHz, MCS0, 96pc duty cycle)	WLAN	8.39	±9.0

E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Calibration Laboratory of

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

HCT

Gyeonggi-do, Republic of Korea

Certificate No.

EX-7681_Nov23

CALIBRATION CERTIFICATE		7/2/3	Ki
Object	EX3DV4 - SN:7681	11 1 2023.12-13	C1 / \$4841 2013/113
QA CAL-25.v8		AL-12.v10, QA CAL-14.v7,	QA CAL-23.v6,
		or dosimetric E-field probes	
Galibration date		or dosimetric E-field probes	
	Calibration procedure to November 27, 2023 currents the traceability to national st	andards, which realize the physical	units of measurements (SI).
This calibration certificate do The measurements and the o	Calibration procedure for November 27, 2023	andards, which realize the physical ity are given on the following pages	units of measurements (SI), and are part of the certifical

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-Z91	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
OCP DAK-3.5 (weighted)	SN: 1249	05-Oct-23 (OCP-DAK3.5-1249 Oct23)	Oct-24
OCP DAK-12	SN: 1016	05-Oct-23 (OCP-DAK12-1016 Oct23)	Oct-24
Reference 20 dB Attenuator	SN: CC2552 (20x)	30-Mar-23 (No. 217-03809)	Mar-24
DAE4	SN: 660	16-Mar-23 (No. DAE4-660 Mar23)	Mar-24
Reference Probe ES3DV2	SN: 3013	06-Jan-23 (No. ES3-3013 Jan23)	Jan-24

Secondary Standards	ID.	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-22)	In house check, Jun-24
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Pawer sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

	Name	Function	Signature
Calibrated by	Jeton Kastrati	Laboratory Technician	100
Approved by	Sven Kühn	Technical Manager	S.E
		n full without written approval of the labor	issued: November 27, 2023

Certificate No: FX-7681 Nov29

Donn 1 of 22



Calibration Laboratory of

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates





- S Schweizerischer Kalibrierdienst Service suisse d'étalonnage
- C Service suisse d'étalonnage Servizio svizzero di taratura S Swiss Calibration Service

Accreditation No.: SCS 0108

Glossary

TSL tissue simulating liquid NORMx,y,z sensitivity in free space CorvF sensitivity in TSL / NORMx,y,z diode compression point

CF crest factor (1/duty_cycle) of the RF signal A, B, C, D modulation dependent linearization parameters

Polarization φ φ rotation around probe axis

Polarization # # rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., # = 0 is

normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Heid And Body-Worn Wireless Communication Devices — Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization θ = 0 (f ≤ 900 MHz in TEM-ceil; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- . PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z; A, B, C, D are numerical linearization parameters assessed based on the data of
 power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum
 calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ±50 MHz to ±100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis).
 No tolerance required.
- . Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Cartificate Star EV 7691 Star On

Para Patro



EX3DV4 - SN:7681 November 27, 2023

Parameters of Probe: EX3DV4 - SN:7681

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm (µV/(V/m) ²) ^A	0.68	0.66	0.69	±10.1%
DCP (mV) B	105.3	105.5	103.3	±4.7%

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB√μV	С	dB	WV mV	Max dev.	Max Unc ^E k = 2
0	CW	X	0.00	0.00	1.00	0.00	125.0	±2.4%	±4.7%
	7-3-1-3-3	Y	0.00	0.00	1.00		109.3		
	CALL DOMESTIC CONTRACT CONTRAC	Z	0.00	0.00	1.00		123.9		
10352	Pulse Waveform (200Hz, 10%)	X	1.66	61.16	6,61	10.00	60.0	±2.9%	±9.6%
		Y	1.59	60.94	6.40		60.0		
		Z	1.68	61.33	6.71		60.0		
10353	Pulse Waveform (200Hz, 20%)	X	42:00	80.00	11.00	6.99	80.0	±2.5%	±9.8%
		Y	22.00	74.00	9.00		80.0		
		Z	42.00	80.00	11.00		80.0	Ī	
10354	Pulse Waveform (200Hz, 40%)	X	0.33	151.44	0.78	3.98	95.0	±2.6%	±9.6%
		Y	0.00	124.27	0.27	3843.23	95.0		
		Z	0.30	149.74	0.15		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	8.74	159.33	25.26	2.22	120.0	±1.6%	±9.6%
	Y 4.70 159.99 3.61 120.0	C-111111111111111111111111111111111111							
	A A SECURITOR OF THE SECURITIES OF THE SECURITIE	Z	8.68	159.46	25.68		120.0		5500
10387	QPSK Waveform, 1 MHz	X	0.64	63.96	12.25	1.00	150.0	±4.9%	±9.6%
		Y	0.66	63.24	11.65	1100000	150.0		
	AND SECOND SECON	Z	0.64	63.99	12.30		150.0		
10388	QPSK Waveform, 10 MHz	X	1.40	65.48	13.81	0.00	150.0	±1.3%	±9.6%
		Y	1,36	64.59	13.49		150.0		
		Z	1.40	65.56	13.84		150.0		
10396	64-QAM Waveform, 100 kHz	X	1.72	64.64	16.13	3.01	150.0	±1.0%	±9.6%
		Y	1.69	64.49	16.04	999878	150.0	-2.000	5.5000
		Z	1.68	64.24	15.84		150.0		
10399	64-QAM Waveform, 40 MHz	X	2.88	66.08	14.98	0.00	150.0	±2.3%	±9.6%
	esacreminasystamonis i chini	Y	2.97	66.30	15.08	102(941)	150.0	- 1525 O 1622	877 2019-00
		Z	2.89	66.12	15.02		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	3.91	65.73	15.18	0.00	150.0	±4.2%	±9.6%
		Y	4.08	65.86	15.30		150.0	-050000083	
		Z	3.91	65.76	15.22		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Cartificate No. EY.7691 No.03

Daniel Station

F-TP22-03 (Rev. 06) Page 197 of 364

A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty Inside TSL (see Pages 5 and 6).

B Linearization parameter uncertainty for maximum specified field strength.

E Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4 - SN:7681 November 27, 2023

Parameters of Probe: EX3DV4 - SN:7681

Sensor Model Parameters

	C1 IF	C2 fF	α V-1	T1 msV ⁻²	T2 msV ⁻¹	T3 ms	T4 V-2	T5 V-1	T6
X.	11.4	82.59	33.63	1.99	0.00	4.90	0.39	0.00	1.00
y	13.7	99.66	33.87	3.73	0.00	4,91	0.51	0.00	1.01
7:	11.1	81.57	34.20	1.61	0.00	4.90	0.35	0.00	1.00

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	81.9°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	.1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

Certificate No: EY,7691 Nov22

Dean Aut on

F-TP22-03 (Rev. 06) Page 198 of 364



EX3DV4 - SN:7681 November 27, 2023

Parameters of Probe: EX3DV4 - SN:7681

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k = 2)
750	41.9	0.89	9.34	9.29	9.81	0.54	1.27	±12.0%
835	41.5	0.90	9.17	9.37	9.66	0.53	1.27	±12.0%
900	41.5	0.97	8.36	10.16	9.29	0.53	1.27	±12.0%
1750	40.1	1.37	8.29	8.71	8.90	0.32	1.27	±12.0%
1900	40.0	1.40	7.94	8.33	8.49	0.33	1.27	±12.0%
2450	39.2	1.80	7.46	7.89	8.02	0.32	1.27	±12.0%
2600	39.0	1.96	7.38	7.79	7.89	0.32	1.27	±12.0%
3300	38.2	2.71	6.78	7.12	7.25	0.37	1.27	±14.0%
3500	37.9	2.91	6.63	6.98	7.10	0.38	1.27	±14.0%
3700	37.7	3.12	6.59	6.94	7.05	0.38	1.27	±14.0%
3900	37.5	3.32	6.52	6.87	6.98	0.40	1.27	±14.09
4100	37.2	3.53	6.38	6.72	6.81	0.39	1.27	±14.0%
4400	36.9	3.84	6.31	6.62	6.72	0.40	1.27	±14.0%
4600	36.7	4.04	6.29	6.61	6.69	0.39	1.27	±14.0%
4800	36.4	4.25	6.28	6.56	6.67	0.38	1.27	±14.0%
4950	36.3	4.40	6.00	6.26	6.38	0.44	1.36	±14.09
5250	35.9	4.71	5.64	5.97	6.05	0.39	1.66	±14.0%
5600	35.5	5.07	4.79	4.98	5.09	0.48	1.67	±14.0%
5750	35.4	5.22	4.94	5.22	5.21	0.46	1.75	±14.0%
5800	35.3	5.27	4.89	5.16	5.19	0.44	1.78	±14.0%

C Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is €-8 MHz, and ConvF assessed at 13 MHz is €-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

The probes are calibrated using tissue simulating iguide (TSL) that deviation for a and or by less then ±5% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10%. If TSL with deviations from the target of less than ±5% are used, the calibration uncertainties are 11,1% for 0.7-3 GHz.

A MILLE THE PROPERTY OF THE PROPERTY

Cartificate No. EV 7004 No. on

F-TP22-03 (Rev. 06) Page 199 of 364

a Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less. than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



EX3DV4 - SN:7681 November 27, 2023

Parameters of Probe: EX3DV4 - SN:7681

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k = 2)
6500	34.5	6.07	5.56	5.72	5.93	0.20	2.00	±18.6%

Certificate No: FX-7681 Nov09

Dann C -4 70


F-TP22-03 (Rev. 06) Page 200 of 364

C Frequency validity at 6.5 GHz is -600/+700 MHz, and ±700 MHz at or above 7 GHz. The uncertainty is the RSS of the Com/F uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

The probes are calibrated using tissue simulating liquids (TSL) that deviate for x and x by less than ±10% from the target values (typically better than ±8%) and are valid for TSL with deviations of up to ±10%.


^Q Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz; below ±2% for frequencies between 3-6 GHz; and below ±4% for frequencies between 6-10 GHz at any distance larger than half the probe tip diameter from the boundary.



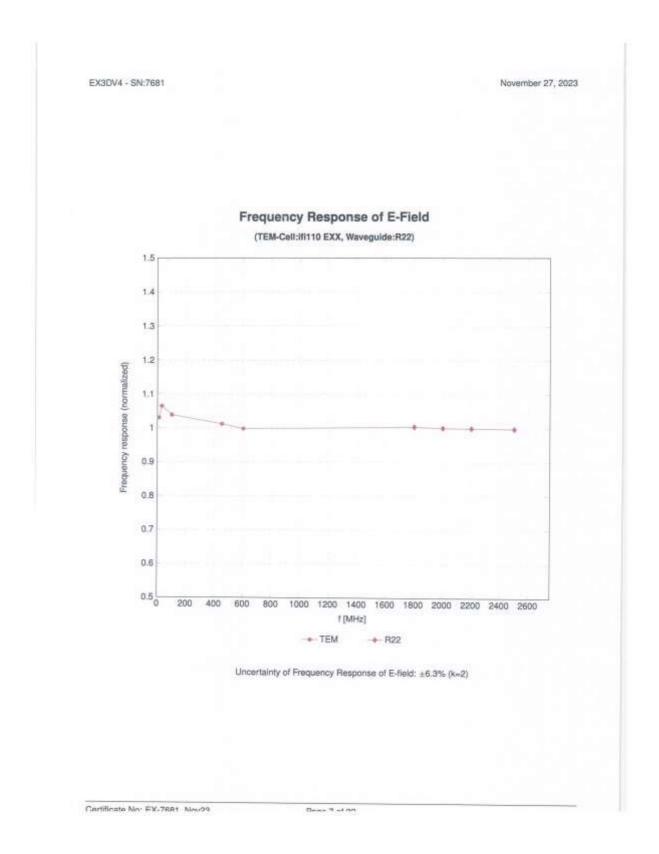


F-TP22-03 (Rev. 06) Page 201 of 364



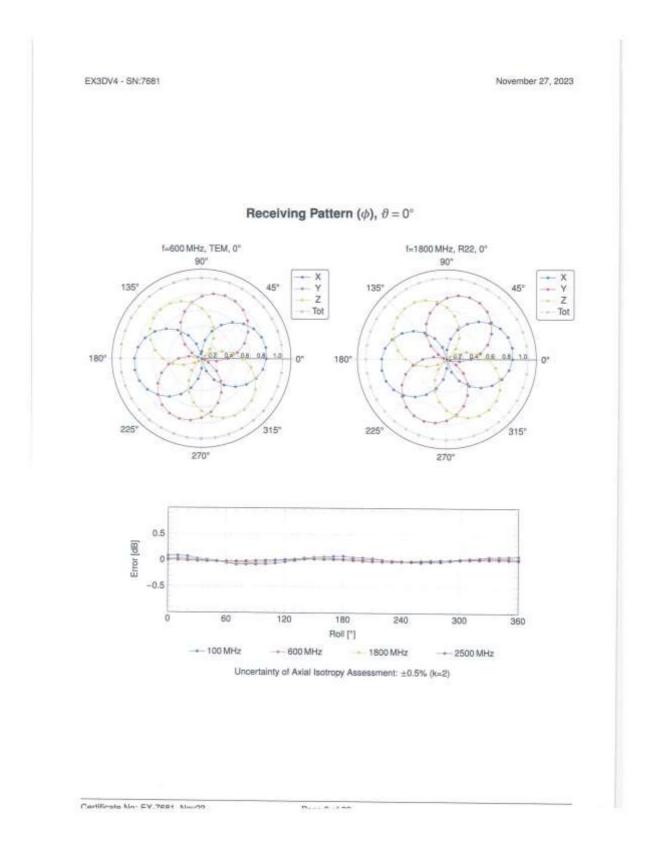


F-TP22-03 (Rev. 06) Page 202 of 364



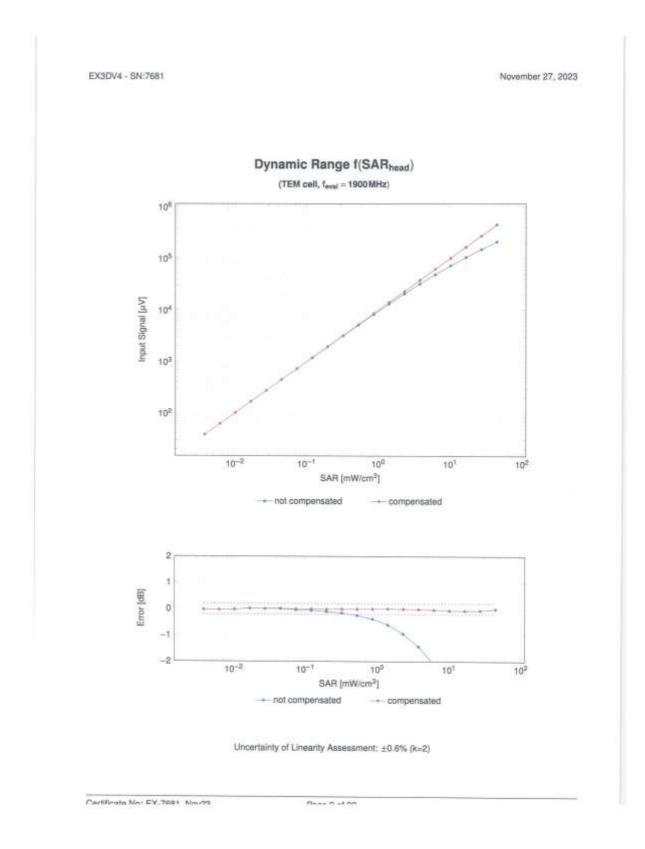

F-TP22-03 (Rev. 06) Page 203 of 364



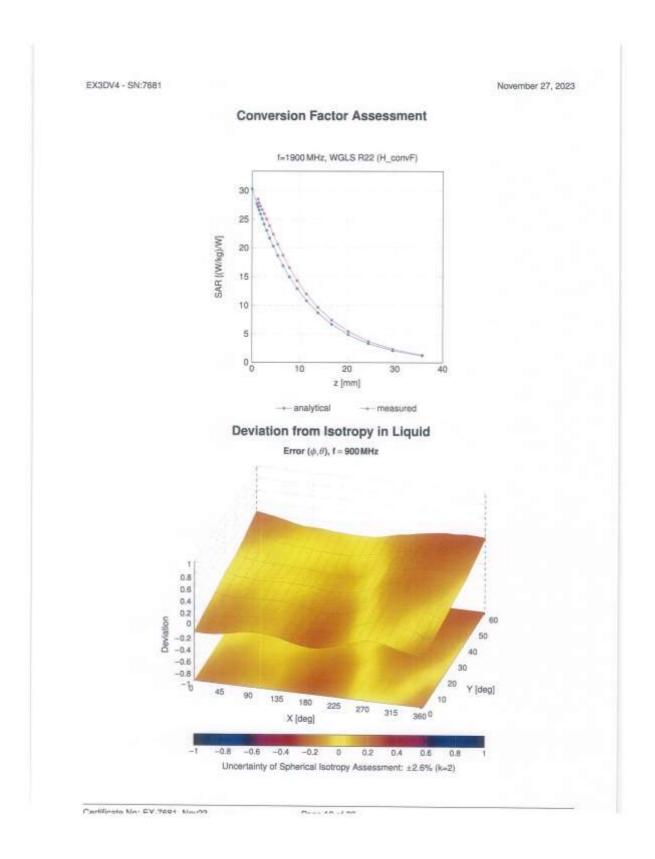

F-TP22-03 (Rev. 06) Page 204 of 364



EX3DV4 - SN:7681 November 27, 2023

Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group		UngE k = 2
0		CW	CW	0.00	±4.7
10010	CAB	SAR Validation (Square, 100 ms, 10 ms)	Test	10.00	±8.6
10011	CAC	UMTS-FDD (WCDMA)	WCDMA	2.91	19.6
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	±9.6
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	±9.6
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	±9.0
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.67	±9.6
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	±9.6
10025	DAC	EDGE-FDD (TDMA, BPSK, TN 0)	GSM	12.62	19.6
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	±9.6
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	19.6
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	±9.6
10029	DAC	EDGE FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	±9.6
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	±9.6
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	±9.6
10032	GAA	IEEE 802 15 1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	±9.6
10033	CAA	IEEE 802.15.1 Bluetooth (Pt/4-DQPSK, DH1)	Bluetooth	7.74	±9.6
10034	CAA	IEEE 802.15.1 Bluetooth (Pt/4-DQPSK, DH3)	Bluetooth	4.53	±9.6
10035	CAA	IEEE 802.15.1 Bluetooth (PV4-DQPSK, DH5)	Blustooth	3.83	±9.6
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	±9.6
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	±9.6
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	±9.6
10038	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	±9.6
10042	CAB	IS-54 / IS-136 FDD (TOMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	±9.6
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	±9.6
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Stot, 24)	DECT	13.80	29.6
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	±9.6
10056	CAA	UMTS-TDD (TD-SCOMA, 1.28 Mcps)	TD-SCDMA	11.01	±9.6
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	±9.6
10059	CAB	IEEE 802,11b WIFI 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	
10060	CAB	EEE 802.11b WFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.12	±9.6
10061	CAB	IEEE 802.11b WFI 2.4 GHz (DSSS, 11 Mbps)	WLAN		±9.6
10062	CAD	IEEE 802.11a/h WFI 5 GHz (OFDM, 6 Mbps)	WLAN	3.60	±9.6
10063	CAD	IEEE 802 11a/h WIFI 5 GHz (OFDM, 9 Mbos)	WLAN	8.68	±9.6
10084	CAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 12 Mbos)	WLAN	8.63	±9.6
10085	CAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 18 Mbps)	WLAN	9.09	±9.6
10066	CAD	IEEE 802.11a/n WIFI 5 GHz (OFDM, 24 Mbps)	WLAN	8.00	±9.6
10067	CAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 36 Mbce)	WLAN	9.38	±9.6
10068	CAD	IEEE 802.11a/h WIFI 5 GHz (OFDM, 48 Mbos)	1000000	10,12	±9.6
10069	CAD	IEEE 802.11a/h WIFI 5GHz (OFDM, 54 Mbps)	WLAN	10.24	±9.6
10071	CAB	IEEE 802.11g WIFL2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	10.56	±9.6
10072	CAB	IEEE 802.11g WIF: 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.83	±9.6
10073	CAB	IEEE 802.11g WFI 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.62	±9/6
10074	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	9.94	±9.6
10075	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.30	±9,6
10076	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.77	±9.6
10077	CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	±9.6
10081	CAB	COMAZODO (1xRTT, RC3)	WLAN	11.00	±9.6
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PIM-DQPSK, Fullrate)	COMA2000	3.97	±9.6
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	AMPS	4.77	±9.6
10097	CAC	UMTS-FDD (HSDPA)	GSM	6,56	±9.6
10098	CAC	UMTS-FDD (HSUPA, Subteet 2)	WCDMA	3.98	±9.6
10099	DAC	EDGE FDD (TDMA, BPSK, TN 0-4)	WCDMA	3.98	±9,6
10100	CAF	LTE FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	GSM	9.55	±9.6
10101	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	5.67	±9.6
10102	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10103	CAH		LTE-FDD	6.60	±9.6
10104	CAH	LTE-TOD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TOD	9.29	±9.6
10106	CAH	LTE-TOD (SC-FOMA, 100% RB, 20 MHz, 16-QAM)	LTE-TOD	9.97	±9.6
10108		LTE-TDD (SC-FOMA, 100% RB, 20MHz, 64-QAM)	LTE-TOD	10.01	±9.6
-	CAH	LTE-FOD (SC-FOMA, 100% RB, 10 MHz, OPSK)	LTE-FOD	5.80	±9.6
10109	CAH	LTE-FOD (SC-FDMA, 100% AB, 10MHz, 18-QAM)	LTE-F00	6.43	±9.6
10110	CAH	LTE-FOD (SC-FDMA, 100% AB, 5 MHz, QPSK)	LTE-FDD	5.75	±9.6
10111	CAH	LTE-FDD (SC-FDMA, 100% RB, 5MHz, 18-QAM)	LTE-FDD	6.44	±9.6

Cardificate No. EV 7001 No. no. 12 18

F-TP22-03 (Rev. 06) Page 205 of 364



November 27, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k =
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 84-QAM)	LTE-FDO	6.59	28.6
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 5MHz, 64-QAM)	LTE-F00	6.62	±9.6
10114	CAD	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	±9.6
10115	CAD	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	±9/6
10116	CAD	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	±9.6
10117	CAD	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	±9,6
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 18-QAM)	WLAN	8,59	±9.6
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	±9.6
10140	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-F00	6.49	±9.6
10141	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	±9.6
10142	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.8
10143	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	±9.6
10144	CAF	LTE-FDD (SC-FDMA, 100% RB, 3MHz, 64-QAM)	LTE-FDD	6.65	±9.6
10145	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	±9.6
10146	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	±9.6
10147	CAG	LTE-FDD (SC-FDMA, 100% R8, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	±9.6
10149	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FD0	6.42	19.6
10150	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	19.6
10151	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	±9.6
10152	CAH	LTE-TOD (SC-FDMA, 60% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10153	CAH	LTE-TOD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	±9.6
10154	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	±9.6
10155	CAH	LTE-FDD (SC-FDMA, 50% RB, 10MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10156	CAH	LTE-FDD (SC-FDMA, 50% RB, 5MHz, QPSK)	LTE-F00	5.79	±9.6
10157	CAH	LTE-FDO (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FOD	6.49	±9.6
10158	CAH	LTE-FD0 (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	±9.5
10150	CAH	LTE-FDO (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-F00	6.56	±9.6
10180	CAF	LTE-FDO (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDO	5.82	±9.5
10181	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10162	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	±9.6
10.166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	±9.6
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 18-QAM)	LTE-FDD	6.21	£9.6
10188	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.79	±9.6
10169	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	±9.6
10170	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10171	AAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 84-QAM)	LTE-FDD	6.49	±9.6
10.172	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	±9.6
10173	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TOD	9.48	±9.6
10174	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 84-QAM)	LTE-TOD	10.25	±9.6
10175	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	±9.6
10176	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10177	CAJ	LTE-FDD (SC-FDMA, 1 RB, 5MHz, QPSK)	LTE-FDD	5.73	89.6
10178	CAH	LTE-FDD (SC-FDMA, 1 RB, 5MHz, 16-QAM)	LTE-FDD	6.52	g9.6
0179	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDO	6.50	±9.6
0180	CAH	LTE-FOD (SC-FDMA, 1 RB, 5MHz, 64-QAM)	LTE-FDD	6.50	19.6
0181	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDO	5.72	±9.6
0182	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
0183	AAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FOD	8.50	±9.6
0184	CAF	LTE FDD (SC-FDMA, 1 R8, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
0185	CAF	LTE FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	8.51	±9.0
0186	AAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
0187	CAG	LTE-FOD (SC-FDMA, 1 AB, 1.4 MHz, QPSK)	LTE-FDD	5.73	±9.6
0188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 18-QAM)	LTE-FOD	6.52	±9.6
0189	AAG	LTE-FDD (SC-FDMA, 1 RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±9.6
0193	CAD	IEEE 802.11n (HT Greenfield, 6,5 Mbps, BPSK)	WLAN	8.09	±9.6
0194	CAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	±9.6
0195	CAD	IEEE 802.11n (HT Greenfield, 65 Mbps, 64 QAM)	WLAN	8.21	±9.6
0196	CAD	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	±9.6
0197	CAD	IEEE 802.11n (HT Mixed, 39 Mbps, 16 QAM)	WLAN	8.13	19.6
0198	CAD	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	±9.6
0219	CAD	IEEE 802.11n (HT Mixed, 7.2 Mops, BPSK)	WLAN	8.03	19.6
0220	CAD	IEEE 802.11n (HT Mixed, 43.3 Mbps, 18-QAM)	WLAN	8/13	19.6
0221	CAD	IEEE 802.11n (HT Mixed, 72.2Mbps, 64-QAM)	WLAN	8.27	19.6
0222	CAD	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	±9.6
0223	CAD	IEEE 802 11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8,48	±9.6
0224	CAD	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		12.00 150

Cartificate No. EX-7691 Nov99

Bess 16 stee

F-TP22-03 (Rev. 06) Page 206 of 364



EX3DV4 - SN:7681 November 27, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ⁶ k = 2
10225	CAC	UMTS-FDD (HSPA+)	WCDMA	5.97	±9.6
10226	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	±9.6
10227	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	±9.6
1022#	CAC	LTE-TOD (SC-FOMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	±9.6
10229	CAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM)	LTE-TOD	9.48	±9.6
10230	CAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM)	LTE-TOD	10.25	±9.6
10231	CAE	LTE-TOD (SC-FDMA, 1 RB, 3MHz, QPSK)	LTE-TOD	9,19	±9.6
10232	CAH	LTE-TDO (SC-FOMA, 1 RB, 5 MHz, 18-QAM)	LTE-TOD	9.48	±9.6
10233	CAH	LTE-TDD (SC-FDMA, 1 RB, 5MHz, 64-QAM)	LTE-TD0	10.25	20.6
10234	CAH	LTE-TOD (SC-FDMA, 1 RB, 5MHz, QPSK)	LTE-TDD	9.21	±9.6
10235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10236	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TOD	10.25	29.6
10237	CAH	LTE-TOD (SC-FOMA, 1 RB, 10 MHz, QPSK)	LTE-TOD	9.21	±9.6
10238	CAG	LTE-TOD (SC-FDMA, 1 RB, 15MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10239	CAG	LTE-TDD (SC-FDMA, 1 RB, 15MHz, 64-QAM)	LTE-TOD:	10.25	±9.6
10240	CAG	LTE-TOD (SC-FDMA, 1 RB, 15MHz, QPSK)	LTE-TOD	9.21	±9.6
10241	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDO	9.82	±9.6
10242	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	±9.6
10243	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.48	±9.6
10244	CAE	LTE-TDD (SC-FDMA, 50% RB, 3MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10245	CAE	LTE-TDD (SC-FDMA, 50% RB, 3MHz, 84-QAM)	LTE-TOD	10.06	±9.6
10246	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	±9.6
10247	CAH	LTE-TOD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	±9.6
10248	CAH	LTE-TDD (SC-FDMA, 50% RB, 5MHz, 64-QAM)	LTE-TOO	10.09	19.6
10249	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TOD	9.29	±9.6
10250	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	19.6
10251	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	±9.6
10252	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TOD	9.24	19.6
10253	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16 QAM)	LTE-TOD	9.90	±9.6
10254	CAG	LTE-TDD (SC-FDMA, 50% R8, 15 MHz, 64-QAM)	LTE-TOD	10.14	±9.6
10255	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TOD	9.20	±9.6
10256	CAC	LTE-TOD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	±9.6
10257	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-TOD	10.08	±9.6
10258	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4MHz, QPSK)	LTE-TOD	9.34	±9.6
10259	CAE	LTE-TDD (SC-FDMA, 100% RB, 3MHz, 16-QAM)	LTE-TOD	9.98	±9.6
10260	CAE	LTE-TDD (SC-FDMA, 100% RB, 3MHz, 64-QAM)	LTE-TOD	9.97	±9.6
10261	CAE	LTE-TDD (SC-FDMA, 100% RB, 3MHz, QPSK)	LTE-TOD	9.24	±9.6
10262	CAH	LTE-TOD (SC-FOMA, 100% RB, 5 MHz, 16-QAM)	LTE-TOD	9.83	±9.6
10263	CAH	LTE-TDD (SC-FDMA, 100% RB, 5MHz, 64-QAM)	LTE-TOD	10.16	#8.6
10264	CAH	LTE-TOO (SC-FOMA, 100% RB, 5MHz, QPSK)	LTE-TOO	9.23	±9.6
10265	CAH	LTE-TDO (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TD0	9.92	±9.6
10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10MHz, 64-QAM)	LTE-TDD	10.07	±9.6
10267	CAH	LTE-TDO (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TOD	9.30	±9.6
10268	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TOD	10.06	±9.6
10269	CAG	LTE-TOD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	±9.6
10270	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	±9.6
10274	CAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rei8.10)	WCDMA	4.87	±9.6
10275	CAC	UMTS-FDD (HSUPA, Subtast 5, 3GPP Rel8.4)	WCDMA	3.96	±9.6
10277	CAA	PHS (QPSK)	PHS	11.81	±9.6
10278	CAA	PHS (QPSK, BW 884 MHz, Rolloff 0.5)	PHS	11,81	±9.6
10279	CAA	PHS (QPSK, BW 884 MHz, Rolloff 0.38)	PHS	12.18	±9.6
10290	AAB	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	±9.6
10291	AAB	CDMA2000, RC3, SD65, Full Rate	CDMA2000	3.46	±9.6
10292	AAB	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	±9.6
10293	AAB	CDMA2000, RC3, SQ3, Full Rativ	CDMA2000	3.50	19.6
10295	AAB	CDMA2000, RC1, SQ3, 1/8th Rate 25 fr.	CDMA2000	12.49	19.6
10.297	AAE	LTE-FDD (SC-FDMA, 50% RB, 20MHz, QPSK)	LTE-FDO	5.81	±9.6
10298	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	19.6
10299	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	19.6
10300	AAE	LTE-FDD (SC-FDMA, 50%, RB, 3MHz, 64-QAM)	LTE-FD0	6.60	±9.6
10301	AAA	IEEE 802.16e WIMAX (29:18, 5 ms. 10 MHz, QPSK, PUSC)	WMAX	12.03	19.6
10302	AAA	IEEE 802.16e WIMAX (29:18, 5 ms. 10 MHz, QPSK, PUSC, 3 CTRL symbols)	WMAX	12.57	19.6
10303	AAA	IEEE 802,16e WIMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)	WMAX	12.52	±9.6
10304	AAA	IEEE 802.16e WIMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)	WMAX	11.86	19.6
10305	AAA	IEEE 802.16e WIMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)	WIMAX	15.24	±9.6
10306	AAA	IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, 64QAM, PUSC, 18 symbols)			

Certificate No: EX-7681 Nov99

Denn 10 of 20

F-TP22-03 (Rev. 06) Page 207 of 364



November 27, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc $E k = 2$
10307	AAA	IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, QPSK, PUSC, 18 symbols)	WMAX	14.49	19.6
10308	AAA	IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, 16QAM, PUSC)	WIMAX	14.46	±9.6
10309	AAA	IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, 16QAM, AMC 2x3, 18 symbols)	WIMAX	14.58	±9.6
10310	AAA	IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, QPSK, AMC 2x3, 18 symbols)	WMAX	14.57	±9.6
10311	AAE	LTE-FDD (SC-FDMA, 100% RB, 15MHz, QPSK)	LTE-FDD	6.06	±9.6
10313	AAA	IDEN 1:3	IDEN	10.51	±9.8
10314	AAA	IDEN 1:8	IDEN	13.48	±9.6
10315	AAB	IEEE 802.11b WIFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	WLAN	1.71	±9.6
10316	AAB	IEEE 802.11g WF: 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.8
10317	AAE	IEEE 802.11a WFI 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.6
10352	AAA	Pulse Waveform (200Hz, 10%)	Generio	10:00	±9.6
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	±9.6
10354	AAA	Pulse Waveform (200Hz, 40%)	Generio	3.98	≘9.6
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	±9.6
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	±9.6
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	±9.6
10388	AAA	QPSK Waveform, 10MHz	Generic	5.22	±9.6
1039fi	AAA	64-QAM Waveform, 100 kHz	Generio	6.27	±9.6
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	±9.6
10400	AAE	IEEE 802.11ac WiFi (20 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.37	±9.6
10401	AAE	IEEE 802.11ac WIFI (40 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.60	±9.6
10402	AAE	IEEE 802.11ac WiFi (80 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.53	±9.6
10403	AAB	CDMA2000 (txEV-DO, Rev. 0)	CDMA2000	3.76	±9.6
10404	AAB	GDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	±9.6
10408	AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	COMA2000	5.22	±9.6
10410	AAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Cont=4)	LTE-TDD	7.82	±9.6
10414	AAA	WLAN CCDF, 64-QAM, 40 MHz	Generic	8.54	±9.6
10415	AAA	IEEE 802.11b WIFI 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	WLAN	1.54	±9.6
10416	AAA	IEEE 802.11g WIFI 2.4 GHz (ERP-DFDM, 6 Mops, 99pc duty cycle)	WLAN	8.23	±9.6
10417	AAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 6 Mbps, 98pc duty cycle)	WLAN	8.23	±9.6
10418	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preambule)	WLAN.	8.14	±9.6
10419	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preambule)	WLAN	8.19	±9.6
10422	AAC	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN:	8,32	±9.6
10423	AAC	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	±9.6
10424	AAC	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	±9.6
10425	AAC	IEEE 802.11n (HT Greenfield, 15Mbps, BPSK)	WLAN	8.41	±9.6
10426	AAC	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	±9.6
10427	AAC	IEEE 802 11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	±9.6
10430	AAE	LTE-FDD (OFDMA, 5MHs, E-TM 3.1)	LTE-FDD	8.28	±9.6
10431	AAE	LTE-FOD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FOD	8.38	±9.6
10432	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10433	DAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	#8.E
10435	AAG	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	±9.6
10.447		LTE-TDD (SC-FDMA, 1 R8, 20 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.82	±9.6
10448	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	19.6
10449	AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%)	LTE-FDD	7.53	±9.8
10450	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%)	LTE-FDD	7.51	±9.6
10451	AAB	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	±9.6
10453	AAE	W-CDMA (BS Tiest Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	±9.8
10456	AAC	Validation (Square, 10 ms, 1 ms)	Test	10.00	±9.6
10457	AAB	IEEE 802.11ac WFI (160 MHz, 64-QAM, 99pc duty cycle) UMTS-FDD (DC-HSDPA)	WLAN	8.63	±9.6
10458	AAA		WCDMA	6.62	±9.6
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	±9.6
10460	AAB	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	±9.6
10461	AAC	LMTS-FDD (WCDMA, AMR)	WCDMA	2.39	±9.6
10462	AAC	LTE-TD0 (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subtrame=2,3,4,7,8,9)	LTE-TOO	7.82	±9.6
10463	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 15-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOO	8.30	±9.6
10464	AAD	LTE-TDD (SC-FDMA, 1 98, 1.4 MHz, 64-QAM, UL Subframe-2,3,4,7.8.9)	LTE-TDD	8.56	±9.6
10465	AAD	LTE-TDD (SC-FDMA, 1 R8, 3 MHz, QPSK, UL Subfrate-2,3,4,7,8,9)	LTE-TOD	7.82	±9.6
10466	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-GAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9,6
10466	AAG	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 84-QAM, U. Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10468	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7.82	±9.6
10468	AAG	LTE-TDD (SC-FDMA, 1 RB, 5MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10469	AAG	LTE-TDD (SC-FDMA, 1 RB, 5MHz, 84-QAM, UL Subtrame=2,3,4,7,8,9)	LTE-TOD	8.56	±9.6
	1.000	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10470	AAG	LTE-TDO (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframes/2.3.4,7,8,9)	LTE-TOO	8.32	±9.6

Cartificate No: EV-7891 Alores

Done 17 of no

F-TP22-03 (Rev. 06) Page 208 of 364



EX3DV4 - SN:7681 November 27, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Uno [®] k = 2
10472	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10473	AAF	LTE-TDD (SC-FDMA, 1 RB, 15MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10474	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10475	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10477	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10.47E	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOD	7,74	±9.6
10480	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe::2.3.4,7,8,9)	LTE-TOD	8.18	±9.6
10481	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframex2,3,4,7,8,9)	LTE-TOO	8.45	±9.6
10482	:DAA	LTE-TDD (SC-FDMA, 50% RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8.9)	LTE-TOO	7,71	±9.6
10483	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 18-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.39	±9.6
10484	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	±9.6
10485	AAG	LTE-TDD (SC-FDMA, 50% RB, 5MHz, QPSK, Ut. Subframe=2,3,4,7,8,9)	LTE-TD0	7.59	±9.5
10486	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subhame=2,3,4,7,8,9)	LTE-TOO	8.38	19.6
10487	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TD0	8.60	±9.8
10488	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subtrame=2,3,4,7,8,9)	LTE-TDD	7.70	±9.6
10489	AAG	LTE-TDD (SC-FDMA, 50% RB, 10MHz, 16-QAM, UL Subtrame+2,3,4,7,8,9)	LTE-TDD	8.31	19.5
10490	AAG	LTE-TDO (SC-FDMA, 50% RB, 10MHz, 64-QAM, UL Subtrame=2,3,4,7,8,9)	LTE-TOO	8.54	±9.6
10491	AAF	LTE-TD0 (SC-FDMA; 50% RB, 15MHz, QPSK, UL Subframe+2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.41	±9.6
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15MHz, 64-QAM, UL Subtrame=2,3,4,7,8,9)	LTE-TDD	8.55	±9.6
10494	AAG	LTE-TDD (SC-FDMA, 50% RB, 20MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10495	AAG.	LTE-TDB (SC-FDMA, 50% RB, 20MHz, 18-QAM, UI, Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	±9.6
10496	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subhame-2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10487	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4MHz, QPSK, UL Subtrame=2,3,4,7,8,9)	LTE-TOD	7.67	±9.6
10498	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subtrame=2,3,4,7,8,9)	LTE-TDD	8.40	±9.6
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	88.8	±9.6
10500	AAD	LTE-TDD (SC-FDMA, 100% RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TOO	7.67	±9.6
10501	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TOD	8.44	19.6
0502	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.52	±9.6
10503	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe+2,3,4,7,8,9)	LTE-TOD	7.72	±9.6
10504	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±9.6
10505	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 54-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10506	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10507	AAG	LTE-7DD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.36	±9.8
10508	AAG	LTE-TOD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±9.6
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	.7,99	±9.6
10510	74.5	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subtrame=2,3,4,7,8,9)	LTE-TDD	8.49	#9.6
10511	AAF	LTE-TOD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe-2,3,4,7,8,9)	LTE-TDD	8.51	±9.6
10512	AAG	LTE-TOD (SC-FOMA, 100% RB, 20MHz, QPSK, UL Subframe=2,3,4,7,6,9)	LTE-TDD	7.74	±9.6
10513	AAG	LTE-TDD (SC-FOMA, 100% RB, 20MHz, 15-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TOO	8.42	±9.6
10515	AAA	LTE-T00 (SC-F0MA, 100% RB, 20MHz, 64-QAM, UL Subframe-2,3,4,7,8,9)	LTE-TD0	8.45	19.6
0516	AAA	IEEE 802,11b WIFI 2.4 GHz (OSSS, 2 Mbps, R0pc duty cycle)	WLAN	1.58	19.8
0517	AAA	IEEE 802,116 WIFI 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle) IEEE 802,116 WIFI 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	WLAN	1.57	±9.6
0518	AAC		WLAN	1.88	±9.6
0519	AAC	IEEE 802.11a/h WIFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle) IEEE 802.11a/h WIFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.23	±9.8
0.520	AAG	IEEE 802.11a/h WIFI 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.39	±9.6
0521	AAG		WLAN.	8.12	19.6
0522	AAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 24 Mbps, 99pc duty cycle) IEEE 802.11a/h WIFI 5 GHz (OFDM, 35 Mbps, 99pc duty cycle)	WLAN	7,97	±9.6
0523	AAC	IEEE 902.11am WIFLS GRAZ (OFDM, 35 Mops, 9900 duty cycle)	WLAN	8.45	±9.0
0524	AAC	IEEE 802.11a/n WIFI 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	WLAN	80.8	±9:6
0525	AAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 54 Mbps, 98pc duty cycle) IEEE 802.11ac WIFI (20 MHz, MCS0, 98pc duty cycle)	WLAN	8.27	±9.6
0528	AAC	IEEE 802.11ac WFI (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.36	±9.6
0527	AAC	IEEE 802.11ac WFI (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.42	±9.6
0528	AAC	IEEE 602 11ac WIFI (20 MHz, MCS3, 98pc duty cycle)	WLAN	6.21	±9.6
0529	AAC	IEEE 802.11ac WH1 (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.36	±9.6
0531	AAC	IEEE 802.11ac WFI (20 MHz, MCS4, 98pc duty cycle)	WLAN	8.36	±9.6
0532	AAC	IEEE 802.11ac WIFI (20 MHz, MCS7, 98pc duty cycle)	WLAN	8.43	±9.6
0533	AAC	IEEE 802.11ac WIFI (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.29	±9.6
0534	AAC	IEEE 802.11ac WIFI (40 MHz, MCS0; 99pc duty cycle)	WLAN	8.38	±9.6
0535	AAC	IEEE 802.11ac WIFI (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.45	19.6
0536	AAC	IEEE 802.11ac WFI (40MHz, MCS2, 99pc duty cycle)	WLAN	8.45	19.6
0537	AAC	IEEE 802,11ac WIFI (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.32	±9.6
0538	AAG	IEEE 802.11ac WFI (40MHz, MCS4, 99pc duty cycle)	The second secon	8.44	19.6
0540	AAC	IEEE 802.11ac WFI (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.54	±9.6
	77.70	The state of the s	WLAN	8.39	±9.6

Cartificate No- EV.7881 No.09

Dear It of the

F-TP22-03 (Rev. 06) Page 209 of 364



November 27, 2023

UID	Rev.	Communication System Name	Group	PAR (dB)	UncE k = 2
10541	AAC	IEEE 802.11ac WIFI (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.46	±9.6
10542	AAC	IEEE 802.11ac WIFI (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.65	±9.6
10543	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.65	±9.6
10544	AAC	IEEE 802.11ac WIFI (80 MHz, MCS0, 99pc duty cycle)	WLAN	8.47	±9.6
10545	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
10546	AAC	IEEE 802.11ac WIFI (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.35	±9.6
10547	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.49	±9.6
10548	AAC	IEEE 802.11ac WiFi (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.37	±9.6
10550	AAC	IEEE 802,11ac WIFI (80 MHz, MCS6, 99pc duty cycle)	WLAN	8.38	±9.8
10551	AAC	IEEE 802.11ac WiFi (80 MHz, MCS7, 99pc duty cycle)	WLAN	8.50	±9.6
10552	AAC	IEEE 802.11ac WIFI (80 MHz, MCSB, 99pc duty cycle)	WLAN	8.42	±9.6
10553	AAC	IEEE 802.11ac WIFI (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.45	19.5
10554	AAD	IEEE 802.11ac WIFI (160 MHz, MCS0, 99pc duty cycle)	WLAN	8.48	19.6
10555	AAD	IEEE 802.11ac WIFI (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9.6
10556	AAD	IEEE 802.11ac WIFI (160 MHz, MCS2, 99pc duly cycle)	WLAN	8.50	±9.6
10557	AAD	IEEE 802.11sc WIFI (160 MHz, MCS3, 99pc duty cycle)	WLAN	8.52	±9.6
10558	AAD	IEEE 802.11ac WIFT (160 MHz, MCS4, 98pc duty cycle)	WLAN	8.61	±9.6
10560	AAD	IEEE 802,11ac WiFI (160 MHz, MCS6, 99pc duty cycle)	WLAN	.8.72	±9.6
10561	AAD	IEEE 802.11ac WIFI (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.56	±9.6
10562	AAD	IEEE 802.11ac WIFI (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.69	19.6
10563	AAD	IEEE 802.11ac WFI (160 MHz, MCS9, 99pc duty cycle)	WLAN	8.77	±9.6
10584	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.25	±9.6
10565	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.45	±9.6
10586	AAA	IEEE 802.11g WIFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.13	±9.6
10567	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	WLAN	8.00	±9.6
10568	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 38 Mbps, 98pc duty cycle)	WLAN	8.37	±9.6
10569	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 48 Mbps, 98pc duty cycle)	WEAN	8.10	±9.6
10570	AAA	IEEE 802 11g WIFI 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.30	±9.6
10571	AAA	IEEE 802.11b WIFI 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1,99	±9.6
10573	AAA	IEEE 802.11b WIF: 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	WLAN	1.99	±9.6
10574	AAA	IEEE 802.11b WIF 2.4 GHz (DSSS, 5.5Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10875	AAA	IEEE 802 11b WIFI 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle) IEEE 802 11g WIFI 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10576	AAA	EEE 802.11g WIFI 2.4 GHz (USSS-OFDM, 9 Mops, 90pc duty cycle)	WLAN	8.59	±9.6
10577	AAA	IEEE 802.11g WF: 2.4 GHz (DSSS-OFDM, 3 Mbps, 90pc duty cycle)	WLAN	8.60	19.6
10578	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 12 Mops, 90pc duty cycle)	WLAN:	8.70	±9.6
10579	AAA	IEEE 802.11g WiFi 2.4 GHz (OSSS-OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10580	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.36	±8.6
10581	AAA	IEEE 882.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 50pc duty cycle)	WLAN	8.76	19.6
10582	AAA.	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8,35	±9.6
10583	AAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10584	AAC	IEEE 802.11a/h WIFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	W.AN	8.59	±9.6
10585	AAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10586	AAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10587	AAC	IEEE 802.11a/h WIFI 5 GHz (OFOM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10588	AAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 36 Mbps, 50pc duty cycle)	WLAN	8.76	±9.6
10589	AAC	IEEE 802.11a/h WIFI 5 GHz (OFOM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	19.6
10590	AAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10591	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS0, 90pc duty cycle)	WLAN	8.63	±9.6
10692	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
0593	AAG	IEEE 802.11n (HT Mixed, 20 MHz, MCS2, 90pc duty cycle)	WLAN	8.64	19.6
0594	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS3, 90pc duty cycle)	WLAN	8.74	±9.6
0.595	AAG	IEEE 802,11n (HT Mixed, 20 MHz, MCS4, 90pc duty cycle)	WLAN	8.74	±9.6
10596	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS5, 90pc duty cycle)	WLAN	8.71	19.6
0597	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS8, 90pc duty cycle)	WLAN	8.72	±9.6
0598	AAG	IEEE 802 11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	WLAN	8.50	19.6
0599	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS0, 90pc duty cycle)	WLAN	8.79	±9.6
0.000	AAC	IEEE 802,11n (HT Mixed; 40 MHz, MGS1, 90pc duty cycle)	WLAN	88.0	±9.6
10601	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS2, 90pc duty cycle)	WLAN	58.8	±9.6
0602	AAC	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	WLAN	8.94	±9.6
0603	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS4, 90pc duty cycle)	WLAN	9.03	±9.6
0604	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS5, 90pc duty cycle)	WLAN	8.76	±9.6
0605	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS6, 90pc duty cycle)	WLAN	8.97	±9.6
0606	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	19.0
0.607	AAC	IEEE 802.11ac WIFI (20 MHz, MCS0, 90pc duty cycle)	WLAN	8.64	19.8
0608	AAC	IEEE 802.11ac WIFI (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.77	19.6

Cortificate No: EV.7081 Nor79

Place se at no

F-TP22-03 (Rev. 06) Page 210 of 364



November 27, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	UncE k = 2
10809	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.57	±9.6
10610	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.76	±9.6
10611	AAC	IEEE 802.11ac WIFI (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	±9.6
10612	AAC.	IEEE 802.11ac WiFi (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±9.6
10613	AAC:	IEEE 802.11ac WiFi (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.94	19.8
10614	AAC	IEEE 802.11ap WIFI (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.59	±9.6
10615	AAG	IEEE 802:11ac WIFI (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10616	AAC	IEEE 802.11ac WIFI (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.82	±9.6
10517	AAC:	IEEE 802.11ac WIFI (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.81	±9.6
10618	AAC	IEEE 802.11ac WIFI (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.58	±9.6
10619	AAC	IEEE 802,11ac WIFi (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.86	±9.6
10620	AAC	IEEE 802.11ac WIFI (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.87	19.6
10621	AAC	IEEE 802.11ac WiFi (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	19.6
10622	AAC	IEEE 802.11ac WIFI (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.68	±9.6
10623	AAC	IEEE 802.11ac WiFi (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±9.6
10624	AAC	IEEE 802.11ac WIFI (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.96	±9.6
10625	AAC	IEEE 802.11ac WIFI (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.96	±9.6
10626	AAC	IEEE 802.11ac WFI (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.6
10827	AAC	IEEE 802.11ac WIFI (80 MHz, MC51, 90pc duty cycle)	WLAN	8.88	±9.6
10628	AAC	IEEE 802.11ac WIFI (80 MHz, MCS2, 90pc duty cycle)	WLAN	8,71	3,9.6
10628	AAC	IEEE 802.11ac WIFI (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	太月.6
10630	AAC.	IEEE 802.11ac WIFI (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.72	±9.6
10631	AAC	IEEE 802.11ac WiFi (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.81	£9.8
10632	AAC	IEEE 802.11ac WIFI (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	±9.8
10833	AAC	IEEE 802.11ac WIFI (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.83	£9.6
10634	AAC	IEEE 802.11ac WiFi (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.80	±9.6
10635	AAC	IEEE 802.11ec WiFi (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±9.6
10636	AAD:	IEEE 802.11ac WiFi (160 MHz, MCSD, 90pc duty cycle)	WLAN	8.83	±9.6
10837	AAD	IEEE 802:11ac WiFi (160 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10638	AAD	IEEE 802.11ac WiFi (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.86	±9.6
10.630	AAD	IEEE 802,11ac WiFi (160 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	19.6
10840	AAD	IEEE 802.11ac WIFI (160 MHz, MCS4, 90pc duty cycle)	WLAN	8.98	19.6
10641	AAD	IEEE 802.11ac WIFI (160 MHz, MCS5, 90pc duty cycle)	WLAN	9.06	±9.6
10642	AAD	IEEE 802.11ac WIFI (160 MHz, MCS6, 90pc duty cycle)	WLAN	9.06	±9.6
10643	AAD	IEEE 802,11ac WIFI (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.89	±9.6
10844	AAD	IEEE 802.11ac WIFI (160 MHz, MCS8, 90pc duty cycle)	WLAN	9.06	±9.6
10646	AAH	IEEE 802.11ac WIFI (160 MHz, MCS9, 90pc duty cycle)	WLAN	9.11	±9.6
10647	AAG	LTE-TDD (SC-FDMA, 1 RB, 5MHz, QPSK, UL Subframe=2,7) LTE-TDD (SC-FDMA, 1 RB, 20MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11.96	±9.6
10648	AAA	CDMA2000 (1x Advanced)	LTE-TOD	11.96	±9.6
10652	AAF	LTE-TDD (OFDMA, 5MHz, E-TM 3.1, Clipping 44%)	CDMA2000	3.45	±9.6
10653	AAF	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TOD	6.91	±9.6
10654	AAE:	LTE-TDD (OFDMA, 15MHz, E-TM 3.1, Clipping 44%)	LTE/TDO	7.42	±9.6
0655	AAF	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDO	6.96	19.6
0858	AAB	Pulse Waveform (200Hz, 10%)	LTE-TOD	7,21	±9.6
0659	AAB	Pulse Waveform (200Hz, 20%)	Tost	10.00	±9.6
0880	AAB	Pulse Waveform (200Hz, 40%)	Test	6.99	±9.8
0661	AAB	Pulse Waveform (200Hz, 60%)	Test	3,98	±9.6
0662	BAA	Pulse Wayelorm (200Hz, 80%)	Test	2,22	±9.6
10670	AAA	Bluetooth Low Energy	Test Stretooth	0.97	±9.6
0671	AAC	IEEE 802.11ax (20 MHz, MCS0, 90pc duty cycle)	Bluetooth WLAN	2.19	±9.6
0672	AAC	IEEE 802.11ex (20 MHz, MCS1, 90pc duty cycle)	WLAN	9.09	±9.6
0673	AAC	IEEE 802 11ax (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.57	±9.6
0674	AAC	IEEE 802 11ax (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.78	±9.6
0675	AAC	IEEE 802.11ax (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.74	±9.6
0676	AAC	IEEE 802.11ax (20 MHz, MCSS, 90pc duty cycle)	WLAN	8.90	±9.6
0677	AAC	IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.73	±9.6
0678	AAC	IEEE 802.11ax (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.78	±9.6
0679	AAG.	IEEE 802.11ax (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.89	±9.6
0680	AAG	IEEE 802.11ax (20 MHz, MCS9, 90pc duty cycle)	WLAN	8.80	±9.6
0881	AAC	IEEE 802.11ax (30 MHz, MCS10, 90pc duty cycle)	WLAN	8.62	The second secon
0.682	AAC	IEEE 802,11ax (20MHz, MCS11, 90pc duty cycle)	WLAN	8.83	19.6
0683	AAC	IEEE 802.11sx (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.42	±9.6
0684	AAC	IEEE 802.11ax (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.26	±9.6
0686	AAG	IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	±9.6
9890	AAC	IEEE 802.11ax (20 MHz, MCS3, 99pc duty cycle)	WLAN	and the second s	±9.6
	transition in the	the state of the s	THE PARE	8.28	±9.6

Cartificate No: EV.7691 Nor29

P--- 47 -t nn

F-TP22-03 (Rev. 06) Page 211 of 364



EX3DV4 - SN:7681 November 27, 2023

FIID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10687	AAC	IEEE 802.11ax (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.45	±9.6
10688	AAC	IEEE 802.11ax (20 MHz, MCSS, 99pc duty cycle)	WLAN	8.29	±9.6
10889	AAC	IEEE 802.11ax (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.55	±9.6
10690	AAC	IEEE 802.11ax (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
10691	AAC	IEEE 802.11ax (20 MHz, MCS8, 98pc duty cycle)	WLAN	8.25	±9.6
10692	AAC	IEEE 802.11ax (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.29	±9.6
10.693	AAC	IEEE 802.11ax (20 MHz, MCS10, 99pc duty cycle)	WLAN	8,25	±9.6
10694	AAC	IEEE 802.11ax (20 MHz, MCS11, 99pc duty cycle)	WLAN	8.57	±9.6
10695	AAC	IEEE 802:11ax (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.78	±9.6
10.696	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.91	19.8
10697	AAC	IEEE 802.11ax (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.61	±9.6
10698	AAG	IEEE 802.11ax (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.89	±9.0
10699	AAC	IEEE 802.11ax (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.82	±9.6
10700	AAC	IEEE 802.11ax (40 MHz, MCSS, 90pc duty cycle)	WLAN	8.79	±9.6
10701	AAC	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.86	±9.6
10702	AAC	IEEE 802 11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.70	±9.6
10703	AAC	IEEE 802.11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10704	AAC	IEEE 802.11ax (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.56	±9.6
10705	AAC	IEEE 802.11ax (40 MHz, MCS10, 90pc duty cycle)	WLAN	8.69	±9.6
10706	AAC	IEEE 802.11ax (40 MHz, MGS11, 90pc duty cycle)	WLAN	8.66	±9.6
10707	AAC	IEEE 802.11ax (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.32	±9.6
10708	AAC	IEEE 802.11ax (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	£9.6
10709	AAC	IEEE 802.11ax (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	±9.6
10710	AAC	IEEE 802.11ax (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.29	±9.6
10711	AAC	IEEE 802.11ax (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.39	±9.6
10712	AAC	IEEE 802.11ax (40 MHz, MCS5, 99pc duty cycle)	WLAN	8.67	19.6
10713	AAC	IEEE 802.11ax (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.33	±9.6
10714	AAC	IEEE 802.11ax (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.26	19.6
10715	AAC	IEEE 802.11ax (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.45	±9.6
10716	AAC	IEEE 802.11ax (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.30	±9.6
10717	AAC	IEEE 802.11ax (40 MHz, MCS10, 99pc duty cycle)	WLAN	8.48	±9.6
10718	AAC	IEEE 802.11ax (40 MHz, MCS11, 99pc duty cycle)	WLAN	8.24	±9.0
10719	10.00	IEEE 802.11ax (80 MHz, MCSo, 90pc duty cycle)	WLAN	8.81	±9.6
10720	AAC	IEEE 802.11ex (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.87	±9.6
10721	AAC	IEEE 802 11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.76	±9.6
10723	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.55	±9.6
10724	AAC	IEEE 882.11ax (80 MHz, MCS4, 80pc duty cycle) IEEE 802.11ax (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.70	±9.6
10725	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.90	±9.6
10726	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc duty cycle)	W.AN	0.74	±9.6
10727	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.72	±9.6
10728	AAC	IEEE 802.11ax (80 MHz, NCS9, 90pc duty cycle)	WLAN	8.66	±9.6
10729	AAC	EEE 802.11ax (80 MHz, MCS10, 90pc duty cycle)	WLAN	8.65	±9.8
10730	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	8.64	±9.6
10731	AAG	IEEE 802.11ax (80 MHz, MCS) 1, 80pc duty cycle)	WLAN	8.67	±9.6
10732	AAC	IEEE 802.11ax (80 MHz, MCS1, Mipc duty cycle)	WLAN	8.42	±9.6
10733	AAC	IEEE 802.11ax (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.46	±9.6
10734	AAG	IEEE 802.11ax (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.40	±9.6
10735	AAC	IEEE 802.11ax (80MHz, MCS4, 99pc duty cycle)	WLAN	8.25	+9.6
10736	AAC	IEEE 802.11ax (80 MHz, MCSS, 99pc duty cycle)	WLAN WLAN	8.33	±8.6
10737	AAC	IEEE 802.11ax (80 MHz, MCS6, 98pc duty cycle)	WLAN	8.27	±9.6
10738	AAC	IEEE 802.11ax (80 MHz, MCS7, 99pc duty cycle)	The state of the s	8.36	±9.6
10739	AAC	IEEE 802 11ax (80 MHz, MCS8, 98pc duty cycle)	WLAN	8.42	±9.6
10740	AAC	IEEE 802.11ax (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.29	±9.6
10741	AAC	IEEE 802.11ax (86 MHz, MCS10, 89pc duty cycle)	WLAN.	8.48	±9.8
10742	AAC	IEEE 802 11ax (80 MHz, MCS11, 99pc duty cycle)	WLAN	91.16	±9.6
10743	AAC	IEEE 802 11ax (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.43	±9.6
10744	AAC	IEEE 802.11ax (190 MHz, MGS1, 90pc duty cycle)	WLAN	8.94	±9.6
10745	AAC	IEEE 802.11ax (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.16	±9.6
10746	AAC	IEEE 802.11ax (160 MHz, MCS3, 90pc duty cycle)	WLAN		±9.6
10747	AAC	IEEE 802.11ax (160 MHz, MCS4, 90pc duty cycle)	WLAN	9.11	±9.6
10748	AAC	IEEE 802.11ax (160 MHz, MCS5, 90pc duty cycle)	WLAN	9.04	±9.6
10749	AAC	IEEE 802.11ex (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.93 8.90	±9.6
10750	AAC	IEEE 802.11ax (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.90	±9.6
		IEEE 802.11ax (160 MHz, MCS8, 90pc duty cycle)	WLAN	PALL TO A	±9.6
10751	AAC.	TEEE BUY, I LEE (100 MPU, MGSS, SUDE GUIV CYCIA)		8.82	+9.6

Cartificate No. EX.7881 Nmr99

Dane (8 of no

F-TP22-03 (Rev. 06) Page 212 of 364



November 27, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k ≃
10753	AAC	IEEE 802.11ax (160 MHz, MCS10, 90pc duty cycle)	WLAN	9,00	±9.6
10754	AAC	IEEE 802.11ax (160 MHz, MCS11, 90pc duty cycle)	WLAN	8.94	±9.0
10755	MAC	IEEE 802.11mx (160 MHz, MCS0, 98pc duty cycle)	WLAN	8.64	±9.6
10756	AAC	IEEE 802,11ax (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.77	19.6
10757	AAC	IEEE 802.11ax (160 MHz, MCS2, 99pc duty cycle)	WLAN	8.77	±9.6
10758	AAC	IEEE 802.11ax (160 MHz, MCS3, 99pt duty cycle)	WLAN	8.69	±9.6
10759	AAC	IEEE 802.11ax (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.58	19.6
10760	AAC	IEEE 802.11ax (160 MHz, MCSS, 99pc duty cycle)	WLAN	8.49	±9.6
10761	AAC	IEEE 802.11ax (160 MHz, MCS6, 99pc duty cycle)	WLAN	8.58	19.6
10762	AAC	IEEE 802.11ax (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.49	±9.6
10763	AAC	IEEE 802.11ax (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.53	±9.6
10764	AAC	IEEE 802.11ax (160 MHz, MCS9, 99pc duty cycle)	WLAN	8.54	±9.6
10765	AAC	IEEE 802.11ax (160 MHz, MCS10, 99pc duty cycle)	WLAN	8.54	19.6
10766	AAC	IEEE 802.11ax (160 MHz, MCS11, 99pc duty cycle)	WLAN	8.51	±9.6
10767	AAE	SG NR (CP-OFDM, 1 RB, 5MHz, QPSK, 15kHz)	5G NR FR1 TDD	7.99	±9.6
10768	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, CPSK, 15 kHz)	5G NR FR1 TOO	8.01	±9.6
10769	AAD	SG NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	SG NR FR1 TOD	8.01	±9.6
10770	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	6G NR FR1 TDD	8.02	±9.6
10771	AAD	5G NR (CP-OFDM, 1 RB. 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	+9.6
10772	AAD	5G NR (CP-OFDM, 1 RB; 30 MHz, QPSK, 15 kHz)	5G NR FR1 TOO	8.23	±9.6
10773	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TOD	8.03	19.6
10774	AAD	50 NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TOO	8.02	19.6
10775	AAD	5G NR (CP-OFDM, 50% RB, 5MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.31	±9.8
10776	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDO	8.30	±9.6
10777	AAC	5G NR (CP-OFDM, 50% RB, 15MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.30	±9.6
10.778	AAD	5G NR (CP-DFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	50 NR FR1 TDD	8.34	±9.6
10779	AAC	5G NR (CP-OFDM, 50% RB, 25MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.42	±9.6
10.780	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	50 NR FR1 TOD	8.38	±9.6
10781	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10782	AAD	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8,43	#9.6
10783	AAE	5G NR (CP-OFDM, 100% RB, 5MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
10.784	AAD	5G NA (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.29	±9.6
10785	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.40	±9.6
10786	CAA	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NA FA1 TOD	8.35	±9.6
10787	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QP8K, 15 kHz)	5G NR FR1 TDD	8,44	±9.6
10788	AAD	53 NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10789	AAD	5G NA (CP-OFDM, 100% AB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.37	±9.6
10790	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±8.6
10791	AAE	5G NR (CP-OFDM, 1 RB, 5MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	±9.6
10792	AAD	5G NR (CP-OFDM, 1 R8, 10 MHz, QP5K, 30 kHz)	5G NR FR1 TDD	7,92	±9.6
10793	AAD	5G NR (CP-OFDM, 1 RB, 15MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	±9.6
10794	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7,82	#9.6
10.795	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NA FR1 TDD	7.84	±9.6
10796	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10797	DAA	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TOD	8.01	±9.6
10798	DAA	SG NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	6G NR FR1 TOD	7.89	±9.6
0799	AAD	SG NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	6G NR FR1 TOD	7.93	±9.6
10801	AAD	SG NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDO	7.89	19.6
0.002	CIAA	SG NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDO	7.87	±9.6
0.803	AAD	SG NR (CP-OFDM, 1 RB. 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDO	7.90	19.6
0805	AAD	SG NR (CP-OFDM, 50% RB, 10 MHz, CPSK, 30 kHz)	5G NR FR1 TD0	8.34	±9,6
0806	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	±9.6
0809	AAD	NG NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
0810	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
0812	CAA	5G NR (CP-OFDM, 50% R8, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	0.35	±9.6
0817	AAE	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±9.6
0818	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
0819	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	±9.6
0820	AAD	9G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8,30	±9.6
0821		5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 38 kHz)	5G NR FR1 TDD	8,41	±9.6
0822	DAA	SG NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
0823	AAD	5G NR (CP-OFOM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.36	±9.6
0824	CIAA	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	±9,6
0825	AAD	5G NR (CP-OFDM, 100% RB, 60MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.41	±9.6
0827	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TOD	8.42	±9.6
0828	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TOD	8.43	±9.6

Cartificate No. EV.7691 Nov23

Deve to at no

F-TP22-03 (Rev. 06) Page 213 of 364



November 27, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10829	DAA	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	±9.6
10830	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 50 kHz)	5G NR FR1 TDD	7,63	±9.6
10831	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	±9.6
10832	AAD	SG NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	±9.8
10833	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TOD	7.70	±9.6
10834	DAA	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	±9.6
10835	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10836	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	±9.6
10837	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7,68	±9.5
10839	DAA	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10840	AAD	SG NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7,67	±9.6
10841	DAA	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	±9.8
10843	AAD	5G NR (CP-OFDM, 50% R8, 15MHz, QPSK, 60%Hz)	SG NR FR1 TDD	8.49	±9.6
10844	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	SG NR FR1 TDD	8.34	±9.6
10846	AAD.	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TOD	8.41	±9.6
10854	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10855	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60kHz)	5G NR FR1 TDD	8.35	±9.6
10856	AAD	5G NR (CP-OFDM, 100% RB, 20MHz, QPSK, 60kHz)	5G NR FR1 TDD	8.37	±9.6
10857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	SG NR FR1 TDD	8.35	±9.6
10858	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	SG NR FR1 7DD	8.36	±9.6
10868	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, OPSK, 60 kHz)	5G NR FR1 TOD	8.34	±9.6
10860	AAD	5G NR (CP-OFDM, 100% RB, 50MHz, QPSK, 60kHz)	5G NR FR1 TDD	8.41	±9.6
10861	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 50 kHz)	5G NR FR1 TDD	8.40	±9.6
10863	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10864	AAD	5G NR (CP-OFDM, 100% RB, 90MHz, QPSK, 60kHz)	5G NR FR1 TOD	8.37	±9.6
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TOD	8.41	±9.6
10888	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10868	AAD	5G NR (DFTs-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.89	19.6
10889	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TOO	5.75	19.6
10870	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TOD	5.86	±9.6
10871	AAE	5G.NR (DFT-e-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TOD	5.75	19.6
10872	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDO	6.52	±9.6
10873	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	9G NR FR2 TDQ	6.61	±9.6
10874	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDO	6.65	±9.6
10875	AAE	5G NR (CP-OFDM, 1 RB; 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDO	7.78	±9.6
10876	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.39	±9.6
10877	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	±9.6
10978	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDO	8.41	±9.6
10879	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	±9.6
10880	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.38	±9.6
10881	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDO	5.75	±9.6
10882	AAE	5G NR (DFT-e-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	50 NR FR2 TDD	5.96	±9.6
10883	AAE	5G NR (DFT-e-OFOM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.57	±9.6
10884	AAE	5G NR (DFT-6-OFOM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	±9.6
10885	AAE	5G NR (DFT-e-OFOM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10886	AAE	50 NR (DFT-s-OFDM, 100% R8, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10887	AAE	5G NR (CP-OFDM, 1 R8, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7,78	±9.6
10888	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, CIPSK, 120 kHz)	5G NR FR2 TDD	8,35	±9.6
10889	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.02	±9.6
10890	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 16GAM, 120 kHz)	5G NR FR2 TDD	8.40	±9.6
10891	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TOD	8.13	±9.6
10892	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TOD	8.41	±9.6
10897	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5,66	±9.6
10898	AAB	SG NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TOD	5.67	±9.6
10899	AAB	5G NR (DFT-s-OFDM, 1 R8, 15 MHz, QPSK, 30 kHz)	SQ NR FR1 TOO	5.67	19.6
10900	AAB	5G NR (DFT-s-OFDM, 1 R8, 29 MHz, QPSK, 30 kHz)	SG NR FR1 TDD	5.68	±9.6
10901	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	5.68	±9.6
10902	BAA	5G NR (DFTs-OFDM, 1 R8, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10903	AAB	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	5.68	±9.6
10904	BAA	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	50 NR FR1 TD0	5.68	±9.6
10905	SAA	5G NR (DFT-s-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TD0	5.68	±9.6
10906	AAB	5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5,68	±9.6
10907	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	±9.6
10908	BAA	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NA FRI TOO	5.93	±9.6
10909	BAA	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NA FA1 TOD	5.96	±9.6
10910	AAB	5G NR (DFT's-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6

Certificate No. EV.7891 No.79

Dear on at on