


# VOTOMY



Bluetooth Speaker

USER MANUAL  
EN

VT360




## CONTENTS

English.....	1-7
Francais.....	8-14
Deutsch.....	15-21
Italiano.....	22-28
Espanol.....	29-35

## Package Contents:

- 1x VT360 Bluetooth Speaker
- 1x Micro USB charging Cable
- 1x User Manual
- 1x Lanyard

## Speaker Overviews

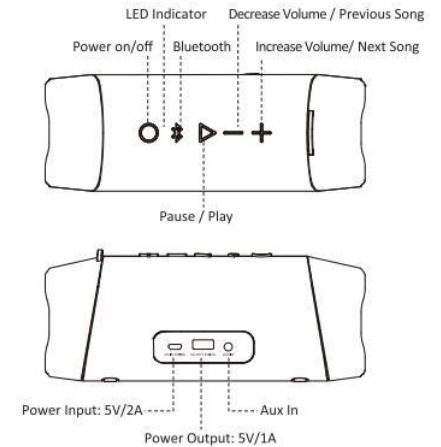

1

## Charging



1. Before using for the first time, please fully charge the built-in battery.
2. Connect the Micro USB charging Cable (included) between the " " Micro USB charging port on the speaker, and a USB port on a computer or USB AC adapter.

LED Indicator	Battery Status
Flashing Red	Low battery(<20%)
Solid Red (Charging LED Indicator)	Charging
Red LED Turns Off	Fully charged

**Note:** When the battery has less than 10% power remaining, the speaker will power off automatically.

## Power On

Press the " " button until you hear a rising tone and the LED indicators turn on.

## Power Off

Press the " " button until you hear a decending tone and the LED indicators turn off.

2

## Bluetooth Connection

Make sure that the speaker is within 10 meters from your mobile device.

1. When your speaker is turned off, press and hold the " " button until you hear a rising tone and the LED indicators turn blinking blue.
2. Go to the Bluetooth settings on your mobile device, search and select "VT360" from the list of device(s).
3. Once paired, the LED indicators turn solid blue.

### Note:

- When powered on, the speaker automatically reconnects to the previously connected device. (The speaker has memories of up to 8 paired devices.)
- The speaker will automatically shut down after 10 minutes if not in use.

## Music Control

Play / Pause ..... Click ▷  
 Decrease Volume ..... Click +  
 Increase Volume ..... Click -  
 Next Song ..... Press and Hold +  
 Previous Song ..... Press and Hold -  
 Bluetooth / TWS Mode Pairing..... Click \*

## Speakerphone (in Bluetooth Connection)

Answer an incoming call.....Click ▷  
 Reject an incoming call..... Press and Hold ▷  
 End the current call..... Click ▷

3

## Bluetooth Disconnection


Press "▷" and " " buttons simultaneously until LED Indicator fast blinking blue to disconnect the currently connected device, and restart a new Bluetooth-pairing status.

## TWS (True Wireless Stereo) Function


The TWS technology enables you to use two speakers pairing via Bluetooth to create a wireless dual-channel system to deliver true stereo sound effect.

## TWS Connection Operation

1. Long press the " \* " button to enter into the true wireless stereo pairing mode as a master speaker. If one of them fails, clean up the pairing information.




2. Enable bluetooth on your device and connect to "VT360", stereo sound will play from both speakers.

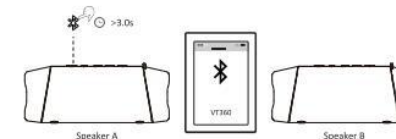

4

3. Once paired, the MAIN speaker LED indicator flashes blue slowly.

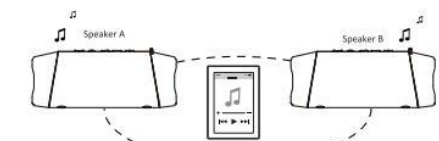

## Disconnect the TWS connection

Long press the button " \* " on the speaker until LED Indicator fast blinking blue to disconnect the TWS connection.

## Listening to music through AUX IN


1. Power on the speaker.
2. Using the AUX Cable, connect your external device to the Aux in port on the speaker.
3. The speaker will automatically turn into AUX IN mode, the LED Indicators turn solid green.

## Sound mode

Insert the AUX cable plug as AUX IN mode,  
 Pull out the AUX cable plug and switch to bluetooth mode.  
 AUX IN mode, the LED indicator keep solid green.

5

**IMPORTANT NOTE** - To ensure the speaker is prepared to use for water-resistant, please remove all the connected cables and close the port protection cover tightly.

**Reset the speaker:** If the control buttons are not working properly, please disconnect the charging cable, long press the button “” and hold it for 10 seconds until the LED light off.

### Specifications

- Bluetooth version: 5.0
- Support: A2DP V1. 3; AVRCP V1. 6, HFP V1.7
- Wireless working distance: 10 meters
- Power output: 15W x 2
- Driver unit:  $\phi 55\text{mm}$
- Frequency response: 70Hz~18kHz
- Signal-to-noise ratio:  $\geq 70\text{dB}$
- DC input voltage/current: Micro USB DC 5V/2A
- Playtime:  $\geq 12$  hours (50% volume)
- Battery charge time:  $\leq 4$  hours (5V/2A)
- Dimensions: 204 x 74 x 78mm / 8.03 x 2.91 x 3.07inch
- Weight: 712g

### CAUTION:

- Keep the speaker and its accessories away from the reach of children to avoid choking or strangling.
- Keep the speaker away from fire, water, liquids, extreme heat, and strong magnetic fields to avoid damage to the device.

- Do NOT use this speaker at high volume for extended period of time as this may cause permanent hearing damage or hearing loss.
- Do NOT drop or knock the speaker on hard surface.
- Do NOT use chemical or detergent to clean the speaker.
- Do NOT scratch or scrape the product with sharp object.
- Do NOT make unauthorized alteration to this product.

### Troubleshooting:

#### Cannot Power on

- Make sure the speaker is fully charged or has sufficient battery power.

#### Cannot Connect to Mobile Device

- Make sure the Bluetooth device supports A2DP profile.
- Make sure the speaker is within 10 meters from the device.
- Make sure the speaker is in pairing status (LED indicator blinking blue) or have paired to this particular device before.

### No Sound

- Make sure the volume is at an audible level on both your device and the speaker.
- Make sure your device is successfully paired with the speaker, the LED indicators should turn solid blue.

### Poor Connection

- Make sure there is no obstacle between the speaker and your mobile device.

### FCC Statement:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.