



Bluetooth®



elite headphones

Extreme Efficiency Headphones



Operating Instructions

**How to use it?**

Pair the headphones with a bluetooth enabled device  
Turn the headphone on by a long press the power switch,a tone will be heard and the LED indicator light will quick flash BLUE.

Keep your bluetooth headphone and bluetooth enabled device within 3feet of each other during the pairing process,set your mobile phone or other bluetooth enabled device to search for Bluetooth devices.

When the bluetooth enabled device finds the headphone, select “ BTELITE ” from the list of found devices. If required, enter the password 0000. Select OK or Yes to pair your device

After a successful registration,a tone will be heard and the LED indicator light will slowly blink BLUE.


© 2017 Zeikos, Inc. iHip is a trademark of Zeikos, Inc. iPod, iPhone and iPad are trademarks of Apple Inc., registered in the U.S and other countries. The illustrated product and specifications may differ slightly from that supplied. All other trademarks and trade names are those of their respective owners. United States and international patent pending. All Rights Reserved. For ages 12+up. This is not a toy. Designed by iHip, Manufactured in China This product contains chemicals known to the state of California to cause cancer and/or birth defects or other reproductive harm.

Limited One Year Warranty.  
To activate your product warranty go to our website [www.ihip.com](http://www.ihip.com) & register this product.


NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help


Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) this device may not cause harmful interference, and  
(2) this device must accept any interference received, including interference that may cause undesired operation.




WIRELESS  
HANDS FREE.  
NO CORDS




MICROPHONE  
EASILY SWITCH  
BETWEEN MUSIC AND  
INCOMING CALLS






COMPACT  
FOLDS AWAY FOR  
EASY STORAGE



COMPATIBLE  
WITH MOST MP3/AUDIO  
DEVICES & SMARTPHONES

**Charging the bluetooth headphones**

Connect the small end of the Micro USB cable to the charging port on the headphones. Connect the large end of the Micro USB cable to your computer's USB port or an AC adaptor(not included). The LED indicator light turns RED when charging.It will turn off when fully charged.

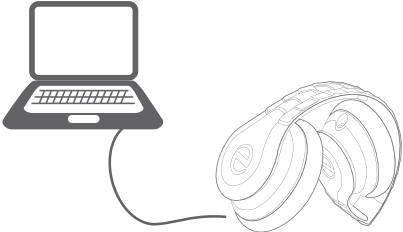

**Note:** If you would like to connect the headphones to another device, you must unpair the headphones from the currently paired device first. On your device's bluetooth settings, select “ BTELITE ” then select “unpair”.When the headphones have been unpaired, it automatically goes into pairing mode again.

**Features**  
Driver Unit: 40mm  
Built-in bluetooth chipset: RDA 4.2 Stereo  
Playing Time: 4 h  
Standby Time: 8 -10h  
Battery: 250mah  
Operation Range: 8-10m  
Frequency Range: 2.4GHz-2.48GHz  
Built-in Mic  
Aux Port  
Volume control/music  
Control/Play/Pause/Answer/Hang-up