OHR507 TWS Wireless headset

Customer Services: (978)230-8895(US) Mon-Fri: 9am-6pm(EST) User Manual

Please read this user manual carefully when using this product

Thank you for purchasing Acer products. For optimum operation, please read this manual carefully before using.

OHR507

Model

Item Name TWS Wireless Earphones


Product List Headphones x2pcs Charging case x1pcs Type-C charging cable x1pcs Instruction manual x1pcs

Product Description

This TWS earphone is a wireless connectivity-enabled audio product. which is compatible with Android and iOS smartphones, tablets, and other portable electronic devices. By eliminating the constraints of wired connections, it offers users enhanced convenience and unrestricted mobility, catering to a wide range of application scenarios.

Product Specifications Material: ABS Product Weight:39.8g Charging port:type-c Earphones Size:29.1*19.6*17.3mm Charging case size: 54.8*54.1*25.6mm

Product structure diagram

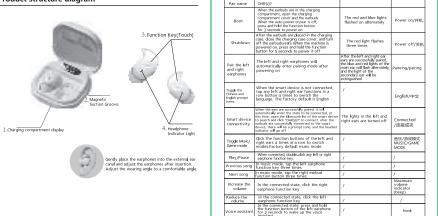

Introduction to product operation

function	operate	Light	Tone	Answer an	When the call is incoming, double-click		Ringtone of
Pair name	OHR507			incoming cal	any left or right earphone function key	/	your phone
Boot	When the earbuds are in the charging compartment, open the charging compartment cover and the earbuds When the auto power onyear is off, press and hold the function button	The red and blue lights flashed on alternately	Power on/开机	incoming call	When the call is incoming, press and hol the function button of any left or right earphone for 2 seconds	/	/
	for 3 seconds to power on After the earbuds are placed in the charging			Hang up	In the call state, double-click the function keys of any left and right earphones	/	/
Shutdown	Arter the earnuss are piaced in the charging case, close the charging case cover, and turn off the earbuds/ears When the machine is powered on, press and hold the function button for 5 seconds to power it off	The red light flashes three times	Power off/关机	Low battery alarm	When the voltage of the earbuds is low than 3.3V, there will be a prompt up to the ear Powered off	The red light flashes every 5 seconds	honk
Pair the left and right	The left and right earphones will automatically enter pairing mode after powering on	After the left and right ear ears are successfully paired, the blue and red lights of the main ear will flash alternately, and the light of the	Painring/pairing	Direconnect	Outside the effective connection range, or manually disconnect the Bluetooth connection of the smart device	The red and blue lights of the main ear flashed alternately, and the secondary ear light went out	Disconnected /断开连接
earphones		secondary ear will be extinguished		Automatic reconnection	After powering on or disconnecting, the earbuds will automatically reconnect to the last connected smart device within	The lights go out	connected /连接成功
Toggle the Chinese and English prompt tones	When the smart device is not connected, tap any left and right ear functions in a row button 4 times to switch the language. The factory default is English	/	English/中文	Charge the	the effective distance Put the earbuds back into the charging compartment and close the charging compartment cover, the earbuds will automatically power off and start charging, the red light of the earbuds will be on, and the light will turn off when fully charged in the control of the earbuds will be on.		ompartment
Smart device	When the ears are successfully paired, it will automatically enter the state to be connected, at this time, open the Buetooth list of the smart device to search and click "OHRSO?" to connect, after the earbuds are successfully connected to the smart	The lights in the left and right ears are turned off	Connected	earbuds back into the charging case	But the serbuck into the charging case and class the list to charge the serbuck, the LID digital table lights up to show the current power and charging status on the serbuck of the nurines good leght in only, and the serbuchAfter the charge is fully charged, the digital bable nuring cole light gives off, and the charging compertment power digital light shows the remarking power and the light time of later LS becomes.		sAfter the charge digital light shows
Connectivity	device, there will be a prompt tone, and the headset indicator will go off		/连接成功		While the charging case is charging, the charging case digitally lights up to display the current power level and flashes to indicate the charging status,		display the
Toggle Music/ Game mode	Click the function buttons of the left and right ears 4 times in a row to switch modes,Factory default music mode	/	音乐/游戏模式 MUSIC/GAME MODE	Fully charge the charging case	When fully charged, the display shows a battery level of 100		
Play/Pause	When connected, double-click any left or right earphone function key	1	/	Note: When the usage time	he Bluetooth headset is connected to a s e and connection distance of the headse	nart device and the game mode i will be shortened	s switched,
Previous song	In music mode, tap the left earphone function key three times	1	/				
Next song	In music mode, tap the right earbud function button three times	1	/	Headset	t parameters		
Increase the volume	In the connected state, click the right earphone function key	/	Maximum volume indicator (beep)	1. Product name; 2. Bluetooth version	on : Bluetooth 5.4 11. Headphon	battery capacity :3.7V/25mAh (poly)	
Reduce the volume	In the connected state, dick the left earphone function key	/	/	 Support mode : Bluetooth trans 		in battery capacity: 3,7V/200mAh (po iterface :USB Type-C	nymer innium batterie
Voice assistant	In the connected state, press and hold the function button of the left earphone for 2 seconds to wake up the voice assistant	/	honk	6. Frequency respo	onse range :20Hz~20KHz 15, Earphone :	e time ; ₉ 3-4 hours ingle charging time ;1-2 hours	
Clear the pairing history	When the smart device is not connected, tap the function buttons of the left and right earbuds 5 times in a row	/	power off	7. Horn size; Φ 6π 8. Horn sensitivity 9. Horn impedance	y: 103db 17. Charge the headset; 2 times		

fault	cause	Resolution
Doesn't turn on	The headphones are low on battery	Charge the headphones
he headphones lash red	The headphones are low on battery	Charge the headphones
Charging is silent	The headphones were not put away	Adjust the position where the headphones are placed
Automatic power off		Charge the headphones
he headphones ave an echo	The volume is too loud or the environment is too noisy	Adjust the volume or change the environment
here is a murmur rom the headphones	Serious external interference or too far away from the phone	Change the location or be close to your phone
The other party's voice is quiet	The headphones are worn incorrectly or the volume is too low	Adjust the headset wear or volume
The signal is intermittent	Serious external interference or too far away from the phone	Choose a distraction-free environment or be close to your phone

Safety guidelines

- 1. Before using this product for the first time, please fully charge it before using it duct is not a toy, and children under the age of 12 must be used under the supervisi
- . se a 5V/1A charger that has passed the safety certification of a regular manufactur lamage to the product caused by a fast charging charger that supports high voltage harge in a safe environment, when charging the charging case, please pull out t able as soon as possible after the power is fully charged to avoid damage to the sused by long-term charging. The charging method of the charging case is the Type-
- of the earbuds will lead to a decrease in battery performance over time, which is II rechargeable batteries does not contain any maintenance components. luct comes with a healthy battery, if it has not been used for a long time, please
- t least once a month. feel skin discomfort when wearing it due to individual differences, please s
- and consult a doctor. ing this product with Bluetooth connection, please adjust the sound of the earphone
- opriate volume to avoid hearing damage caused by long-term loud volume. se this product while engaging in activities that require concentration, you should tention to your own safety and the safety of others, such as when driving or cycling, or extreme temperature and dust. roads, construction sites, railways, or walking. You should remove your headphones or adjust
- 10. Please follow the relevant regulations of your region or country and use this product
- required when driving. 11. This product contains magnetic materials, please keep away from electrical appliances with strong magnetic or electric fields, such as microwave ovens, refrigerators, etc., when using or
- placing the product. 12. It is recommended to use this product in an environment with a temperature of -0°C~45°
- When the ambient temperature is below +5°C battery performance is limited
- 13. Do not use this product in places where it is expressly prohibited to use wireless equipment otherwise it will interfere with other electronic equipment or cause other dangers,

the volume to ensure that you can hear the sounds around you, including alarms and warning

- 14. Before approaching medical or industrial equipment or boarding a plane, please ask the local staff if they can use it.
- 15. Before cleaning and maintaining this product, stop using this product, turn off all applications and disconnect all connections or cables to other equipment
- 16. Please dispose of waste electronic products properly in accordance with local laws and regulations, and do not dispose of electrical and electronic equipment, parts, batteries and other household waste.

- . Do not use abrasive cleaners to clean this product.
- Do not allow this product to be heated or close to a fire source, suchas a
- Do not expose the product to direct sunlight for a long time.
- Do not attempt to disassemble this product to make any modifications as it
- Do not use this product in rain.

Do not discard this product in fire to avoid explosion.

- If you do not plan to use this product for a long time.please store itin a dry environment and Charge the headset less once to prolong itslife and avoid
- Permanent hearing loss may occur if earphones or headphones are used at high volume for prolonged periods of time.
- Batteries may explode if not handled properly.
- Do not disassemble or dispose of batteries in fire.
- . Do not short external contacts, crush, puncture or otherwise tamper with batterie
- Follow local regulations when disposing of used batteries.

FCC Warnning

- Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection againstharmful interference in a residential installation. This equipment generates uses and can radiateradio frequency energy and, if not installed and used in accordance with the insructions, may cause harmful interference to radio
- communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct
- the interference by one or more of thefollowing measures. Reorent or relocate the receiving antenna.
- Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to

This equipment has been tested and found to comply with the limits for a

- which the receiver is connected.
- · Consult the dealer or an experienced radioTy technician for help.
- Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this
- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
- (1) This device may not cause harmful interference, and (2) this device must accept amy interference received, including interference that may cause unde sire d operation.
- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment, This eguipment should be installed and operated with minimum distance 0cm between the radiator and



产地:中国•广东

