



L U V O D I

**XM183-B172**  
**INTRODUCTION**

LUVODI LED Bathroom Mirrors , Make Life Polychrome

EN(1-8)  
CONTENTS

01 Brand Introduction ..... (01)

02 Warm Note ..... (02)

03 Q & A ..... (02)

04 Product Introductions ..... (03)

05 Detailed Instruction of Functions ..... (03)

06 Product Installation ..... (05)

07 Wiring Methods ..... (06)

Installation method of round/ oval mirror ..... (07)

Installation method of rectangular mirror ..... (08)

DE(9-16)  
Katalog

01 Über LUVODI der Marke ..... (09)

02 Hinweis ..... (10)

03 Kundenfragen und -antworten ..... (10)

04 Produktbeschreibung ..... (11)

05 Einführung in die Spiegelfunktion ..... (11)

06 Installation ..... (13)

07 Verdrahtungsmethode ..... (14)

Installationsmethode für runde und ovale Badezimmerspiegel ..... (15)

Installationsmethode für quadratische Badezimmerspiegel ..... (16)

JP(17-24)  
目次

01 ブランド紹介 ..... (17)

02 注意事項 ..... (18)

03 Q & A ..... (18)

04 製品紹介 ..... (19)

05 鏡の使用法 ..... (19)

06 取付工事手順 ..... (21)

07 電流の接続方法 ..... (22)

円形/楕円形の鏡の取付工事手順 ..... (23)

スクエア形の鏡の取付工事手順 ..... (24)

FR(25-32)  
TABLE

01 Instruction de la marque ..... (25)

02 Avis importants ..... (26)

03 Q & A ..... (26)

04 Instruction du produit ..... (27)

05 Les fonctions du miroir ..... (27)

06 Installation manuel ..... (29)

07 Méthode de câblage ..... (30)

Méthode d'installation de miroir de salle de bain rond et ovale ..... (31)

Méthode d'installation du miroir de salle de bain carré ..... (32)

ES(33-40)  
CONTENIDOS

01 Introducción de la marca ..... (33)

02 Consejos ..... (34)

03 Q & A ..... (34)

04 Descripción del Producto ..... (35)

05 Introducción a la función de espejo ..... (35)

06 Instalación del producto ..... (37)

07 Método de cableado ..... (38)

Guía para la instalación del espejo redondo y ovalado ..... (39)

Guía para la instalación del espejo cuadrado o rectangular ..... (40)

KR(41-48)  
내용물

01 브랜드 소개 ..... (41)

02 주의 사항 ..... (42)

03 Q & A ..... (42)

04 제품 소개 ..... (43)

05 기능 설명 ..... (43)

06 제품 설치 ..... (45)

07 배선 방법 ..... (46)

원형/타원형 미러 설치 방법 ..... (47)

사각거울 설치방법 ..... (48)

ITA(49-56)  
CONTENUTI

01 Introduzione del marchio ..... (49)

02 Promemoria importante ..... (50)

03 Q & A ..... (50)

04 Introduzione del prodotto ..... (51)

05 Introduzione alle funzioni dello specchio ..... (51)

06 Installazione del prodotto ..... (53)

07 Metodo di cablaggio ..... (54)

Installazione di specchio da bagno rotondo/ovale ..... (55)

Metodo di installazione dello specchio da bagno rettangolare ..... (56)

# Brand Introduction

*LUVODI LED Bathroom Mirrors, Make Life Polychrome*

*We strive to deliver real value for our customers through distinctive design, superb quality and excellent customer service at prices that reflect the real worth of our products.*

*Anti-fogging/Dimmable Light/Memory Function/3 Year Warranty*

*Perfect choice for your bathroom, bedroom and makeup room.*



- We strictly implement quality control to ensure that the products are 100% safe and qualified. If there is any problem when you receive the mirror, please feel free to contact us by email.
- If you are satisfied with the mirror, welcome to share it on social media. We look forward to your comments and video feedback as well as your suggestions for us.

## I Warm Note

- 1.If you have any confused questions about the mirror,you can e-mail us and we are willing to help you solve problem.
- 2.If you find the electronic component damaged,please contact us and we'll resend to you.



**Wiring must be installed by qualified electricians**

- If you have any suggestions or advice, please feel free to send e-mail to our customer services.

## I Q & A

*After receiving the mirror, if you have any problem, please contact customer service at the first time. We will solve the problem for you within 48 hours and you have the chance to win a small prize*

Q1: What if the mirror broken after you receive the package?

A: Please don't worry about it. Take a photo and contact our customer service, we will handle it within 48 hours for you.

Q2: The defog function does not work, how to do?

- A: 1. Check whether the switch is turn on (white means turn on)  
 2.The defog function need to be turned on after 5 minutes to work, please be patient.  
 3. If it still can't work, please contact our customer service.

Q3: The bathroom mirror button does not work?

- A: 1. Open the bathroom mirror back cover, check whether the switch is shifted, if switch shift, just restore the position.  
 2. If it's a bad connection, please rewiring.

Q4: If the inner light strap of the bathroom mirror comes off?

A: Please don't worry about it, please contact our customer service, we will quickly help you to solve such problems.

Q5: The bathroom mirror doesn't work after wiring, how to do?

A: Please make sure the null line of wire connection is correct.

Q6: Bathroom cracks on the back of the mirror, what can you do?

A: Please contact our customer service, we will send a waterproof repair subsidy to you.


Q7: How to daily maintenance of the bathroom mirror?





A: You can use the dust cloth and wipe it with warm water.

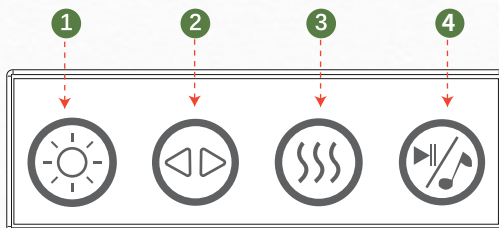

## Product Introduction

**Bluetooth name:**  
**LUVODI-mirror**



- 1  Short press for On/Off; long press to adjust brightness; After all the lights are off, long press to turn off the screen, then short press to restore the display.
- 2  Short press to switch three color temperature (Cold White, Neutral, Warm Light).
- 3  Short press to turn on/ off the defog function. Long press to enter Settings mode, short press to select the next menu, then press and hold again to adjust it. While playing music, double-click to switch to the previous song.
- 4  Long press to turn on/ off the Bluetooth function, short press to play or pause. Double click to switch to the next song.

## Four-Button Digital Display Switch + Wireless Bluetooth Audio Touch Button Description

### 1.Key Icon






















【1.1】 The key is defined from left (outlet end) to right:

①Light control ② Color temperature control ③ Anti-fog control ④ Bluetooth control





## 2. Keys operation

### 【2.1】Key functions

1.  Button: The little light icon will appear on the right side of  after clicking the on/off button , otherwise it is in off state
  - 1.1 After all the lights are off, long press  to turn off the screen, then short press  to restore the display.
  - 1.2 Short press the  to turn on/ off the light.
  - 1.3 Long press the  to adjust brightness,  will be changed according to your adjustment.
2.  Button: Short press to switch three color temperature (Cold White - Neutral - Warm Light).
3.  Button:
  - 3.1 Short press  for defog function of on/off, (The little defog icon will appear on the right side of  after clicking the on/off button, otherwise the function is in off state.
  - 3.2 Long press  to enter Settings mode, short press  to select the next menu, then press and hold again  to adjust it.
  - 3.3 While playing music, double-click the  to switch to the previous song.
4.  Button: The little Bluetooth icon will flicker on the right side of  after clicking the on/off button, otherwise the function is in off state.
  - 4.1 Long press the  to turn on/ off the Bluetooth function.
  - 4.2 Short press the  to play or pause.
  - 4.3 Double click the  to switch to the next song.




## Settings Description

Long press  to enter the Settings mode, short press  to select the next menu, then press and hold again  to set it




### 【1.1】Time Setting

The Settings are in the following order: Date(Month), Month(Date), Year, Time, Minute



Long press  to enter the Settings mode, then short tap  to set the time, the digits on the screen flashing  
Tap the  to change the digits, long tap it to switch to the next option






### 【1.2】Date Setting (Date - Month - Year or Month - Date - Year)

Long press  to enter the Settings mode, short press  once for date setting option, then long tap  to set the date






USA: Month - Date - Year

EUR: Date - Month - Year

### 【1.3】 Hour System Setting (12/24 Hours)

Long press  to enter the Settings mode, short press  twice for hour system setting option, then long tap the  to set the hour system, short tap the  to switch to 12H or 24H, “AM” and “PM” will display on the screen, then long press the  to save and exit.

### 【1.4】 Temperature Unit Setting(OF/OC)

Long press  to enter the Settings mode, short press  three times for temperature unit setting option, long tap  to enter, then press the  to choose Fahrenheit (OF) / Celsius (OC), the unit value on the screen will be changed according to your choice, then long press the  to save.



## 3. Remarks


【3.1】 Please use your mobile phone to adjust the volume if you need to adjust it while playing the music.

# Product Installation



# 06

### Recommend Height

1. When installing the bathroom mirror, please first pick up the bathroom mirror and confirm the best installation height for marking, then punch for installation
2. Make sure your face is in the middle of the mirror for a better image.

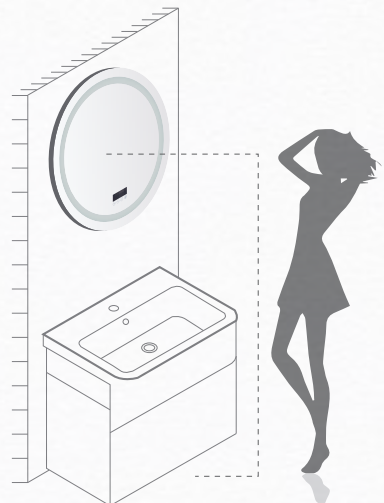



# Wiring Method

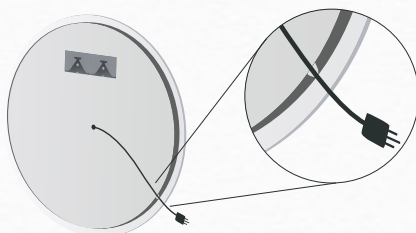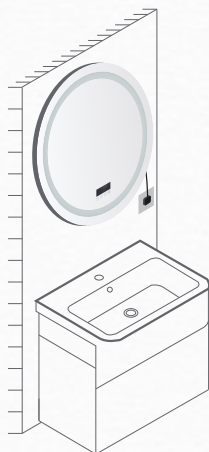

## Method 1


Extend the line of the bathroom mirror from the grooves on the side and plug it in to use.

**To reduce the risk of strangulation, the flexible cable connected to this luminaire must be fixed on the wall when the cable is in the hand region**

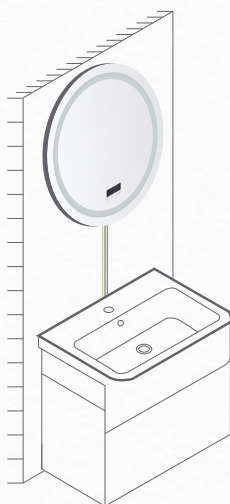

## Method 2

1. Wiring must be installed by qualified electricians
2. Please use insulating tape to protect the wires



	AU	US	EU	UK	TP	JP
L					Don't need to distinguish the wiring colors	
N						
E						
					×	



# Round /Oval Bathroom Mirror Installation



Tape Measure



Pencil



Drill




Hammer




Screwdriver




Screw Kit (Set)

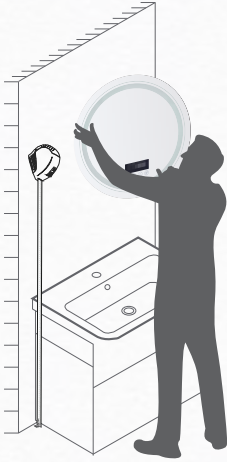


1. Measure the distance of the bathroom mirror hook.

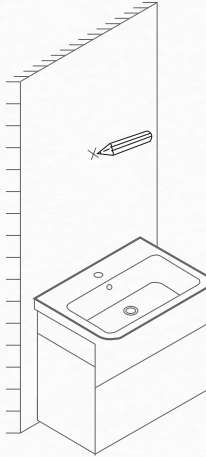


2. Lift the bathroom mirror up to confirm the best mounting height.

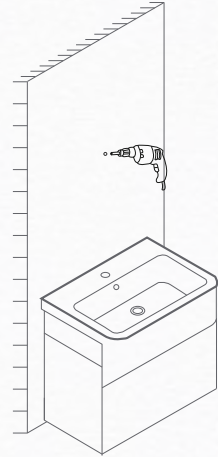


3. Mark the wall with a pencil.

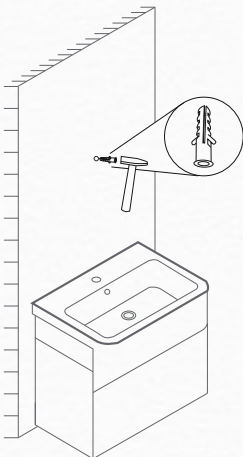

4. Drill the marks with an electric drill.

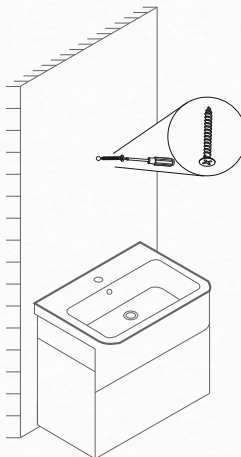

5. Drive a screw and an expansion plug into the hole.

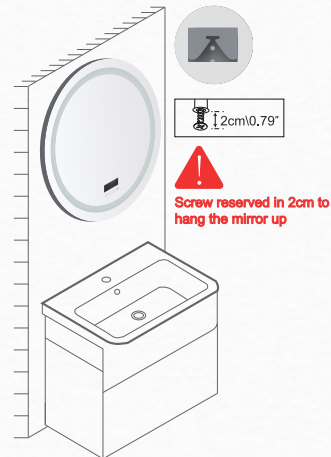

6. Hang up the bathroom mirror.

# Square Bathroom Mirror



Tape Measure



Pencil



Drill




Hammer



Screwdriver




Screw Kit (Set)

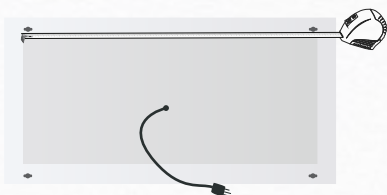


1. Measure the distance of the bathroom mirror hook.




2. Lift the bathroom mirror up to confirm the best mounting height.

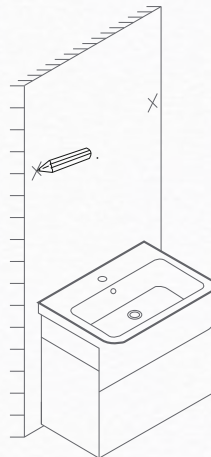


3. Mark the wall with a pencil.

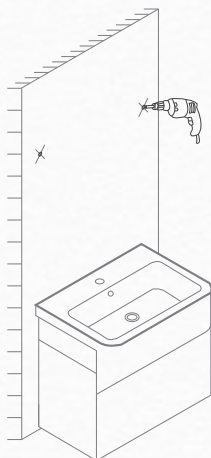

4. Drill the marks with an electric drill.

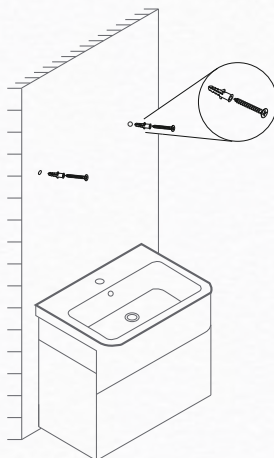

5. Drive a screw and an expansion plug into the hole.

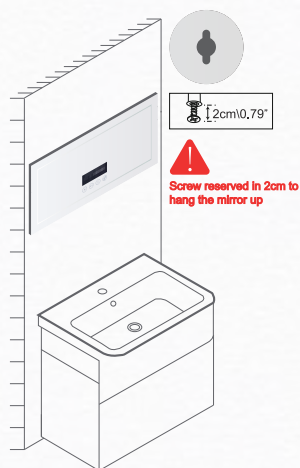

6. Hang up the bathroom mirror.

## **FCC Warning**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## **RF Exposure Statement**

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm between the radiator and your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

**Watt Range:36W**

**Output Voltage:DC12V**

**Waterproof Rating:IP56**

**LED Light Temperature:3000k to 6000k**

**Operating Temperature:-30°Cto75°C**

**CRI:≥80RA**

**Product Certification:CE**

**Input Voltage:AC100-240V**

**Service Life:>20000HRS**

**Frequency: 50Hz/60Hz**



Product Name:Bathroom Mirror

Manufacturer: Yingbo Luo

Address:Tangkengwei Tanguang Village,Tangnan Town,  
Fengshun County,Meizhou, Guangdong 514300

REPÚBLICA POPULAR DE CHINA

Country of origin:Made in China

Email:lurvodi@wisfor.com

Warning

It's an electrical product, keep the plug away from children

Dies ist ein elektrisches Produkt. Halten Sie Kinder vom Stecker fern.

Produit électrique. Gardez les enfants éloignés de la prise.

Questo è un prodotto elettrico. Tenere i bambini lontani dalla spina.

Este producto es eléctrico; evitar que los niños toquen los enchufes

電気製品なので、感電を防ぐため、子供がプラグなどに触れないようにしてください。

이 제품은 전자 제품이므로, 어린이가 플러그에 손대지 않도록 하세요.



EC

REP

**C&E Connection**

**E-Commerce (DE) GmbH**

**Zum Linnegraben 20, 65933,  
Frankfurt am Main, Germany**

**info@ce-connection.de**



FR



ÉTUI



FR

Les équipements électriques  
et électroniques, leurs  
accessoires, piles, batteries  
et cordons se recyclent

REPRISE  
À LA LIVRAISON



À DÉPOSER  
EN MAGASIN



À DÉPOSER  
EN DÉCHÈTERIE



Points de collecte sur [www.quefairede mesdechets.fr](http://www.quefairede mesdechets.fr)  
Privilégiez la réparation ou le don de votre appareil !

UK

REP

Company:YH Consulting Limited  
Address: C/O YH Consulting Limited Office 147,  
Centurion House , London Road ,  
Staines-upon-Thames , Surrey , TW18 4AX