




Angle, degrees	Freq=' 915MHz' Phi=' 0deg' dBi (GainTotal)	Freq=' 915MHz' Theta=' 90deg' dBi (GainTotal)	Freq=' 915MHz' Theta=' 90deg' dBi (GainTotal)
	Z-X plane	Z-Y plane	X-Y plane
0	-3.61	-4.86	-4.81
10	-3.17	-6.07	-5.66
20	-2.67	-7.43	-6.33
30	-2.29	-8.7	-6.86
40	-2.08	-9.52	-7.36
50	-2	-9.89	-7.91
60	-2.03	-10.08	-8.5
70	-2.16	-10.22	-9.2
80	-2.32	-10.38	-10.21
90	-2.38	-10.6	-11.78
100	-2.31	-10.79	-14.31
110	-2.17	-10.9	-18.53
120	-2.07	-10.94	-23.36
130	-2.03	-10.74	-19.21
140	-2.1	-10.06	-15.32
150	-2.27	-8.87	-13.6
160	-2.56	-7.37	-13.41
170	-2.91	-5.82	-14.59
180	-3.22	-4.47	-17.79
190	-3.47	-3.44	-24.43
200	-3.76	-2.76	-19.24
210	-4.2	-2.42	-13.32
220	-4.91	-2.39	-10.18
230	-6.01	-2.61	-8.39
240	-7.62	-2.97	-7.32
250	-9.91	-3.31	-6.57
260	-12.86	-3.57	-5.81
270	-15.36	-3.69	-4.87
280	-14.21	-3.66	-3.83
290	-11.06	-3.48	-2.93
300	-8.43	-3.22	-2.31
310	-6.54	-2.96	-2.01
320	-5.23	-2.8	-2.05
330	-4.4	-2.85	-2.42
340	-4	-3.2	-3.06
350	-3.84	-3.88	-3.89

	Antenna gain dBi
905MHz	-2.1
915, 85MHz	-2
926, 5MHz	-2.05

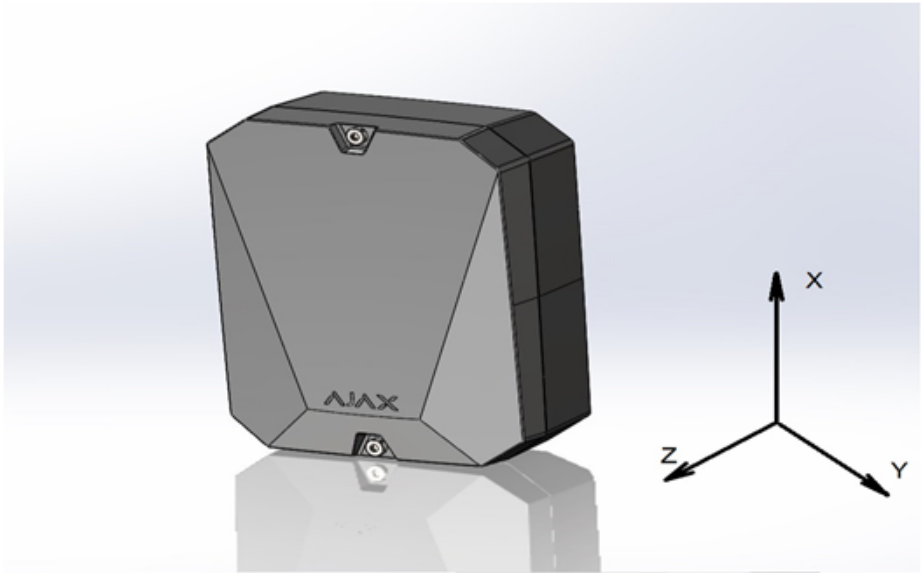


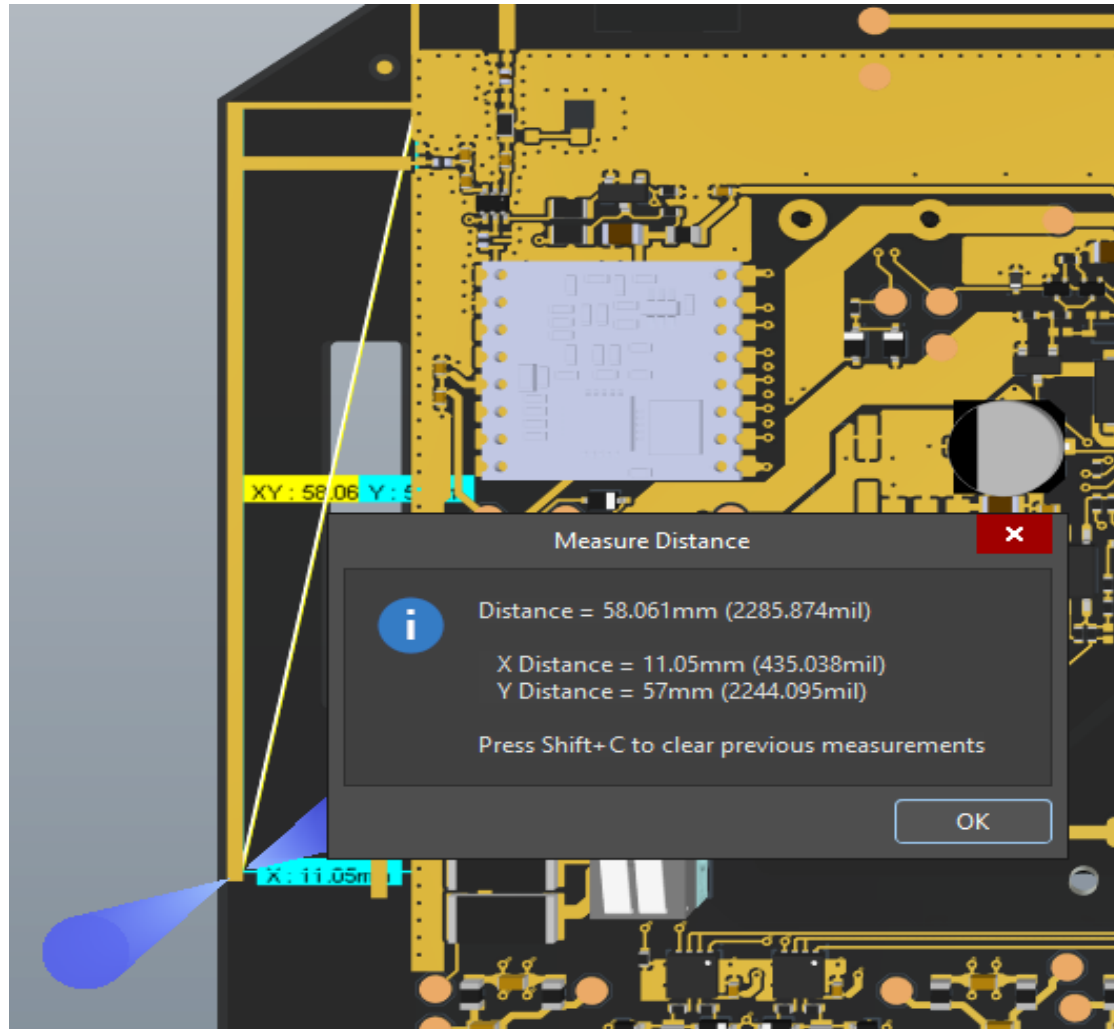

Z-X plane norm.

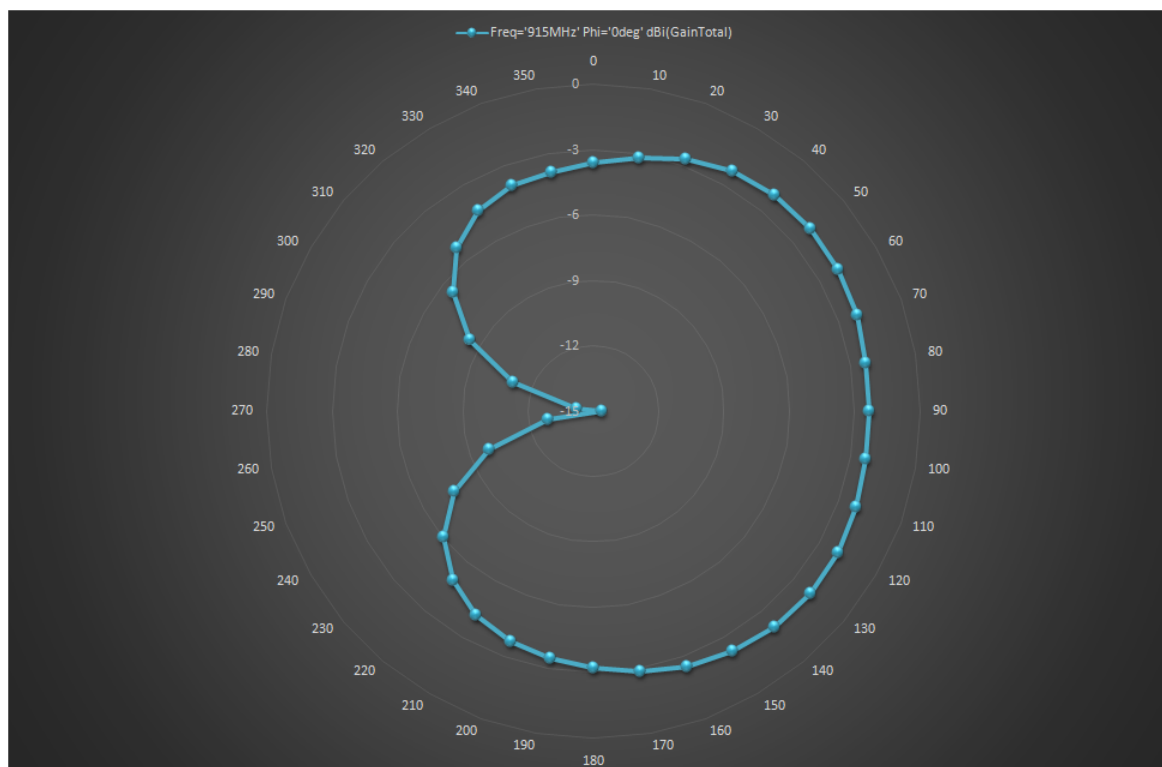

Z-Y plane norm.

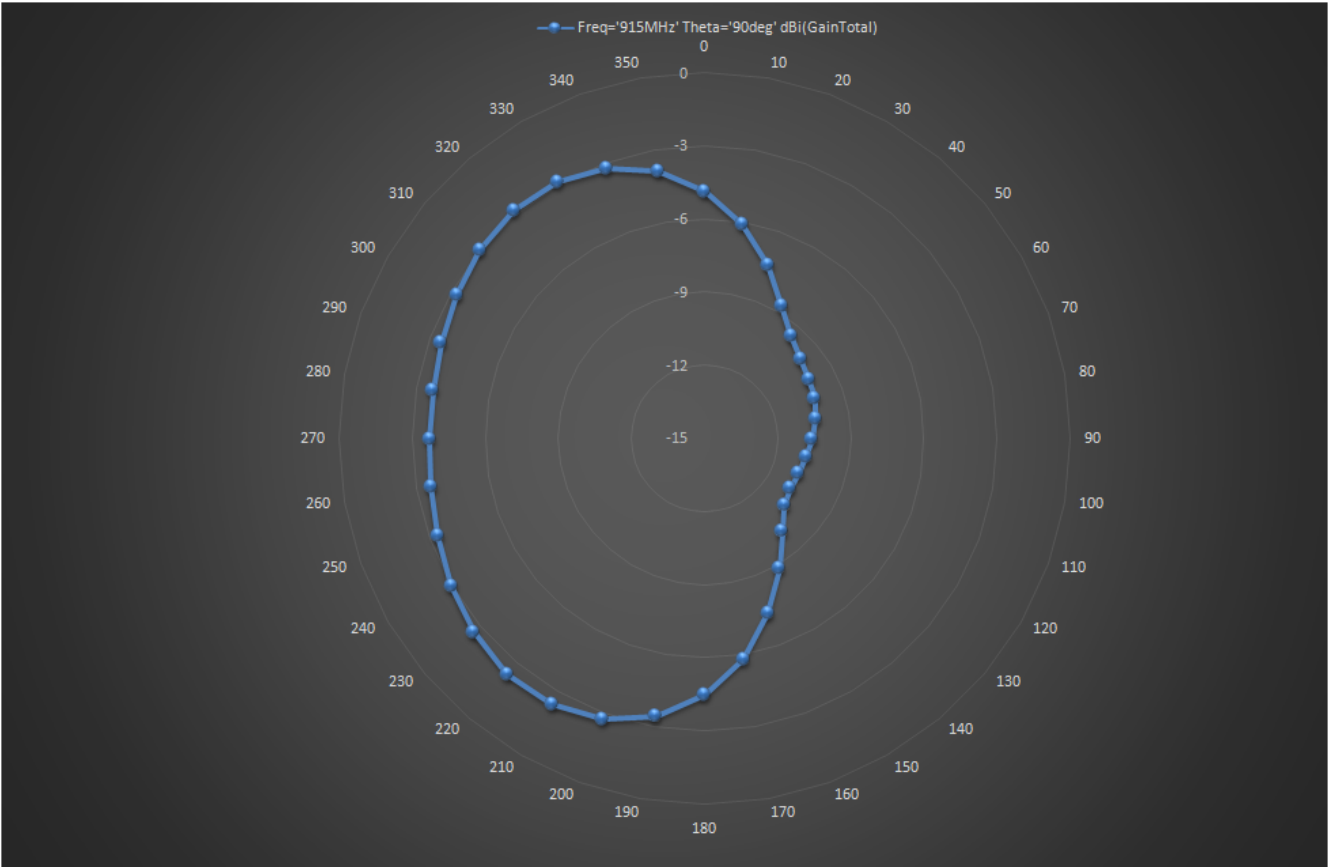

X-Y plane norm.

