

Antenna Specification

Product Model: Tapo C260

Manufacturer: TP-Link Systems Inc.

Date: 2024.10.14

Checked By: Shao Jinwei *Shao Jinwei*


TP-Link Systems Inc.
10 Mauchly, Irvine, CA 92618

Index

1.	Antenna Distribution.....	3
2.	Electrical Characteristics	3
3.	S Parameter Test Data	4
4.	Antenna Peak Gain.....	4
5.	Antenna Radiation Pattern	4

1. Antenna Distribution

Tapo C260


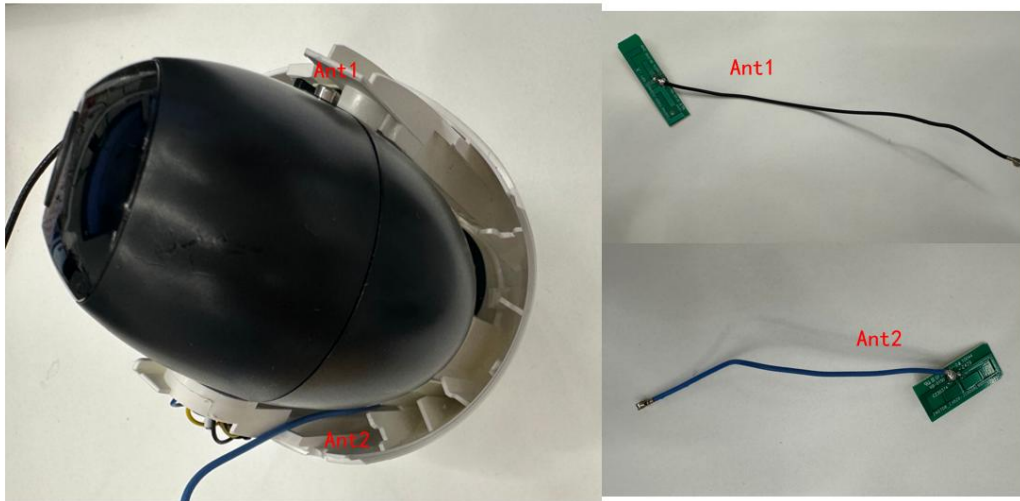


2. Electrical Characteristics

Ant1	
Frequency	2400~2500 & 5150~5895MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	0.00dBi@2400~2500MHz 1.00dBi@5150~5250MHz 1.00dBi@5250~5350MHz 1.00dBi@5470~5725MHz 1.00dBi@5725~5895MHz
Radiation pattern	Omni-Directional
P/N	Tapo C260-Ant1

Ant2	
Frequency	2400~2500 & 5150~5895MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	0.00dBi@2400~2500MHz 1.00dBi@5150~5250MHz 1.00dBi@5250~5350MHz 1.00dBi@5470~5725MHz 1.00dBi@5725~5895MHz
Radiation pattern	Omni-Directional
P/N	Tapo C260-Ant2

3. S Parameter Test Data

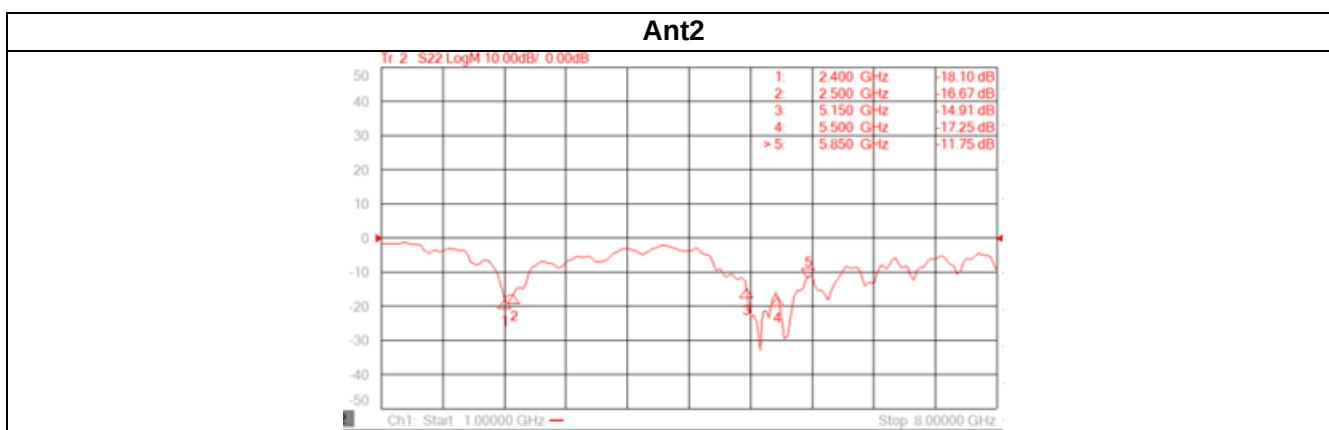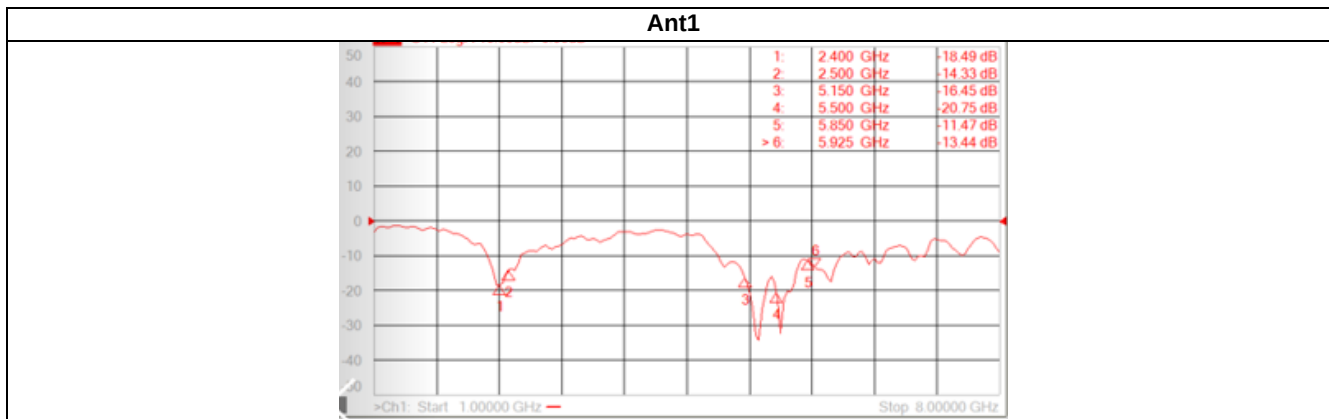

4. Antenna Peak Gain

Frequency	2.45GHz 2400~2500MHz	5.2GHz 5150~5250MHz	5.3GHz 5250~5350MHz	5.6GHz 5470~5725MHz
Ant1 MaxGain(dBi)	0.00	1.00	1.00	1.00
Ant2 MaxGain(dBi)	0.00	1.00	1.00	1.00
Max Gain(dBi)	0.00	1.00	1.00	1.00

Frequency	5.8GHz 5725~5895MHz
Ant1 MaxGain(dBi)	1.00
Ant2 MaxGain(dBi)	1.00
Max Gain(dBi)	1.00

5. Antenna Radiation Pattern

Ant1

