

FCC Test Report

Product Name	ROG STRIX Fusion Wireless
Model No.	ROGSTRIX F-WL/BLK/UBD/AS
FCC ID	BJM-ROGSTRIXFWL

Applicant	Tatung Company
Address	22 Chungshan N Road Sec 3 , Taipei 10451, Taiwan

Date of Receipt	Apr. 17, 2018
Issued Date	Jun. 27, 2018
Report No.	1840177R-RFUSP15V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Test Report

Issued Date: Jun. 27, 2018

Report No.: 1840177R-RFUSP15V00



Product Name	ROG STRIX Fusion Wireless
Applicant	Tatung Company
Address	22 Chungshan N Road Sec 3 , Taipei 10451, Taiwan
Manufacturer	Tatung Company
Model No.	ROGSTRIX F-WL/BLK/UBD/AS
EUT Rated Voltage	DC 4.2V (Power by Battery)
EUT Test Voltage	DC 4.2V (Power by Battery)
Trade Name	ASUS
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2017 ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By

:

Jinn Chen

(Senior Adm. Specialist / Jinn Chen)

Tested By

:

Nova chu

(Engineer / Nova Chu)

Approved By

:



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. EUT Description.....	4
1.2. Operational Description	6
1.3. Tested System Details.....	7
1.4. Configuration of Test System	7
1.5. EUT Exercise Software	7
1.6. Test Facility	8
1.7. List of Test Equipment	9
2. Conducted Emission	10
2.1. Test Setup	10
2.2. Limits	10
2.3. Test Procedure	11
2.4. Uncertainty	11
2.5. Test Result of Conducted Emission.....	12
3. Radiated Emission	14
3.1. Test Setup	14
3.2. Limits	15
3.3. Test Procedure	16
3.4. Uncertainty	16
3.5. Test Result of Radiated Emission.....	17
4. Band Edge	37
4.1. Test Setup	37
4.2. Limits	37
4.3. Test Procedure	38
4.4. Uncertainty	38
4.5. Test Result of Band Edge	39
5. Duty Cycle	47
5.1. Test Setup	47
5.2. Uncertainty	47
5.3. Test Result of Duty Cycle.....	48
6. EMI Reduction Method During Compliance Testing	49

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	ROG STRIX Fusion Wireless
Trade Name	ASUS
Model No.	ROGSTRIX F-WL/BLK/UBD/AS
FCC ID	BJM-ROGSTRIXFWL
Frequency Range	2405.35-2477.35MHz
Channel Number	37ch
Channel Control	Auto
Type of Modulation	Pi/4 DQPSK
Antenna Type	PCB Antenna
Antenna Gain	Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Tatung	051-044R,048-056R(Ant 1) 051-044R,048-056R(Ant 2)	PCB	5.48dBi for 2.4 GHz

Note: The antenna of EUT is conform to FCC 15.203

Center Frequency of Each Channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2405.35 MHz	Channel 11:	2425.35 MHz	Channel 21:	2445.35 MHz	Channel 31:	2465.35 MHz
Channel 2:	2407.35 MHz	Channel 12:	2427.35 MHz	Channel 22:	2447.35 MHz	Channel 32:	2467.35 MHz
Channel 3:	2409.35 MHz	Channel 13:	2429.35 MHz	Channel 23:	2449.35 MHz	Channel 33:	2469.35 MHz
Channel 4:	2411.35 MHz	Channel 14:	2431.35 MHz	Channel 24:	2451.35 MHz	Channel 34:	2471.35 MHz
Channel 5:	2413.35 MHz	Channel 15:	2433.35 MHz	Channel 25:	2453.35 MHz	Channel 35:	2473.35 MHz
Channel 6:	2415.35 MHz	Channel 16:	2435.35 MHz	Channel 26:	2455.35 MHz	Channel 36:	2475.35 MHz
Channel 7:	2417.35 MHz	Channel 17:	2437.35 MHz	Channel 27:	2457.35 MHz	Channel 37:	2477.35 MHz
Channel 8:	2419.35 MHz	Channel 18:	2439.35 MHz	Channel 28:	2459.35 MHz		
Channel 9:	2421.35 MHz	Channel 19:	2441.35 MHz	Channel 29:	2461.35 MHz		
Channel 10:	2423.35 MHz	Channel 20:	2443.35 MHz	Channel 30:	2463.35 MHz		

Note:

1. The EUT is a ROG STRIX Fusion Wireless with a built-in 2.4GHz transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance of 2.4G transmitter with Part 15 Subpart C Paragraph 15.249 for spread spectrum devices.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit
-----------	------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	Inspiron 15 3000	GT5JPJ2	N/A

Signal Cable Type		Signal cable Description
A	USB Cable	Non-Shielded, 0.9m

1.4. Configuration of Test System

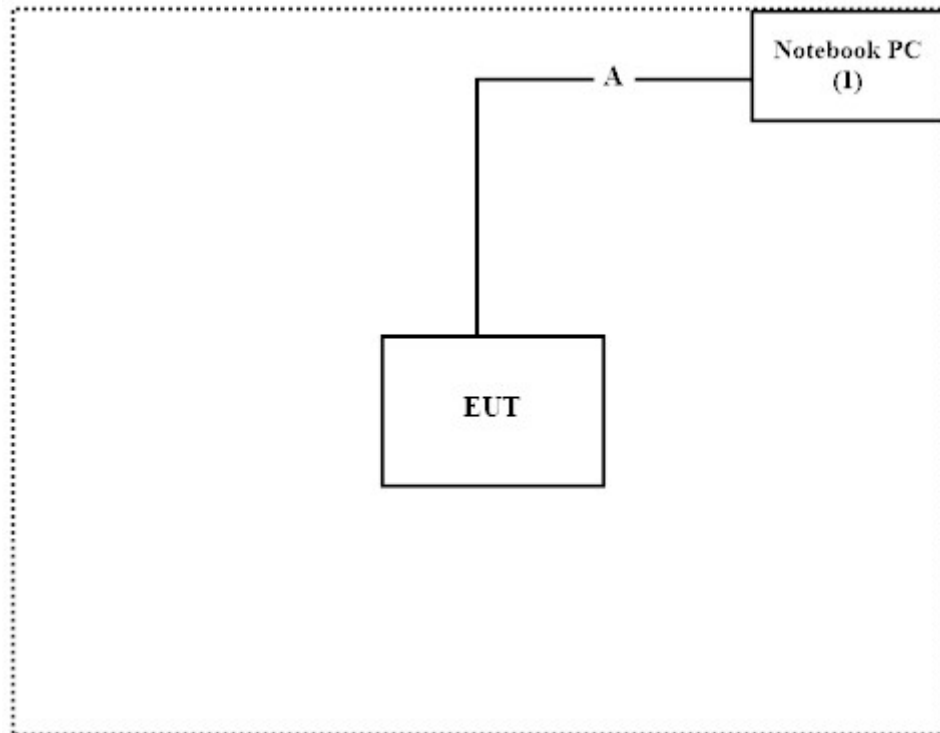

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute software "Avnera_Continue_v2017.1.20.4" on the Notebook.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press "OK" to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en.aspx

Site Description: Accredited by TAF
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd.
Site Address: No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,
New Taipei City 24457, Taiwan.
TEL: 886-2-2602-7968 / FAX : 866-2-2602-3286
E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW0023

1.7. List of Test Equipment

For Conduction measurements /ASR1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	EMI Test Receiver	R&S	ESR7	101601	2018.02.08	2019.02.07
X	Two-Line V-Network	R&S	ENV216	101306	2018.03.09	2019.03.08
X	Two-Line V-Network	R&S	ENV216	101307	2018.03.20	2019.03.19
X	Coaxial Cable	Quietek	RG400_BNC	RF001	2018.05.24	2019.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

For Conducted measurements /ASR4

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103464	2018.01.23	2019.01.22
	Power Meter	Anritsu	ML2496A	1548003	2017.12.11	2018.12.10
	Power Sensor	Anritsu	MA2411B	1531024	2017.12.11	2018.12.10
	Power Sensor	Anritsu	MA2411B	1531025	2017.12.11	2018.12.10
	Bluetooth Tester	R&S	CBT	101238	2018.01.18	2019.01.17

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek Conduction Test System V8.0.110

For Radiated measurements /ACB1


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	AMETEK	HLA6121	49611	2018.01.26	2019.01.25
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-674	2018.04.02	2019.04.01
X	Horn Antenna	ETS-Lindgren	3117	00203800	2017.11.10	2018.11.09
X	Horn Antenna	Com-Power	AH-840	101087	2018.06.01	2019.05.31
X	Pre-Amplifier	EMCI	EMC001330	980316	2018.06.01	2019.05.31
X	Pre-Amplifier	EMCI	EMC051835SE	980311	2018.06.04	2019.06.03
X	Pre-Amplifier	EMCI	EMC05820SE	980310	2018.06.04	2019.06.03
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2018.05.16	2019.05.15
	Filter	MICRO TRONICS	BRM50702	G251	2017.08.30	2018.08.29
	Filter	MICRO TRONICS	BRM50716	G188	2017.08.30	2018.08.29
X	EMI Test Receiver	R&S	ESR7	101602	2017.12.11	2018.12.10
X	Spectrum Analyzer	R&S	FSV40	101148	2018.02.08	2019.02.07
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2018.05.25	2019.05.24
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2017.08.11	2018.08.10

Note:

1. Loop Antenna is calibrated every two year, the other equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

2. Conducted Emission

2.1. Test Setup

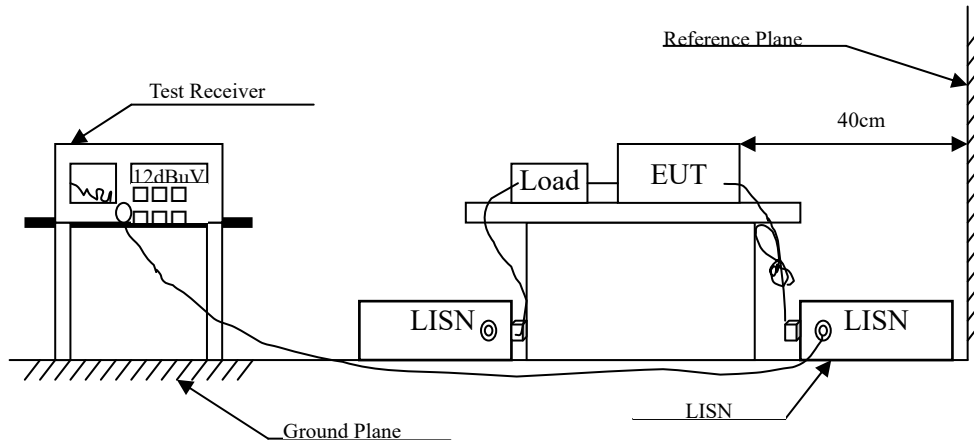

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.4. Uncertainty


± 2.35 dB

2.5. Test Result of Conducted Emission

Product : ROG STRIX Fusion Wireless
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Date : 2018/05/09
 Test Mode : Mode 1: Transmit (2441.35MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V	Margin dB	Limit dB μ V
Line 1					
Quasi-Peak					
0.150	9.611	34.821	44.432	-21.568	66.000
0.467	9.698	26.691	36.389	-20.554	56.943
1.401	9.730	19.339	29.069	-26.931	56.000
3.012	9.780	15.828	25.608	-30.392	56.000
4.884	9.829	14.085	23.914	-32.086	56.000
26.623	10.110	19.096	29.206	-30.794	60.000
Average					
0.150	9.611	19.087	28.698	-27.302	56.000
0.467	9.698	19.701	29.399	-17.544	46.943
1.401	9.730	14.153	23.883	-22.117	46.000
3.012	9.780	9.259	19.039	-26.961	46.000
4.884	9.829	8.985	18.814	-27.186	46.000
26.623	10.110	17.948	28.058	-21.942	50.000


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : ROG STRIX Fusion Wireless
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Date : 2018/05/09
 Test Mode : Mode 1: Transmit (2441.35MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V	dB	dB μ V
Line 2					
Quasi-Peak					
0.150	10.994	33.654	44.648	-21.352	66.000
0.454	9.982	26.689	36.671	-20.643	57.314
2.454	9.887	12.604	22.492	-33.508	56.000
4.994	9.870	11.761	21.631	-34.369	56.000
13.745	10.037	15.647	25.684	-34.316	60.000
17.401	10.109	14.744	24.853	-35.147	60.000
Average					
0.150	10.994	16.507	27.501	-28.499	56.000
0.454	9.982	20.580	30.562	-16.752	47.314
2.454	9.887	6.868	16.756	-29.244	46.000
4.994	9.870	6.079	15.949	-30.051	46.000
13.745	10.037	10.629	20.666	-29.334	50.000
17.401	10.109	8.522	18.631	-31.369	50.000


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor


3. Radiated Emission

3.1. Test Setup


Radiated Emission Under 30MHz

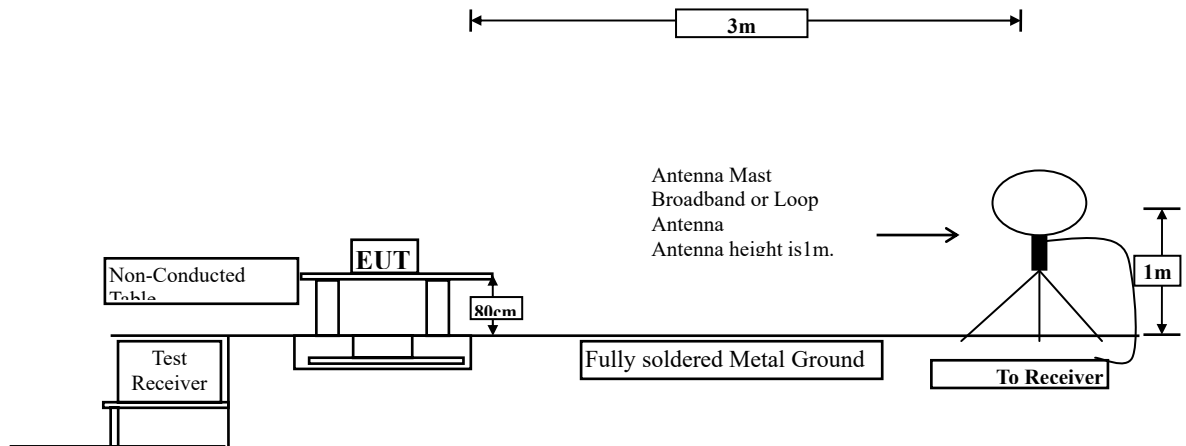

Radiated Emission Below 1GHz

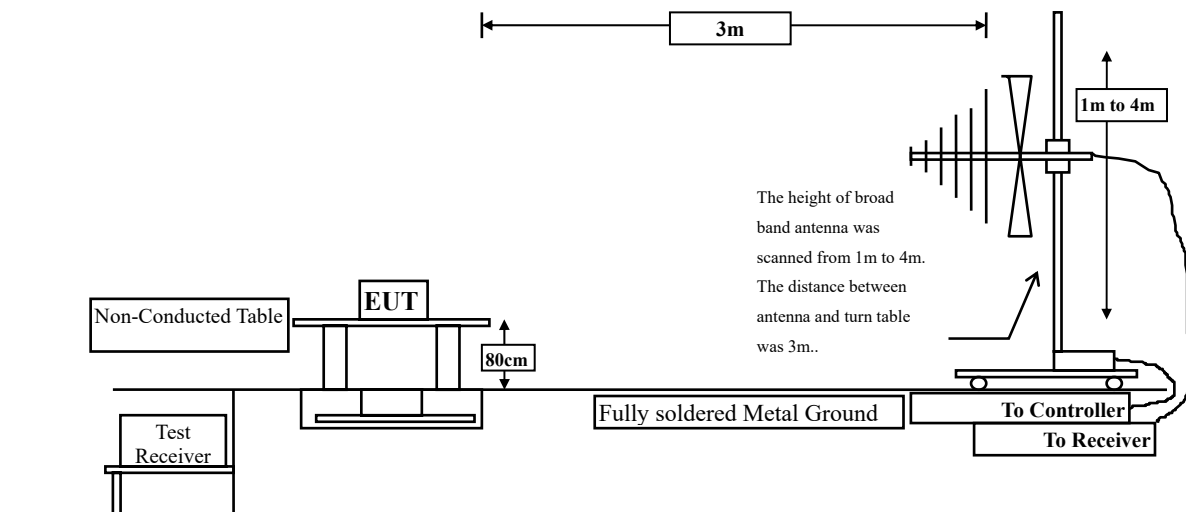

Radiated Emission Above 1GHz

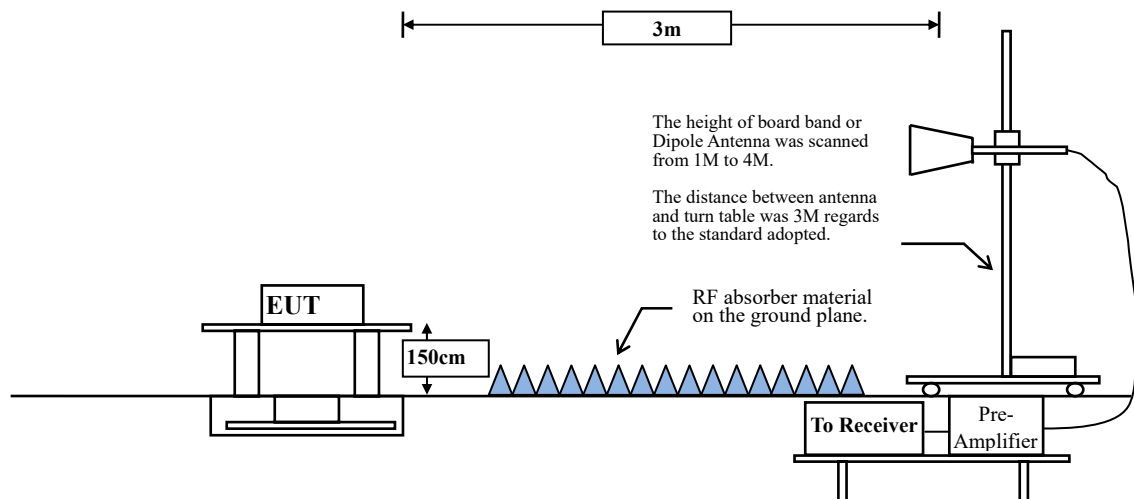

3.2. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.249 Limits				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBμV/m @3m)	(uV/m @3m)	(dBμV/m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54

Remarks : 1. RF Voltage (dBμV/m) = 20 log RF Voltage (uV/m)
 2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBμV/m) = 20 log E field strength (uV/m)

3.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.249 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level.

This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna. The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.4. Uncertainty

Horizontal :

30-300MHz: $\pm 4.08\text{dB}$; 300M-1GHz: $\pm 3.86\text{dB}$; 1-18GHz: $\pm 3.77\text{dB}$; 18-40GHz: $\pm 3.98\text{dB}$ °

Vertical :

30-300MHz: $\pm 4.81\text{dB}$; 300M-1GHz: $\pm 3.87\text{dB}$; 1-18GHz: $\pm 3.83\text{dB}$; 18-40GHz: $\pm 3.98\text{dB}$ °

3.5. Test Result of Radiated Emission

Product : ROG STRIX Fusion Wireless
 Test Item : Fundamental Radiated Emission
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (X-Axis)_Ant1

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector:					
2405.350	-8.892	109.770	100.878	-13.122	114.000
2441.350	-8.759	109.580	100.822	-13.178	114.000
2477.350	-8.625	108.250	99.625	-14.375	114.000
Vertical					
Peak Detector:					
2405.350	-8.892	103.670	94.778	-19.222	114.000
2441.350	-8.759	99.350	90.592	-23.408	114.000
2477.350	-8.625	103.040	94.415	-19.585	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Average Detector:

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Correct Factor dB	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Average Detector:					
2405.350	100.878	-26.303	74.575	-19.425	94.000
2441.350	100.822	-26.303	74.519	-19.481	94.000
2477.350	99.625	-26.303	73.322	-20.678	94.000
Vertical					
Average Detector:					
2405.350	94.778	-26.303	68.475	-25.525	94.000
2441.350	90.592	-26.303	64.289	-29.711	94.000
2477.350	94.415	-26.303	68.112	-25.888	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Fundamental Radiated Emission
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (Y-Axis) _Ant1

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
2405.350	-8.892	107.170	98.278	-15.722	114.000
2441.350	-8.759	106.500	97.742	-16.258	114.000
2477.350	-8.625	104.950	96.325	-17.675	114.000
Vertical					
Peak Detector:					
2405.350	-8.892	107.220	98.328	-15.672	114.000
2441.350	-8.759	107.940	99.182	-14.818	114.000
2477.350	-8.625	106.450	97.825	-16.175	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Correct Factor	Measurement Level	Margin	Limit
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Horizontal					
Average Detector:					
2405.350	98.278	-26.303	71.975	-22.025	94.000
2441.350	97.742	-26.303	71.439	-22.561	94.000
2477.350	96.325	-26.303	70.022	-23.978	94.000
Vertical					
Average Detector:					
2405.350	98.328	-26.303	72.025	-21.975	94.000
2441.350	99.182	-26.303	72.879	-21.121	94.000
2477.350	97.825	-26.303	71.522	-22.478	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Fundamental Radiated Emission
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (Z-Axis) _Ant1

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector:					
2405.350	-8.892	108.790	99.898	-14.102	114.000
2441.350	-8.759	109.690	100.932	-13.068	114.000
2477.350	-8.625	106.940	98.315	-15.685	114.000
Vertical					
Peak Detector:					
2405.350	-8.892	105.780	96.888	-17.112	114.000
2441.350	-8.759	104.820	96.062	-17.938	114.000
2477.350	-8.625	105.340	96.715	-17.285	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Average Detector:

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Correct Factor dB	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Average Detector:					
2405.350	99.898	-26.303	73.595	-20.405	94.000
2441.350	100.932	-26.303	74.629	-19.371	94.000
2477.350	98.315	-26.303	72.012	-21.988	94.000
Vertical					
Average Detector:					
2405.350	96.888	-26.303	70.585	-23.415	94.000
2441.350	96.062	-26.303	69.759	-24.241	94.000
2477.350	96.715	-26.303	70.412	-23.588	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Fundamental Radiated Emission
 Test Date : 2018/05/07
 Test Mode : Mode 1: Transmit (X-Axis)_Ant2

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
2405.350	-8.892	104.940	96.048	-17.952	114.000
2441.350	-8.759	104.120	95.362	-18.638	114.000
2477.350	-8.625	104.730	96.105	-17.895	114.000
Vertical					
Peak Detector:					
2405.350	-8.892	107.280	98.388	-15.612	114.000
2441.350	-8.759	106.560	97.802	-16.198	114.000
2477.350	-8.625	106.960	98.335	-15.665	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Correct Factor	Measurement Level	Margin	Limit
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Horizontal					
Average Detector:					
2405.350	96.048	-26.303	69.745	-24.255	94.000
2441.350	95.362	-26.303	69.059	-24.941	94.000
2477.350	96.105	-26.303	69.802	-24.198	94.000
Vertical					
Average Detector:					
2405.350	98.388	-26.303	72.085	-21.915	94.000
2441.350	97.802	-26.303	71.499	-22.501	94.000
2477.350	98.335	-26.303	72.032	-21.968	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Fundamental Radiated Emission
 Test Date : 2018/05/07
 Test Mode : Mode 1: Transmit (Y-Axis) _Ant2

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
2405.350	-8.892	105.560	96.668	-17.332	114.000
2441.350	-8.759	107.150	98.392	-15.608	114.000
2477.350	-8.625	105.410	96.785	-17.215	114.000
Vertical					
Peak Detector:					
2405.350	-8.892	107.170	98.278	-15.722	114.000
2441.350	-8.759	106.820	98.062	-15.938	114.000
2477.350	-8.625	104.410	95.785	-18.215	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Correct Factor	Measurement Level	Margin	Limit
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Horizontal					
Average Detector:					
2405.350	96.668	-26.303	70.365	-23.635	94.000
2441.350	98.392	-26.303	72.089	-21.911	94.000
2477.350	96.785	-26.303	70.482	-23.518	94.000
Vertical					
Average Detector:					
2405.350	98.278	-26.303	71.975	-22.025	94.000
2441.350	98.062	-26.303	71.759	-22.241	94.000
2477.350	95.785	-26.303	69.482	-24.518	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Fundamental Radiated Emission
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (Z-Axis) _Ant2

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector:					
2405.350	-8.892	107.390	98.498	-15.502	114.000
2441.350	-8.759	107.660	98.902	-15.098	114.000
2477.350	-8.625	106.300	97.675	-16.325	114.000
Vertical					
Peak Detector:					
2405.350	-8.892	105.550	96.658	-17.342	114.000
2441.350	-8.759	106.030	97.272	-16.728	114.000
2477.350	-8.625	103.770	95.145	-18.855	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Average Detector:

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Correct Factor dB	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Average Detector:					
2405.350	98.498	-26.303	72.195	-21.805	94.000
2441.350	98.902	-26.303	72.599	-21.401	94.000
2477.350	97.675	-26.303	71.372	-22.628	94.000
Vertical					
Average Detector:					
2405.350	96.658	-26.303	70.355	-23.645	94.000
2441.350	97.272	-26.303	70.969	-23.031	94.000
2477.350	95.145	-26.303	68.842	-25.158	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (2405.35MHz) _Ant1

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4810.700	-6.116	52.120	46.004	-27.996	74.000
7216.050	-3.103	47.780	44.678	-29.322	74.000
9621.400	-0.699	48.260	47.561	-26.439	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit
	Measurement	Correct Factor	Level		
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Horizontal					
Average Detector:					
4810.700	46.004	-26.303	19.701	-34.299	54.000
7216.050	44.678	-26.303	18.375	-35.625	54.000
9621.400	47.561	-26.303	21.258	-32.742	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (2405.35MHz) _Ant1

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Vertical					
Peak Detector:					
4810.700	-6.116	49.910	43.794	-30.206	74.000
7216.050	-3.103	48.950	45.848	-28.152	74.000
9621.400	-0.699	49.800	49.101	-24.899	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit
	Measurement	Correct Factor	Level		
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Vertical					
Average Detector:					
4810.700	43.794	-26.303	17.491	-36.509	54.000
7216.050	45.848	-26.303	19.545	-34.455	54.000
9621.400	49.101	-26.303	22.798	-31.202	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (2441.35MHz) _Ant1

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal**Peak Detector:**

4882.700	-6.067	50.670	44.603	-29.397	74.000
7324.050	-3.020	49.930	46.910	-27.090	74.000
9765.400	-0.521	47.390	46.869	-27.131	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit
	Measurement	Correct Factor	Level		
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m

Horizontal**Average Detector:**

4882.700	44.603	-26.303	18.300	-35.700	54.000
7323.050	46.910	-26.303	20.607	-33.393	54.000
9765.400	46.869	-26.303	20.566	-33.434	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (2441.35MHz) _Ant1

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Vertical					
Peak Detector:					
4882.700	-6.067	50.110	44.043	-29.957	74.000
7324.050	-3.020	49.540	46.520	-27.480	74.000
9765.400	-0.521	48.160	47.639	-26.361	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Correct Factor	Measurement Level	Margin	Limit
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Vertical					
Average Detector:					
4882.700	44.043	-26.303	17.740	-36.260	54.000
7323.050	46.520	-26.303	20.217	-33.783	54.000
9765.400	47.639	-26.303	21.336	-32.664	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (2477.35MHz) _Ant1

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m

Horizontal**Peak Detector:**

4954.700	-6.057	50.410	44.353	-29.647	74.000
7432.050	-2.881	49.140	46.258	-27.742	74.000
9909.400	-0.321	46.350	46.029	-27.971	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit
	Measurement	Correct Factor	Level		
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m

Horizontal**Average Detector:**

4954.700	44.353	-26.303	18.050	-35.950	54.000
7432.050	46.258	-26.303	19.955	-34.045	54.000
9909.400	46.029	-26.303	19.726	-34.274	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (2477.35MHz) _Ant1

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Vertical					
Peak Detector:					
4954.700	-6.057	49.910	43.853	-30.147	74.000
7432.050	-2.881	49.710	46.828	-27.172	74.000
9909.400	-0.321	47.450	47.129	-26.871	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit
	Measurement	Correct Factor	Level		
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Vertical					
Average Detector:					
4954.700	43.853	-26.303	17.550	-36.450	54.000
7432.050	46.828	-26.303	20.525	-33.475	54.000
9909.400	47.129	-26.303	20.826	-33.174	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (2405.35MHz) _Ant2

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4810.700	-6.116	53.870	47.754	-26.246	74.000
7216.050	-3.103	50.920	47.818	-26.182	74.000
9621.400	-0.699	53.530	52.831	-21.169	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit
	Measurement	Correct Factor	Level		
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Horizontal					
Average Detector:					
4810.700	47.754	-26.303	21.451	-32.549	54.000
7216.050	47.818	-26.303	21.515	-32.485	54.000
9621.400	52.831	-26.303	26.528	-27.472	54.000

Note:

3. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
4. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (2405.35MHz) _Ant2

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Vertical					
Peak Detector:					
4810.700	-6.116	53.190	47.074	-26.926	74.000
7216.050	-3.103	50.540	47.438	-26.562	74.000
9621.400	-0.699	51.850	51.151	-22.849	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit
	Measurement	Correct Factor	Level		
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Vertical					
Average Detector:					
4810.700	47.074	-26.303	20.771	-33.229	54.000
7216.050	47.438	-26.303	21.135	-32.865	54.000
9621.400	51.151	-26.303	24.848	-29.152	54.000

Note:

3. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
4. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (2441.35MHz) _Ant2

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4882.700	-6.067	50.920	44.853	-29.147	74.000
7324.050	-3.020	48.700	45.680	-28.320	74.000
9765.400	-0.521	49.310	48.789	-25.211	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit
	Measurement	Correct Factor	Level		
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Horizontal					
Average Detector:					
4882.700	44.853	-26.303	18.550	-35.450	54.000
7323.050	45.680	-26.303	19.377	-34.623	54.000
9765.400	48.789	-26.303	22.486	-31.514	54.000

Note:

3. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
4. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (2441.35MHz) _Ant2

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Vertical					
Peak Detector:					
4882.700	-6.067	50.630	44.563	-29.437	74.000
7324.050	-3.020	49.120	46.100	-27.900	74.000
9765.400	-0.521	47.330	46.809	-27.191	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Correct Factor	Measurement Level	Margin	Limit
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Vertical					
Average Detector:					
4882.700	44.563	-26.303	18.260	-35.740	54.000
7323.050	46.100	-26.303	19.797	-34.203	54.000
9765.400	46.809	-26.303	20.506	-33.494	54.000

Note:

3. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
4. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (2477.35MHz) _Ant2

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4954.700	-6.057	51.400	45.343	-28.657	74.000
7432.050	-2.881	48.560	45.678	-28.322	74.000
9909.400	-0.321	46.990	46.669	-27.331	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit
	Measurement	Correct Factor	Level		
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Horizontal					
Average Detector:					
4954.700	45.343	-26.303	19.040	-34.960	54.000
7432.050	45.678	-26.303	19.375	-34.625	54.000
9909.400	46.669	-26.303	20.366	-33.634	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2018/05/08
 Test Mode : Mode 1: Transmit (2477.35MHz) _Ant2

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Vertical					
Peak Detector:					
4954.700	-6.057	50.270	44.213	-29.787	74.000
7432.050	-2.881	50.290	47.408	-26.592	74.000
9909.400	-0.321	46.360	46.039	-27.961	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit
	Measurement	Correct Factor	Level		
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m
Vertical					
Average Detector:					
4954.700	44.213	-26.303	17.910	-36.090	54.000
7432.050	47.408	-26.303	21.105	-32.895	54.000
9909.400	46.039	-26.303	19.736	-34.264	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : General Radiated Emission Data
 Test Date : 2018/05/04
 Test Mode : Mode 1: Transmit (2441.35MHz) _Ant1

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
194.478	-13.701	46.023	32.322	-11.178	43.500
336.464	-9.521	32.213	22.692	-23.308	46.000
457.362	-6.727	37.580	30.853	-15.147	46.000
613.406	-3.974	28.961	24.987	-21.013	46.000
755.391	-2.045	29.121	27.076	-18.924	46.000
897.377	-0.355	29.305	28.951	-17.049	46.000
Vertical					
184.638	-13.063	35.170	22.107	-21.393	43.500
312.565	-10.066	33.603	23.537	-22.463	46.000
454.551	-6.774	28.968	22.194	-23.806	46.000
617.623	-3.950	28.252	24.303	-21.697	46.000
787.725	-1.811	29.558	27.747	-18.253	46.000
901.594	-0.303	29.031	28.728	-17.272	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.
7. No emission found between lowest internal used/generated frequency to 30MHz.

Product : ROG STRIX Fusion Wireless
 Test Item : General Radiated Emission Data
 Test Date : 2018/05/04
 Test Mode : Mode 1: Transmit (2441.35MHz)_Ant2

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
260.551	-11.949	44.476	32.527	-13.473	46.000
437.681	-7.153	44.862	37.710	-8.290	46.000
527.652	-5.590	30.438	24.847	-21.153	46.000
669.638	-3.477	29.389	25.912	-20.088	46.000
783.507	-1.843	29.213	27.370	-18.630	46.000
925.493	-0.043	29.479	29.436	-16.564	46.000
Vertical					
239.464	-12.295	45.452	33.157	-12.843	46.000
370.203	-8.754	32.450	23.697	-22.303	46.000
470.014	-6.518	35.918	29.400	-16.600	46.000
619.029	-3.941	29.556	25.615	-20.385	46.000
775.072	-1.905	29.074	27.169	-18.831	46.000
917.058	-0.135	29.254	29.118	-16.882	46.000


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.
7. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge

4.1. Test Setup

RF Radiated Measurement:

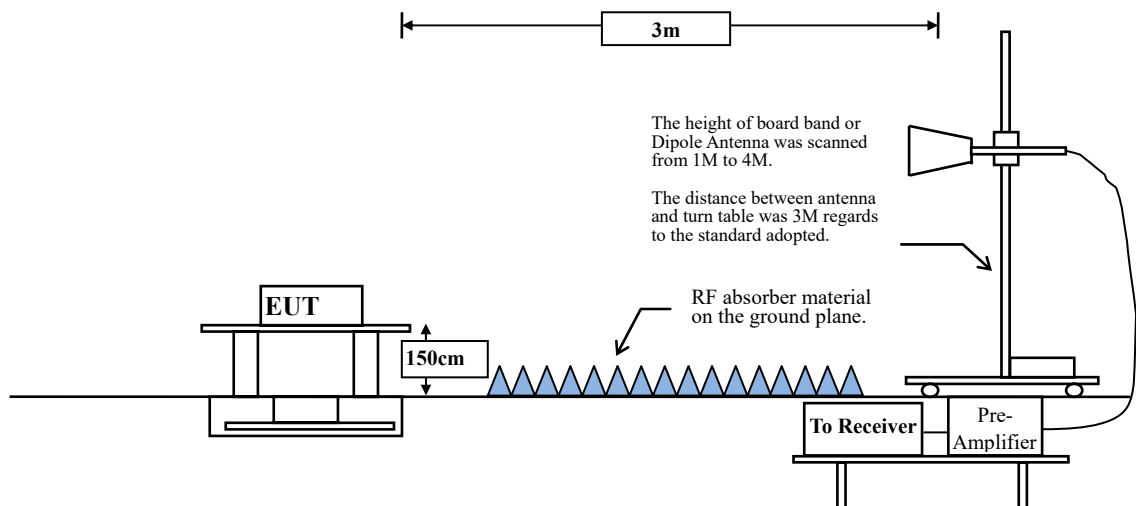

4.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBμV /m) = 20 log E field strength (uV/m)

4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

4.4. Uncertainty

Horizontal polarization : 1-18GHz: ± 3.77 dB

Vertical polarization : 1-18GHz : ± 3.83 dB


4.5. Test Result of Band Edge

Product : ROG STRIX Fusion Wireless
 Test Item : Band Edge Data
 Test Date : 2018/05/04
 Test Mode : Mode 1: Transmit (2405.35MHz)_Ant1

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
01 (Peak)	2387.391	10.251	37.543	47.794	74.00	54.00	Pass
01 (Peak)	2390.000	10.262	36.695	46.957	74.00	54.00	Pass
01 (Peak)	2400.000	10.304	54.949	65.252	74.00	54.00	Pass
01 (Peak)	2405.652	10.326	88.372	98.698	--	--	--

Figure Channel 1: Horizontal (Peak)

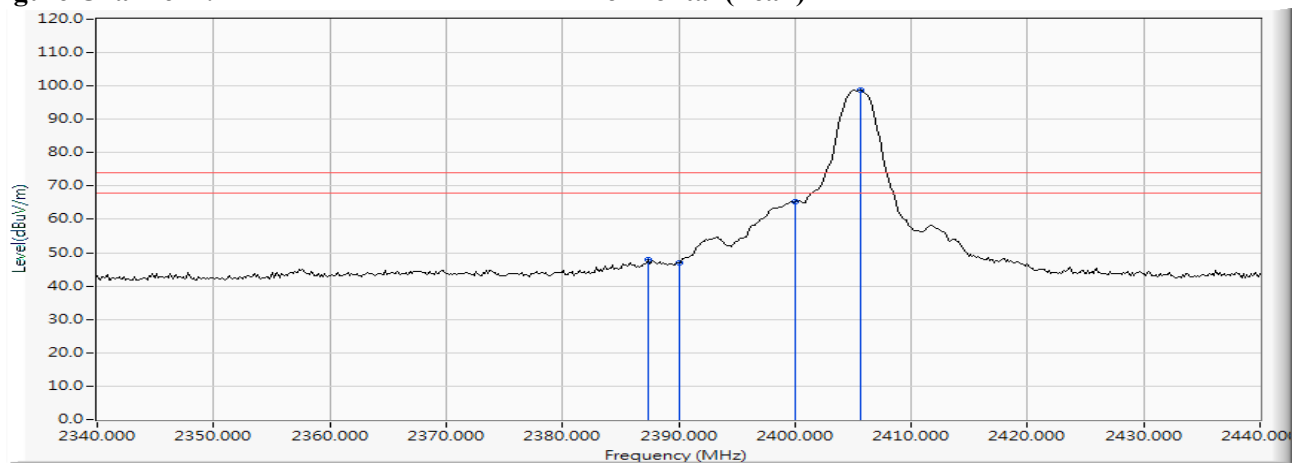

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
01 (Average)	2387.391	47.794	-26.303	21.491	74.00	54.00	Pass
01 (Average)	2390.000	46.957	-26.303	20.654	74.00	54.00	Pass
01 (Average)	2400.000	65.252	-26.303	38.949	74.00	54.00	Pass
01 (Average)	2405.652	98.698	-26.303	72.395	--	--	--


Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Band Edge Data
 Test Date : 2018/05/04
 Test Mode : Mode 1: Transmit (2405.35MHz) _Ant1

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
01 (Peak)	2387.971	10.253	37.374	47.628	74.00	54.00	Pass
01 (Peak)	2390.000	10.262	37.292	47.554	74.00	54.00	Pass
01 (Peak)	2400.000	10.304	55.838	66.141	74.00	54.00	Pass
01 (Peak)	2405.652	10.326	89.285	99.611	--	--	--

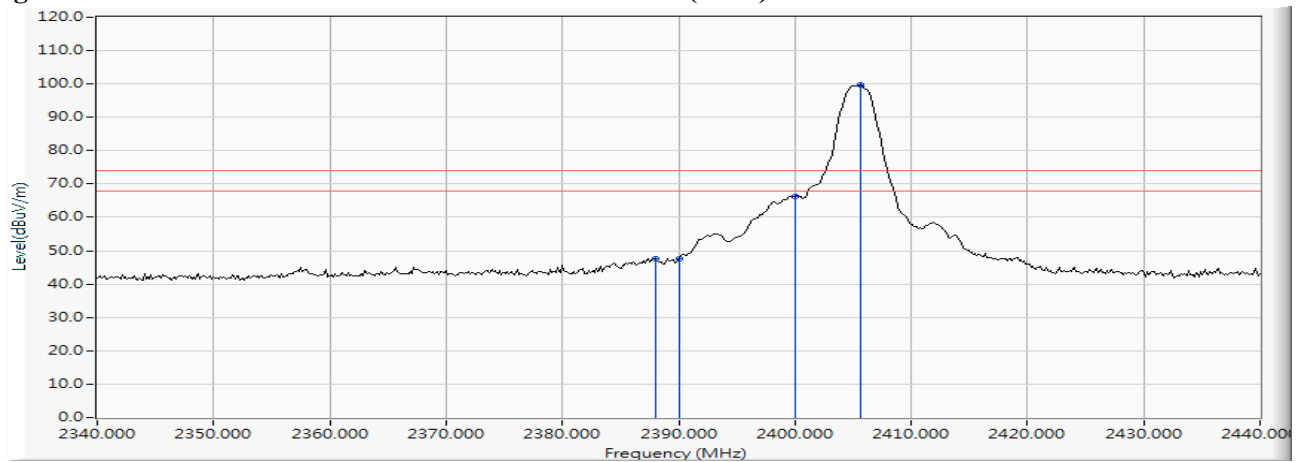Figure Channel 1: Vertical (Peak)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Channel No.	Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Average Measurement (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
01 (Average)	2387.971	47.628	-26.303	21.325	74.00	54.00	Pass
01 (Average)	2390.000	47.554	-26.303	21.251	74.00	54.00	Pass
01 (Average)	2400.000	55.838	-26.303	29.535	74.00	54.00	Pass
01 (Average)	2405.652	99.611	-26.303	73.308	--	--	--


Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Band Edge Data
 Test Date : 2018/05/04
 Test Mode : Mode 1: Transmit (2477.35MHz) _Ant1

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
37 (Peak)	2477.123	10.616	87.156	97.772	--	--	--
37 (Peak)	2483.500	10.640	46.965	57.606	74.00	54.00	Pass
37 (Peak)	2483.935	10.644	47.482	58.125	74.00	54.00	Pass

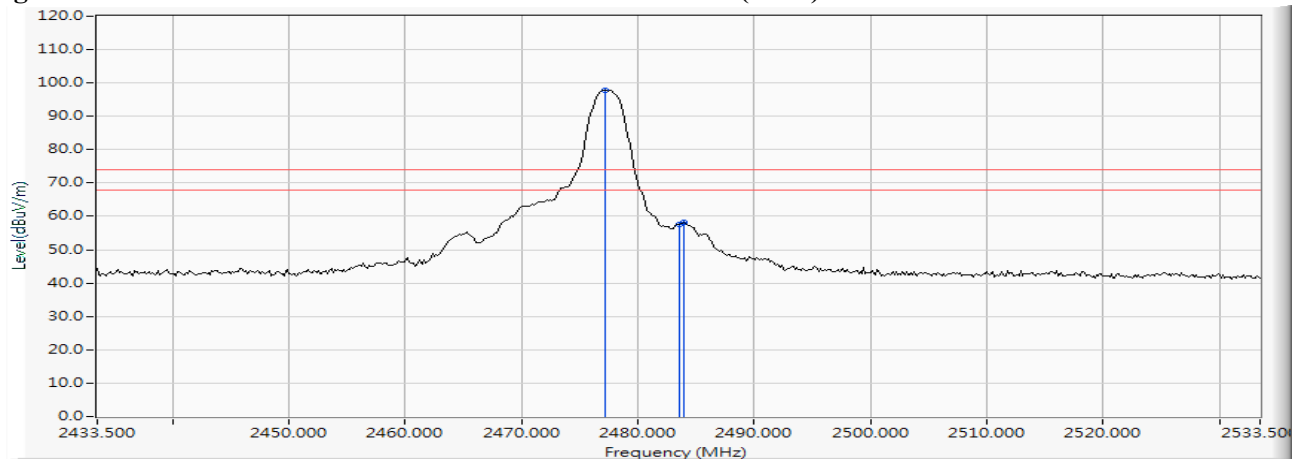Figure Channel 37:**Horizontal (Peak)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Channel No.	Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Average Measurement (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
37 (Average)	2477.123	97.772	-26.303	71.469	--	--	--
37 (Average)	2483.500	57.606	-26.303	31.303	74.00	54.00	Pass
37 (Average)	2483.935	58.125	-26.303	31.822	74.00	54.00	Pass


Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Band Edge Data
 Test Date : 2018/05/04
 Test Mode : Mode 1: Transmit (2477.35MHz) _Ant1

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
37 (Peak)	2477.123	10.616	88.473	99.089	--	--	--
37 (Peak)	2483.500	10.640	48.280	58.921	74.00	54.00	Pass
37 (Peak)	2483.790	10.643	48.848	59.490	74.00	54.00	Pass

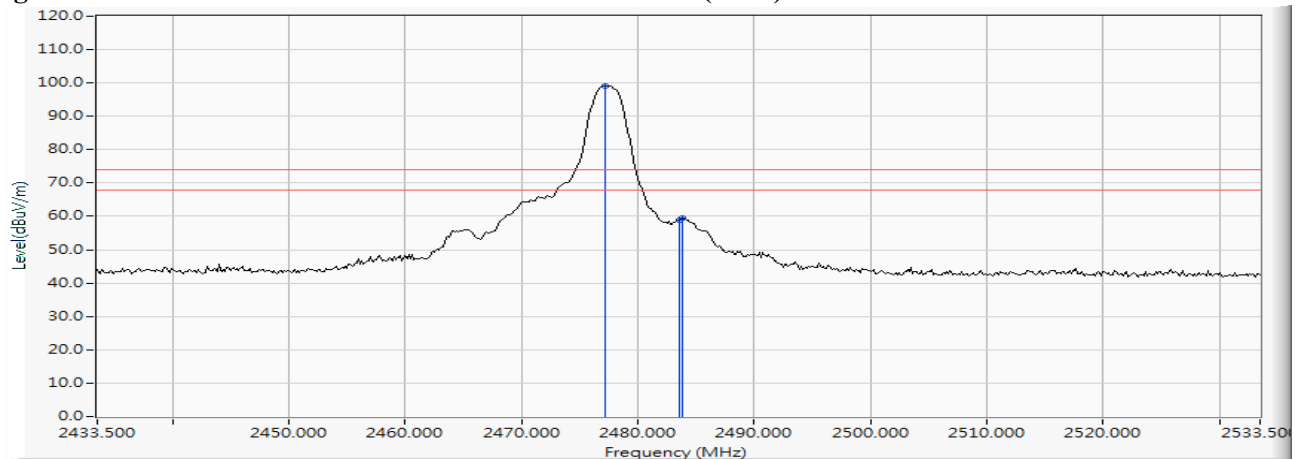Figure Channel 37:**Vertical (Peak)**

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Channel No.	Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Average Measurement (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
37 (Average)	2477.123	99.089	-26.303	72.786	--	--	--
37 (Average)	2483.500	58.921	-26.303	32.618	74.00	54.00	Pass
37 (Average)	2483.790	59.490	-26.303	33.187	74.00	54.00	Pass


Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Band Edge Data
 Test Date : 2018/05/04
 Test Mode : Mode 1: Transmit (2405.35MHz)_Ant2

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
01 (Peak)	2388.696	10.257	37.099	47.356	74.00	54.00	Pass
01 (Peak)	2390.000	10.262	36.525	46.787	74.00	54.00	Pass
01 (Peak)	2400.000	10.304	54.455	64.758	74.00	54.00	Pass
01 (Peak)	2405.652	10.326	87.814	98.140	--	--	--

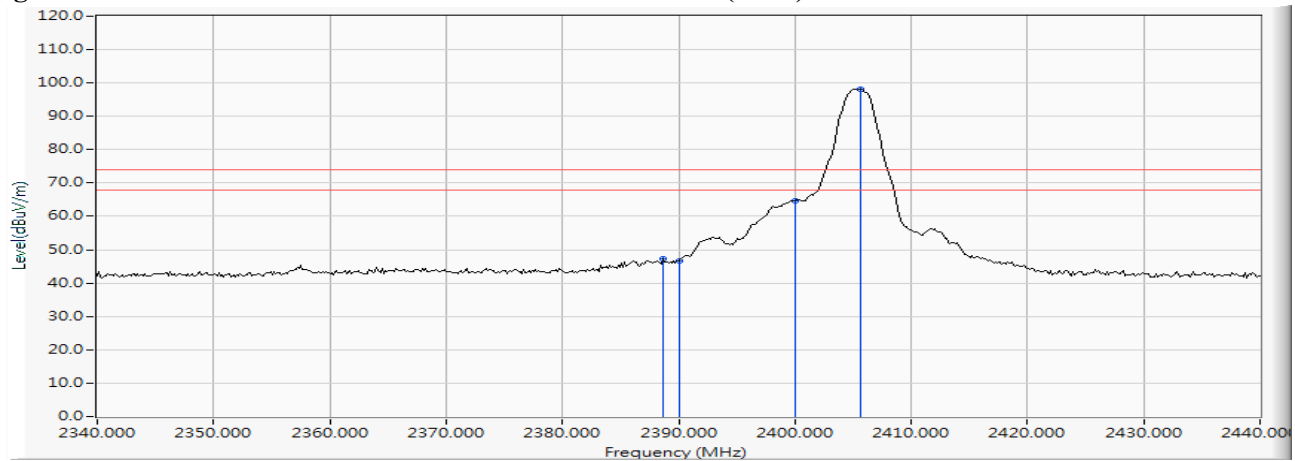Figure Channel 1:**Horizontal (Peak)**

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
01 (Average)	2388.696	47.356	-26.303	21.053	74.00	54.00	Pass
01 (Average)	2390.000	46.787	-26.303	20.484	74.00	54.00	Pass
01 (Average)	2400.000	64.758	-26.303	38.455	74.00	54.00	Pass
01 (Average)	2405.625	98.140	-26.303	71.837	--	--	--


Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Band Edge Data
 Test Date : 2018/05/04
 Test Mode : Mode 1: Transmit (2405.35MHz) _Ant2

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
01 (Peak)	2389.420	10.260	33.459	43.719	74.00	54.00	Pass
01 (Peak)	2390.000	10.262	32.910	43.172	74.00	54.00	Pass
01 (Peak)	2400.000	10.304	46.747	57.050	74.00	54.00	Pass
01 (Peak)	2405.652	10.326	79.249	89.575	--	--	--

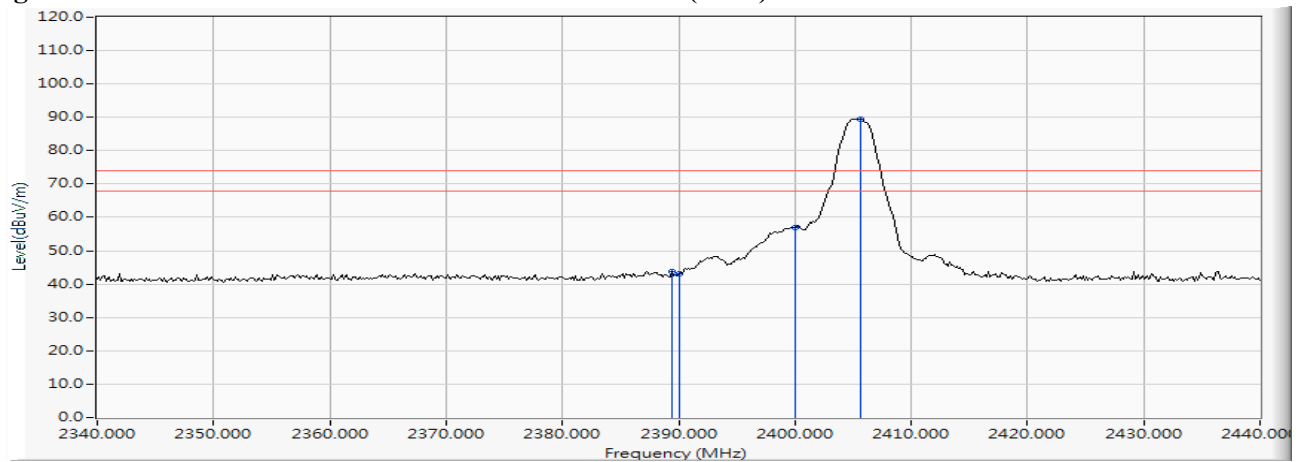Figure Channel 1:**Vertical (Peak)**

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Channel No.	Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Average Measurement (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
01 (Average)	2389.420	43.719	-26.303	17.416	74.00	54.00	Pass
01 (Average)	2390.000	43.172	-26.303	16.869	74.00	54.00	Pass
01 (Average)	2400.000	57.050	-26.303	30.747	74.00	54.00	Pass
01 (Average)	2405.652	89.575	-26.303	63.272	--	--	--


Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Band Edge Data
 Test Date : 2018/05/04
 Test Mode : Mode 1: Transmit (2477.35MHz) _Ant2

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
37 (Peak)	2477.123	10.616	80.814	91.430	--	--	--
37 (Peak)	2483.500	10.640	40.980	51.621	74.00	54.00	Pass
37 (Peak)	2483.935	10.644	41.638	52.281	74.00	54.00	Pass

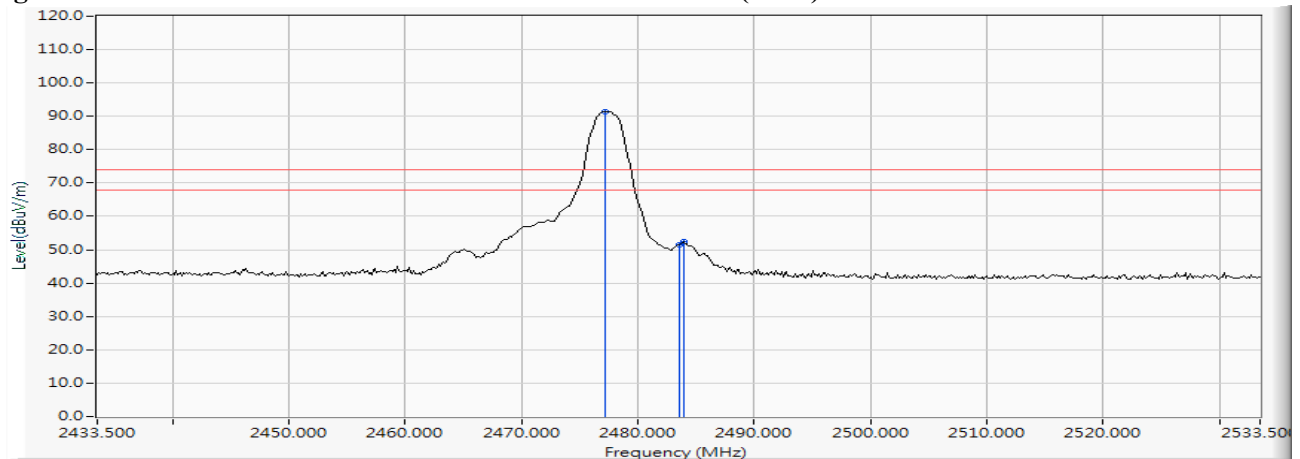Figure Channel 37:**Horizontal (Peak)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Channel No.	Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Average Measurement (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
37 (Average)	2477.123	91.430	-26.303	65.127	--	--	--
37 (Average)	2483.500	51.621	-26.303	25.318	74.00	54.00	Pass
37 (Average)	2483.935	52.281	-26.303	25.978	74.00	54.00	Pass


Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : ROG STRIX Fusion Wireless
 Test Item : Band Edge Data
 Test Date : 2018/05/04
 Test Mode : Mode 1: Transmit (2477.35MHz) _Ant2

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
37 (Peak)	2477.123	10.616	74.311	84.927	--	--	--
37 (Peak)	2483.500	10.640	36.228	46.869	74.00	54.00	Pass
37 (Peak)	2484.225	10.645	37.024	47.668	74.00	54.00	Pass

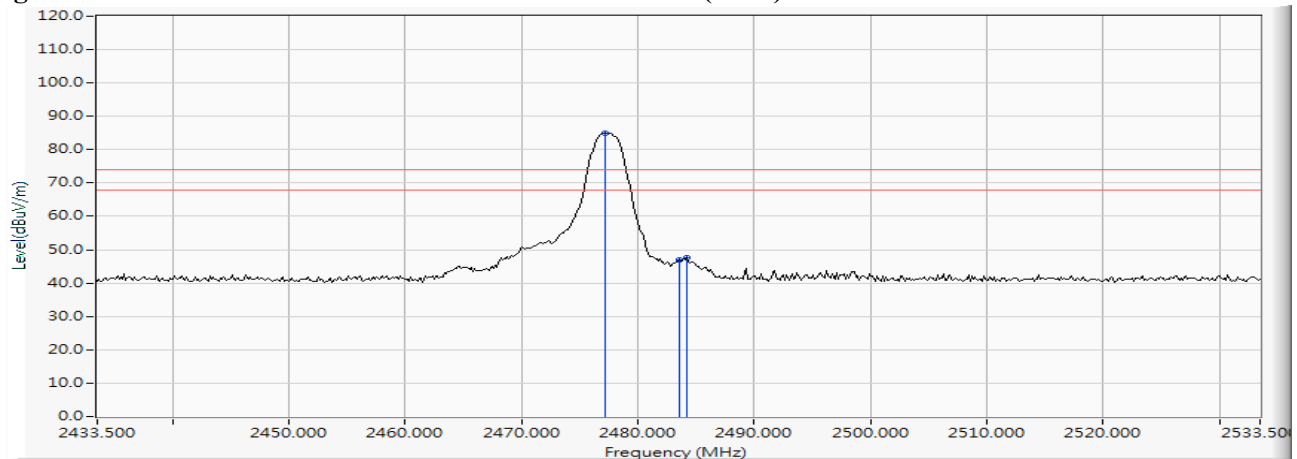Figure Channel 37:**Vertical (Peak)**

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Average Measurement (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
37 (Average)	2477.123	84.927	-26.303	58.624	--	--	--
37 (Average)	2483.500	36.228	-26.303	9.925	74.00	54.00	Pass
37 (Average)	2484.225	47.668	-26.303	21.365	74.00	54.00	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

5. Duty Cycle

5.1. Test Setup

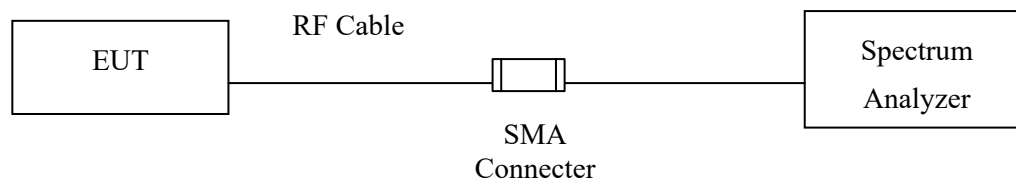


5.2. Uncertainty


$\pm 2.31\text{ms}$

5.3. Test Result of Duty Cycle

Product : ROG STRIX Fusion Wireless
 Test Item : Duty Cycle Data
 Test Mode : Mode 1: Transmit

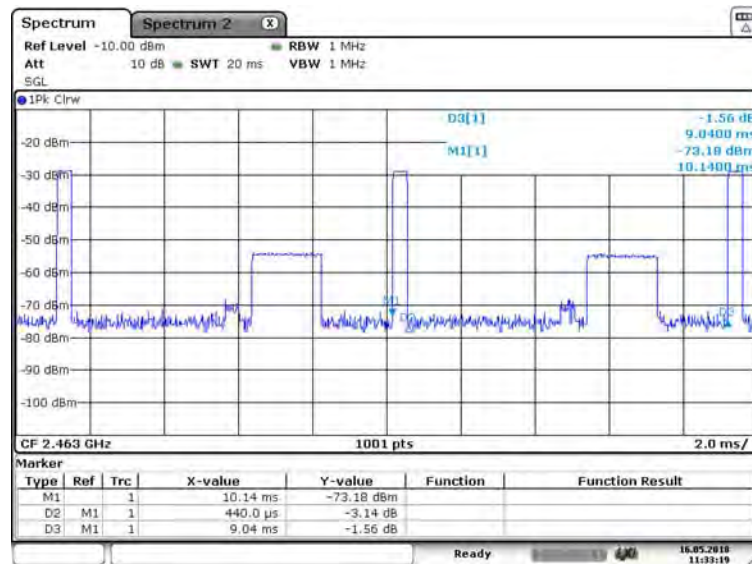

Date: 16 MAY 2018 11:33:19

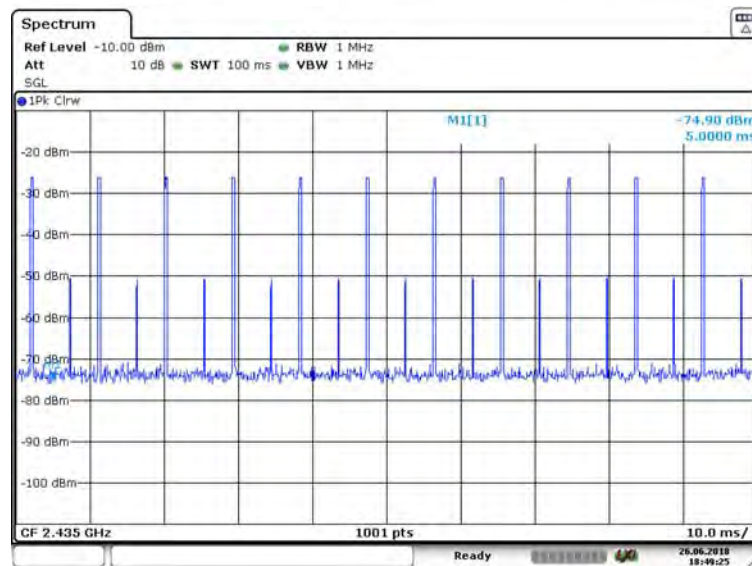

Date: 26 JUN 2018 18:49:28

Note: The signals which are under -50dBm are transmitted by the ancillaries.

Time on of 100ms= 440us*11= 4.84ms

Duty Cycle= 4.84ms / 100ms= 0.0484

Duty Cycle correction factor= 20 LOG 0.0484= -26.303 dB

Duty Cycle correction factor	-26.303	dB
------------------------------	---------	----

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.