



Y19说明书规格：
材质：128G 铜版纸



PORTABLE CD PLAYER
Ver1.0

Y19

WHAT'S IN THE BOX?



① CD Player



② Type-C charging cable



③ Remote control



④ 3.5mm aux cable




⑤ Instruction manual

PRODUCT SPECIFICATIONS


Product name	CD Player
Input power	DC 5V/2A
Bluetooth version	5.0
BT protocol support	ADP/AVRCP
BT receiving distance	10M
Battery capacity	3.6V/2600mAh
Output Power	speaker(4Ω)2X2W; earphone(16Ω)2X20mW
USB playback format	MP3/WMA/WAV/APE/FLAC
CD playback format	CD-DA/MP3/CD-R
Audio In	3.5mm Audio In
Analog audio output	3.5mm stereo headphone output
Charging cable length	80CM
Product Size	160x200x46.5mm
Product weight	about 490g
Product accessories	(charging cable, audio cable, manual, remote)×1

BUTTON PANEL CONTROLS





- ①UPPER COVER
②LEFT CHANNEL SPEAKER
③STANDBY/ON
④SHORT PRESS:INPUT SOURCE SELECTION(CD,USB,AUX,BT)
LONG PRESS:BT TRANSMITTER SWITCH
⑤STOP
⑥LED DISPLAY
⑦SHORT PRESS:PLAY/PAUSE
LONG PRESS:CYCLE MODE SELECTION
⑧SHORT PRESS:PREVIOUS
LONG PRESS:VOLUME+
⑨SHORT PRESS:NEXT
LONG PRESS:VOLUME-
⑩RIGHT CHANNEL SPEAKER

REAR PANEL CONNECTIONS

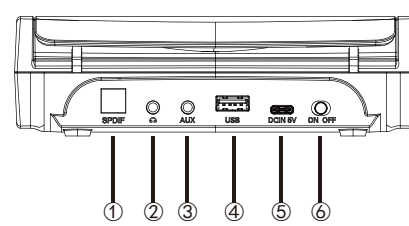


- ①OPTICAL FIBER OUTPUT
②HEADPHONES AUDIO OUTPUT TERMINAL
③AUXILIARY INPUT
④USB SLOT
⑤TYPE-C POWER TERMINAL
⑥SWITCH

REMOTE CONTROLLER

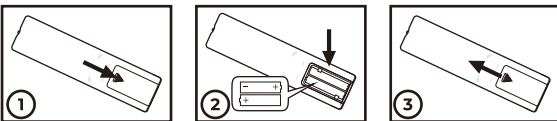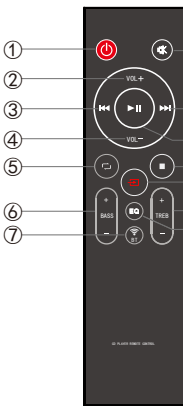


- ①STANDBY/ON
②VOLUME+
③PREVIOUS
④VOLUME-
⑤REPEAT/SHUFFLE
⑥BASS+/-
⑦BT TRANSMITTING SIGNAL
⑧MUTE
⑨NEXT
⑩PLAY/PAUSE
⑪STOP
⑫INPUT SOURCE SELECTION (BT/AUX/CD/USB)
⑬TREBLE+/-
⑭EQ


POWER ON/STANDBY



- ① Turn the switch to ON state button ⑥ on the rear panel




- ② To turn on the unit,click the STANDBY button ③ on the button panel




- ③ To put the unit into standby mode,click the STANDBY button once again


BLUETOOTH MODE



- ① Select the Bluetooth mode.Click the SOURCE(button ④) on the button panel,until the BT option appears on the screen.The light will start flashing,which means the unit is ready to pair




- ② Search for the pairing name THINKYA CD in the list of Bluetooth devices




- ③ Stay close.The effective range of Bluetooth devices is 10 meters


USB-MP3



- ① Plug the desired USB in the USB input slot of the rear panel




- ② Devices compatible with USB 2.0 Size 32Gb




- ③ Select the USB mode. Using the button panel (SOURCE button④)


PLAYING CDS




- ① Select the CD mode. Using the button panel (SOURCE button ④)




- ② Insert the CD into the tray




- ③ Click Play(button⑦) on the button panel.You can play your CD-DA, CD-R and CD with files in MP3 format



- ④ Press the STOP(button⑤) on the button panel to stop playback



- ⑤ To search for a section on a CD track,long press the NEXT (button ⑨) or PREVIOUS(button⑧) during playback,then release it at the point you want to listen



- ⑥ Long pressing the PLAY (button⑦) on the button panel for the first time will enter the single loop, the second time will enter the all loops,the third time will enter the random play,the fourth time will turn off loop playback



China est2006

Follow us!Thinkya



www.gzbluelight.com

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.