

FCC CFR47 PART 15 TV INTERFACE DEVICE

TEST REPORT

FOR

VCR

MODEL: SV-D142P

FCC ID: A3LTWIN2000

REPORT NUMBER: 99U0743-1

ISSUE DATE: JANUARY 04, 2000

Prepared for

SAMSUNG ELECTRONICS CO., LTD. 416 MAETAN DONG, PALDAL GU SUWON SHI, KOREA

Prepared by

COMPLIANCE ENGINEERING SERVICES, INC.

d.b.a.

COMPLIANCE CERTIFICATION SERVICES 1366 BORDEAUX DRIVE

SUNNYVALE, CA 94089, USA

TEL: (408) 752-8166 FAX: (408) 752-8168



| 1. | VERIFICATION OF COMPLIANCE | |
|-----|-----------------------------------|-----|
| 2. | PRODUCT DESCRIPTION | . 3 |
| 3. | TESTED SYSTEM DETAILS | . 6 |
| 4. | TEST FACILITY | . 6 |
| 5. | ACCREDITATION AND LISTING | . 6 |
| 6. | MEASUREMENT INSTRUMENTATION | . 6 |
| 7. | MEASURING INSTRUMENT CALIBRATION | . 7 |
| 8. | UNITS OF MEASUREMENT | . 7 |
| 9. | ANTENNAS | . 7 |
| 10. | CONDUCTED EMISSION TEST PROCEDURE | . 8 |
| 11. | RADIATED EMISSION TEST PROCEDURE | |
| 12. | AMBIENT CONDITIONS | . 9 |
| 13. | EQUIPMENT MODIFICATIONS | . 9 |
| 14. | EUT SETUP PHOTOS | 10 |
| 15. | TEST EQUIPMENT LIST | |
| 16. | TEST RESULT SUMMARY | 13 |
| 17. | CONFIGURATION BLOCK DIAGRAM | 25 |

Exhibits

- 1. Proposed FCC ID Label Format
- 2. Authorization Letter
- 3. User's Manual
- 4. Schematic Diagram5. EUT Photographs

1. VERIFICATION OF COMPLIANCE

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

416 MAETAN DONG, PALDAL GU

SUWON SHI, KOREA

CONTACT PERSON: BEN KIM / MANAGER

TELEPHONE NO: 408-544-5124

MODEL NO/NAME: SV-D142P

SERIAL NO: N/A

DATE TESTED: JANUARY 04, 2000

| TYPE OF EQUIPMENT: | TV INTERFACE DEVICE |
|--|---|
| MEASUREMENT DISTANCE: | (X) 3 METER () 10 METER |
| FCC RULES: | PART 15.115 |
| MEASUREMENT PROCEDURE | ANSI C63.4: 1992 |
| EQUIPMENT AUTHORIZATION PROCEDURE | CERTIFICATION |
| MODIFICATIONS MADE ON EUT | ☐ YES ☐ NO |
| DEVIATIONS FROM MEASUREMENT PROCEDURE | ☐ YES (refer to section 21 for comments) ☐ NO |
| TEST RESULT | PASSED |

The above equipment was tested by Compliance Certification Services for compliance with the requirements set forth in the FCC CFR 47, PART 15. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Reviewed By

| T. N. COKENIAS / ENGINEERING DIRECTO |)F |
|--------------------------------------|----|
| COMPLIANCE CERTIFICATION SERVICES | |

2 OF 25

2. PRODUCT DESCRIPTION

| CHASSIS TYPE | METAL |
|---|-----------------|
| LIST OF EACH OSC. OR XTAL. FREQ. (FREQ.>=1 MHz) | 14.318 MHz |
| NUMBER OF PCB LAYERS | 1 LAYER |
| POWER REQUIREMENTS | 110 V AC, 60 Hz |
| NO. OF EXTERNAL I/O CONNECTORS | 11 |

External Peripheral Devices

| Device Type | Manufacturer | Model Number | Serial No. | FCC ID / DoC |
|------------------------------|--------------------|--------------|------------|--------------|
| TV | OPTIMUS | 16-133 | 01316 | N/A |
| NTSC PATTERN GENERATOR | LEADER IN JAPAN | N/A | 1060096 | N/A |

DATE: JANUARY 04, 2000

External I/O Cable Construction Description

| CABLE NO: 1 | | |
|------------------------------|-------------------------------------|--|
| I/O Port: Antenna In | Number of I/O ports of this type: 1 | |
| Number of Conductors: 2 | Connector Type: F Connector | |
| Capture Type: Screw-In | Type of Cable used: Shielded | |
| Cable Connector Type: Molded | Cable Length: 4 M | |
| Bundled During Tests: Yes | Data Traffic Generated: Yes | |
| Remark: N/A | | |

| CABLE NO: 2 | | |
|------------------------------|-------------------------------------|--|
| I/O Port: RF Out | Number of I/O ports of this type: 1 | |
| Number of Conductors: 2 | Connector Type: F Connector | |
| Capture Type: Screw-In | Type of Cable used: Shielded | |
| Cable Connector Type: Molded | Cable Length: 1 M | |
| Bundled During Tests: No | Data Traffic Generated: Yes | |
| Remark: N/A | | |

| CABLE NO: 3 | | |
|------------------------------|-------------------------------------|--|
| I/O Port: S-Video | Number of I/O ports of this type: 1 | |
| Number of Conductors: 5 | Connector Type: S-Video | |
| Capture Type: Snap-In | Type of Cable used: Unshielded | |
| Cable Connector Type: Molded | Cable Length: 1.5 M | |
| Bundled During Tests: Yes | Data Traffic Generated: Yes | |
| Remark: N/A | | |

| CABLE NO: 4 | | |
|------------------------------|-------------------------------------|--|
| I/O Port: Audio Out | Number of I/O ports of this type: 4 | |
| Number of Conductors: 2 | Connector Type: RCA Jack | |
| Capture Type: Snap-In | Type of Cable used: Unshielded | |
| Cable Connector Type: Molded | Cable Length: 2 M | |
| Bundled During Tests: Yes | Data Traffic Generated: Yes | |
| Remark: N/A | | |

| CABLE NO: 5 | | |
|------------------------------|-------------------------------------|--|
| I/O Port: Video Out | Number of I/O ports of this type: 2 | |
| Number of Conductors: 2 | Connector Type: RCA jack | |
| Capture Type: Snap-In | Type of Cable used: Unshielded | |
| Cable Connector Type: Molded | Cable Length: 2 M | |
| Bundled During Tests: Yes | Data Traffic Generated: Yes | |
| Remark: N/A | | |

| CABLE NO: 6 | | |
|------------------------------|-------------------------------------|--|
| I/O Port: Audio In | Number of I/O ports of this type: 3 | |
| Number of Conductors: 2 | Connector Type: RCA Jack | |
| Capture Type: Snap-In | Type of Cable used: Unshielded | |
| Cable Connector Type: Molded | Cable Length: 1.5 M | |
| Bundled During Tests: Yes | Data Traffic Generated: Yes | |
| Remark: Dummy cables | | |

| CABLE NO: 7 | | |
|------------------------------|-------------------------------------|--|
| I/O Port: Video In | Number of I/O ports of this type: 1 | |
| Number of Conductors: 2 | Connector Type: RCA Jack | |
| Capture Type: Snap-In | Type of Cable used: Unshielded | |
| Cable Connector Type: Molded | Cable Length: 1.5 M | |
| Bundled During Tests: Yes | Data Traffic Generated: Yes | |
| Remark: Dummy cable | | |

| CAB | LE NO: 8 |
|---|-------------------------------------|
| I/O Port: Power | Number of I/O ports of this type: 1 |
| Number of Conductors: 3 | Connector Type: USA 110 Type |
| Capture Type: Snap-in | Type of Cable used: Unshielded |
| Cable Connector Type: Molded | Cable Length: 1.5 M |
| Bundled During Tests: No- Radiation, Yes- | Data Traffic Generated: No |
| Line Conduction | |
| Remark: N/A | |

3. TESTED SYSTEM DETAILS

During the tests, TV is tuned to Channels 3 or 4 to play VHS tape.

4. TEST FACILITY

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5. ACCREDITATION AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code:200065-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (reference no: 31040/SIT (1300B3) and 31040/SIT(1300F2))

6. MEASUREMENT INSTRUMENTATION

Radiated emissions were measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, ridged waveguide, liner horn. EMI receivers were used for line conducted readings, spectrum analyzers with pre-selectors and quasi-peak detectors were used to perform radiated measurements. Receiving equipment (i.e., receiver, analyzer, quasi-peak adapter, pre-selector) and LISNs conform to CISPR specification for "Radio Interference Measuring Apparatus and Measurement Methods," Publication 16.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

7. MEASURING INSTRUMENT CALIBRATION

The measuring equipment which was utilized in performing the tests documented herein has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment which is traceable to recognized national standards.

8. UNITS OF MEASUREMENT

Measurements of radiated interference are reported in terms of dB(uV/m) at a specified distance. The indicated readings on the spectrum analyzer were converted to dB(uV/m) by use of appropriate conversion factors. Measurements of conducted interference are reported in terms of dB(uV).

The field strength is calculated by adding the Antenna Factor and Cable Factors, then by subtracting the Amplifier Gain from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - AG

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

Assume a receiver reading of 52.5 dBuV is obtained. The Antenna Factor of 7.4dB/m and a Cable Factor of 1.1dB is added. The Amplifier Gain of 29 dB is subtracted, giving a field strength of 32 dBuV/m. The 32 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \, dBuV/m$$

Level in uV/m = Common Antilogarithm [(32 dBuV/m)/20] = 39.8 uV/m

9. ANTENNAS

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 meters from the leading edge of the turn table.

10. CONDUCTED EMISSION TEST PROCEDURE

The EUT is located so that the distance between the boundary of the EUT and the closest surface to the LISN is 0.8m.

EUT test configuration is according to Section 7 of ANSI C63.4/1992.

Conducted disturbance shall be measured between the phase lead and the ground, and between the neutral lead and the ground. The frequency 0.450 - 30 MHz shall be investigated.

Set the EMI receiver to PEAK detector setting and sweep continuously over the frequency range to be investigated. Set resolution bandwidth to 9kHz minimum. Connect EMI receiver input cable to LINE 1 RF measurement connection on the LISN. Connect a 50ohm terminator to the unused RF connection on the LISN. For each mode of EUT operation, maximize emissions readings by manipulating cable and wire positions. Record the configuration for each EUT power cord which produces emissions closest to the limit. Repeat the same procedure for LINE 2 of each EUT power cord.

11. RADIATED EMISSION TEST PROCEDURE

The EUT and all other support equipment are placed on a wooden table 80 cm above the ground screen. Antenna to EUT distance is 3 meters. During the test, the table is rotated 360 degrees to maximize emissions and the antenna is positioned from 1 to 4 meters above the ground screen to further maximize emissions. The antenna is polarized in both vertical and horizontal positions.

EUT test configuration is according to Section 8 of ANSI C63.4/1992.

Monitor the frequency range of interest at a fixed antenna height and EUT azimuth. Frequency span should be small enough to easily differentiate between broadcast stations and intermittent ambients. Rotate EUT 360 degrees to maximize emissions received from EUT. If emission increases by more than 1 dB, or if another emission appears that is greater by 1 dB, return to azimuth where maximum occurred and perform additional cable manipulation to further maximize received emission.

Move antenna up and down to further maximize suspected highest amplitude signal. If emission increased by 1 dB or more, or if another emission appears that is greater by 1dB or more, return to antenna height where maximum signal was observed and manipulate cables to produce highest emissions, noting frequency and amplitude.

12. AMBIENT CONDITIONS

The ambient conditions at the time of final tests were as follows:

| | Radiated Emission | Conducted Emission |
|-------------|-------------------|--------------------|
| Temperature | 23° C | 24° C |
| Humidity | 80% | 80% |

13. EQUIPMENT MODIFICATIONS

NOT APPLICABLE

14. EUT SETUP PHOTOS











15. TEST EQUIPMENT LIST

| Equipment | Manufacturer | Model No. | Serial No. | Site | Cal Date | Due Date |
|--------------|---------------|---------------------|------------|------|----------|----------|
| EMI | H.P. | 8546A | 3520A00259 | A | 04/1999 | 04/2000 |
| RECEIVER | | | | | | |
| Pre-Amp | H.P. | 8447D | 2944A06833 | A | 10/1999 | 10/2000 |
| Antenna | CHASE | CBL6112 | 2049 | A | 03/1999 | 03/2000 |
| LISN | Fischer | LISN2 | N/A | Cond | 01/2000 | 01/2001 |
| LISN | Fischer | CISPR adapter | N/A | Cond | 01/2000 | 01/2001 |
| EMI Receiver | Rhode Schwarz | ESHS20 | 827129/006 | Cond | 03/1999 | 03/2000 |
| Abs. Clamp | Fischer | F-201 | 251 | Cond | 04/1999 | 04/2000 |
| LISN | Fischer | FCCLISN 50/250-25-2 | 114 | Cond | 08/1999 | 08/2000 |
| PATTERN | Phillips | PM5418TX | LO678084 | N/A | 06/1999 | 06/2000 |
| GENERATOR | | | | | | |

16. TEST RESULT SUMMARY

Model name: SV-D142P

1) Test Requirements: 15.109 (a), 15.107 (a) Technical Limits: 15.109 (a), 15.107 (a)

Test Result: please refer to radiated emission data report number 991006A1. (Channel 3 & 4)

| Preliminary Radiated Emission Test | | | | | | |
|------------------------------------|----------|--------------------|------------|--|--|--|
| Frequency Range Investigated | | 30 MHz TO 1000 MHz | | | | |
| Mode of operation | Date | Data Report No. | Worst Mode | | | |
| CH3 RF PLAY | 12/22/99 | 991222A1 | | | | |
| CH3 RF RECORD | 12/22/99 | 991222A1 | | | | |
| CH4 RF PLAY | 12/22/99 | 991222A1 | | | | |
| CH4 RF RECORD | 12/22/99 | 991222A1 | | | | |
| RECORD VITS 1Vpp | 12/22/99 | 991222A1 | | | | |
| PLAY VITS 1Vpp | 12/22/99 | 991222A1 | | | | |
| RECORD VITS 5Vpp | 12/22/99 | 991222A1 | | | | |
| PLAY VITS 5Vpp | 12/22/99 | 991222A1 | | | | |

| OATS | | Data Report No. | | Date | | Tested 1 | • |
|-----------|------------|-----------------|----------------|---------------------|-----------|----------------|-------|
| A/3M | ETER | 9912 | 222A1 | 12/22/99 | | JESSE SALDIVAR | |
| | _ | Six Hi | ghest Radiated | Emission Rea | adings | | |
| Frequency | Range Invo | estigated | | 3 | 30 MHz TO | 1000 MHz | |
| | Meter | | Corrected | | | Reading | |
| Freq | Reading | C.F. | Reading | Limits | Margin | Type | Polar |
| (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | (P/Q/A) | (H/V) |
| 62 | 15.5 | 7.7 | 23.2 | 40 | -16.8 | P | V |
| 220 | 20.45 | 14.35 | 34.8 | 46 | -11.2 | P | V |
| 300 | 21.15 | 16.36 | 37.51 | 46 | -8.49 | P | V |
| 62 | 20.41 | 8 | 28.41 | 40 | -11.59 | P | H |
| 220 | 23 | 13.76 | 36.76 | 46 | -9.24 | P | H |
| 300 | 21.12 | 16.82 | 37.94 | 46 | -8.06 | P | Н |

Project No. : 99U0743 Compliance Engineering Services Inc. Report No. : 991222A1

Date: 12/22/1999

Time : 13:22

>> 3 M RADIATED EMISSION DATA << Test Engr : JESSE

Company : SAMSUNG ELECTRONICS CO LTD -3

Equipment Under Test : VCR MODEL SV-D142
Test Configuration : EUT/TV/ANTENNA
Type of Test : FCC CLASS B
Mode of Operation : PLAYING VIDEO


| Freq. | dBuV | PreAmp | Ant | Cable | dBuV/m | Limit | Margin | Pol | Hgt(m) | Az |
|-----------|---------|---------|-------|-------|--------|-------|--------|-----|--------|-----|
| Bilog 204 | 19 ; No | Pre-amp | : | | | | | | | |
| 62.00 | 15.50 | 0.00 | 6.66 | 1.04 | 23.20 | 40.00 | -16.80 | V | 1.0 | 180 |
| 220.00 | 20.45 | 0.00 | 12.24 | 2.12 | 34.80 | 46.00 | -11.20 | V | 1.0 | 0 |
| 300.00 | 21.15 | 0.00 | 13.86 | 2.50 | 37.51 | 46.00 | -8.49 | V | 1.0 | 180 |
| | | | | | | | | | | |
| 62.00 | 20.41 | 0.00 | 6.96 | 1.04 | 28.41 | 40.00 | -11.59 | H | 1.5 | 180 |
| 220.00 | 23.00 | 0.00 | 11.65 | 2.12 | 36.76 | 46.00 | -9.24 | H | 1.4 | 180 |
| 300.00 | 21.12 | 0.00 | 14.32 | 2.50 | 37.94 | 46.00 | -8.06 | H | 1.4 | 180 |

COMPLETED SCAN FROM 30MHz TO 1GHz IN VERTICAL AND HORIZONTAL POLARIZATIONS.

Total # of data 6 V. a2.2

| Preliminary Conducted Emission Test | | | | | | |
|-------------------------------------|----------|-------------------|------------|--|--|--|
| Frequency Range Investigated | | 450 kHz TO 30 MHz | | | | |
| Mode of operation | Date | Data Report No. | Worst Mode | | | |
| CH3 RF PLAY | 12/22/99 | 991222A1 | | | | |
| CH3 RF RECORD | 12/22/99 | 991222A1 | | | | |
| CH4 RF PLAY | 12/22/99 | 991222A1 | | | | |
| CH4 RF RECORD | 12/22/99 | 991222A1 | | | | |
| RECORD VITS 1Vpp | 12/22/99 | 991222A1 | | | | |
| PLAY VITS 1Vpp | 12/22/99 | 991222A1 | | | | |
| RECORD VITS 5Vpp | 12/22/99 | 991222A1 | | | | |
| PLAY VITS 5Vpp | 12/22/99 | 991222A1 | | | | |


| Conduc | ted | Plot No. | | | e | Teste | ed By: |
|-----------|--------------|----------|---------------|---------------|------------------|-----------|---------|
| Room | ı | 99U(| 0743 | 12/22/ | 12/22/99 JESSE : | | ALDIVAR |
| | • | Six | Highest Condu | cted Emission | Readings | | |
| Frequency | y Range Inve | stigated | | | 450 kHz 7 | ГО 30 MHz | |
| | Meter | | Corrected | | | Reading | |
| Freq | Reading | C.F. | Reading | Limits | Margin | Type | Line |
| (MHz) | (dBuV) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | (P/Q/A) | (L1/L2) |
| 7.96 | 46.85 | 0 | 46.85 | 48 | -1.15 | Q | L1 |
| 8.09 | 46.85 | 0 | 46.85 | 48 | -1.15 | Q | L1 |
| 8.37 | 46.14 | 0 | 46.14 | 48 | -1.86 | Q | L1 |
| 8.09 | 44.11 | 0 | 44.11 | 48 | -3.89 | Q | L2 |
| 8.19 | 45.28 | 0 | 45.28 | 48 | -2.72 | Q | L2 |
| 8.37 | 44.35 | 0 | 44.35 | 48 | -3.65 | Q | L2 |

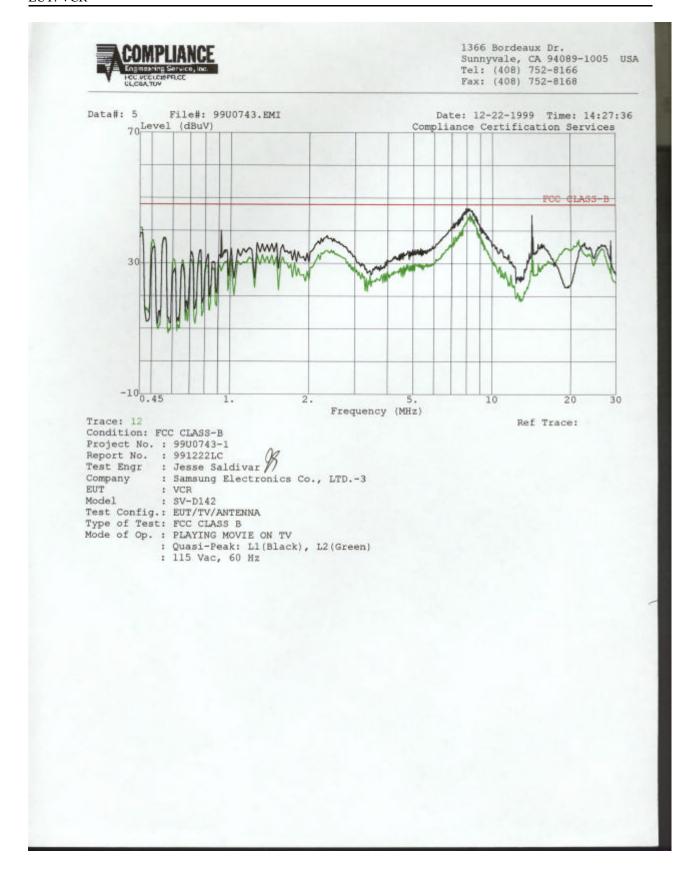

Output Signal limits and transfer switch limits:

Technical requirement: 15.115 (b)(1)(ii), (b)(2)(ii), (c)(ii)

Chart below designates plots. Mask shows compliance to FCC 15.115(b)(1)(ii) and 15.115(b)(2)(ii) measured at the RF output. Harmonics show compliance to FCC 15.115(b)(2)(ii) at the 2nd and 3rd harmonics of the fundamental output signal frequency measured at the RF output. Transfer switch plots show compliance to FCC15.115(c)(1)(ii) at the fundamental and harmonics measured at the RF antenna input. Limits are calculated using 75 ohms. Levels and frequencies are show in example mask plot below, frequencies are adjusted for channel 3 and 4 accordingly.

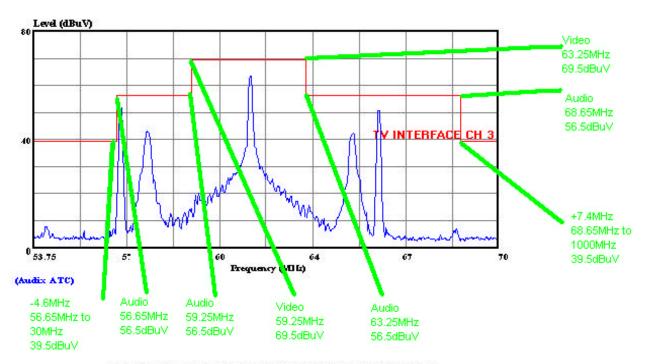


CHANNEL 3 EMISSION MASK FCC 15.115(b)(1)(ii) & 15.115(b)(2)(ii).

| CHANNEL 3 – VITS | S 5Vpp PLAY BACK |
|--|------------------|
| MASK | 1 |
| 2 nd HARMONIC | 2 |
| 3 rd HARMONIC | 3 |
| TRANSFER SWITCH 1st HARMONIC | 4 |
| TRANSFER SWITCH 2 nd HARMONIC | 5 |
| TRANSFER SWITCH 3 rd HARMONIC | 6 |


| CHANNEL 4 – VITS 5Vpp PLAY BACK | | | | | |
|--|----|--|--|--|--|
| MASK | 7 | | | | |
| 2 nd HARMONIC | 8 | | | | |
| 3 rd HARMONIC | 9 | | | | |
| TRANSFER SWITCH 1st HARMONIC | 10 | | | | |
| TRANSFER SWITCH 2 nd HARMONIC | 11 | | | | |
| TRANSFER SWITCH 3 rd HARMONIC | 12 | | | | |

| L1 IN RECOR | RD VITS 5Vpp |
|------------------------------|--------------|
| MASK | 13 |
| TRANSFER SWITCH 1st HARMONIC | 14 |


| CHANNEL 3 R | RECORD NTSC |
|------------------------------|-------------|
| MASK | 15 |
| TRANSFER SWITCH 1st HARMONIC | 16 |

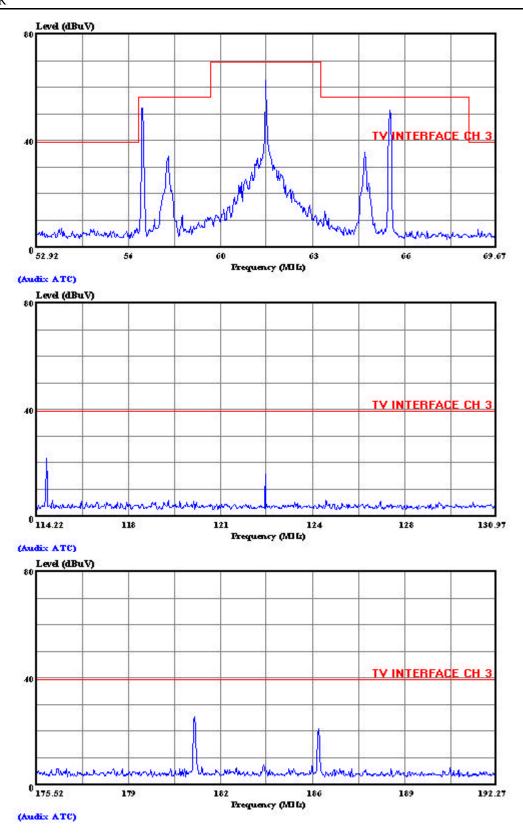

Plots 1-3: FCC 15.115 (b) (1) (ii) & FCC 15.115 (b) (2) (ii)

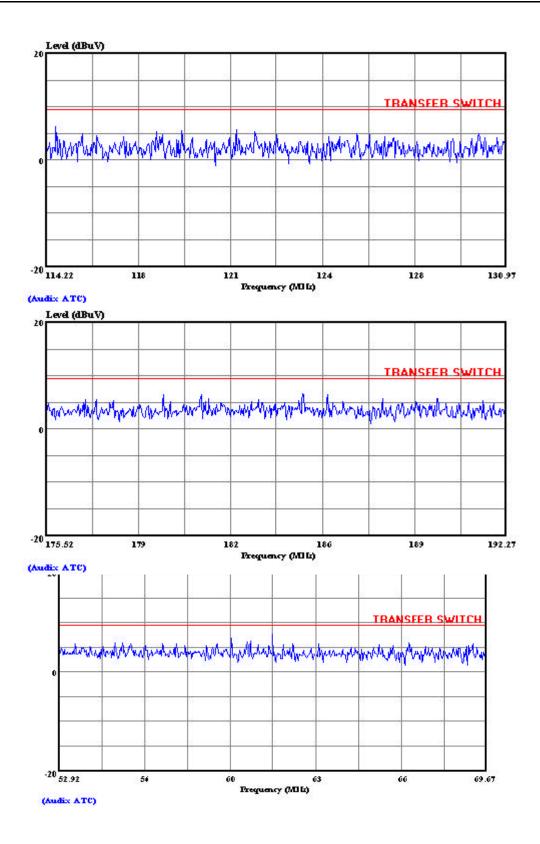


Plots 4-6 FCC 15.115 (C) (1) (ii)

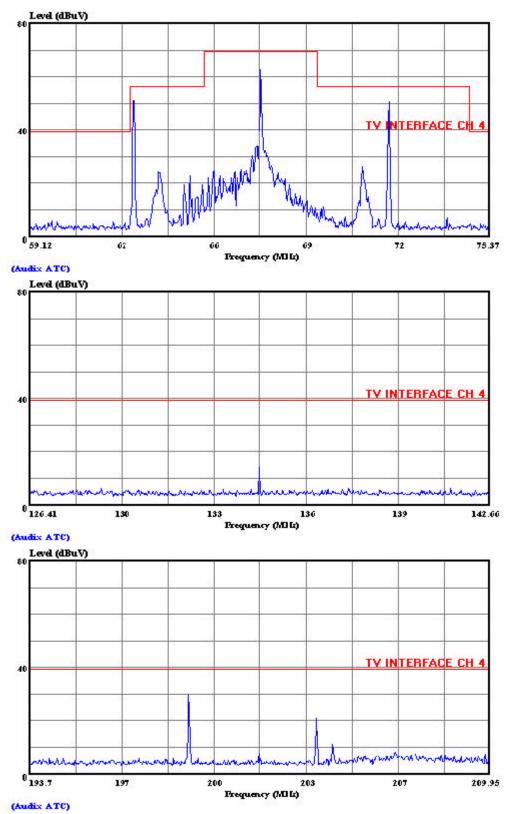


Plots 7-9: FCC 15.115(b) (1) (ii) & (b) (2) (ii)


21 OF 25

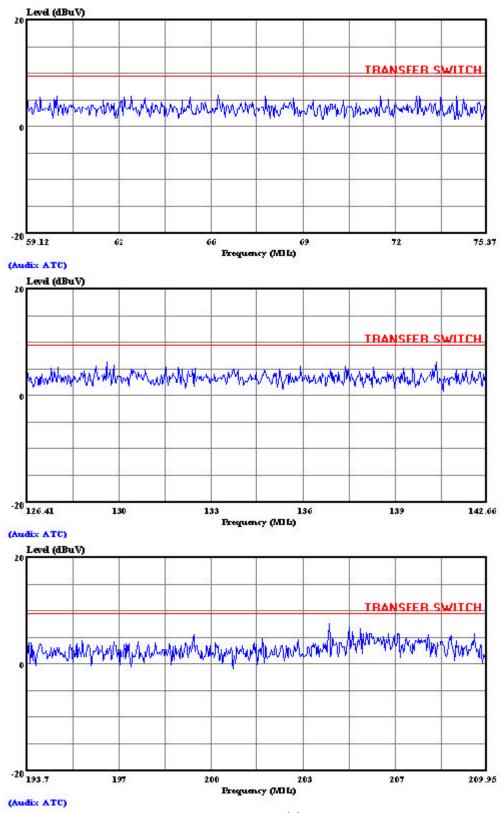


Plots 10-12: FCC 15.115 (c) (1) (ii)

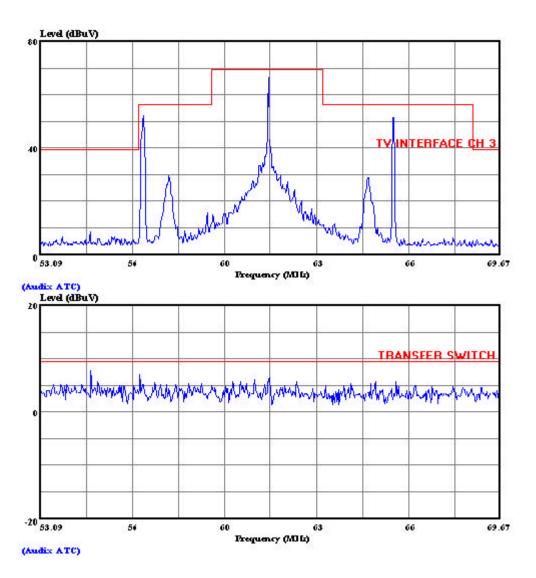

Plots 13, 14: L1 in Record VITS 5Vpp

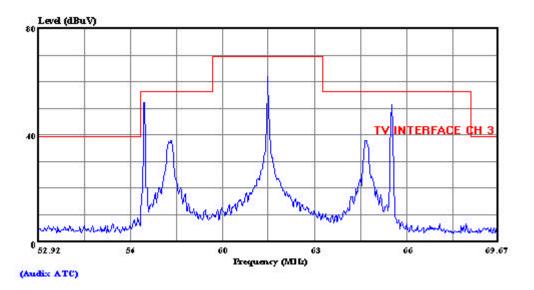

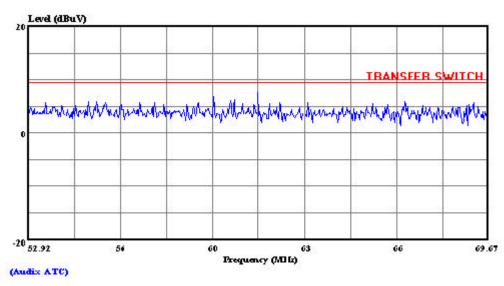

Channel 3 Record NTSC

17. Configuration Block Diagram

