

Instruction of X12 Bluetooth Headset

Thanks for purchasing Padmate X12 Bluetooth Headset. You will need to pair the device with your mobile phone or other Bluetooth enabled devices in order to experience its great performance. Please read through the instruction manual below before using.

LIMPORTANCE BEFORE USING

The unit was designed and produced according to the related quality requests and safety standards. Please read through the following operation instructions before using it:

1. Read and keep well these instructions;
2. Do not use or operate the it where it is forbidden of using, for example, airplanes and hospitals;
3. Do not use or operate the it according to the local laws and rules, for example, do not use it when driving;
4. Do not use or operate it when you are close to explosive or flammable sources, eg, gas station etc;
5. Do not hit or throw or open the unit by force as it may cause damage to the device;
6. Do not put the unit near heat sources, eg, stoves, heat registers and radiators etc;
7. Keep the unit away from wet, water or other liquids that might cause short circuit or malfunctions;
8. Keep the unit and its accessories away from children to prevent being swallowed
9. For special users, such as patients who use heart pacemakers, audiphones and built-in cochlea devices etc, please follow the advice of doctors.
10. Using it below minus 15 _ or above 55 _ could shorten the life span of battery.


II. About The Device

2.1 Packing list

- Bluetooth headset*1pair
- Instruction manual*1pcs
- Micro-USB cable*1pcs
- Silicon earbuds*3pair
- Quick start*1pcs
- Charging cradle with built power bank*1pcs

2.2 Device contronls and locations

1. Multi Function button
2. Silicon earbuds
3. LED indicator
4. Charging case

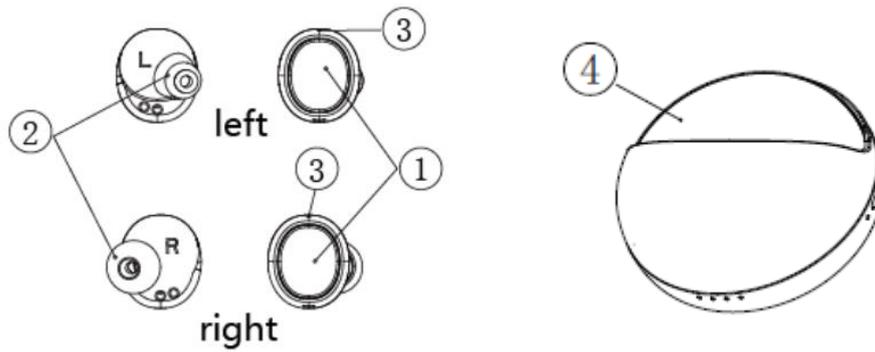

2.3 LED indications and modes

Device mode	LED indications(Blue & Red)
Power on/Pairing	Blue LED glitters
Paired successfully	Blue LED glitters and voice prompt "Pairing successful, Second device connected"
Playing music	Blue LED color glitters slowly
Low battery	Red LED glitters slowly and voice prompt "low battery, please charge"
Charging	Red LED on
Fully charged	LED goes off
Charging Cradle mode	LED indications(Blue & Red)
Low battery in cradle	Red LED color glitters slowly
Cradle Charging	Each light on behalf of twenty-five percent power
Headset Charging	Red LED on
Headset Fully charged	Blue LED on with external USB power Blue LED on and goes off after 4 seconds without external USB power

2.4 Charging and battery

Please use the original USB cable provided for charging.

Warning: Using unmatched USB cable for charging might damage the device. Also, you are not permitted to take the battery out of the device in case of damage and danger. Suggested input power is DC 5V, 100mA-2A max.

III. Operations

3.1 How to pair

NOTE: The left and right headsets will automatically connect after power on in factory. The left headset for pairing will be the master headset while sub-headset for the right one.

1. Please take your mobile phone close to the device. Suggested distance is less than 1 meter.
2. Press Multi Function button of the left and right headset for 1 second and Blue LED on, then the left and right headsets will automatically connect
3. Turn on the bluetooth application of your mobile phone and click to search Bluetooth devices near your mobile. Once searched "X12" device name, please select it to pair. After completely paired, blue LED on and voice prompt "Pairing successful, Second device connected".

3.2 Operations

NOTE: The left and right headsets will automatically connect after power on in factory. The left headset for pairing will be the master headset while sub-headset for the right one.

Power on/Pairing	Press Multi Function button of the headsets for 1 second at the same time	Blue LED glitters , and voice prompt "Pairing successful, Second device connected"
Power off	Long Press Multi Function button either of the headsets for 5 seconds	Red LED glitters twice, and voice prompt " power off"
Play	Click Multi Function button either of the headset	
Pause	Click Multi Function button either of the headset	
Re-dial the last phone number made before	Double click Multi Function button either of the headset (without music playing mode)	
Answer phone call	Click Multi Function button either of the headset when incoming call	
Reject phone calls	Double click Multi Function button either of the headset when incoming call	

3.3 Cradle charging

1. After putting headsets into the cradle, please click the cradle of charging button. On the edge of USB LED of cradle will show red once charging started. Once fully charged, the LED will show blue.
2. The red LED on the edge of will glitters slowly when low battery in cradle, please charging for cradle timely.

3. The cradle can supply up to three times charging to the two headsets once fully charged.

4. If the cradle and headsets are charged by USB outlet, no need to press the headset charging button. All of them will be charged automatically.

5. Four LED in front of cradle is the battery capacity of indication light (Each light on behalf of twenty-five percent power), Long Press the cradle of charging button can display the battery capacity of cradle.

IV. Specifications

Bluetooth version	Bluetooth V4.2
Supported profiles	A2DP (V1.3) / AVRCP (V1.5) / HFP (V1.6) / HSP (V1.2) / SBC, MP3, AAC
Radio frequency	2.402GHz-2.480GHz
Music time	About 3 hours
Talk time	About 4 hours
Standby time	Up to 60 hours
Charging time	Up to 1.5 hour
Distance	10 meters plus (open area)
Working temperature	-10~50 centigrade
Product weight	5.0 grams *2pcs
Dimensions (cradle)	19.5x16.9x27.5mm

4.1 Notice

-If you fail to connect the headset with your mobile phone, please follow the below suggestions and instructions:

- Make sure your headset has enough power and at power on mode, and paired successfully with your mobile phone.

- Make sure the bluetooth application of your mobile phone is at open mode

- Make sure your mobile phone is within 10 meter distance to the headset and no objectives between them, such as wall, electronic devices, metal things etc

- Please re-operate them again if failed.

- If the headset can not be paired to your mobile phone within 10 minutes at pairing mode, it will power off automatically.

- If the headset is disconnected with your mobile phone and is not connected to your mobile phone within 10 minutes, it will power off automatically.

4.2 Use them as two separate headsets:

1. The left and right headsets will automatically connect after power on in factory. The left headset for pairing will be the master headset while sub-headset for the right one.

2. If need to use them as two separate headsets, it have two way as below:

A、 Turn on and pair either of the headset with your mobile phone and power off the other headset.

B、 If need to use them as two separate headsets at the same time, suggested distance is more than 30 meter, turn on the headset and pairing with the different mobile phone.

C、 The use way of one headset as below:

Power on	Long Press Multi Function button for 1 second	Blue LED glitters, and voice prompt “Power on”
Pairing	Long Press Multi Function button for 3 seconds	Blue and red LED glitters , and voice prompt “Pairing successful, Second device connected”
Power off	Long Press Multi Function button for 5 seconds	Red LED glitters twice, and voice prompt” power off”
Play	Click Multi Function button	
Pause	Click Multi Function button	
Track forward	Double click Multi Function button	
Answer phone call	Click Multi Function button when incoming calll	
Reject phone calls	Double click Multi Function button when incoming call	

Federal Communication Commission (FCC) Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement, The device can be used in portable exposure condition without restriction Federal Communication Commission (FCC) Radiation Exposure Statement Power is so low that no RF exposure calculation is needed.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications or changes to this equipment. Such modifications or changes could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC ID:2AJEO-X12