

Wolverine Bluetooth Headset User Manual

Thank you for purchasing Mpow Wolverine Stereo Bluetooth Headset. We hope you enjoy it! This instruction manual will get you to understand and make the most of your headset.

Specification

Bluetooth Standard: V4.1

Bluetooth Operation: Class 2

Bluetooth Mode: Headset / Handfree / A2DP / AVRCP

Bluetooth Range: > 10m

Talking Time: Up to 8 hours


Playing Time: Up to 8 hours

Stand By Time: 300 hours

Charging Time: 2 hours

①


Product indication

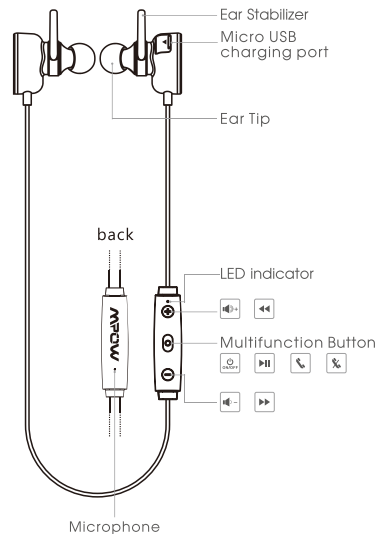

②


Charging the headset

Charging the headset before use is recommended but not required. Every Mpow Wolverine headset is pre-charged before it leaves the factory.

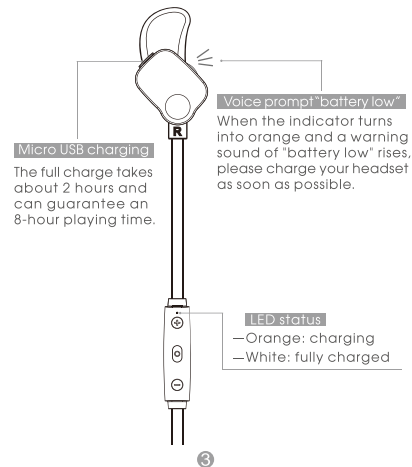

③

Pair it to your phone

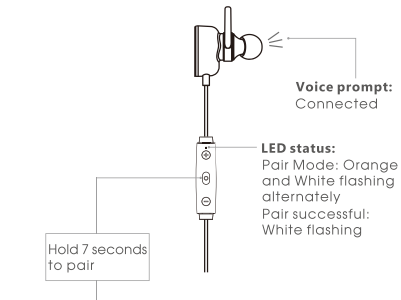

④

1. Before using the headset for the first time, you must pair it with your phone.
2. Turn on the Bluetooth function on your phone.
3. Press the Multifunction button for 7 seconds until the orange and white indicator light start flashing alternately, you will also hear a voice prompting "Pairing".

- 4. Search Bluetooth devices and select “Mpow BH29B” on your phone. Enter passcode 0000 if needed.
- 5. If pairing is successful, the white indicator light will start flashing slowly, you will also hear a voice prompting "Connected".
- 6. Pairing failed: Please turn off your headset and then repeat the steps outlined above.
- 7. Automatic Connect: It will connect to the last connected phone automatically when it turns on. Please make sure the Bluetooth function of your phone is on before turning on the headset. If not, it won't connect to the last connected phone automatically.

Power on / off the headset

Power on :
Press the Multifunction button for 3 seconds until the white indicator light flashing, you will also hear a voice prompting "Power On".

Power off:
Press the Multifunction button for 4 seconds until the orange indicator light turns on and then goes off, you will also hear a voice prompting "Power Off".

Connect to two Bluetooth devices at the same time

- 1. Pair the Bluetooth headset to the first phone.
- 2. After a successful pairing, turn off the headset, and also turn off the Bluetooth function on the first phone.
- 3. Pair the Bluetooth headset to the second phone.
- 4. After a successful pairing, turn on the Bluetooth function of the first phone. Select the "Mpow Wolverine" and click "connect".
- 5. Two phones will both be connected to the headset at the same time.

- Answering a call**
Press the Multifunction button.
- Ending a call**
Press the Multifunction button.
- Rejecting a call**
Press the Multifunction button until you hear a voice prompting "toot toot" and then release.
- Redialing the last called number**
Double press the Multifunction button.
- Voice Dial**
Press the Multifunction button and “+” button simultaneously, please make sure your phone support this function.

Microphone muting
During a call, press the “+” and “-” button simultaneously and you will hear a low tone alert to confirm that the headset MIC is in mute status. The same alert repeats every 10 seconds.

- Playing music**
 - 1. Play/Pause: Press the Multifunction button.
 - 2. Next Song: Long press the “-” button.
 - 3. Previous Song: Long press the “+” button.
 - 4. Volume Up: Short press the “+” button.
 - 5. Volume Down: Short press the “-” button.

Correct disposal of this product
 (Waste Electrical & Electronic Equipment) This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life.

To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.
Household user should contact either the retailer where they purchased this product, or their local government office, for details

of where and how they can take this item for environmentally safe recycling.
Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

FCC Warning

Any Changes expressly or modifications not approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.
FCC Radiation Exposure Statement:
This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment .
This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.