



# BEITONG ZEUS ELITE GAMEPAD

BEGINNER GUIDE

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

BTP-T6

FCC ID:2AWMK-BTP-T6



---

## CONTENTS IN PACKAGE

\*BEITONG ZEUS Elite Gamepad \* 1

\*Wireless Receiver \* 1

\*USB to Type-C Cable \* 1

\*Replaceable Thumbstick Module \* 6

\*Product Guide \* 1

---

## SUPPORTED HOST DEVICES

### PC with Windows Operating System

Windows XP/ Windows Vista/ Windows7/Windows8/Windows8.1/

Windows 10

### Nintendo Switch

Nintendo Switch/Nintendo Switch Long-life Edition/Nintendo

Switch Lite

---

## "ZEUS CONTROLLER ASSISTANT" INTEGRATED CONFIGURATION SOFTWARE

BEITONG ZEUS Elite Gamepad is supplied with PC terminal "ZEUS Controller Assistant" integrated configuration software.

Using "ZEUS Controller Assistant", you can customize the software functions of the controller on the PC, including lighting, vibration, key remapping, custom macro programming, trigger stroke, bumper sensitivity, motion-sensing mapping, air mouse convenient functions.

Download link: [WWW.BETOP-CN.COM](http://WWW.BETOP-CN.COM)

---


## CONTROLLER FRONT INTRODUCTION



- A** BEITONG LOGO Indicator
- B** Touch Return Key
- C** Touch Menu Key
- D** Replaceable Thumbstick Module
- E** Mechanical Action Button
- F** D-pad Module
- G** FN Shift Button
- H** 3.5 mm Headset Port
- I** Grip Indicator


---

## CONTROLLER REAR INTRODUCTION

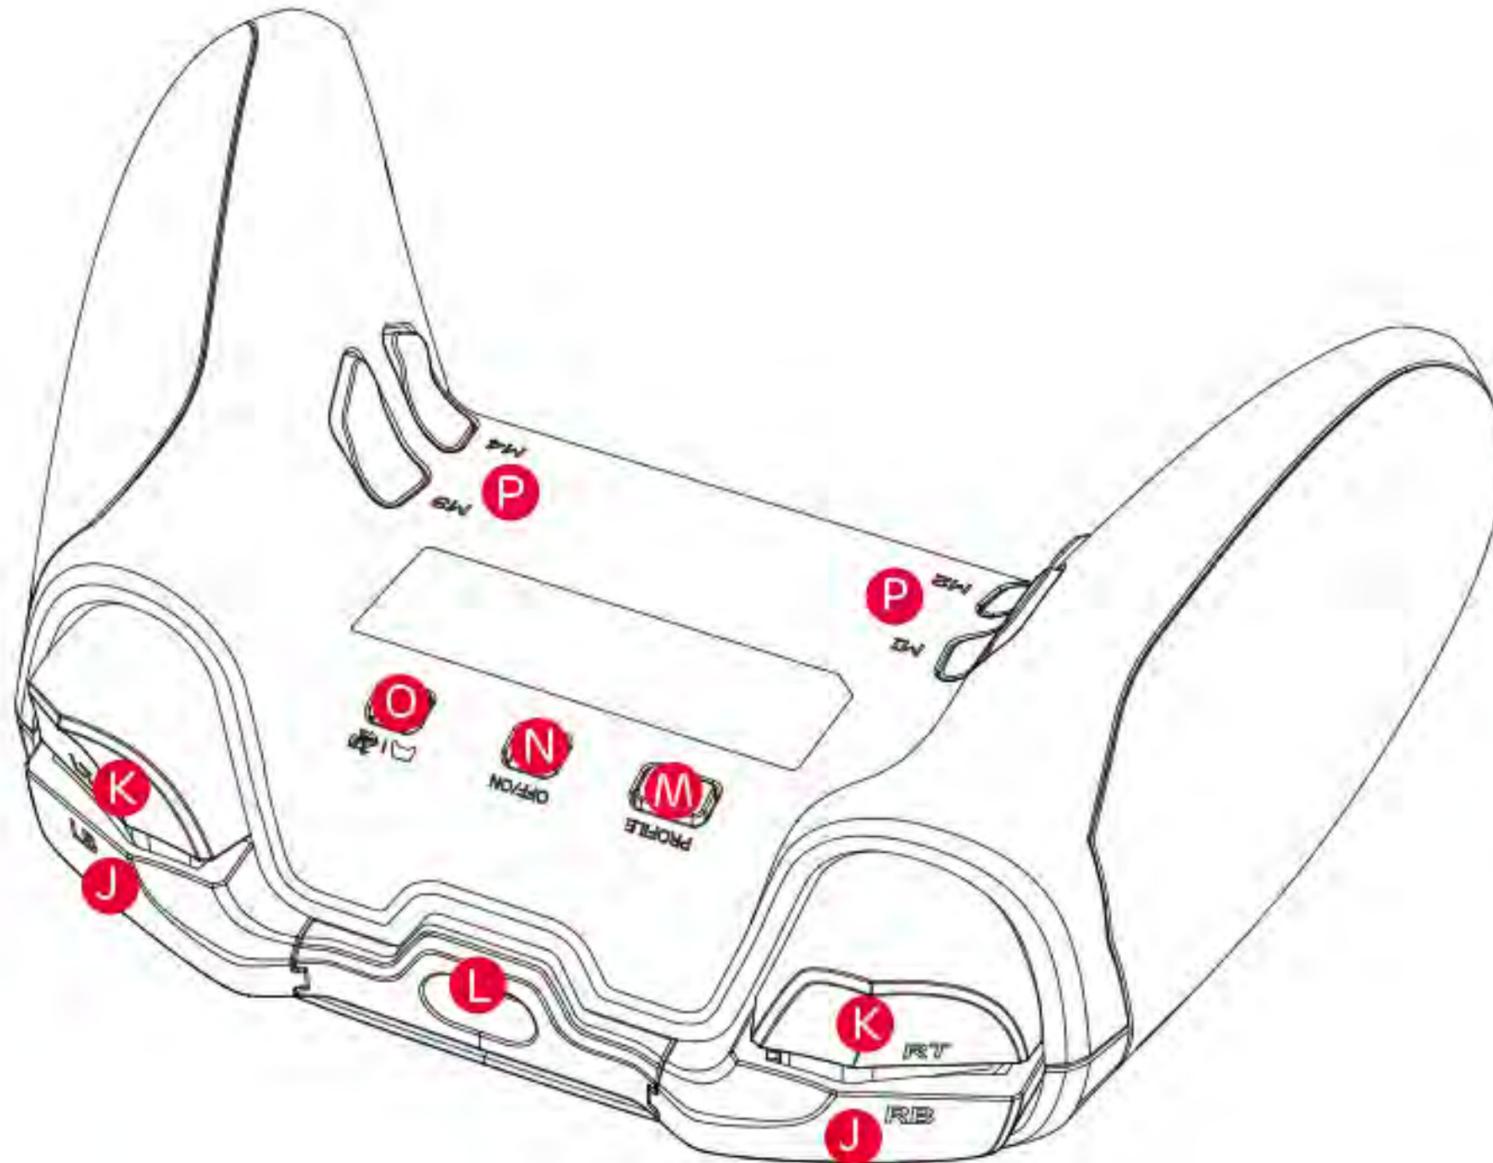



- J** Bumpers (LB/RB)
- K** Triggers (LT/RT)
- L** Type-C Port
- M** Profile Cycle Button
- N** Power Switch
- O** Motion Control Switch
- P** Hyperresponse (M1/M2/M3/M4)

## INTRODUCTION OF WIRELESS RECEIVER

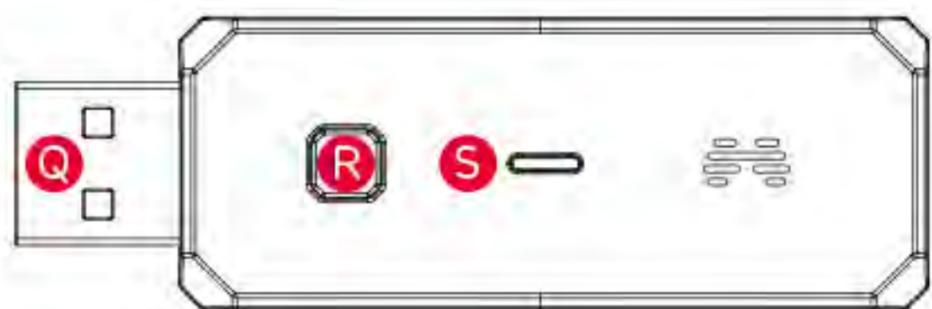

- Q** USB Port
- R** Wireless Pairing Button
- S** Status Indicator

## OTHER COMPONENTS INTRODUCTION

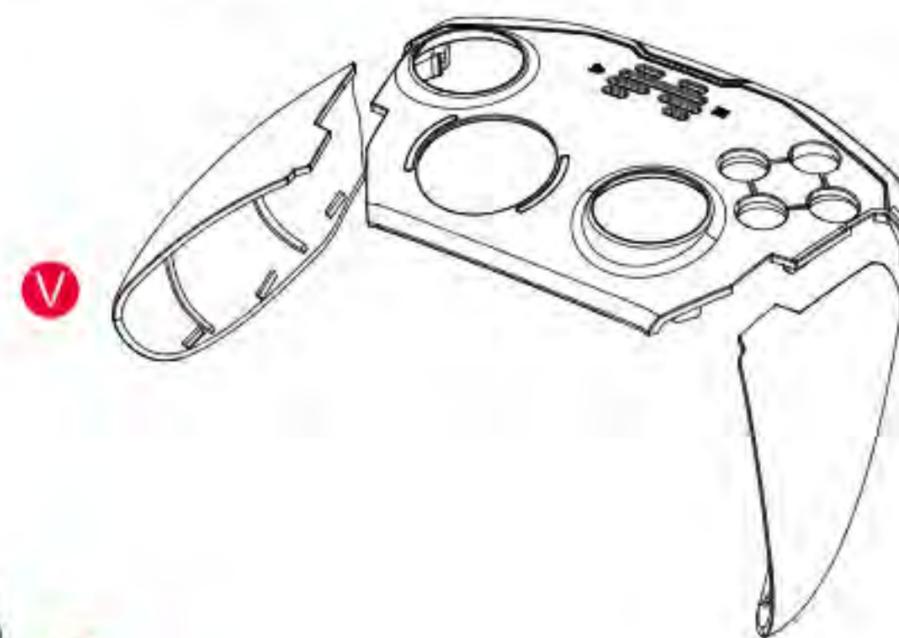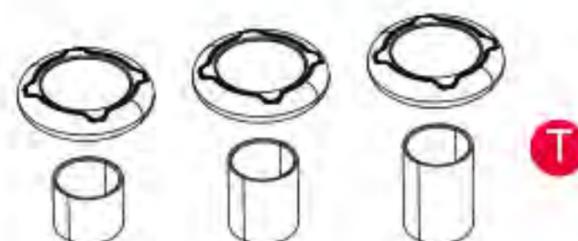

- T** Replaceable Thumbstick Module (Low/Medium/High)
- U** Position-changable Action Button Cap (A/B/X/Y)
- V** Replaceable Theme Face-shell




\* Please login to BEITONG Website to view more replaceable theme face-shells [WWW.BETOP-CN.COM](http://WWW.BETOP-CN.COM)

## CONNECT BEITONG ZEUS TO PC


### Wireless Connection By Wireless Receiver First Connection Mode:

1. Plug the wireless receiver into your PC's USB port and press the wireless pairing button.

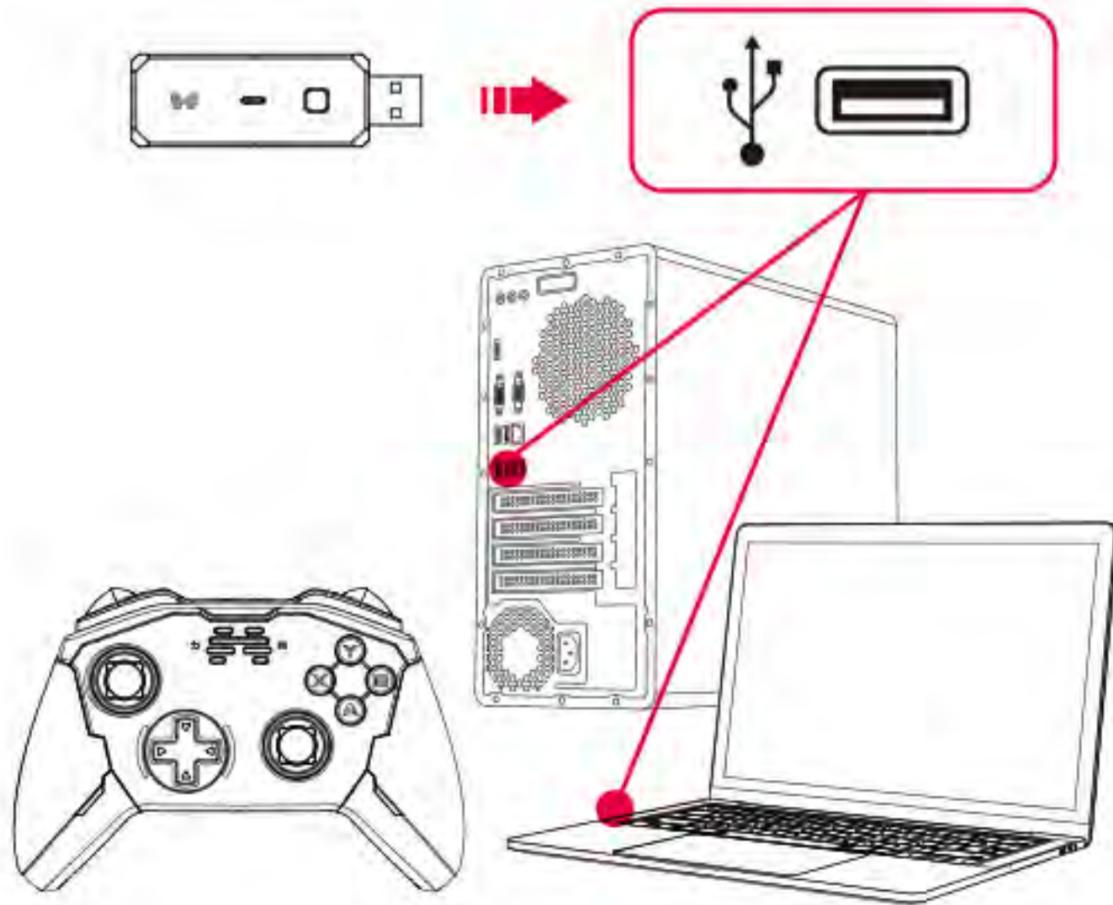


Wireless receiver indicator becomes fast blink

2. Press and hold the [FN button] at the bottom of BEITONG ZEUS, and at the same time switch the [Power switch] at the back of BEITONG ZEUS from OFF to ON;

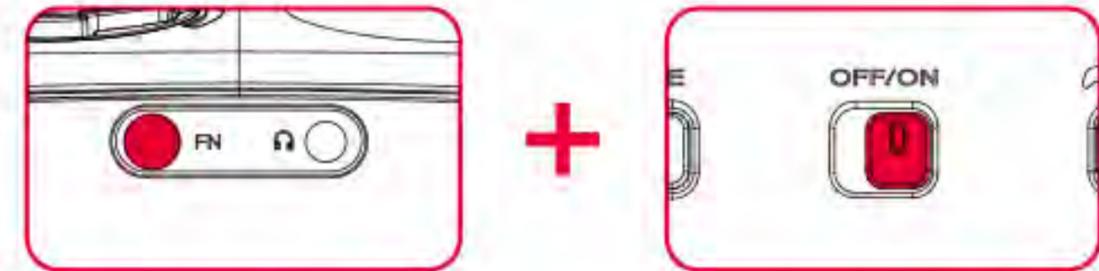

BEITONG ZEUS starts up and [BEITONG LOGO Indicator] becomes fast blinks in multiple colors


3. Wait for the gaming controller driver to install automatically, BEITONG ZEUS vibrates to indicate successful connection.



[BEITONG LOGO Indicator] turns to single color "always on" or "breathing" state



[Grip Indicator] lights

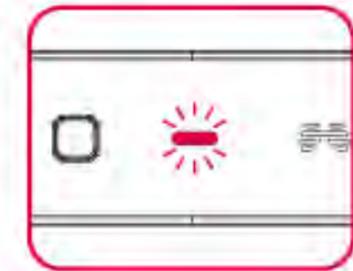

Wireless receiver [Status Indicator] becomes always on

---

## CONNECT BEITONG ZEUS TO PC

### Reconnection Mode:

1.Plug the wireless receiver into your PC's USB port:

- \* Wireless receiver indicator becomes slow blink

2.Switch the [Power switch] at the back of BEITONG ZEUS from OFF to ON;

- \* BEITONG ZEUS starts up and [BEITONG LOGO indicator] slowly blinks in multiple colors


3.Wait for the gaming controller driver to install automatically, BEITONG ZEUS vibrates to indicate successful connection.

- \* [BEITONG LOGO Indicator] turns to single color "always on" or "breathing" state
- \* [Grip Indicator] lights
- \* Wireless receiver [Status Indicator] becomes always on

## CONNECT BEITONG ZEUS TO PC

### Wired connection via USB to Type-C Cable


1. Connect to PC via USB to Type-C Cable;

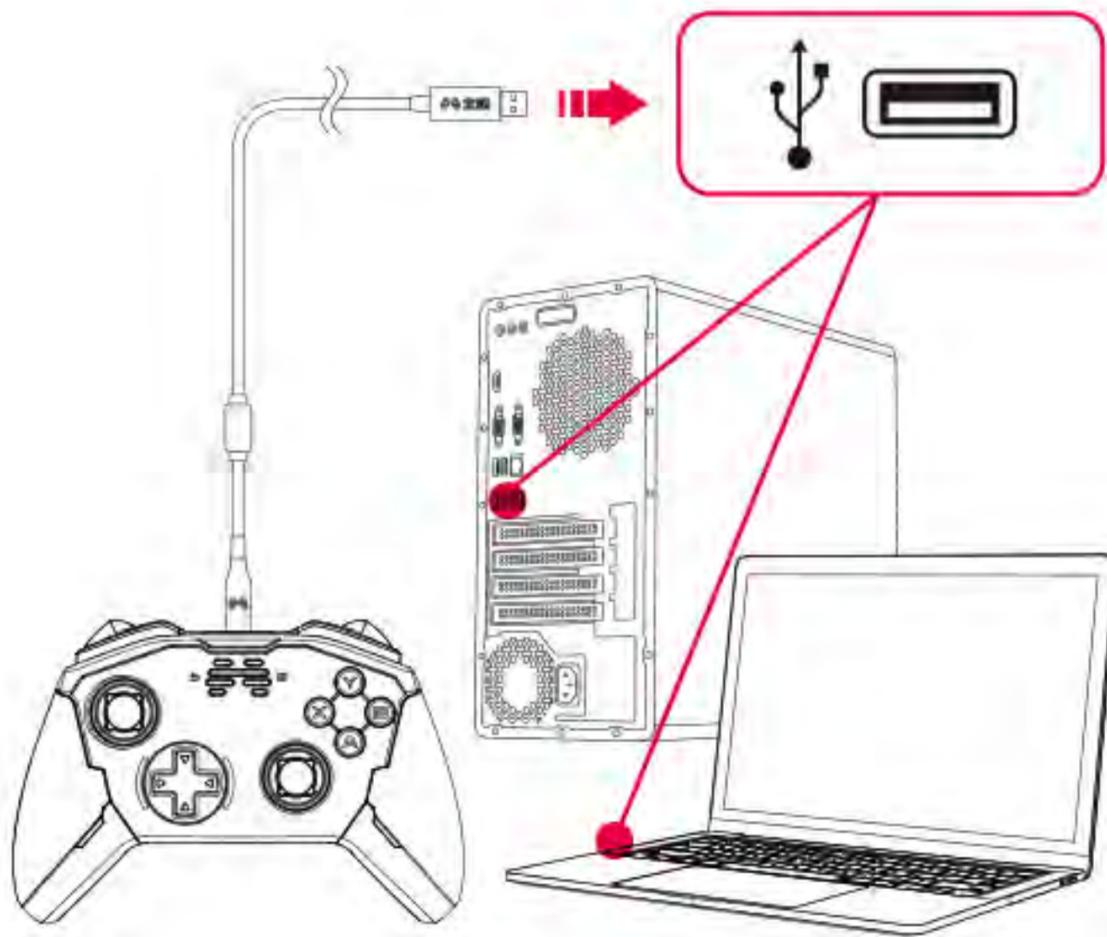

2. Switch the [Power switch] at the back of BEITONG ZEUS from OFF to ON;



3. Wait for the gaming controller driver to install automatically, BEITONG ZEUS vibrates to indicate successful connection.

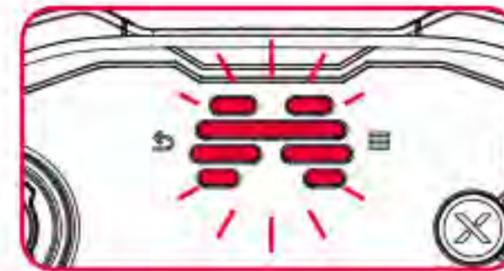

[BEITONG LOGO Indicator]  
turns to single color \*always  
on\* or \*breathing\* state






[Grip Indicator] lights

## CONNECT BEITONG ZEUS TO THE NINTENDO SWITCH IN HANDHELD MODE


### Wireless Connection By Wireless Receiver First Connection Mode:

1. Enter the system settings of Nintendo Switch and switch on the option of "Wired Connection of Pro Gaming Controller".
2. Using the OTG adapter, connect the wireless receiver to the Type-C port at the bottom of the Nintendo Switch console and press the wireless pairing button.

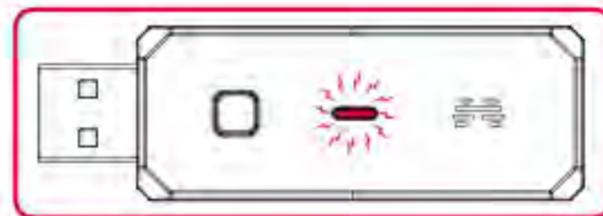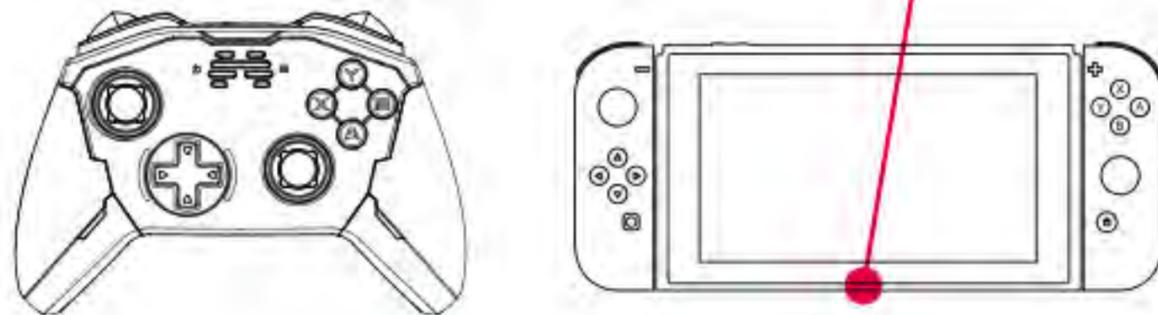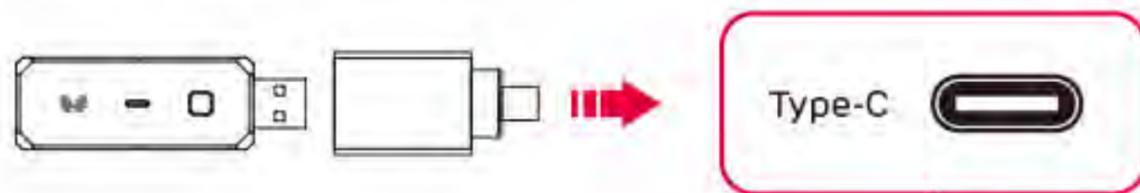


Wireless receiver indicator becomes fast blink

3. Press and hold the [FN button] at the bottom of BEITONG ZEUS, and at the same time switch the [Power switch] at the back of BEITONG ZEUS from OFF to ON;

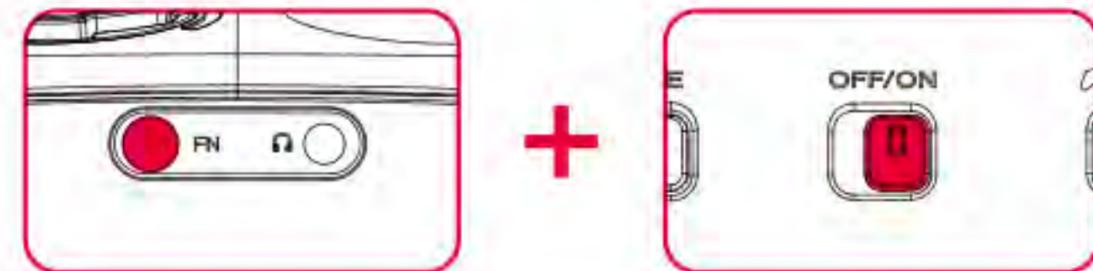

\* BEITONG ZEUS starts up and [BEITONG LOGO Indicator] becomes fast blinks in multiple colors

4. Wait for a moment, BEITONG ZEUS vibrates to indicate successful connection.



[BEITONG LOGO Indicator] turns to single color "always on" or "breathing" state



[Grip Indicator] lights



Wireless receiver [Status Indicator] becomes always on

---

## CONNECT BEITONG ZEUS TO THE NINTENDO SWITCH IN HANDHELD MODE


### Reconnection Mode:

1. Using the OTG adapter, connect the wireless receiver to the type-c port at the bottom of the Nintendo Switch console
  - \* Wireless receiver indicator becomes slow blink
2. Switch the [Power switch] at the back of BEITONG ZEUS from OFF to ON;
  - \* BEITONG ZEUS starts up and [BEITONG LOGO indicator] slowly blinks in multiple colors
3. Wait for a moment, BEITONG ZEUS vibrates to indicate successful connection.
  - \* [BEITONG Logo Indicator] becomes "always on" or "breathing" state
  - \* [Grip Indicator] lights
  - \* Wireless receiver [Status Indicator] becomes always on

## CONNECT BEITONG ZEUS TO THE NINTENDO SWITCH IN HANDHELD MODE

### Wired connection via USB to Type-C Cable


1. Enter the system settings of Nintendo Switch and switch on the option of "Wired Connection of Pro Gaming Controller".
2. Using the OTG adapter, connect the USB to Type-C cable to the Type-C port at the bottom of the Nintendo Switch console;

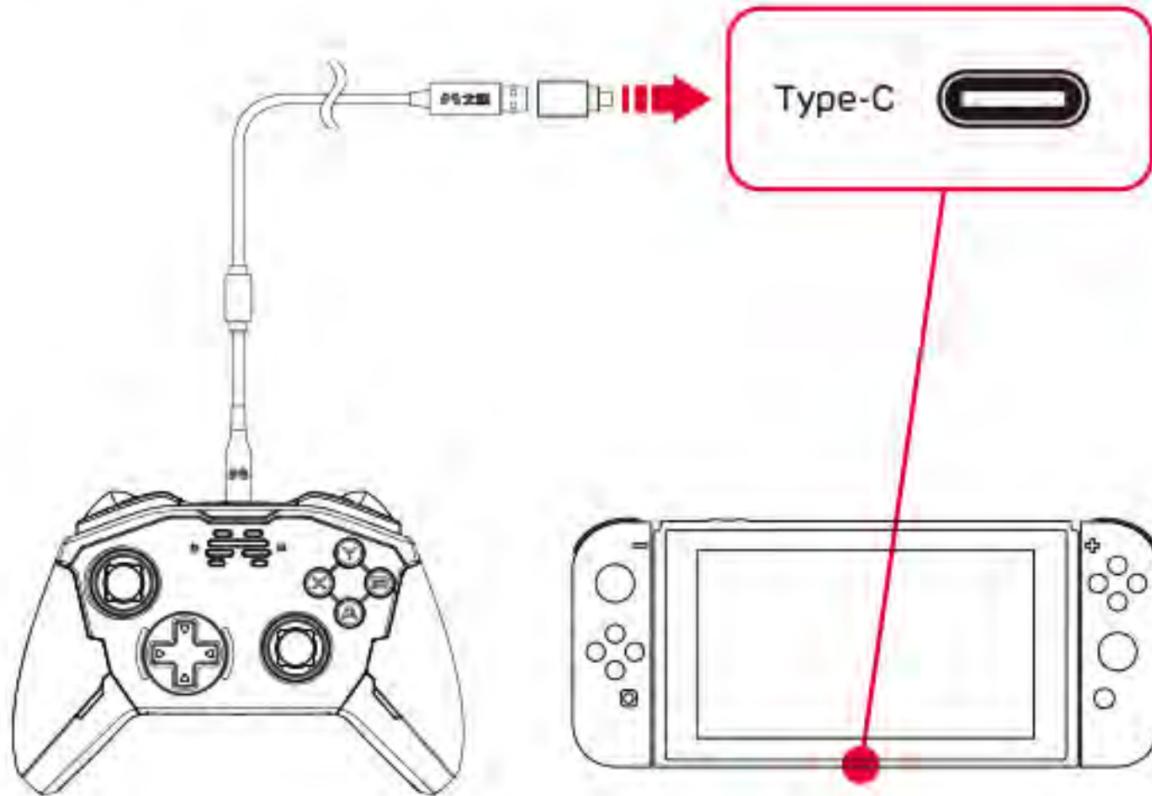

2. Switch the [Power switch] at the back of BEITONG ZEUS from OFF to ON;



3. Wait for a moment, BEITONG ZEUS vibrates to indicate successful connection.

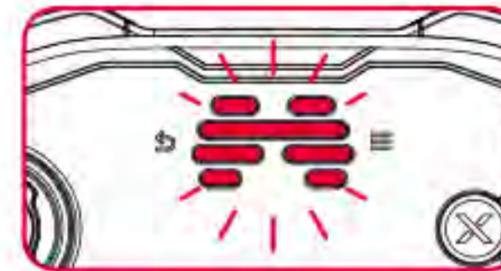

[BEITONG LOGO Indicator]  
turns to single color "always  
on" or "breathing" state




[Grip Indicator] lights


## COCONNECT BEITONG ZEUS TO THE NINTENDO SWITCH IN TV MODE

### Wireless Connection By Wireless Receiver First Connection Mode:

1. Enter the system settings of Nintendo Switch and switch on the option of "Wired Connection of Pro Gaming Controller".
2. Plug the wireless receiver into Nintendo Switch Console's USB port and press the wireless pairing button.

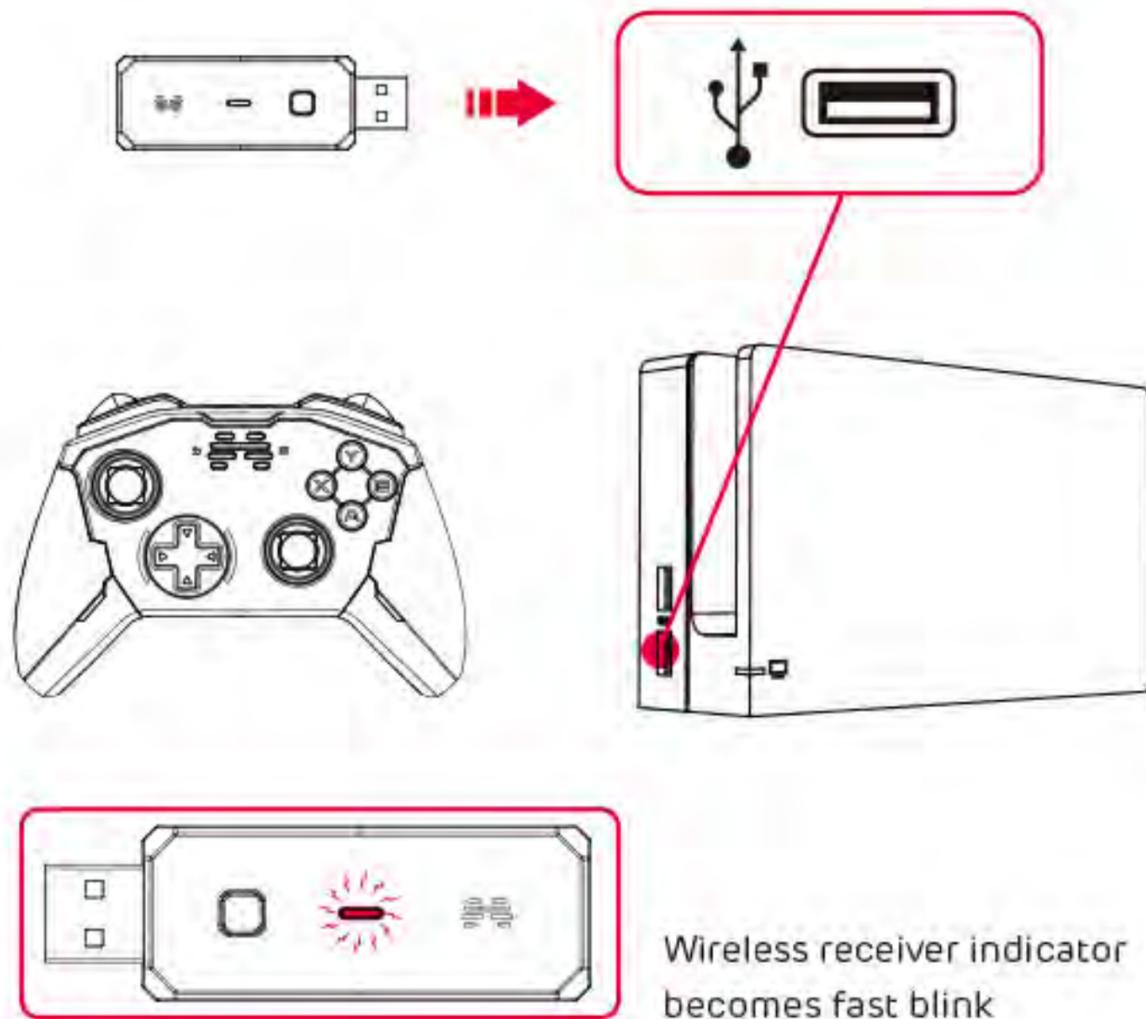

3. Press and hold the [FN button] at the bottom of BEITONG ZEUS, and at the same time switch the [Power switch] at the back of BEITONG ZEUS from OFF to ON;

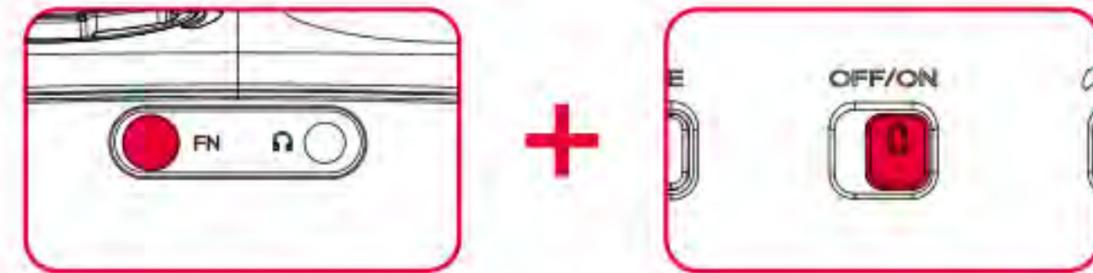

- \* BEITONG ZEUS starts up and [BEITONG LOGO Indicator] becomes fast blinks in multiple colors

4. Wait for a moment, BEITONG ZEUS vibrates to indicate successful connection.



[BEITONG LOGO Indicator] turns to single color "always on" or "breathing" state

[Grip Indicator] lights

Wireless receiver [Status Indicator] becomes always on

---

## COCONNECT BEITONG ZEUS TO THE NINTENDO SWITCH IN TV MODE


### Reconnection Mode:

1. Plug the wireless receiver into Nintendo Switch Console's USB port;
  - \* Wireless receiver indicator becomes slow blink
2. Switch the [Power switch] at the back of BEITONG ZEUS from OFF to ON;
  - \* BEITONG ZEUS starts up and [BEITONG LOGO indicator] slowly blinks in multiple colors
3. Wait for a moment, BEITONG ZEUS vibrates to indicate successful connection.
  - \* [BEITONG Logo Indicator] becomes "always on" or "breathing" state
  - \* [Grip Indicator] lights
  - \* Wireless receiver [Status Indicator] becomes always on


## COCONNECT BEITONG ZEUS TO THE NINTENDO SWITCH IN TV MODE

### Wired connection via USB to Type-C Cable


1. Enter the system settings of Nintendo Switch and switch on the option of "Wired Connection of Pro Gaming Controller".
2. Connect the USB to Type-C cable to the USB port of the Nintendo Switch console;

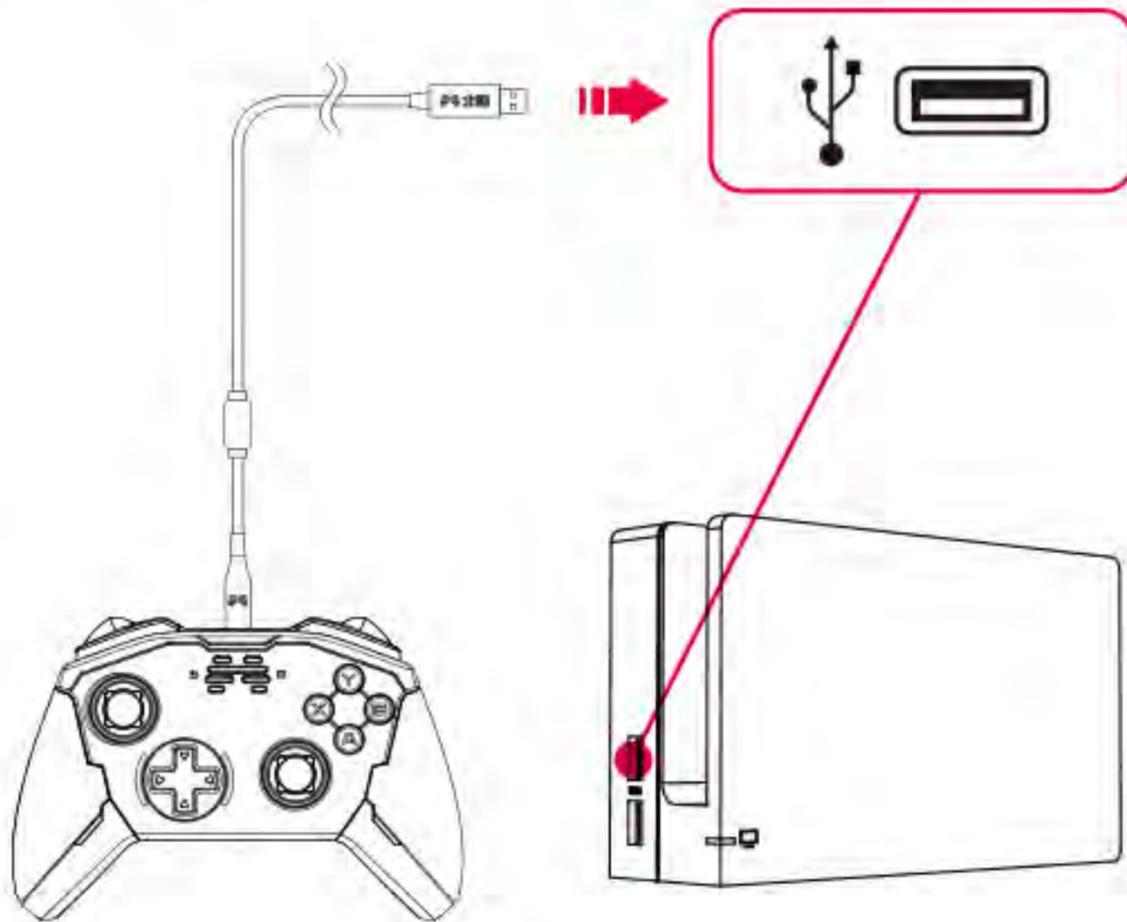

3. Switch the [Power switch] at the back of BEITONG ZEUS from OFF to ON;

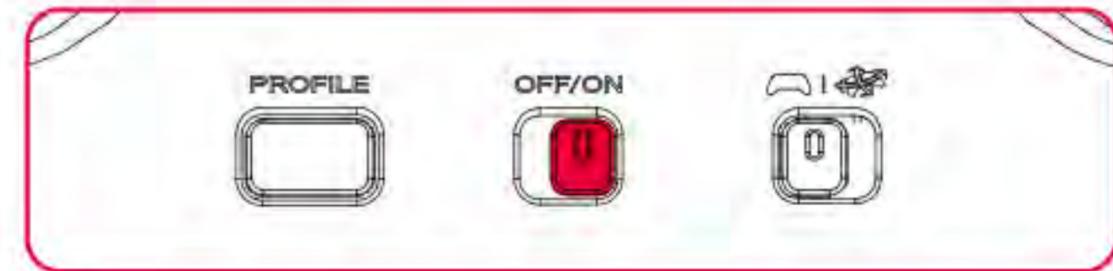

4. Wait for a moment, BEITONG ZEUS vibrates to indicate successful connection.

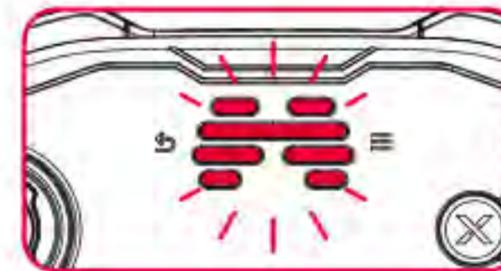

[BEITONG LOGO Indicator]  
turns to single color "always  
on" or "breathing" state



[Grip Indicator] lights

## CUSTOM MODULE REPLACEMENT

### Change thumbstick module with different heights

BEITONG ZEUS gaming controller has three thumbstick modules of high, medium and low in height. You can change the thumbstick module at will to enjoy different control experiences.




\* Take out the thumbstick module cap and ferrule, and then insert the ferrule of a different height into the thumbstick module, and then put in the corresponding thumbstick module cap to complete the replacement

### Replace Theme Face-shell

BEITONG ZEUS gaming controller has a number of different themes of face shell, and aperiodically launches more theme design for players to choose. You can change the theme face shell at any time, so that BEITONG ZEUS has a different appearance.

- \*Dig out the front shell face with the tips of the fingers along the top edge of BEITONG ZEUS;
- \*Find the clip of the grip face shell and pull out it forcibly from the clip position with your thumb.
- \*Choose your favorite theme face shell and reassemble it to complete the replacement.

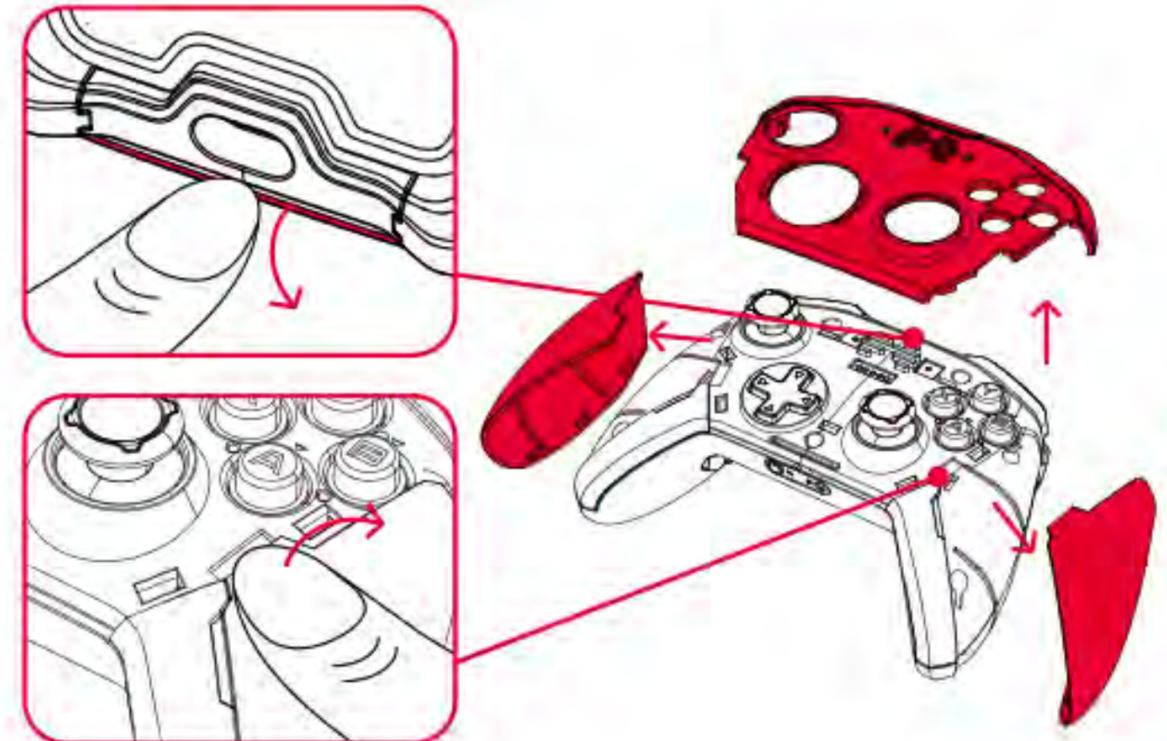

---

## CUSTOM MODULE REPLACEMENT

### Adjust the cap position of ABXY action button

As the controller button positions of PC platform and NS platform are different, you can adjust the button cap position of ABXY action buttons of BEITONG ZEUS when playing with the two platforms at any time to avoid triggering the wrong button.

1. Dig out the front shell face with the tips of the fingers along the top edge of BEITONG ZEUS;
2. Pull out the cap of ABXY action buttons with the nail on index finger;
3. Reposition the button cap according to the actual game platform.




Note! To ensure the stable assembly of BEITONG ZEUS, install the face shell a little tightly, please be careful to exert efforts to avoid damaging fingers.  
Prohibition! Never use your fingernails to dig out the face shell forcedly. If disassembly is difficult, it is recommended to find suitable tools to assist disassembly.

## USE CONTROLLER FUNCTIONS

### Select profiles


BEITONG ZEUS gaming controller has 4 built-in profiles that you can use to customize the gaming controller (for example, remapping button functions, motion-sensing settings, thumbstick module sensitivity adjustments and BEITONG ZEUS lighting effects adjustments).

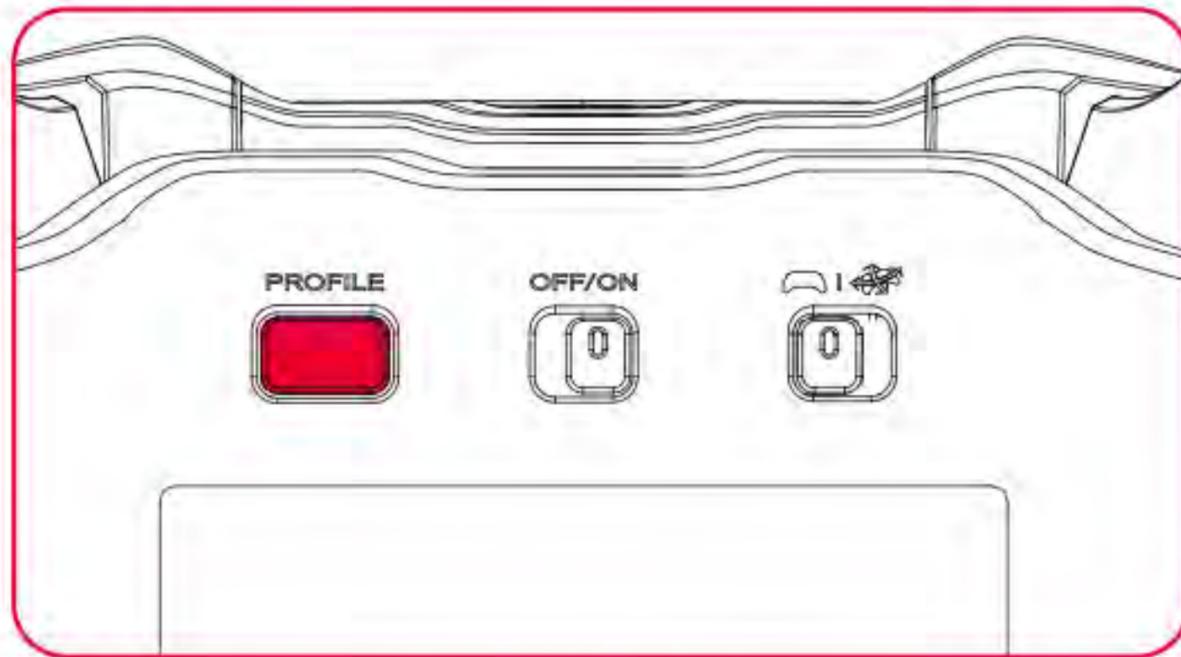

\* Press [PROFILE] to switch among the four saved profiles.

### Turn motion-sensing function on

With BEITONG ZEUS gaming controller built-in six-axis gyroscope based on the self-developed BMC™ motion-sensing mapping technology, you can map the motion-sensing to the thumbstick module, using motion-sensing to control the movement or visual direction of the character. You can also map motion-sensing to action buttons, using motion-sensing to control character actions.

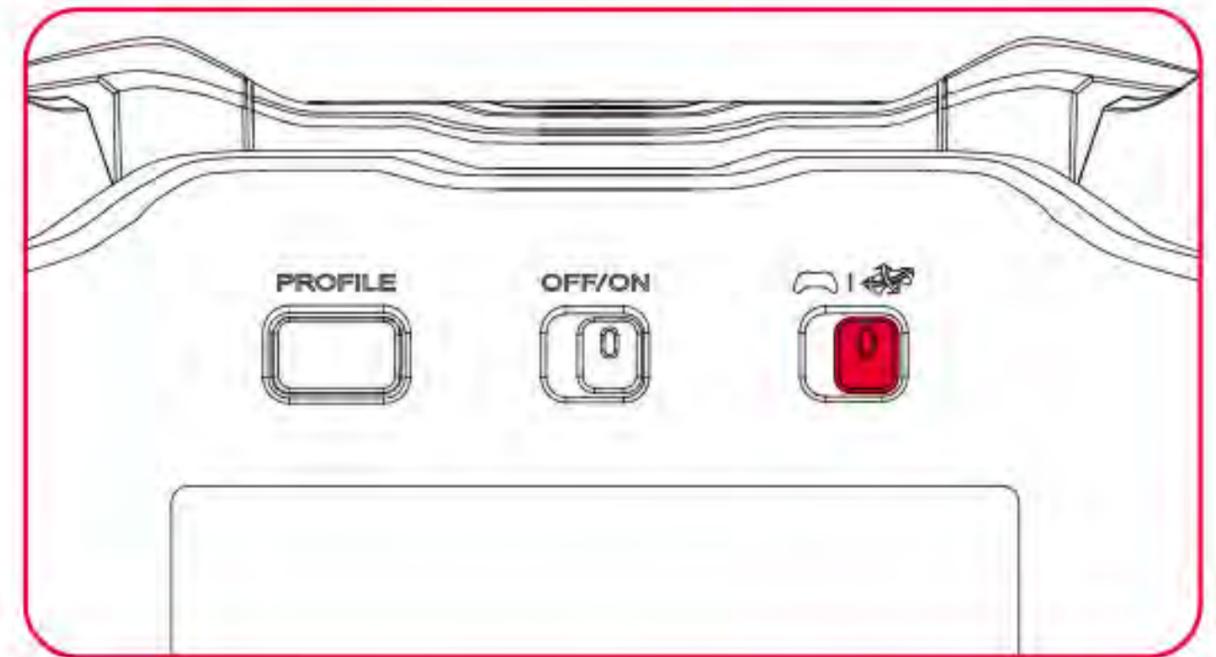

\* Switch [Motion-sensing switch] from OFF to ON to enable motion-sensing functions.

\* You can set the detailed motion-sensing control parameters via the "ZEUS gaming controller assistant" for PC.



## USE CONTROLLER FUNCTIONS

### FN+ multi-function convenient operations


BEITONG ZEUS is equipped with a multi-functional [FN button], you can trigger by combining the [FN button] and other keys to achieve shortcut control of different functions.

Connect to PC with Windows Operating System

[FN button]: turn air mouse mode on

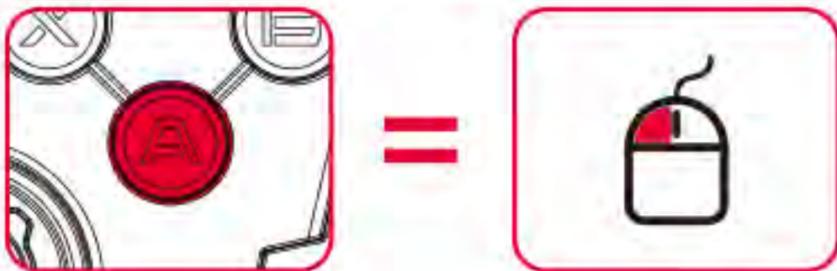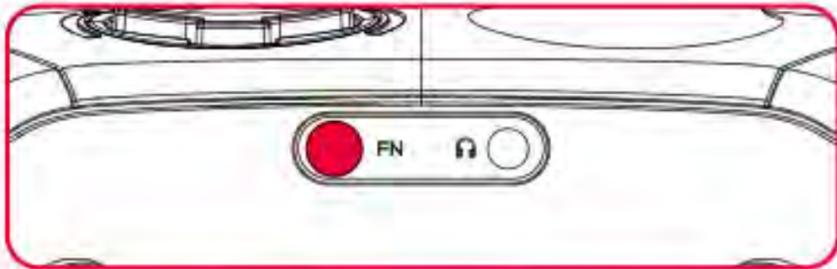


[Button A] = [Left mouse button]

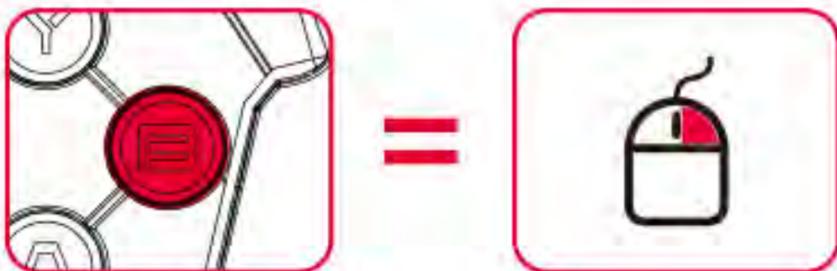


[Button B] = [Right mouse button]


[FN + Up arrow button]: increase volume

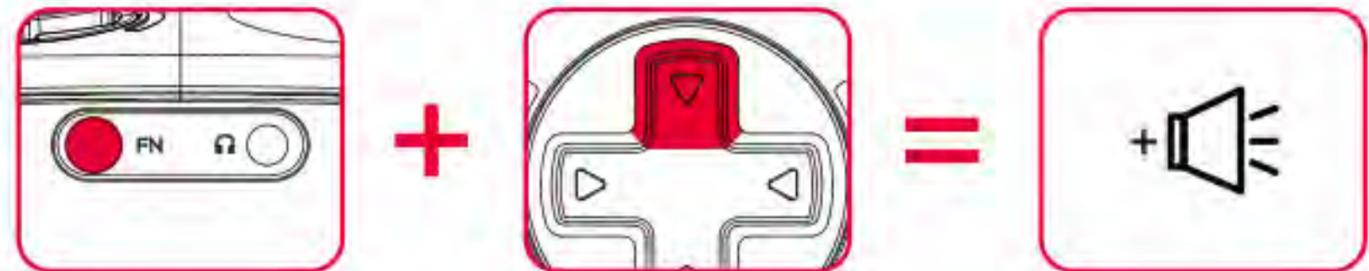

[FN + Down arrow button]: decrease volume

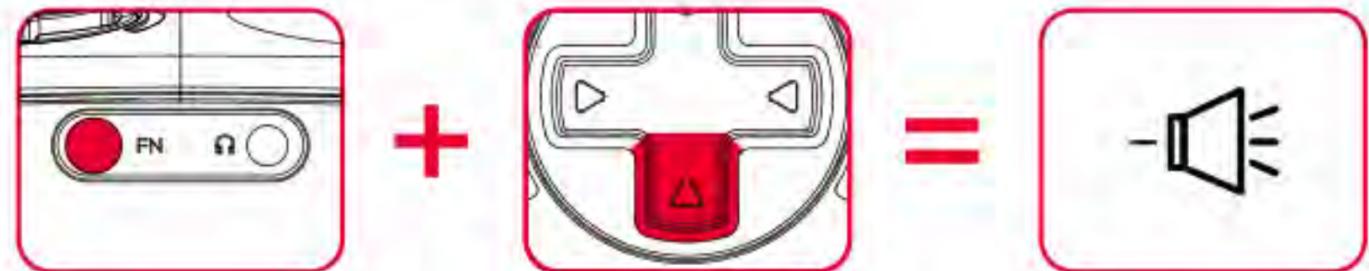


[+ Touch return button]: home

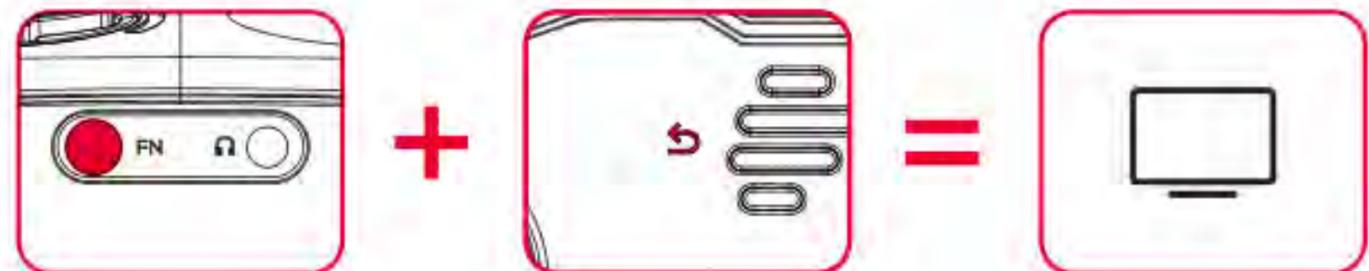


## USE CONTROLLER FUNCTIONS

### Connect to Nintendo Switch


[Touch menu button] = [+ button]

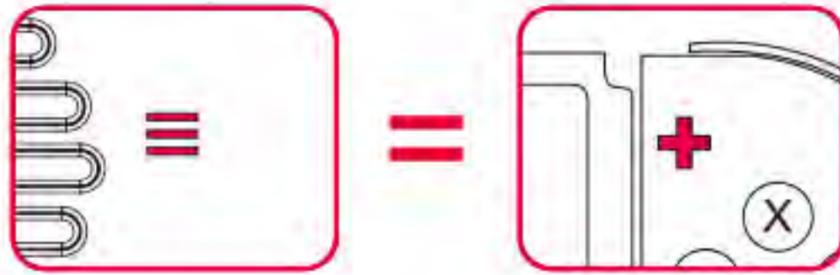

[Touch return button] = [- button]

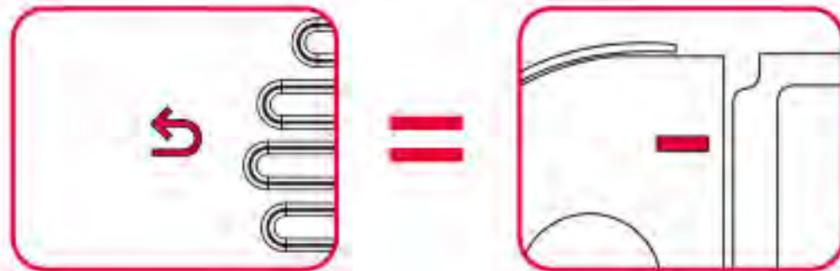


[FN + Touch menu button] = [Home button]

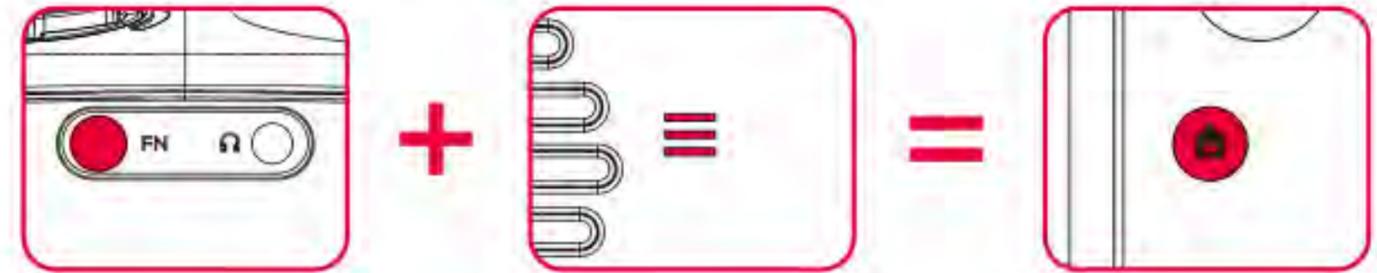

\*Touch: home | Touch & hold: menu

[FN + Touch return button] = [Capture button]

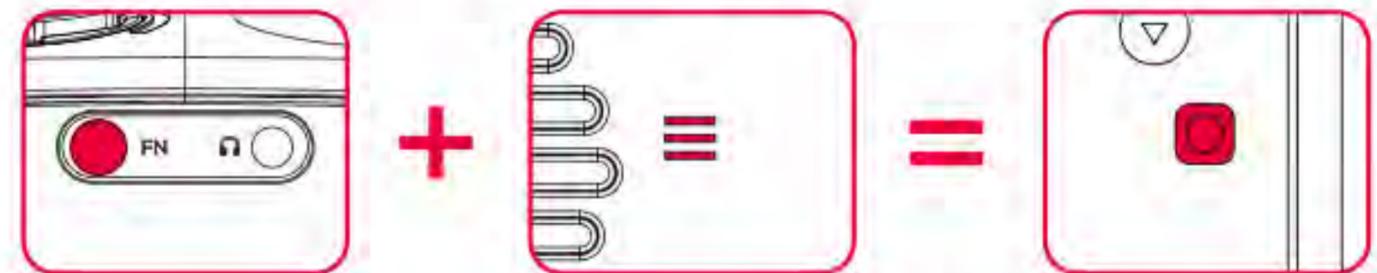

\*Touch: screenshot | Touch & hold: screen recording

## USE CONTROLLER FUNCTIONS


### Headphone audio output

BEITONG ZEUS is equipped with a 3.5mm headset port at the bottom. The audio function can be activated by inserting the four-segment wired headset into BEITONG ZEUS' headset port. BEITONG ZEUS can not only pass your call for help to teammates, but also pass your voice to teammates via the microphone on the headset for real-time communication.



### Install and use "ZEUS Controller Assistant" Integrated Configuration Software for PC

1. Login BEITONG's official website (<http://www.betop-cn.com/>) on PC to download and install the "Zuoyou Game Center" for PC;
2. Connect BEITONG ZEUS to PC with USB to Type-C Cable via wired connection for successful connection;
3. Open the "ZEUS controller assistant" plug-in in "Zuoyou game center" to set the functions of BEITONG ZEUS software according to your needs.

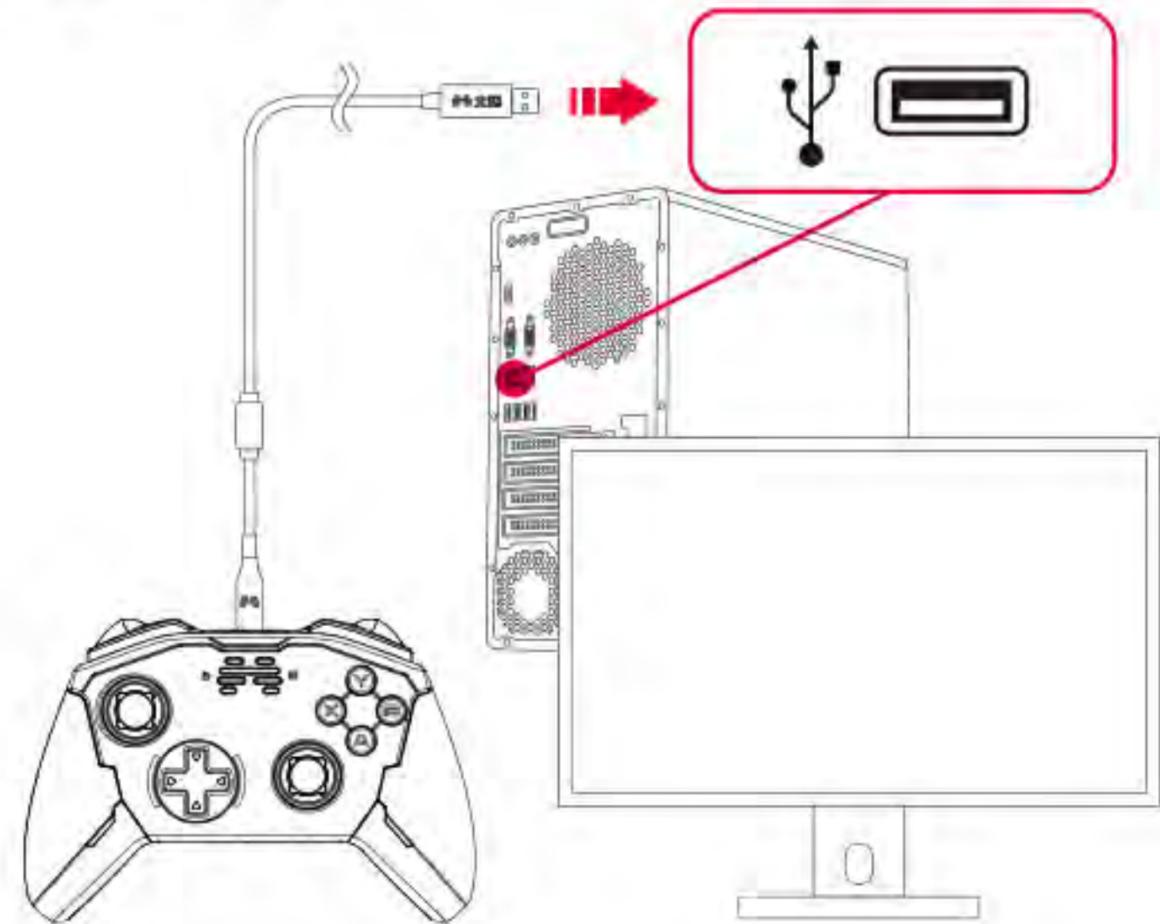

---

## WARRANTY CARD

Dear Valued Customer:

Greetings. When applying for customer services, please fill in the Product Warranty Card according to your actual situation, and mail both the product in question and the Product Warranty Card to the seller where you have bought the product. Thank you!

1. Please check the reason for the customer service:

functions are not useful                       appearance is not appealing

the device is uncomfortable to handle

tutorials are incomplete, do not know how to operate

or other: \_\_\_\_\_

cannot play the games I want to play, such as: \_\_\_\_\_

2. Please check the services you need:

change for new                       repair                       refund

3. Please leave us your valuable advice: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



Please fill the following information (all the following items are required)

Order Number: \_\_\_\_\_

User Name: \_\_\_\_\_

Contact Name: \_\_\_\_\_

Return Address: \_\_\_\_\_

**Company Name:** Guangzhou Pinzhong Electronic Technology CO., LTD

**Address:** Room 611-612, Greenland Center of Financial City, No. 662, Huangpu Avenue

Middle Road, Tianhe District, Guangzhou City

**Note:** Please consult the seller for specific locations of customer service.

WWW.BETOP-CN.COM

**BEITONG**  
**ACHIEVE GOD-LEVEL ACTIONS WITH BEITONG**

Chinese intelligent game controller brand  
Huawei intelligent ecological DFH partner  
23 years of dedicated R&D on game controller and complementary software  
Customized professional operation solutions for different types of games

Official website: [WWW.BETOP-CN.COM](http://WWW.BETOP-CN.COM)  
QQ for customer service: 4006754300 (9:30-21:00)  
Service hotline: 4000963918 (9:30-18:00)



**ACHIEVE GOD-LEVEL ACTIONS WITH BEITONG**



[WWW.BETOP-CN.COM](http://WWW.BETOP-CN.COM)

MADE IN CHINA