

## PARENT UNIT ICONS (CONT'D)

| Status icons                                                                         | Status icons                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                       |
|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
|       | <b>Connection status</b> <ul style="list-style-type: none"> <li> - Strong signal strength.</li> <li> - Moderate signal strength.</li> <li> - Low signal strength.</li> <li> - Weak signal strength.</li> </ul> |  <b>Lullaby</b> - On |
|       |  <b>Night light</b> - On                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                       |
|       |  <b>Night light</b> - Auto night light timer is activated.                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                       |
|  1 or |  <b>Real-time temperature</b>                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                       |
|  2    | <ul style="list-style-type: none"> <li>Real-time temperature detected by the baby unit in Fahrenheit (°F) or Celsius (°C) (e.g. 57°F or 14°C).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                       |
|                                                                                      | <b>Temperature alert tone</b> - On                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                       |
|                                                                                      |  <b>Talkback</b> - On                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                       |
|                                                                                      |  <b>Mute alert</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                       |
|                                                                                      | <ul style="list-style-type: none"> <li>Displays when the parent unit speaker volume is set to off.</li> <li>Displays when the parent unit is talking to the baby unit.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                       |
|     | <b>Battery status</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                       |
|                                                                                      | <ul style="list-style-type: none"> <li> animates when the battery is charging.</li> <li> - battery is fully charged.</li> <li> - battery is low and needs charging.</li> </ul>                                                                                                                  |                                                                                                       |
|       | <b>Night vision</b> - On                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                       |
|       | <b>Zoom</b> - On                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                       |
| Alert icons                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                       |
|       | <ul style="list-style-type: none"> <li>Displays when parent unit's battery is low and needs charging.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                       |
|       | <ul style="list-style-type: none"> <li>Displays when connection between parent unit and baby unit is lost.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                       |
|       | <ul style="list-style-type: none"> <li>Displays when sound is detected at a baby unit when in <b>Split</b> view. (For <b>VM5266-2</b> only)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                       |
|       | <ul style="list-style-type: none"> <li>Baby unit detects temperature reaches or exceeds the set maximum.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                       |
|       | <ul style="list-style-type: none"> <li>Baby unit detects temperature is at or is lower than the set minimum.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                       |

## SOUND SENSITIVITY AND SOUND ACTIVATION

## Adjust the sound sensitivity of the baby unit

The parent unit screen will turn on only when the detected sounds exceed a set level.

Use the parent unit to adjust the microphone sensitivity of your baby unit. The higher the sensitivity level, the more sensitive the baby unit is in detecting sounds that transmit to the parent unit. The sound sensitivity level is preset to the highest level.


| SOUND SENSITIVITY LEVEL | Level 5 (Highest)                                                                                      | Level 4 (High)                                                                                                                    | Level 3 (Medium)                                                                                                                     | Level 2 (Low)                                                                                                                 | Level 1 (Lowest)                                                                                                                     |
|-------------------------|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| DESCRIPTION             | The parent unit screen turns on for quiet sounds, (including background noises) from your baby's room. | The parent unit screen turns on for soft babbling and louder sounds from your baby. It remains off when your baby sleeps soundly. | The parent unit screen turns on for loud babbling and louder sounds from your baby. It remains off when your baby makes soft sounds. | The parent unit screen turns on for crying and louder sounds from your baby. It remains off when your baby makes soft sounds. | The parent unit screen turns on for loud crying or screaming sounds from your baby. It remains off when your baby makes soft sounds. |

When **AUTO** is selected, the parent unit screen stays off to save power when the baby unit detects sounds that are lower than the set sensitivity level.

Once the baby unit detects sounds that are louder than the set sensitivity level, the parent unit screen turns on automatically. It will then turn off again after 50 seconds if the sounds detected are lower than the set sensitivity level.

 DIM MODE

Dim mode helps you save parent unit power. Your parent unit display will automatically dim after 10 minutes of inactivity, when no keys are pressed or alerts are received from the baby unit.

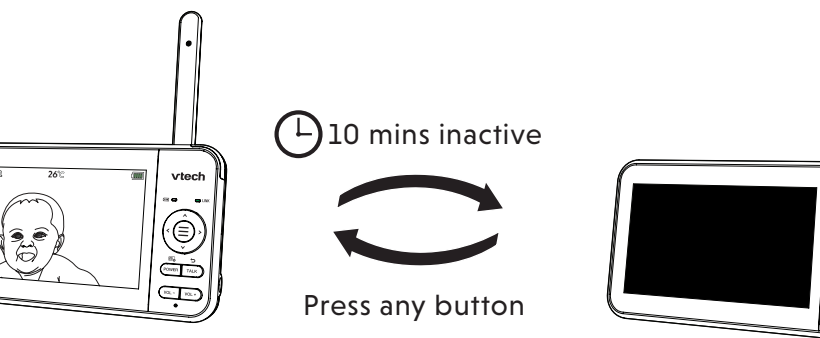

**NIGHT VISION**



The baby unit has infrared LEDs that allow you to see your baby clearly at night or in a dark room. When the baby unit being viewed detects low light levels, the infrared LEDs are switched on automatically. The images from the baby unit are in black and white, and  appears on the screen.

**NOTES**

- It is normal to see a short white glare on your parent unit screen when the baby unit adapts to the dark environment.
- When the infrared LEDs are on, it is normal for the images to be in black and white.

**TIP**


- Depending on the surroundings and other interfering factors, for example, lighting, objects, colors and backgrounds, the image quality may vary. Adjust the baby unit angle or place the baby unit at a higher location to prevent glare and a blurred display.

 **FOR VM5266-2 ONLY**

### Change different views - Single CAM

To switch between the image of baby units ① and ②:


1. Press .
2. Enter  **Monitoring mode** menu.
3. Select the baby unit you would like to view  1 or  2.

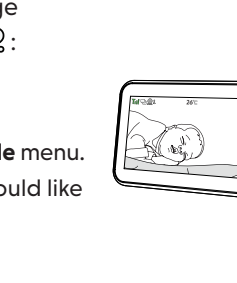

### Change different views - Patrol



Select **Patrol** as your monitoring mode to alternately view the image from baby units ① and ② every 10 seconds.

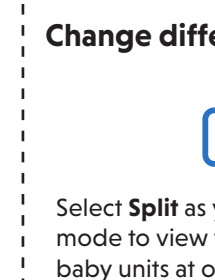

### Change different views - Split



Select **Split** as your monitoring mode to view the images from both baby units at once.



 **NOTE**

- If you power on only one baby unit, your parent unit may display  and the LINK LED light will flash.

## Q&A FREQUENTLY ASKED QUESTIONS

|                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Why does the baby monitor not respond normally?</p>                                                                       | <p>Try the following (in the order listed) for common cure:</p> <ol style="list-style-type: none"> <li>1. Disconnect the power to the baby units and the parent unit.</li> <li>2. Wait a few seconds before connecting power back to the baby units and the parent unit.</li> <li>3. Turn on the baby units and the parent unit.</li> <li>4. Wait for the parent unit to synchronize with the baby units. Allow up to one minute for this to take place.</li> </ol>                                                                |
| <p>Why doesn't the baby unit and parent unit power-on light illuminate when the units are switched on?</p>                   | <p>Perhaps the parent unit is not connected to the power. Insert the adapter plug into the parent unit and put the adapter in a wall socket. Then, press <b>POWER</b> to switch on the parent unit and to establish connection with the baby unit.</p> <p>Perhaps the baby unit is not connected to the power. Insert the adapter plug into the baby unit and put the adapter in a wall socket. Then, slide the <b>ON/OFF</b> switch to <b>ON</b> to switch on the baby unit and to establish connection with the parent unit.</p> |
| <p>Why doesn't my parent unit charge while connected to AC power?</p>                                                        | <p>Make sure the power is not controlled by a electronic wall switch.</p> <p>The battery may be degraded through extended use or defective. See <b>Warranty for repair/replacement</b>.</p>                                                                                                                                                                                                                                                                                                                                        |
| <p>Why is my screen in black and white?</p>                                                                                  | <p>The screen is in black and white during night-time or in a dark room when the night vision feature is activated. This is normal.</p>                                                                                                                                                                                                                                                                                                                                                                                            |
| <p>Why do I get glare or blurry display on my screen when viewing my baby at night?</p>                                      | <p>During night-time or in a dark room, the surroundings and other interfering factors, like lightings, objects, colors and backgrounds may affect the image quality on your parent unit screen. Adjust the baby unit's angle or place the baby unit at a higher level to prevent glare and blurry display.</p>                                                                                                                                                                                                                    |
| <p>Why does the baby monitor produce a feedback noise?</p>                                                                   | <p>The parent unit and baby units may be too close to each other.</p> <ul style="list-style-type: none"> <li>• Move the parent unit away from the baby units until the noise stops; OR</li> <li>• Turn down the volume of your parent unit.</li> </ul>                                                                                                                                                                                                                                                                             |
| <p>Why does the parent unit beep?</p>                                                                                        | <p>The baby units may be out of range. Move the parent unit closer to the baby units (but not less than 3 feet).</p> <p>The parent unit may not have enough charge for the parent unit to perform normally. Charge the battery in the parent unit until the battery icon segments are solid .</p> <p>The temperature of your baby's room may be too high or too low.</p>                                                                        |
| <p>Why does the parent unit react too quickly to other sounds?</p>                                                           | <p>The baby unit also picks up other sounds than those of your baby. Adjust the sound sensitivity level to a lower level or lower the parent unit speaker volume.</p>                                                                                                                                                                                                                                                                                                                                                              |
| <p>Why don't I hear a sound/Why can't I hear my baby cry?</p>                                                                | <p>The parent unit speaker volume may be too low. See <b>Adjust parent unit speaker volume</b> to increase the volume.</p> <p>You may have set a low sound sensitivity level. See <b>Adjust the sound sensitivity of the baby unit</b> to set to a higher level.</p>                                                                                                                                                                                                                                                               |
| <p>Why can't I establish a connection? Why is the connection lost every now and then? Why are there sound interruptions?</p> | <p>The baby units may be out of range. Move the parent unit closer to the baby units (but not less than 3 feet).</p> <p>Other electronic products and wireless products may cause interference with your baby monitor. Try installing your baby monitor as far away from these devices as possible.</p> <p>If you power on only one baby unit, your parent unit may display , and the <b>LINK</b> LED light will flash.</p>                     |

 MOUNT THE BABY UNIT (OPTIONAL)

## Items to purchase

You will need to purchase the following items separately to mount your baby unit:

2 screws

2 wall plugs

### NOTE

- The types of screws and wall plugs you need depend on the composition of the wall.

1

### NOTE

- Check for reception strength and camera angle before drilling the holes.

Use a pencil to mark two holes in parallel. Make sure they are the same distance apart as the wall mount holes on the baby unit.

2

Drill two holes in the wall (7/32 inch drill bit). If you drill the holes into a stud, go to step 3.

**-OR-**

If you drill the holes into an object other than a stud, insert the wall plugs into the holes. Tap gently on the ends with a hammer until the wall plugs are flush with the wall.

3

Insert the screws into the holes and tighten the screws until only 1/4 inch of the screws are exposed.

4

Align the wall mount holes on the baby unit with the screws on the wall. Slide the baby unit down until it locks into place.

5

Adjust the baby unit angle.

## THE RBRC SEAL

The FCC logo is a circular seal with "FEDERAL COMMUNICATIONS COMMISSION" around the top and "DEPARTMENT OF COMMERCE" around the bottom. In the center, it says "FEDERAL COMMUNICATIONS COMMISSION" and "UNITED STATES OF AMERICA".

The FCCR seal and the 1 (800) 8 BATTERY® are registered trademarks of CalZirec, Inc.

## FCC and IC REGULATIONS

### FCC Part 15

This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**WARNING:** Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystander located near the equipment during use of the product. This product has been tested and found to comply with the FCC criteria. The baby unit shall be installed and used such that parts of all persons' body are maintained at a distance of approximately 8 in (20 cm) or more. The transmitter and antenna of the parent unit shall be held at least 1 in (2.5 cm) from your face.

This Class B digital apparatus complies with Canadian requirement:  
CAN ICES-3 (B)/NMB-3(B)

### Industry Canada

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept the interference, including interference that may cause undesired operation of the device.

The term "CIC" before the certification/registration number only signifies that the Industry Canada technical specifications were met. This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

### RF radiation exposure statement

The product complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The baby unit should be installed and operated with a minimum distance of 8 in (20 cm) between the baby unit and all persons' body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. This equipment complies also with Industry Canada RSS-102 with respect to Canada's Health Code 6 for Exposure of Humans to RF Fields.

## CALZIREC ENERGY COMMISSION BATTERY CHARGING TESTING MODE

This baby monitor meets the California Energy Commission (CEC) regulations for energy consumption. Your baby monitor is set up to comply with the energy-conserving standards right out of the box. Follow the instructions to install and charge the battery. The CEC battery charging testing mode is activated while charging. Even if the parent unit is paired to baby units, the CEC battery charging testing mode is activated while it is powered off and charging.

## DISCLAIMER AND LIMITATION OF LIABILITY

Vtech Communications, Inc. and its suppliers assume no responsibility for any damage or loss resulting from the use of this user's manual. Vtech Communications, Inc. and its suppliers assume no responsibility for any loss or claims by third parties that may arise through the use of this product.

Company: Vtech Communications, Inc.  
Address: 9020 SW Washington Square Road - Ste 555 Tigard, OR 97223, United States  
Phone: 1 (800) 595-9512 in the U.S. or 1 (800) 267-7377 in Canada

FOR cETL COMPLIANCE ONLY

**Précautions de sécurité importantes**

La plaque signalétique applicable est située au bas du socle de la pile.

Lorsque vous utilisez votre appareil, vous devriez toujours suivre certaines règles de sécurité afin d'éviter tout risque d'incendie, d'électrocution et de blessures corporelles. Ces règles sont les suivantes :

1. Observez toutes les instructions et mises en garde inscrites sur l'appareil.
2. L'installation par un adulte est requise.
3. L'installation de cet appareil sur le cou de bébé à une hauteur supérieure à 2 mètres.
4. Ce produit ne remplace pas la surveillance adulte du nourrisson, et la personne qui s'occupe de l'enfant. Ce produit pourrait provoquer des blessures, risquer l'incendie ou l'électrocution si l'utilisateur n'utilise pas correctement le produit. Ce produit n'est pas un instrument médical et ne devrait pas être utilisé comme tel. Ce produit est destiné à vous aider à superviser votre bébé.
5. L'utilisation de cet appareil avec ou sans fil ne constitue pas une source d'humidité, par exemple, près d'une baignoire, cuve à lessive, évier de cuisine, dans un sous-sol, même si près d'un sèche-linge.
6. **MISE EN GARDE :** N'utilisez que la pile fournie. Il peut y avoir un risque d'incendie, d'électrocution ou de blessures corporelles pour le dispositif apparelé. La pile ne peut pas être soumise à des températures extrêmes, élevées ou basses et a une faible pression atmosphérique à l'intérieur. Toute pression, utilisation, sur-empilage ou son transport. Le fait de faire le plein de la pile peut provoquer une explosion. Le fait de faire fonctionner l'appareil à une température supérieure à la température nominale élevée peut entraîner une explosion ou une fuite de liquide ou de gaz inflammable. Une pile soumise à une pression d'air élevée peut provoquer une explosion ou une fuite de liquide ou de gaz inflammable. Mettez au rebut la pile usagée conformément aux informations figurant dans la section la PILE.
7. N'utilisez que les adaptateurs inclus avec ce produit. L'utilisation d'un autre type de produit peut entraîner un incendie ou une explosion d'endommager sérieusement le produit et mettre votre sécurité en danger.
8. Informations sur les adaptateurs électroniques :  
 Source : 3V DLR  
 Vtech Technologies Ltd  
 Modèle : VT05EUS005100  
 DJI  
 Jiangxi Jian-A308 Technology Co., Ltd.  
 Modèle : A308-050100W-US2
9. Informations sur les piles rechargeables :  
 Zhihui Gear Power Energy Co., Ltd.  
 3.6V batteries 2x 260mAh  
 Modèle : ICR1650-3.6V-3.6V-151P-01
10. Lorsque les piles sont branchées dans le produit, assurez-vous que l'orientation, soit à la verticale ou au plancher. Les broches sont conçues pour être connectées à la pile. Ne tentez pas de déconnecter, soit le maintenir en place si celui-ci est branché dans une prise au plafond, sous une lampe ou dans un autre endroit. Ne tentez pas de brancher une autre pile. **NE PAS COUVRIR, la prise de courant doit être installée près du produit.** Si vous n'avez pas accès à une prise de courant, vous pouvez vous adresser à un technicien qualifié pour l'installation.
11. Débranchez ce produit de la prise de courant avant de procéder au nettoyage. N'utilisez pas de nettoyeurs en aérosols. Utilisez un chiffon humide pour nettoyer.
12. Ne coupez pas les cordons d'alimentation pour remplacer les fiches, car ceci peut présenter un danger potentiel.
13. Ne tentez pas de réparer ou d'ajuster quelconque partie de l'appareil. N'installez pas cet appareil dans un endroit où il pourrait entraîner le cordon d'alimentation ou le câblage.
14. Ne faites fonctionner cet appareil qu'avec le type d'alimentation indiqué sur votre étiquette. Si vous ne connaissez pas l'alimentation recommandée, consultez votre fournisseur, consultez votre marchand ou votre compagnie locale.
15. Ne surchargez pas les prises de courant murales ni les rallonges électriques.
16. Ne branchez pas cet appareil sur un chariot, meuble, trépied, support de montage ni table connectée.
17. Les trous et ouvertures du boîtier, situés à l'arrière de l'appareil, sont destinés à assurer la ventilation de l'appareil. Ne tentez pas surchauffer, ne bloquez sous aucun prétexte ces ouvertures et n'empêchez pas l'aération adéquate de l'appareil en fonctionnant.
18. Ne placez pas l'appareil sur une surface dure ou une surface glissante, ni sur un lit, tapis, divan, ou toute autre surface similaire. De même, ne le positionnez pas à proximité ni au-dessus d'une source de chaleur, telle qu'un radiateur, poêle à bois, etc.
19. L'appareil dans un endroit avant de vous assurer qu'il y ait une ventilation adéquate.
20. N'enfoncez jamais d'objet à travers les ouvertures de cet appareil, car il pourrait entraîner en contact avec des points de contact électrique, provoquant des blessures corporelles, ou dégrader en incendies ou en risques d'électrocution. Ne jetez jamais l'appareil dans une poubelle.
21. Afin de réduire les risques d'électrocution, ne démontez pas cet appareil, mais apportez-le dans un centre de service agréé.
22. L'utilisation du boîtier de l'appareil est conçue pour contenir cet appareil, à l'exception de l'accès autorisé à certaines parties extérieures, risques d'incendie ou d'électrocution, ou d'autres dangers, ou d'autres dangers. Un remontage incorrect peut par la suite présenter des risques d'électrocution.
23. Si l'installation est effectuée par un professionnel, vous mettez l'appareil en fonction.
24. Si l'installation est effectuée par vous-même, vous êtes conscient des conséquences de venir d'elles-ci, et vous ne serez pas endommagés.
25. Il existe un très faible risque de perte de confidentialité si les données sont envoyées à un serveur cloud, par exemple, téléphones sans fils etc. Pour l'éviter, s'assurer que le produit n'a jamais été utilisé avant l'achat, réinitialiser l'unité de fabrication, éteindre l'appareil, et ne pas l'utiliser.
26. L'appareil ne devrait être supervisé afin de vous assurer qu'il ne jouent pas avec l'appareil.
27. Le produit n'est pas conçu pour être utilisé par des personnes souffrant des troubles de la vue, de l'audition, de l'équilibre ou mentales réduites ou qui manquent d'expérience et de connaissances, à moins qu'ils ne soient supervisés par une personne de supervision ou d'instructions relativement à l'utilisation de l'appareil par une personne responsable de leur utilisation.

**CONSERVER CES INSTRUCTIONS**

**MISE EN GARDE**

Utiliser et entreposer le produit à une température entre 0 °C et 40 °C.

N'exposez pas cet appareil à des froids ou des chaleurs extrêmes, ainsi qu'à l'humidité ou au soleil. Ne l'installez pas près d'une source de chauffage.

Le bloc-piles ne doit pas être exposé à la chaleur excessive telle que la lumière d'un feu.

**AVERTISSEMENT - Risque de strangulation**

Les enfants se sont ENTRAÎNÉS dans des cordons. Gardez ce cordon hors de portée des enfants à plus de 0,6 m. Ne laissez pas les cordons s'enchevêtrer.

Ne jetez pas le montage à l'intérieur d'un sac à poussette ou du sac à main. Ne laissez pas le montage ou l'unité (s) portative avec un article tel une serviette ou une serviette.

D'autres équipements électroniques peuvent produire des interférences sur votre montage vidéo et audio. Tentez d'installer votre montage à l'écart de tout autre équipement électronique tels que des routeurs sans fil, radios, téléphones cellulaires, interphones, appareils de musique, appareils personnels, équipements informatiques et téléphones sans fil.

**Stimulateurs cardiaques implantés dans l'organisme**

Les personnes qui ont des dispositifs numériques sans fil :

- L'organisme "Wireless Technology Research, LLC (WTR)" a une firme d'expertise indépendante à mener une évaluation pluridisciplinaire des interférences entre les téléphones sans fil et les dispositifs numériques sans fil.
- Appuyée par l'Administration des aliments et drogues (FDA) des États-Unis, WTR recommande aux médecins :

**AVIS aux détenteurs de dispositifs numériques sans fil**

Vous devez maintenir les dispositifs sans fil à au moins 15 cm du simulateur cardiaque. Ne jetez pas le simulateur cardiaque, ni ne devez PAS placer le téléphone sans fil directement sur le simulateur cardiaque, tel que dans une poche de chemise, la poche à l'estomac, etc.

L'étude effectuée par l'organisme WRS n'a pas identifié de risque pour les détenteurs de stimulateurs cardiaques causés par les gens qui utilisent des dispositifs numériques sans fil.

**Champs électromagnétiques (EMF)**

Ce produit de Vtech est conforme à toutes les normes se rapportant aux champs électromagnétiques (EMF). Le produit est conçu pour manipuler correctement en suivant les instructions de ce guide, son utilisation sera sécuritaire pendant des nombreuses années, selon les meilleures évidences scientifiques dont nous disposons aujourd'hui.

## LIMITED WARRANTY

**What does this limited warranty cover?**

The manufacturer of this Vtech Product warrants to the holder of a valid certificate of purchase ("Consumer") or you ("you") that the Product and all accessories provided in the sales package ("Product") are free from defects in material and workmanship, pursuant to the following terms and conditions, when installed and used normally and in accordance with the Product operating instructions. This limited warranty extends only to the Consumer for Products purchased and used in the states of America and Canada.

**What will Vtech do if the Product is not free from defects in material and workmanship during the limited warranty period ("Materially Defective Product")?**

During the limited warranty period, Vtech's authorized service representative will repair or replace at Vtech's option, without charge, a Materially Defective Product. If we repair the Product, we may use new or refurbished replacement parts. If we choose to replace the Product, we may replace it with a new or refurbished Product of the same or similar design. We will retain defective parts, modules, or equipment. Repair or replacement of the Product, at Vtech's option, is your exclusive remedy. Vtech will return the repaired or replacement Product to you in working condition. You should expect the repair or replacement to take approximately 30 days.

**How long is the limited warranty period?**

The limited warranty period for the Product extends for ONE (1) YEAR from the date of purchase. If Vtech repairs or replaces a Materially Defective Product under the terms of this limited warranty, this limited warranty also applies to the repaired or replacement Product for a period of either (a) 90 days from the date the repaired or replacement Product is shipped to you or (b) the time remaining on the original one-year warranty, whichever is longer.

**What is not covered by this limited warranty?**

This limited warranty does not cover:

- 1. Product that has been subjected to misuse, accident, shipping or other physical damage, improper installation, abnormal operation or handling, neglect, inundation, fire, water or other liquid intrusion;
- 2. Product that has been damaged due to repair, alteration or modification by anyone other than an authorized service representative of Vtech; or
- 3. Product to the extent that the problem experienced is caused by signal conditions, network reliability, or cable or antenna systems; or
- 4. Product to the extent that the problem is caused by use with non-Vtech accessories;
- 5. Product whose warranty/quality stickers, product serial number plates or electronic serial numbers have been removed, altered or rendered illegible; or
- 6. Product purchased, used, serviced, or shipped for repair from outside the United States of America or Canada, or used for commercial or institutional purposes (including but not limited to Products used for rental purposes); or
- 7. Product returned without a valid proof of purchase (see item 2 below).

8. Charges for restoration or set up, adjustment of customer controls, and installation or repair of systems outside the unit.

**How do you get warranty service?**

To obtain warranty service in the USA, please visit our website at [www.vtechphones.com](http://www.vtechphones.com) or call 1 (800) 595-9511. In Canada, go to [www.vtechcanada.com](http://www.vtechcanada.com) or call 1 (800) 267-7377.

**NOTE:** Before calling for service, please review the user's manual - a copy of the Product's controls and features may save you a service call.

Except as provided by applicable law, you assume the risk of loss or damage during transit and transport and accept full liability for delivery or handling charges incurred in the transport of the Product to the service location. Vtech will assume no repair or replacement of the Product under this limited warranty. Transportation, delivery or handling charges are prepaid. Vtech assumes no risk for damage or loss of the Product in transit. If the Product failure is not covered by this limited warranty, or proof of purchase does not meet the terms of this limited warranty, Vtech will notify you and will request that you authorize the cost of repair for any further repair activity. You must pay for the cost of repair and return shipping costs for the repair of Products that are not covered by this limited warranty.

**What must you return with the Product to get warranty service?**

- 1. Return the entire original package and contents including the Product to the Vtech service location along with a description of the malfunction or difficulty; and
- 2. Include a "valid proof of purchase" (sales receipt) identifying the Product purchased (Product model) and the date of purchase or receipt; and
- 3. Provide your name, complete and correct mailing address, and telephone number.

**Other limitations**

This warranty is the complete and exclusive agreement between you and Vtech. It supersedes all other written or oral communications related to this Product. Vtech provides no warranty for the Product. The Product warranty exclusively describes all of Vtech's responsibilities regarding the Product. There are no other express warranties. No one is authorized to make modifications to this limited warranty and you should not rely on any such modification. State or Provincial Law Rights: This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state or province to province.

**Limitations:** Implied warranties, including those of fitness for a particular purpose and merchantability (an unwritten warranty that the Product is fit for ordinary use) are limited to one year from the date of purchase. Some states/provinces do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. In no event shall Vtech be liable for any indirect, incidental, consequential, or similar damages (including, but not limited to lost profits or revenue, inability to use the Product or other associated equipment, the cost of substitute equipment, and claims by third parties) resulting from the use of this Product. Some states/provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

**Please retain your original sales receipt as proof of purchase.**

 CABLE MANAGEMENT

The diagram illustrates the process of securing a cable with a strap in three steps:

- 1**: The strap is looped around the cable.
- 2**: The strap is pulled tight.
- 3**: The strap is secured with a knot.