


	manufacturer	:	Shenzhen Zhongyi Tengda Technology Co., Ltd
	model	:	ANT1
	Gain Pack	:	1.22dbi

Freq	EfficiencGain	Efficiency_Pcent
2300	-6	-1.66 25.11
2310	-5.7	-1.35 26.94
2320	-5.32	-1.04 29.37
2330	-4.9	-0.64 32.38
2340	-4.54	-0.29 35.13
2350	-4.18	0.1 38.2
2360	-3.83	0.47 41.43
2370	-3.59	0.69 43.75
2380	-3.26	1 47.22
2390	-3.07	1.1 49.37
2400	-2.92	1.21 51.02
2410	-2.85	1.22 51.94
2420	-2.84	1.21 52.03
2430	-2.89	1.13 51.45
2440	-2.92	1.07 51.09
2450	-2.98	0.95 50.4
2460	-3.12	0.78 48.79
2470	-3.29	0.57 46.85
2480	-3.48	0.3 44.84
2490	-3.73	0 42.33
2500	-3.9	-0.19 40.7
2510	-4.07	-0.41 39.16
2520	-4.31	-0.81 37.09
2530	-4.58	-1.14 34.85
2540	-4.95	-1.5 32
2550	-5.2	-1.74 30.22
2560	-5.44	-1.95 28.57
2570	-5.78	-2.32 26.43
2580	-6.09	-2.65 24.6
2590	-6.48	-2.98 22.48
2600	-6.88	-3.35 20.49



天线形式

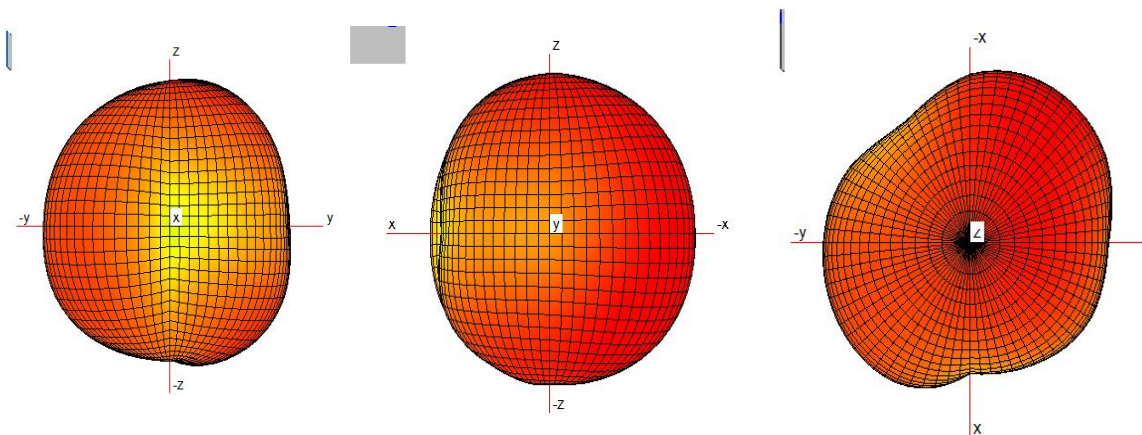