

Bluetooth Music Receiver and TF Card Player 2 in 1 Adapter

User Manual

Specifications:

Bluetooth Version: 4.0

Output Power Category: Class2

Bluetooth Protocol: HFP/HSP/A2DP/AVRCP


Bluetooth Range: up to 30 feet

TF Card Audio Format: MP3 / WMA / FLAC / AAC/ WAV

Battery: Li-Polymer 400mAh

Charge Voltage: DC 5.0V

Product Diagram

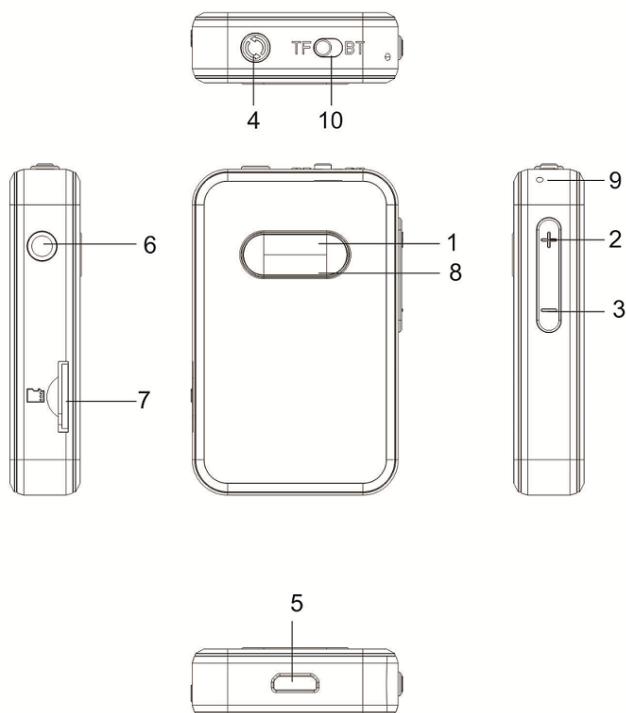

1. Multifunction Button: Power ON/OFF; Pause/Play; Answer/Hang Up
2. Next Song/Volume Up
3. Previous Song /Volume Down
4. Switch Button
5. USB Charge
6. Audio Output
7. TF Card Socket
8. Indicator Light
9. Microphone
10. TF Card / Bluetooth Switch

Power On

Long press the button “  ” about 2s, it will power on automatically, blue light will stay on for 1 second then the Indicator light flashing .

Power Off

Long press the button “  ” about 2s, red light will stay on for 1 second then power off automatically.

TF & BT

TF: TF Card Player mode.

BT: Bluetooth Music mode.

Bluetooth Mode

Instruction

1. Connect the device to audio port of your headphone/Home Speakers or Car Stereo System with 3.5mm audio cable.
2. Pair the receiver to your smart device.
3. Now you can enjoy your music through your Headphone, Speakers, Home Stereo System/ Car Stereo System, or answer calls with hands free.

Pair to your smart device:

1. When power on, Turn the switch to the ‘BT’ side.
2. short press the button “  ”, the red and blue light flash alternately, it will enter into pairing state.
3. Turn on the Bluetooth function of your smart device.
4. Search for the Bluetooth device "BH182" and connect.
5. Enter the code "0000" if needed.
6. If it pairs successfully, the blue indicator will stay on.

Note:

The receiver will connect to the last connected device automatically when it turns on. (Please make sure enable the Bluetooth function of your device is turned on before turn on the receiver.)

In pairing mode

If you want to disconnect the paired phone and connect another phone, you can long press the button " " about 4s ,it will turn into pairing mode, the red and blue light flash alternately.

Receiving Call

When you want to receive a call, short press the button " "or just answer it from your phone.

Ending Call

When you want to end a call,press the button " "or just hang up your phone.

Rejecting Call

Double press the button " "

Redialing the Last Called Number

Double press the button " "

Phone Voice Switch

When a call on the phone,long press the button " " can switch between Bluetooth and phone to receive the call .

Voice assistant

Double press the button " " to start or end cellphone voice assistant function.

Play Music

1. Play/Pause: Short press the button " "
2. Next Song: Short press the button " "
3. Previous Song: Short press the button " "
4. Volume Up: Long press the button " "
5. Volume Down: Long press the button " "

Clear Bluetooth Connection List

Long press the button “” for about 10 seconds till the red and blue light stay on 1 second. After powered on, it will clear the pairing lists that have paired before, then it will turn into pairing mode.

TF Card Mode

TF Card Media Play

Inset the TF Card into the TF Card play socket, Turn the switch to the ‘TF’ side, it will automatically play the music in the TF Card; If your cellphone is paired with the receiver, you can receive call and redialing the last called number.

TF Card Play Mode Switch

In the TF Card mode, long press the button “” for about 1 seconds, it will switch music playback mode automatically and indicate state by indicator light.

Order play: The blue light flashes three times intermittently.

Shuffle play: The blue light flashes two times intermittently.

Single repeat: The blue light flashes one times intermittently.

Low Battery warning

When the device is in low battery state, it will alarm automatically that the red light will flashing quickly, it will power off automatically if the power runs out.

Charge the device

1. When the device is in low battery state or lack of battery, please charge it through USB charge port with DC 5V power supply input, during charging the red indicator will stay on. When charging finished, the red indicator will go off.
2. Please use the micro USB cable to charge the device.

Note:

1. Please charge it in time when in low battery state.
2. If you don't use it regularly, please charge it every 3 months, in case it won't work normally or damage the battery.

FCC Notice

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.