





Appendix B. AC Conducted Emission Test Results



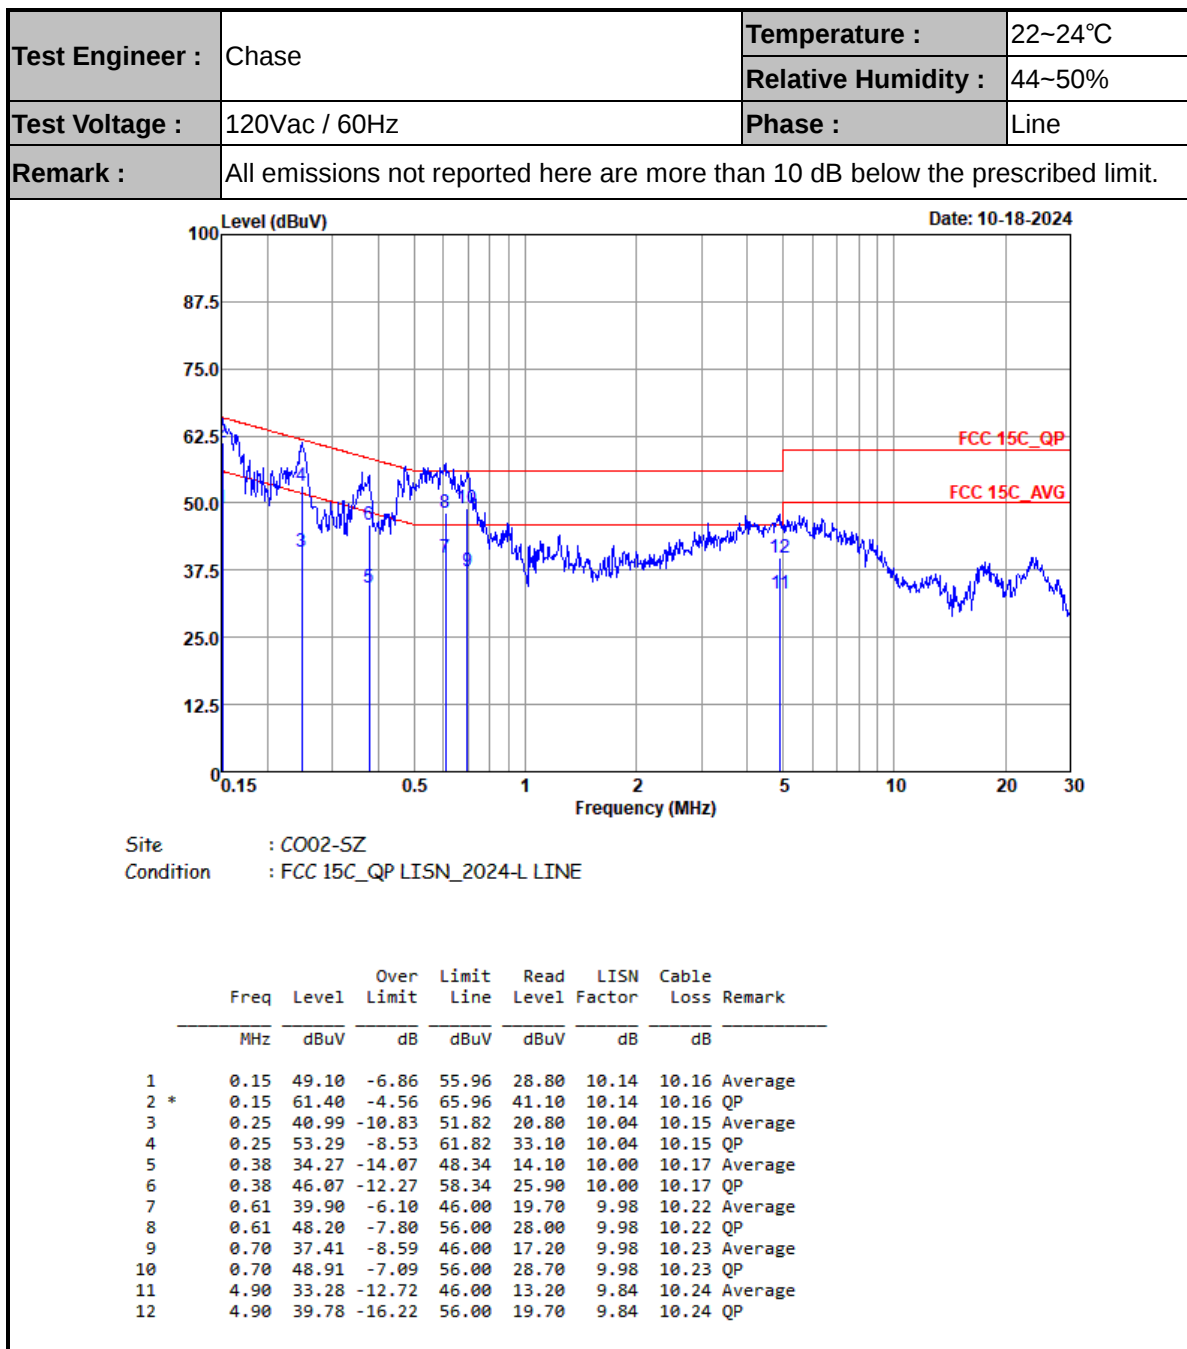

Test Engineer :	Chase	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

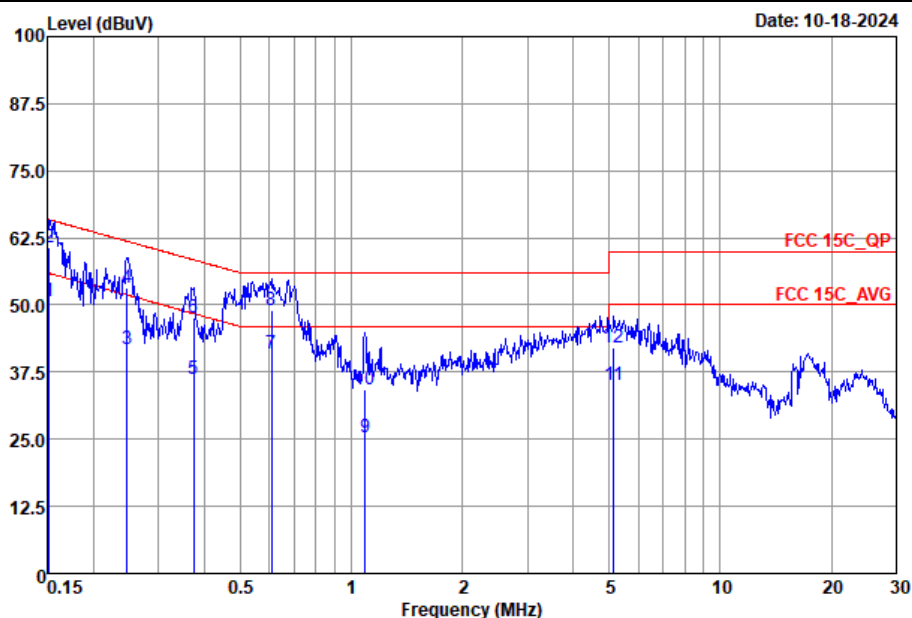

Site : CO02-SZ
Condition : FCC 15C_QP LISN_2024-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	50.58	-5.33	55.91	30.30	10.12	10.16	Average
2 *	0.15	60.78	-5.13	65.91	40.50	10.12	10.16	QP
3	0.25	41.66	-10.20	51.86	21.50	10.01	10.15	Average
4	0.25	53.16	-8.70	61.86	33.00	10.01	10.15	QP
5	0.37	36.14	-12.29	48.43	16.00	9.97	10.17	Average
6	0.37	47.64	-10.79	58.43	27.50	9.97	10.17	QP
7	0.61	40.98	-5.02	46.00	20.79	9.97	10.22	Average
8	0.61	48.98	-7.02	56.00	28.79	9.97	10.22	QP
9	1.09	25.39	-20.61	46.00	5.20	9.96	10.23	Average
10	1.09	34.19	-21.81	56.00	14.00	9.96	10.23	QP
11	5.14	35.07	-14.93	50.00	14.99	9.84	10.24	Average
12	5.14	41.97	-18.03	60.00	21.89	9.84	10.24	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Zhaohui Liang	Relative Humidity :	48~49%
		Temperature :	24-25°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	1	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 7	2400-2483.5	1	Bluetooth LE LF- Bluetooth-LE	39	2480	2Mbps	-	LF
Mode 8	2400-2483.5	2	Bluetooth-LE	00	2402	1Mbps	-	-
Mode 9	2400-2483.5	2	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 10	2400-2483.5	2	Bluetooth-LE	39	2480	1Mbps	-	-
Mode 11	2400-2483.5	2	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 12	2400-2483.5	2	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 13	2400-2483.5	2	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 14	2400-2483.5	2	Bluetooth LE LF	39	2480	2Mbps	-	LF
Mode 15	2400-2483.5	2	Bluetooth-LE	18	2438	1Mbps	-	-
Mode 16	2400-2483.5	2	Bluetooth-LE	38	2478	2Mbps	-	-







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	00	2384.97	41.44	54.00	-12.56	V	AVERAGE	Pass	Band Edge
1	Bluetooth-LE	00	4804.00	53.41	54.00	-0.59	H	Average	Pass	Harmonic
2	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE	19	7320.00	51.55	54.00	-2.45	V	Average	Pass	Harmonic
3	Bluetooth-LE	39	2483.54	41.83	54.00	-12.17	H	AVERAGE	Pass	Band Edge
3	Bluetooth-LE	39	7440.00	51.05	54.00	-2.95	V	Average	Pass	Harmonic
4	Bluetooth-LE	00	2385.29	44.70	54.00	-9.30	H	AVERAGE	Pass	Band Edge
4	Bluetooth-LE	00	4804.00	50.08	54.00	-3.92	H	Average	Pass	Harmonic
5	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
5	Bluetooth-LE	19	7320.00	51.50	54.00	-2.50	V	Average	Pass	Harmonic
6	Bluetooth-LE	39	2483.54	46.92	54.00	-7.08	H	AVERAGE	Pass	Band Edge
6	Bluetooth-LE	39	7440.00	53.48	54.00	-0.52	V	Average	Pass	Harmonic
7	Bluetooth LE LF-Bluetooth-LE	39	949.56	31.97	46.00	-14.03	V	Peak	Pass	LF
8	Bluetooth-LE	00	2384.24	40.58	54.00	-13.42	V	AVERAGE	Pass	Band Edge
8	Bluetooth-LE	00	4804.00	45.72	74.00	-28.28	V	Peak	Pass	Harmonic
9	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
9	Bluetooth-LE	19	7320.00	52.80	54.00	-1.20	V	Average	Pass	Harmonic
10	Bluetooth-LE	39	2483.52	41.38	54.00	-12.62	V	AVERAGE	Pass	Band Edge
10	Bluetooth-LE	39	7440.00	51.32	54.00	-2.68	V	Average	Pass	Harmonic
11	Bluetooth-LE	00	2385.39	44.17	54.00	-9.83	V	AVERAGE	Pass	Band Edge
11	Bluetooth-LE	00	4804.00	47.27	74.00	-26.73	V	Peak	Pass	Harmonic
12	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
12	Bluetooth-LE	19	7320.00	53.19	54.00	-0.81	V	Average	Pass	Harmonic
13	Bluetooth-LE	39	2483.52	42.74	54.00	-11.26	V	AVERAGE	Pass	Band Edge
13	Bluetooth-LE	39	7440.00	53.46	54.00	-0.54	V	Average	Pass	Harmonic
14	Bluetooth LE LF	39	359.80	32.77	46.00	-13.23	H	Peak	Pass	LF
15	Bluetooth-LE	18	-	-	-	-	-	-	-	Band Edge
15	Bluetooth-LE	18	7314.00	53.46	54.00	-0.54	V	Average	Pass	Harmonic
16	Bluetooth-LE	38	-	-	-	-	-	-	-	Band Edge
16	Bluetooth-LE	38	7434.00	50.38	54.00	-3.62	V	Average	Pass	Harmonic



Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.02</td><td>51.75</td><td>74.00</td><td>-22.25</td><td>43.83</td><td>32.25</td><td>7.75</td><td>32.08</td><td>393</td><td>263</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2388.02	51.75	74.00	-22.25	43.83	32.25	7.75	32.08	393	263	PEAK	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>112.19</td><td>-----</td><td>-----</td><td>104.20</td><td>32.28</td><td>7.79</td><td>32.08</td><td>393</td><td>263</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2402.00	112.19	-----	-----	104.20	32.28	7.79	32.08	393	263	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	2388.02	51.75	74.00	-22.25	43.83	32.25	7.75	32.08	393	263	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	2402.00	112.19	-----	-----	104.20	32.28	7.79	32.08	393	263	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.76</td><td>41.34</td><td>54.00</td><td>-12.66</td><td>33.42</td><td>32.25</td><td>7.75</td><td>32.08</td><td>393</td><td>263</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2384.76	41.34	54.00	-12.66	33.42	32.25	7.75	32.08	393	263	AVERAGE	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>111.58</td><td>-----</td><td>-----</td><td>103.59</td><td>32.28</td><td>7.79</td><td>32.08</td><td>393</td><td>263</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2402.00	111.58	-----	-----	103.59	32.28	7.79	32.08	393	263	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	2384.76	41.34	54.00	-12.66	33.42	32.25	7.75	32.08	393	263	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	2402.00	111.58	-----	-----	103.59	32.28	7.79	32.08	393	263	AVERAGE																																																																															

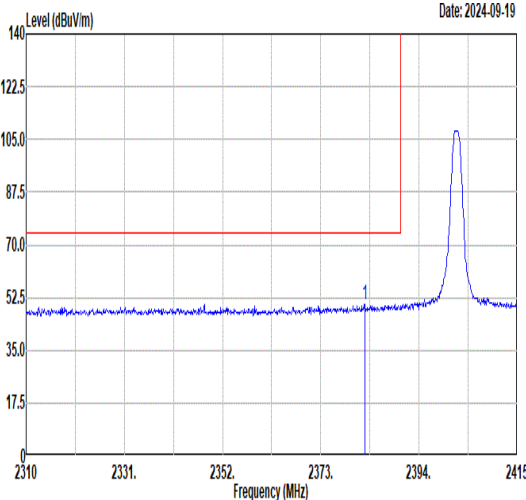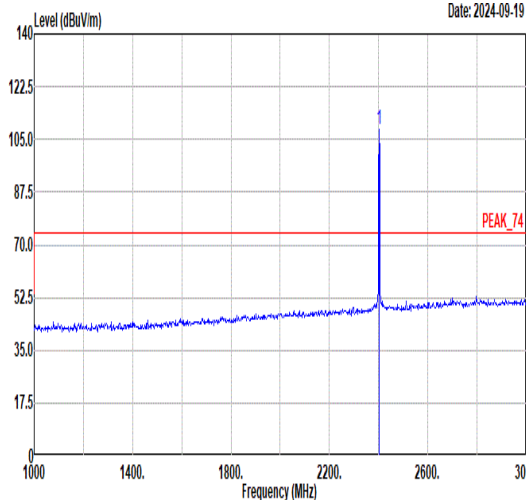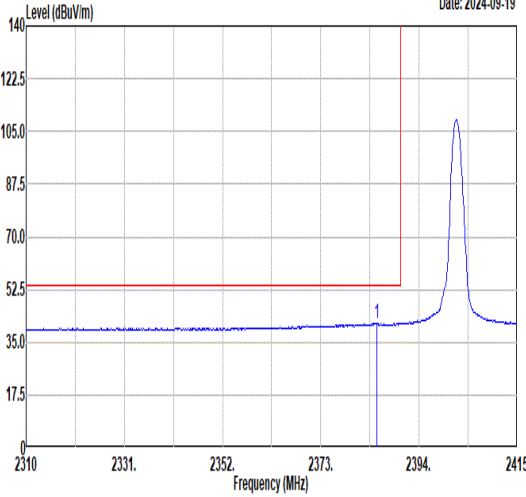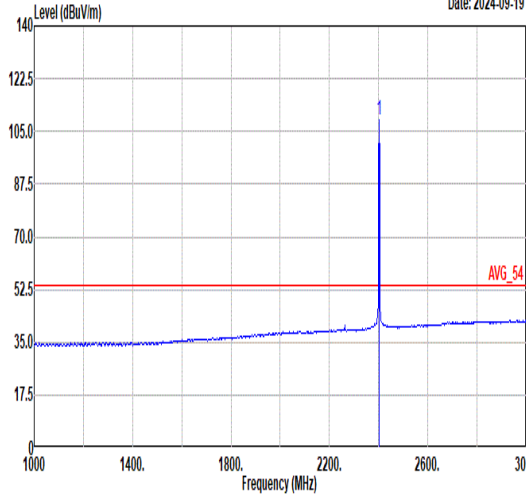

Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-19  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2382.45</td><td>50.26</td><td>74.00</td><td>-23.74</td><td>42.36</td><td>32.24</td><td>7.74</td><td>32.08</td><td>385</td><td>19</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2382.45	50.26	74.00	-23.74	42.36	32.24	7.74	32.08	385	19	PEAK	Level (dBuV/m) Date: 2024-09-19  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>108.43</td><td>-----</td><td>-----</td><td>100.44</td><td>32.28</td><td>7.79</td><td>32.08</td><td>385</td><td>19</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	108.43	-----	-----	100.44	32.28	7.79	32.08	385	19	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2382.45	50.26	74.00	-23.74	42.36	32.24	7.74	32.08	385	19	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	108.43	-----	-----	100.44	32.28	7.79	32.08	385	19	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2024-09-19  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.97</td><td>41.44</td><td>54.00</td><td>-12.56</td><td>33.52</td><td>32.25</td><td>7.75</td><td>32.08</td><td>385</td><td>19</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2384.97	41.44	54.00	-12.56	33.52	32.25	7.75	32.08	385	19	AVERAGE	Level (dBuV/m) Date: 2024-09-19  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>108.69</td><td>-----</td><td>-----</td><td>100.70</td><td>32.28</td><td>7.79</td><td>32.08</td><td>385</td><td>19</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	108.69	-----	-----	100.70	32.28	7.79	32.08	385	19	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2384.97	41.44	54.00	-12.56	33.52	32.25	7.75	32.08	385	19	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	108.69	-----	-----	100.70	32.28	7.79	32.08	385	19	AVERAGE																																																																							



Mode	1																																																																																																																					
	Harmonic																																																																																																																					
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																																					
ANT	1																																																																																																																					
Pol.	Horizontal					Vertical																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>57.69</td><td>74.00</td><td>-16.31</td><td>63.38</td><td>34.82</td><td>11.07</td><td>51.58</td><td>339</td><td>84 Peak</td></tr><tr><td>2</td><td>4804.00</td><td>53.41</td><td>54.00</td><td>-0.59</td><td>59.10</td><td>34.82</td><td>11.07</td><td>51.58</td><td>339</td><td>84 Average</td></tr></tbody></table>							Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	57.69	74.00	-16.31	63.38	34.82	11.07	51.58	339	84 Peak	2	4804.00	53.41	54.00	-0.59	59.10	34.82	11.07	51.58	339	84 Average	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>54.93</td><td>74.00</td><td>-19.07</td><td>60.62</td><td>34.82</td><td>11.07</td><td>51.58</td><td>339</td><td>53 Peak</td></tr><tr><td>2</td><td>4804.00</td><td>50.03</td><td>54.00</td><td>-3.97</td><td>55.72</td><td>34.82</td><td>11.07</td><td>51.58</td><td>339</td><td>53 Average</td></tr></tbody></table>							Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	54.93	74.00	-19.07	60.62	34.82	11.07	51.58	339	53 Peak	2	4804.00	50.03	54.00	-3.97	55.72	34.82	11.07	51.58	339	53 Average
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4804.00	57.69	74.00	-16.31	63.38	34.82	11.07	51.58	339	84 Peak																																																																																																												
2	4804.00	53.41	54.00	-0.59	59.10	34.82	11.07	51.58	339	84 Average																																																																																																												
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4804.00	54.93	74.00	-19.07	60.62	34.82	11.07	51.58	339	53 Peak																																																																																																												
2	4804.00	50.03	54.00	-3.97	55.72	34.82	11.07	51.58	339	53 Average																																																																																																												



Mode	2																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																											
ANT	1																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>46.66</td><td>74.00</td><td>-27.34</td><td>52.26</td><td>34.85</td><td>11.10</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>56.40</td><td>74.00</td><td>-17.60</td><td>58.14</td><td>36.33</td><td>13.09</td><td>51.16</td><td>363</td><td>66</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>51.36</td><td>54.00</td><td>-2.64</td><td>53.10</td><td>36.33</td><td>13.09</td><td>51.16</td><td>363</td><td>66</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	46.66	74.00	-27.34	52.26	34.85	11.10	51.55	---	---	Peak	2	7320.00	56.40	74.00	-17.60	58.14	36.33	13.09	51.16	363	66	Peak	3	7320.00	51.36	54.00	-2.64	53.10	36.33	13.09	51.16	363	66	Average	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>47.10</td><td>74.00</td><td>-26.90</td><td>52.70</td><td>34.85</td><td>11.10</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>56.44</td><td>74.00</td><td>-17.56</td><td>58.18</td><td>36.33</td><td>13.09</td><td>51.16</td><td>324</td><td>166</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>51.55</td><td>54.00</td><td>-2.45</td><td>53.29</td><td>36.33</td><td>13.09</td><td>51.16</td><td>324</td><td>166</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	47.10	74.00	-26.90	52.70	34.85	11.10	51.55	---	---	Peak	2	7320.00	56.44	74.00	-17.56	58.18	36.33	13.09	51.16	324	166	Peak	3	7320.00	51.55	54.00	-2.45	53.29	36.33	13.09	51.16	324	166	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																			
1	4880.00	46.66	74.00	-27.34	52.26	34.85	11.10	51.55	---	---	Peak																																																																																																																																	
2	7320.00	56.40	74.00	-17.60	58.14	36.33	13.09	51.16	363	66	Peak																																																																																																																																	
3	7320.00	51.36	54.00	-2.64	53.10	36.33	13.09	51.16	363	66	Average																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																			
1	4880.00	47.10	74.00	-26.90	52.70	34.85	11.10	51.55	---	---	Peak																																																																																																																																	
2	7320.00	56.44	74.00	-17.56	58.18	36.33	13.09	51.16	324	166	Peak																																																																																																																																	
3	7320.00	51.55	54.00	-2.45	53.29	36.33	13.09	51.16	324	166	Average																																																																																																																																	



Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal					Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>52.73</td><td>74.00</td><td>-21.27</td><td>44.49</td><td>32.46</td><td>7.88</td><td>32.10</td><td>363 259 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.56	52.73	74.00	-21.27	44.49	32.46	7.88	32.10	363 259 PEAK	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>100.53</td><td>-----</td><td>-----</td><td>92.30</td><td>32.46</td><td>7.87</td><td>32.10</td><td>363 259 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2480.00	100.53	-----	-----	92.30	32.46	7.87	32.10	363 259 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																												
1	2483.56	52.73	74.00	-21.27	44.49	32.46	7.88	32.10	363 259 PEAK																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																												
1	2480.00	100.53	-----	-----	92.30	32.46	7.87	32.10	363 259 PEAK																																																																											
Avg	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>41.83</td><td>54.00</td><td>-12.17</td><td>33.59</td><td>32.46</td><td>7.88</td><td>32.10</td><td>363 259 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.54	41.83	54.00	-12.17	33.59	32.46	7.88	32.10	363 259 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>99.74</td><td>-----</td><td>-----</td><td>91.51</td><td>32.46</td><td>7.87</td><td>32.10</td><td>363 259 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2480.00	99.74	-----	-----	91.51	32.46	7.87	32.10	363 259 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																												
1	2483.54	41.83	54.00	-12.17	33.59	32.46	7.88	32.10	363 259 AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																												
1	2480.00	99.74	-----	-----	91.51	32.46	7.87	32.10	363 259 AVERAGE																																																																											







Mode	3																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2024-09-19 PEAK_BE_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2487.34</td><td>51.28</td><td>74.00</td><td>-22.72</td><td>43.03</td><td>32.47</td><td>7.88</td><td>32.10</td><td>373 1 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2487.34	51.28	74.00	-22.72	43.03	32.47	7.88	32.10	373 1 PEAK	Level (dBuV/m) Date: 2024-09-19 PEAK_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>100.01</td><td>-----</td><td>-----</td><td>91.78</td><td>32.46</td><td>7.87</td><td>32.10</td><td>373 1 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	100.01	-----	-----	91.78	32.46	7.87	32.10	373 1 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 2487.34	51.28	74.00	-22.72	43.03	32.47	7.88	32.10	373 1 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 2480.00	100.01	-----	-----	91.78	32.46	7.87	32.10	373 1 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2024-09-19 AVG_BE_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.54</td><td>41.17</td><td>54.00</td><td>-12.83</td><td>32.93</td><td>32.46</td><td>7.88</td><td>32.10</td><td>373 1 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2483.54	41.17	54.00	-12.83	32.93	32.46	7.88	32.10	373 1 AVERAGE	Level (dBuV/m) Date: 2024-09-19 AVG_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>98.88</td><td>-----</td><td>-----</td><td>90.65</td><td>32.46</td><td>7.87</td><td>32.10</td><td>373 1 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	98.88	-----	-----	90.65	32.46	7.87	32.10	373 1 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 2483.54	41.17	54.00	-12.83	32.93	32.46	7.88	32.10	373 1 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 2480.00	98.88	-----	-----	90.65	32.46	7.87	32.10	373 1 AVERAGE																																																																		



Mode	3																																																																																																																																															
	Harmonic																																																																																																																																															
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																															
ANT	1																																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																																									
Peak Avg	Level (dBuV/m) Date: 2024-09-19 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>47.77</td><td>74.00</td><td>-26.23</td><td>53.26</td><td>34.88</td><td>11.14</td><td>51.51</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>54.68</td><td>74.00</td><td>-19.32</td><td>56.52</td><td>36.38</td><td>12.97</td><td>51.19</td><td>357</td><td>59</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>48.76</td><td>54.00</td><td>-5.24</td><td>50.60</td><td>36.38</td><td>12.97</td><td>51.19</td><td>357</td><td>59</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4960.00	47.77	74.00	-26.23	53.26	34.88	11.14	51.51	---	---	Peak	2	7440.00	54.68	74.00	-19.32	56.52	36.38	12.97	51.19	357	59	Peak	3	7440.00	48.76	54.00	-5.24	50.60	36.38	12.97	51.19	357	59	Average	Level (dBuV/m) Date: 2024-09-19 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>46.52</td><td>74.00</td><td>-27.48</td><td>52.01</td><td>34.88</td><td>11.14</td><td>51.51</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>56.28</td><td>74.00</td><td>-17.72</td><td>58.12</td><td>36.38</td><td>12.97</td><td>51.19</td><td>356</td><td>160</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>51.05</td><td>54.00</td><td>-2.95</td><td>52.89</td><td>36.38</td><td>12.97</td><td>51.19</td><td>356</td><td>160</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4960.00	46.52	74.00	-27.48	52.01	34.88	11.14	51.51	---	---	Peak	2	7440.00	56.28	74.00	-17.72	58.12	36.38	12.97	51.19	356	160	Peak	3	7440.00	51.05	54.00	-2.95	52.89	36.38	12.97	51.19	356	160	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	4960.00	47.77	74.00	-26.23	53.26	34.88	11.14	51.51	---	---	Peak																																																																																																																																					
2	7440.00	54.68	74.00	-19.32	56.52	36.38	12.97	51.19	357	59	Peak																																																																																																																																					
3	7440.00	48.76	54.00	-5.24	50.60	36.38	12.97	51.19	357	59	Average																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	4960.00	46.52	74.00	-27.48	52.01	34.88	11.14	51.51	---	---	Peak																																																																																																																																					
2	7440.00	56.28	74.00	-17.72	58.12	36.38	12.97	51.19	356	160	Peak																																																																																																																																					
3	7440.00	51.05	54.00	-2.95	52.89	36.38	12.97	51.19	356	160	Average																																																																																																																																					

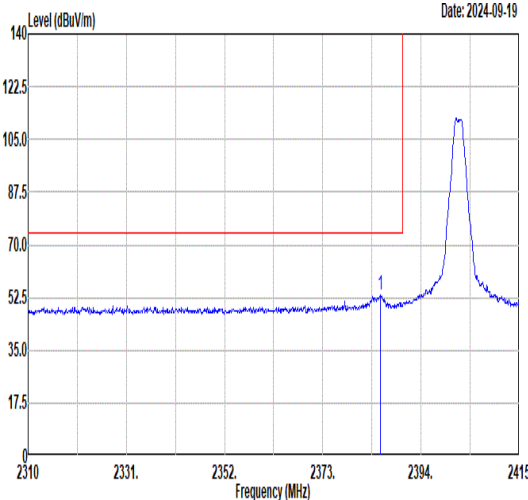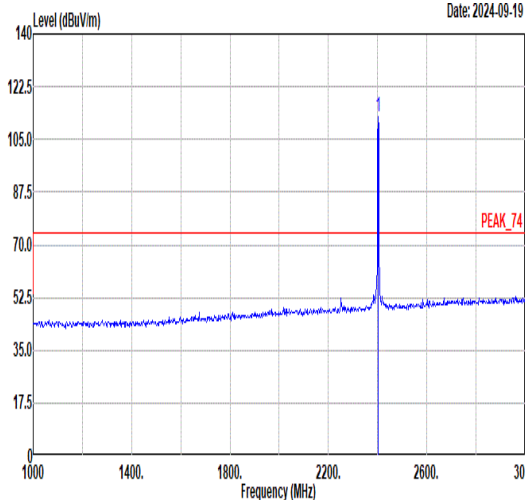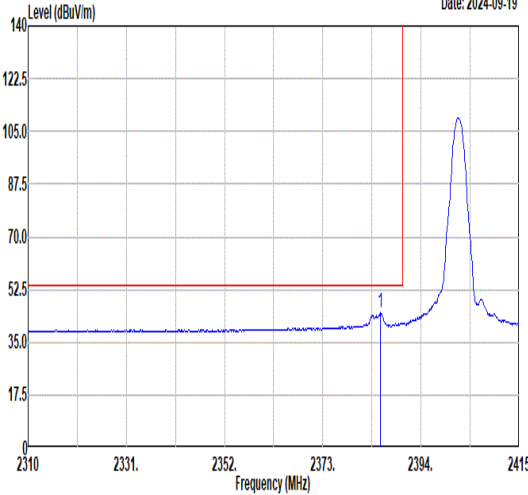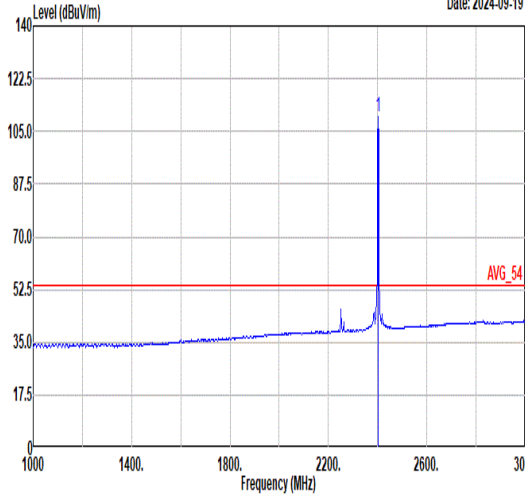

Mode	4																																																																																														
	Band Edge																																																																																														
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																														
ANT	1																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak																																																																																															
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.39</td><td>53.35</td><td>74.00</td><td>-20.65</td><td>45.43</td><td>32.25</td><td>7.75</td><td>32.08</td><td>393</td><td>268</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2385.39	53.35	74.00	-20.65	45.43	32.25	7.75	32.08	393	268	PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>112.59</td><td>-----</td><td>-----</td><td>104.60</td><td>32.28</td><td>7.79</td><td>32.08</td><td>393</td><td>268</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	112.59	-----	-----	104.60	32.28	7.79	32.08	393	268
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2385.39	53.35	74.00	-20.65	45.43	32.25	7.75	32.08	393	268	PEAK																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2402.00	112.59	-----	-----	104.60	32.28	7.79	32.08	393	268	PEAK																																																																																				
Avg																																																																																															
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.29</td><td>44.70</td><td>54.00</td><td>-9.30</td><td>36.78</td><td>32.25</td><td>7.75</td><td>32.08</td><td>393</td><td>268</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2385.29	44.70	54.00	-9.30	36.78	32.25	7.75	32.08	393	268	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>109.87</td><td>-----</td><td>-----</td><td>101.88</td><td>32.28</td><td>7.79</td><td>32.08</td><td>393</td><td>268</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	109.87	-----	-----	101.88	32.28	7.79	32.08	393	268
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2385.29	44.70	54.00	-9.30	36.78	32.25	7.75	32.08	393	268	AVERAGE																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2402.00	109.87	-----	-----	101.88	32.28	7.79	32.08	393	268	AVERAGE																																																																																				



Mode	4																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.71</td><td>52.57</td><td>74.00</td><td>-21.43</td><td>44.65</td><td>32.25</td><td>7.75</td><td>32.08</td><td>386</td><td>22</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2385.71	52.57	74.00	-21.43	44.65	32.25	7.75	32.08	386	22	PEAK	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>109.91</td><td>-----</td><td>-----</td><td>101.92</td><td>32.28</td><td>7.79</td><td>32.08</td><td>386</td><td>22</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	109.91	-----	-----	101.92	32.28	7.79	32.08	386	22	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2385.71	52.57	74.00	-21.43	44.65	32.25	7.75	32.08	386	22	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	109.91	-----	-----	101.92	32.28	7.79	32.08	386	22	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.50</td><td>43.85</td><td>54.00</td><td>-10.15</td><td>35.93</td><td>32.25</td><td>7.75</td><td>32.08</td><td>386</td><td>22</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2385.50	43.85	54.00	-10.15	35.93	32.25	7.75	32.08	386	22	AVERAGE	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>107.56</td><td>-----</td><td>-----</td><td>99.57</td><td>32.28</td><td>7.79</td><td>32.08</td><td>386</td><td>22</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	107.56	-----	-----	99.57	32.28	7.79	32.08	386	22	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2385.50	43.85	54.00	-10.15	35.93	32.25	7.75	32.08	386	22	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	107.56	-----	-----	99.57	32.28	7.79	32.08	386	22	AVERAGE																																																																							



Mode	4																																																																																																																																																																			
	Harmonic																																																																																																																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																																																																																			
ANT	1																																																																																																																																																																			
Pol.	Horizontal								Vertical																																																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 3000 6000. 9000. 12000. 15000. 18000 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1</td><td>4804.00</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>61.67</td><td>34.82</td><td>11.07</td><td>51.58</td><td>336</td><td>86</td><td colspan="3">Peak</td><td></td></tr><tr><td>2</td><td>4804.00</td><td>50.08</td><td>54.00</td><td>-3.92</td><td>55.77</td><td>34.82</td><td>11.07</td><td>51.58</td><td>336</td><td>86</td><td colspan="3">Average</td><td></td></tr></table>										Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	4804.00	55.98	74.00	-18.02	61.67	34.82	11.07	51.58	336	86	Peak				2	4804.00	50.08	54.00	-3.92	55.77	34.82	11.07	51.58	336	86	Average				Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 3000 6000. 9000. 12000. 15000. 18000 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1</td><td>4804.00</td><td>52.85</td><td>74.00</td><td>-21.15</td><td>58.54</td><td>34.82</td><td>11.07</td><td>51.58</td><td>342</td><td>44</td><td colspan="3">Peak</td><td></td></tr><tr><td>2</td><td>4804.00</td><td>46.03</td><td>54.00</td><td>-7.97</td><td>51.72</td><td>34.82</td><td>11.07</td><td>51.58</td><td>342</td><td>44</td><td colspan="3">Average</td><td></td></tr></table>										Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	4804.00	52.85	74.00	-21.15	58.54	34.82	11.07	51.58	342	44	Peak				2	4804.00	46.03	54.00	-7.97	51.72	34.82	11.07	51.58	342	44	Average			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																											
1	4804.00	55.98	74.00	-18.02	61.67	34.82	11.07	51.58	336	86	Peak																																																																																																																																																									
2	4804.00	50.08	54.00	-3.92	55.77	34.82	11.07	51.58	336	86	Average																																																																																																																																																									
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																											
1	4804.00	52.85	74.00	-21.15	58.54	34.82	11.07	51.58	342	44	Peak																																																																																																																																																									
2	4804.00	46.03	54.00	-7.97	51.72	34.82	11.07	51.58	342	44	Average																																																																																																																																																									



Mode	5																																																																																																																																															
	Harmonic																																																																																																																																															
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																															
ANT	1																																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																																									
Peak Avg	Level (dBuV/m) Date: 2024-09-19 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>46.99</td><td>74.00</td><td>-27.01</td><td>52.59</td><td>34.85</td><td>11.10</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>56.87</td><td>36.33</td><td>13.09</td><td>51.16</td><td>338</td><td>64</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>48.29</td><td>54.00</td><td>-5.71</td><td>50.03</td><td>36.33</td><td>13.09</td><td>51.16</td><td>338</td><td>64</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	46.99	74.00	-27.01	52.59	34.85	11.10	51.55	---	---	Peak	2	7320.00	55.13	74.00	-18.87	56.87	36.33	13.09	51.16	338	64	Peak	3	7320.00	48.29	54.00	-5.71	50.03	36.33	13.09	51.16	338	64	Average	Level (dBuV/m) Date: 2024-09-19 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>46.48</td><td>74.00</td><td>-27.52</td><td>52.08</td><td>34.85</td><td>11.10</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>57.11</td><td>74.00</td><td>-16.89</td><td>58.85</td><td>36.33</td><td>13.09</td><td>51.16</td><td>324</td><td>167</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>51.50</td><td>54.00</td><td>-2.50</td><td>53.24</td><td>36.33</td><td>13.09</td><td>51.16</td><td>324</td><td>167</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	46.48	74.00	-27.52	52.08	34.85	11.10	51.55	---	---	Peak	2	7320.00	57.11	74.00	-16.89	58.85	36.33	13.09	51.16	324	167	Peak	3	7320.00	51.50	54.00	-2.50	53.24	36.33	13.09	51.16	324	167	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	4880.00	46.99	74.00	-27.01	52.59	34.85	11.10	51.55	---	---	Peak																																																																																																																																					
2	7320.00	55.13	74.00	-18.87	56.87	36.33	13.09	51.16	338	64	Peak																																																																																																																																					
3	7320.00	48.29	54.00	-5.71	50.03	36.33	13.09	51.16	338	64	Average																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	4880.00	46.48	74.00	-27.52	52.08	34.85	11.10	51.55	---	---	Peak																																																																																																																																					
2	7320.00	57.11	74.00	-16.89	58.85	36.33	13.09	51.16	324	167	Peak																																																																																																																																					
3	7320.00	51.50	54.00	-2.50	53.24	36.33	13.09	51.16	324	167	Average																																																																																																																																					



Mode	6																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484 2488 2492 2496 2500 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.90</td><td>57.06</td><td>74.00</td><td>-16.94</td><td>48.82</td><td>32.46</td><td>7.88</td><td>32.10</td><td>365</td><td>96</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.90	57.06	74.00	-16.94	48.82	32.46	7.88	32.10	365	96	PEAK	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>105.38</td><td>-----</td><td>-----</td><td>97.15</td><td>32.46</td><td>7.87</td><td>32.10</td><td>365</td><td>96</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2480.00	105.38	-----	-----	97.15	32.46	7.87	32.10	365	96	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	2483.90	57.06	74.00	-16.94	48.82	32.46	7.88	32.10	365	96	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	105.38	-----	-----	97.15	32.46	7.87	32.10	365	96	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484 2488 2492 2496 2500 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>46.92</td><td>54.00</td><td>-7.08</td><td>38.68</td><td>32.46</td><td>7.88</td><td>32.10</td><td>365</td><td>96</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.54	46.92	54.00	-7.08	38.68	32.46	7.88	32.10	365	96	AVERAGE	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>102.53</td><td>-----</td><td>-----</td><td>94.30</td><td>32.46</td><td>7.87</td><td>32.10</td><td>365</td><td>96</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2480.00	102.53	-----	-----	94.30	32.46	7.87	32.10	365	96	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	2483.54	46.92	54.00	-7.08	38.68	32.46	7.88	32.10	365	96	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	102.53	-----	-----	94.30	32.46	7.87	32.10	365	96	AVERAGE																																																																															



Mode	6																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484 2488 2492 2496 2500 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>54.98</td><td>74.00</td><td>-19.02</td><td>46.74</td><td>32.46</td><td>7.88</td><td>32.10</td><td>375</td><td>0</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2483.58	54.98	74.00	-19.02	46.74	32.46	7.88	32.10	375	0	PEAK	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>103.55</td><td>-----</td><td>-----</td><td>95.32</td><td>32.46</td><td>7.87</td><td>32.10</td><td>375</td><td>0</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2480.00	103.55	-----	-----	95.32	32.46	7.87	32.10	375	0	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																									
1	2483.58	54.98	74.00	-19.02	46.74	32.46	7.88	32.10	375	0	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																									
1	2480.00	103.55	-----	-----	95.32	32.46	7.87	32.10	375	0	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484 2488 2492 2496 2500 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>44.63</td><td>54.00</td><td>-9.37</td><td>36.39</td><td>32.46</td><td>7.88</td><td>32.10</td><td>375</td><td>0</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2483.52	44.63	54.00	-9.37	36.39	32.46	7.88	32.10	375	0	AVERAGE	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>101.16</td><td>-----</td><td>-----</td><td>92.93</td><td>32.46</td><td>7.87</td><td>32.10</td><td>375</td><td>0</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	2480.00	101.16	-----	-----	92.93	32.46	7.87	32.10	375	0	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																									
1	2483.52	44.63	54.00	-9.37	36.39	32.46	7.88	32.10	375	0	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																									
1	2480.00	101.16	-----	-----	92.93	32.46	7.87	32.10	375	0	AVERAGE																																																																							



Mode	6																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																											
ANT	1																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg	Level (dBuV/m) Date: 2024-09-26 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>46.99</td><td>74.00</td><td>-27.01</td><td>52.48</td><td>34.88</td><td>11.14</td><td>51.51</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>56.73</td><td>74.00</td><td>-17.27</td><td>58.57</td><td>36.38</td><td>12.97</td><td>51.19</td><td>356</td><td>63</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>50.62</td><td>54.00</td><td>-3.38</td><td>52.46</td><td>36.38</td><td>12.97</td><td>51.19</td><td>356</td><td>63</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	46.99	74.00	-27.01	52.48	34.88	11.14	51.51	---	---	Peak	2	7440.00	56.73	74.00	-17.27	58.57	36.38	12.97	51.19	356	63	Peak	3	7440.00	50.62	54.00	-3.38	52.46	36.38	12.97	51.19	356	63	Average	Level (dBuV/m) Date: 2024-09-26 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>46.70</td><td>74.00</td><td>-27.30</td><td>52.19</td><td>34.88</td><td>11.14</td><td>51.51</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>58.55</td><td>74.00</td><td>-15.45</td><td>60.39</td><td>36.38</td><td>12.97</td><td>51.19</td><td>355</td><td>162</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>53.48</td><td>54.00</td><td>-0.52</td><td>55.32</td><td>36.38</td><td>12.97</td><td>51.19</td><td>355</td><td>162</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	46.70	74.00	-27.30	52.19	34.88	11.14	51.51	---	---	Peak	2	7440.00	58.55	74.00	-15.45	60.39	36.38	12.97	51.19	355	162	Peak	3	7440.00	53.48	54.00	-0.52	55.32	36.38	12.97	51.19	355	162	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	4960.00	46.99	74.00	-27.01	52.48	34.88	11.14	51.51	---	---	Peak																																																																																																																																	
2	7440.00	56.73	74.00	-17.27	58.57	36.38	12.97	51.19	356	63	Peak																																																																																																																																	
3	7440.00	50.62	54.00	-3.38	52.46	36.38	12.97	51.19	356	63	Average																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	4960.00	46.70	74.00	-27.30	52.19	34.88	11.14	51.51	---	---	Peak																																																																																																																																	
2	7440.00	58.55	74.00	-15.45	60.39	36.38	12.97	51.19	355	162	Peak																																																																																																																																	
3	7440.00	53.48	54.00	-0.52	55.32	36.38	12.97	51.19	355	162	Average																																																																																																																																	







Mode	7																																																																																																																																																																																																																											
	LF																																																																																																																																																																																																																											
	2400-2483.5_Bluetooth LE LF-Bluetooth-LE_CH39_2480MHz																																																																																																																																																																																																																											
ANT	1																																																																																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																																																																																					
QP/ Peak	Level (dBuV/m) Date: 2024-09-25 Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>48.43</td><td>17.72</td><td>40.00</td><td>-22.28</td><td>32.61</td><td>15.03</td><td>1.28</td><td>31.20</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>167.74</td><td>23.51</td><td>43.50</td><td>-19.99</td><td>36.29</td><td>15.90</td><td>2.35</td><td>31.03</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>312.27</td><td>25.66</td><td>46.00</td><td>-20.34</td><td>33.69</td><td>19.67</td><td>3.18</td><td>30.88</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>359.80</td><td>31.07</td><td>46.00</td><td>-14.93</td><td>37.66</td><td>20.77</td><td>3.42</td><td>30.78</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>780.78</td><td>30.07</td><td>46.00</td><td>-15.93</td><td>30.07</td><td>26.02</td><td>5.02</td><td>31.04</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>31.87</td><td>46.00</td><td>-14.13</td><td>30.09</td><td>27.19</td><td>5.59</td><td>31.00</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	48.43	17.72	40.00	-22.28	32.61	15.03	1.28	31.20	---	---	---	Peak	2	167.74	23.51	43.50	-19.99	36.29	15.90	2.35	31.03	---	---	---	Peak	3	312.27	25.66	46.00	-20.34	33.69	19.67	3.18	30.88	---	---	---	Peak	4	359.80	31.07	46.00	-14.93	37.66	20.77	3.42	30.78	---	---	---	Peak	5	780.78	30.07	46.00	-15.93	30.07	26.02	5.02	31.04	---	---	---	Peak	6	958.29	31.87	46.00	-14.13	30.09	27.19	5.59	31.00	---	---	---	Peak	Level (dBuV/m) Date: 2024-09-25 Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>47.46</td><td>18.45</td><td>40.00</td><td>-21.55</td><td>32.99</td><td>15.40</td><td>1.26</td><td>31.20</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>157.07</td><td>17.63</td><td>43.50</td><td>-25.87</td><td>30.06</td><td>16.36</td><td>2.28</td><td>31.07</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>386.96</td><td>28.90</td><td>46.00</td><td>-17.10</td><td>34.55</td><td>21.54</td><td>3.54</td><td>30.73</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>632.37</td><td>27.02</td><td>46.00</td><td>-18.98</td><td>28.34</td><td>25.09</td><td>4.53</td><td>30.94</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>810.85</td><td>30.81</td><td>46.00</td><td>-15.19</td><td>30.60</td><td>26.19</td><td>5.11</td><td>31.09</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>949.56</td><td>31.97</td><td>46.00</td><td>-14.03</td><td>30.30</td><td>27.10</td><td>5.57</td><td>31.00</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	47.46	18.45	40.00	-21.55	32.99	15.40	1.26	31.20	---	---	---	Peak	2	157.07	17.63	43.50	-25.87	30.06	16.36	2.28	31.07	---	---	---	Peak	3	386.96	28.90	46.00	-17.10	34.55	21.54	3.54	30.73	---	---	---	Peak	4	632.37	27.02	46.00	-18.98	28.34	25.09	4.53	30.94	---	---	---	Peak	5	810.85	30.81	46.00	-15.19	30.60	26.19	5.11	31.09	---	---	---	Peak	6	949.56	31.97	46.00	-14.03	30.30	27.10	5.57	31.00	---	---	---	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																															
		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																
1	48.43	17.72	40.00	-22.28	32.61	15.03	1.28	31.20	---	---	---	Peak																																																																																																																																																																																																																
2	167.74	23.51	43.50	-19.99	36.29	15.90	2.35	31.03	---	---	---	Peak																																																																																																																																																																																																																
3	312.27	25.66	46.00	-20.34	33.69	19.67	3.18	30.88	---	---	---	Peak																																																																																																																																																																																																																
4	359.80	31.07	46.00	-14.93	37.66	20.77	3.42	30.78	---	---	---	Peak																																																																																																																																																																																																																
5	780.78	30.07	46.00	-15.93	30.07	26.02	5.02	31.04	---	---	---	Peak																																																																																																																																																																																																																
6	958.29	31.87	46.00	-14.13	30.09	27.19	5.59	31.00	---	---	---	Peak																																																																																																																																																																																																																
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																	
1	47.46	18.45	40.00	-21.55	32.99	15.40	1.26	31.20	---	---	---	Peak																																																																																																																																																																																																																
2	157.07	17.63	43.50	-25.87	30.06	16.36	2.28	31.07	---	---	---	Peak																																																																																																																																																																																																																
3	386.96	28.90	46.00	-17.10	34.55	21.54	3.54	30.73	---	---	---	Peak																																																																																																																																																																																																																
4	632.37	27.02	46.00	-18.98	28.34	25.09	4.53	30.94	---	---	---	Peak																																																																																																																																																																																																																
5	810.85	30.81	46.00	-15.19	30.60	26.19	5.11	31.09	---	---	---	Peak																																																																																																																																																																																																																
6	949.56	31.97	46.00	-14.03	30.30	27.10	5.57	31.00	---	---	---	Peak																																																																																																																																																																																																																



Mode	8																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																									
ANT	2																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2357.67</td><td>50.21</td><td>74.00</td><td>-23.79</td><td>42.42</td><td>32.19</td><td>7.67</td><td>32.07</td><td>396</td><td>114</td><td>PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	2357.67	50.21	74.00	-23.79	42.42	32.19	7.67	32.07	396	114	PEAK	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>100.46</td><td>-----</td><td>-----</td><td>92.47</td><td>32.28</td><td>7.79</td><td>32.08</td><td>396</td><td>114</td><td>PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	2402.00	100.46	-----	-----	92.47	32.28	7.79	32.08	396	114	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																		
1	2357.67	50.21	74.00	-23.79	42.42	32.19	7.67	32.07	396	114	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																		
1	2402.00	100.46	-----	-----	92.47	32.28	7.79	32.08	396	114	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.02</td><td>39.95</td><td>54.00</td><td>-14.05</td><td>32.03</td><td>32.25</td><td>7.75</td><td>32.08</td><td>396</td><td>114</td><td>AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	2388.02	39.95	54.00	-14.05	32.03	32.25	7.75	32.08	396	114	AVERAGE	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>99.26</td><td>-----</td><td>-----</td><td>91.27</td><td>32.28</td><td>7.79</td><td>32.08</td><td>396</td><td>114</td><td>AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	2402.00	99.26	-----	-----	91.27	32.28	7.79	32.08	396	114	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																		
1	2388.02	39.95	54.00	-14.05	32.03	32.25	7.75	32.08	396	114	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																		
1	2402.00	99.26	-----	-----	91.27	32.28	7.79	32.08	396	114	AVERAGE																																																																															

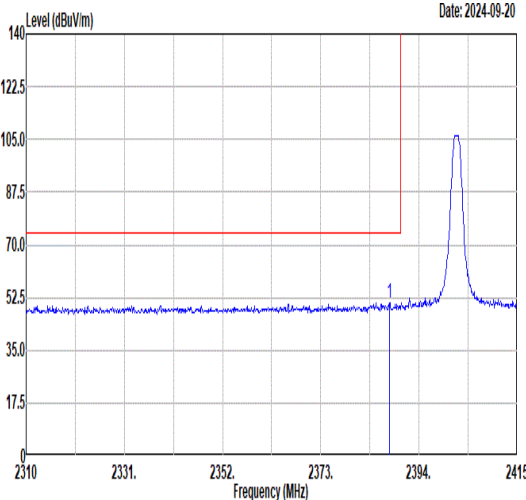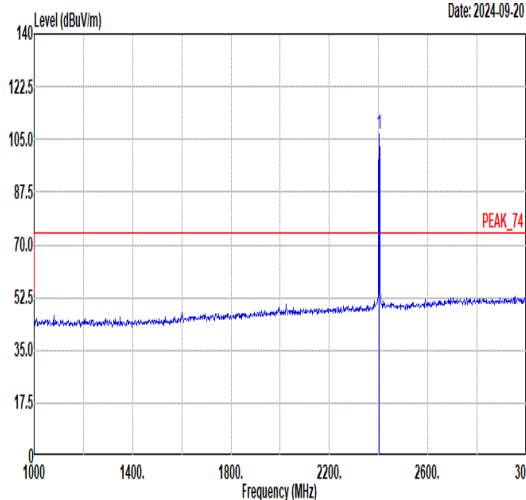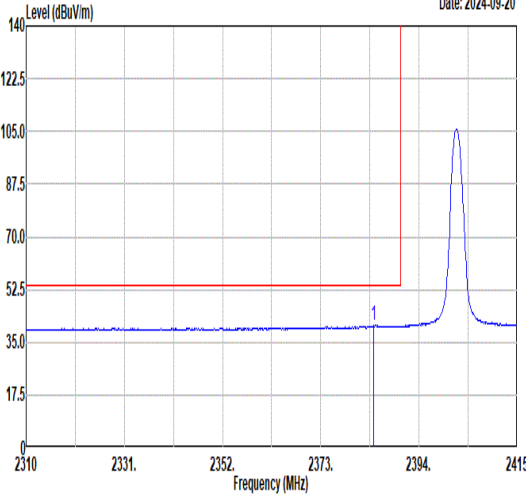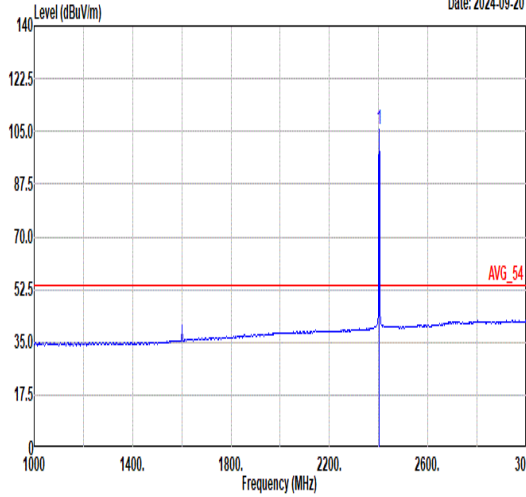

Mode	8																																																																																												
	Band Edge																																																																																												
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																												
ANT	2																																																																																												
Pol.	Vertical						Fundamental																																																																																						
Peak	 Date: 2024-09-20 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.70</td><td>50.68</td><td>74.00</td><td>-23.32</td><td>42.76</td><td>32.25</td><td>7.75</td><td>32.08</td><td>360</td><td>76 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2387.70	50.68	74.00	-23.32	42.76	32.25	7.75	32.08	360	76 PEAK	 Date: 2024-09-20 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>106.86</td><td>-----</td><td>-----</td><td>98.87</td><td>32.28</td><td>7.79</td><td>32.08</td><td>360</td><td>76 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	106.86	-----	-----	98.87	32.28	7.79	32.08	360	76 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2387.70	50.68	74.00	-23.32	42.76	32.25	7.75	32.08	360	76 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2402.00	106.86	-----	-----	98.87	32.28	7.79	32.08	360	76 PEAK																																																																																			
Avg	 Date: 2024-09-20 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2384.24</td><td>40.58</td><td>54.00</td><td>-13.42</td><td>32.67</td><td>32.25</td><td>7.74</td><td>32.08</td><td>360</td><td>76 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2384.24	40.58	54.00	-13.42	32.67	32.25	7.74	32.08	360	76 AVERAGE	 Date: 2024-09-20 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>105.66</td><td>-----</td><td>-----</td><td>97.67</td><td>32.28</td><td>7.79</td><td>32.08</td><td>360</td><td>76 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	105.66	-----	-----	97.67	32.28	7.79	32.08	360	76 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2384.24	40.58	54.00	-13.42	32.67	32.25	7.74	32.08	360	76 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2402.00	105.66	-----	-----	97.67	32.28	7.79	32.08	360	76 AVERAGE																																																																																			



Mode	8																																																																																											
	Harmonic																																																																																											
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																											
ANT	2																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg	Level (dBuV/m) Date: 2024-09-20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>45.36</td><td>74.00</td><td>-28.64</td><td>51.05</td><td>34.82</td><td>11.07</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	45.36	74.00	-28.64	51.05	34.82	11.07	51.58	---	---	Peak	Level (dBuV/m) Date: 2024-09-20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>45.72</td><td>74.00</td><td>-28.28</td><td>51.41</td><td>34.82</td><td>11.07</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	45.72	74.00	-28.28	51.41	34.82	11.07	51.58	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4804.00	45.36	74.00	-28.64	51.05	34.82	11.07	51.58	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4804.00	45.72	74.00	-28.28	51.41	34.82	11.07	51.58	---	---	Peak																																																																																	



Mode	9																																																																																																																																										
	Harmonic																																																																																																																																										
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																										
ANT	2																																																																																																																																										
Pol.	Horizontal										Vertical																																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>45.26</td><td>74.00</td><td>-28.74</td><td>50.86</td><td>34.85</td><td>11.10</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>53.41</td><td>74.00</td><td>-20.59</td><td>55.15</td><td>36.33</td><td>13.09</td><td>51.16</td><td>274</td><td>318</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>46.57</td><td>54.00</td><td>-7.43</td><td>48.31</td><td>36.33</td><td>13.09</td><td>51.16</td><td>274</td><td>318</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	45.26	74.00	-28.74	50.86	34.85	11.10	51.55	---	---	Peak	2	7320.00	53.41	74.00	-20.59	55.15	36.33	13.09	51.16	274	318	Peak	3	7320.00	46.57	54.00	-7.43	48.31	36.33	13.09	51.16	274	318	Average	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>45.64</td><td>74.00</td><td>-28.36</td><td>51.24</td><td>34.85</td><td>11.10</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>56.67</td><td>74.00</td><td>-17.33</td><td>58.41</td><td>36.33</td><td>13.09</td><td>51.16</td><td>264</td><td>140</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>52.80</td><td>54.00</td><td>-1.20</td><td>54.54</td><td>36.33</td><td>13.09</td><td>51.16</td><td>264</td><td>140</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	45.64	74.00	-28.36	51.24	34.85	11.10	51.55	---	---	Peak	2	7320.00	56.67	74.00	-17.33	58.41	36.33	13.09	51.16	264	140	Peak	3	7320.00	52.80	54.00	-1.20	54.54	36.33	13.09	51.16	264	140	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																		
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																	
1	4880.00	45.26	74.00	-28.74	50.86	34.85	11.10	51.55	---	---	Peak																																																																																																																																
2	7320.00	53.41	74.00	-20.59	55.15	36.33	13.09	51.16	274	318	Peak																																																																																																																																
3	7320.00	46.57	54.00	-7.43	48.31	36.33	13.09	51.16	274	318	Average																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																		
1	4880.00	45.64	74.00	-28.36	51.24	34.85	11.10	51.55	---	---	Peak																																																																																																																																
2	7320.00	56.67	74.00	-17.33	58.41	36.33	13.09	51.16	264	140	Peak																																																																																																																																
3	7320.00	52.80	54.00	-1.20	54.54	36.33	13.09	51.16	264	140	Average																																																																																																																																



Mode	10																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																	
ANT	2																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-20 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2491.44</td><td>50.67</td><td>74.00</td><td>-23.33</td><td>42.40</td><td>32.48</td><td>7.89</td><td>32.10</td><td>400 258 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2491.44	50.67	74.00	-23.33	42.40	32.48	7.89	32.10	400 258 PEAK	Level (dBuV/m) Date: 2024-09-20 PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>91.41</td><td>-----</td><td>83.18</td><td>32.46</td><td>7.87</td><td>32.10</td><td>400</td><td>258 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	91.41	-----	83.18	32.46	7.87	32.10	400	258 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2491.44	50.67	74.00	-23.33	42.40	32.48	7.89	32.10	400 258 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2480.00	91.41	-----	83.18	32.46	7.87	32.10	400	258 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-09-20 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.48</td><td>40.32</td><td>54.00</td><td>-13.68</td><td>32.07</td><td>32.47</td><td>7.88</td><td>32.10</td><td>400 258 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2488.48	40.32	54.00	-13.68	32.07	32.47	7.88	32.10	400 258 AVERAGE	Level (dBuV/m) Date: 2024-09-20 AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>90.27</td><td>-----</td><td>82.04</td><td>32.46</td><td>7.87</td><td>32.10</td><td>400</td><td>258 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	90.27	-----	82.04	32.46	7.87	32.10	400	258 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2488.48	40.32	54.00	-13.68	32.07	32.47	7.88	32.10	400 258 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2480.00	90.27	-----	82.04	32.46	7.87	32.10	400	258 AVERAGE																																																																									







Mode	10																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																									
ANT	2																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-20 PEAK_BE_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.44</td><td>51.14</td><td>74.00</td><td>-22.86</td><td>42.86</td><td>32.49</td><td>7.89</td><td>32.10</td><td>378</td><td>72</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2497.44	51.14	74.00	-22.86	42.86	32.49	7.89	32.10	378	72	PEAK	Level (dBuV/m) Date: 2024-09-20 PEAK_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>101.42</td><td>-----</td><td>-----</td><td>93.19</td><td>32.46</td><td>7.87</td><td>32.10</td><td>378</td><td>72</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.42	-----	-----	93.19	32.46	7.87	32.10	378	72	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2497.44	51.14	74.00	-22.86	42.86	32.49	7.89	32.10	378	72	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2480.00	101.42	-----	-----	93.19	32.46	7.87	32.10	378	72	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2024-09-20 AVG_BE_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>41.38</td><td>54.00</td><td>-12.62</td><td>33.14</td><td>32.46</td><td>7.88</td><td>32.10</td><td>378</td><td>72</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.52	41.38	54.00	-12.62	33.14	32.46	7.88	32.10	378	72	AVERAGE	Level (dBuV/m) Date: 2024-09-20 AVG_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>99.65</td><td>-----</td><td>-----</td><td>91.42</td><td>32.46</td><td>7.87</td><td>32.10</td><td>378</td><td>72</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.65	-----	-----	91.42	32.46	7.87	32.10	378	72	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.52	41.38	54.00	-12.62	33.14	32.46	7.88	32.10	378	72	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2480.00	99.65	-----	-----	91.42	32.46	7.87	32.10	378	72	AVERAGE																																																																															



Mode	10																																																																																																																																															
	Harmonic																																																																																																																																															
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																															
ANT	2																																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																																									
Peak Avg	Level (dBuV/m) Date: 2024-09-20 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>45.75</td><td>74.00</td><td>-28.25</td><td>51.24</td><td>34.88</td><td>11.14</td><td>51.51</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>53.70</td><td>74.00</td><td>-20.30</td><td>55.54</td><td>36.38</td><td>12.97</td><td>51.19</td><td>100</td><td>237</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>47.54</td><td>54.00</td><td>-6.46</td><td>49.38</td><td>36.38</td><td>12.97</td><td>51.19</td><td>100</td><td>237</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4960.00	45.75	74.00	-28.25	51.24	34.88	11.14	51.51	---	---	Peak	2	7440.00	53.70	74.00	-20.30	55.54	36.38	12.97	51.19	100	237	Peak	3	7440.00	47.54	54.00	-6.46	49.38	36.38	12.97	51.19	100	237	Average	Level (dBuV/m) Date: 2024-09-20 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>45.98</td><td>74.00</td><td>-28.02</td><td>51.47</td><td>34.88</td><td>11.14</td><td>51.51</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>57.26</td><td>36.38</td><td>12.97</td><td>51.19</td><td>150</td><td>155</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>51.32</td><td>54.00</td><td>-2.68</td><td>53.16</td><td>36.38</td><td>12.97</td><td>51.19</td><td>150</td><td>155</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4960.00	45.98	74.00	-28.02	51.47	34.88	11.14	51.51	---	---	Peak	2	7440.00	55.42	74.00	-18.58	57.26	36.38	12.97	51.19	150	155	Peak	3	7440.00	51.32	54.00	-2.68	53.16	36.38	12.97	51.19	150	155	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	4960.00	45.75	74.00	-28.25	51.24	34.88	11.14	51.51	---	---	Peak																																																																																																																																					
2	7440.00	53.70	74.00	-20.30	55.54	36.38	12.97	51.19	100	237	Peak																																																																																																																																					
3	7440.00	47.54	54.00	-6.46	49.38	36.38	12.97	51.19	100	237	Average																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	4960.00	45.98	74.00	-28.02	51.47	34.88	11.14	51.51	---	---	Peak																																																																																																																																					
2	7440.00	55.42	74.00	-18.58	57.26	36.38	12.97	51.19	150	155	Peak																																																																																																																																					
3	7440.00	51.32	54.00	-2.68	53.16	36.38	12.97	51.19	150	155	Average																																																																																																																																					

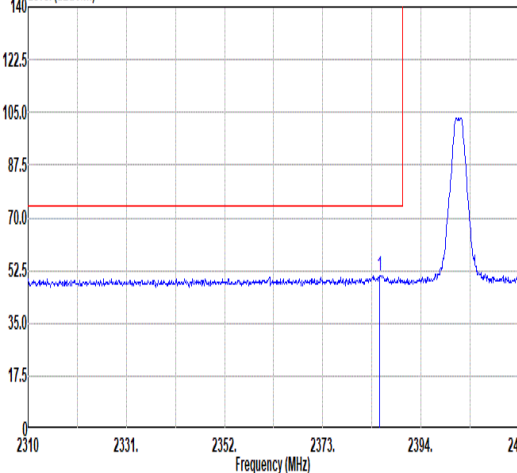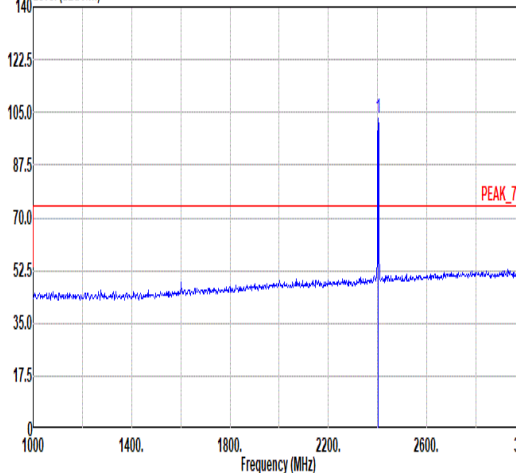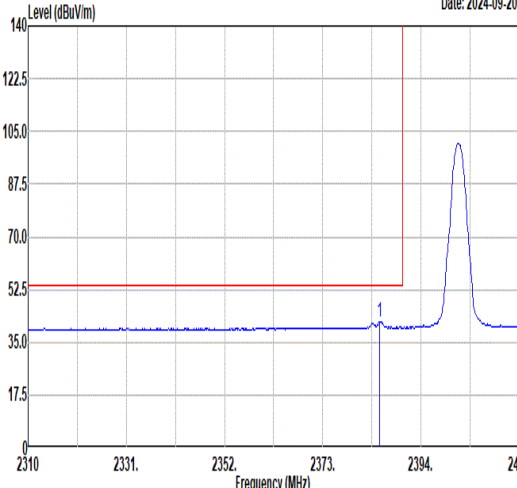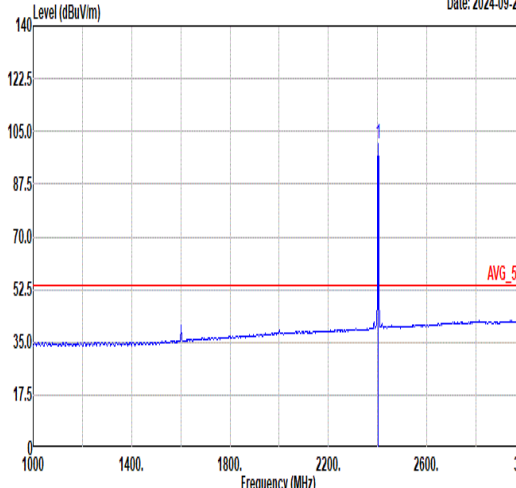

Mode	11																																																		
	Band Edge																																																		
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																		
ANT	2																																																		
Pol.	Horizontal																																																		
Peak	Level (dBuV/m) Date: 2024-09-20  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.18</td><td>50.81</td><td>74.00</td><td>-23.19</td><td>42.89</td><td>32.25</td><td>7.75</td><td>32.08</td><td>351</td><td>110</td><td>PEAK</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.18	50.81	74.00	-23.19	42.89	32.25	7.75	32.08	351	110	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	2385.18	50.81	74.00	-23.19	42.89	32.25	7.75	32.08	351	110	PEAK																																								
Fundamental	Level (dBuV/m) Date: 2024-09-20  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>103.28</td><td>-----</td><td>-----</td><td>95.29</td><td>32.28</td><td>7.79</td><td>32.08</td><td>351</td><td>110</td><td>PEAK</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	103.28	-----	-----	95.29	32.28	7.79	32.08	351	110	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	2402.00	103.28	-----	-----	95.29	32.28	7.79	32.08	351	110	PEAK																																								
Avg	Level (dBuV/m) Date: 2024-09-20  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.18</td><td>41.77</td><td>54.00</td><td>-12.23</td><td>33.85</td><td>32.25</td><td>7.75</td><td>32.08</td><td>351</td><td>110</td><td>AVERAGE</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.18	41.77	54.00	-12.23	33.85	32.25	7.75	32.08	351	110	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	2385.18	41.77	54.00	-12.23	33.85	32.25	7.75	32.08	351	110	AVERAGE																																								
AVG	Level (dBuV/m) Date: 2024-09-20  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>100.95</td><td>-----</td><td>-----</td><td>92.96</td><td>32.28</td><td>7.79</td><td>32.08</td><td>351</td><td>110</td><td>AVERAGE</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.95	-----	-----	92.96	32.28	7.79	32.08	351	110	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	2402.00	100.95	-----	-----	92.96	32.28	7.79	32.08	351	110	AVERAGE																																								



Mode	11																																																																															
	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																															
ANT	2																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2385.39</td><td>53.29</td><td>74.00</td><td>-20.71</td><td>45.37</td><td>32.25</td><td>7.75</td><td>32.08</td><td>363</td><td>51 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2385.39	53.29	74.00	-20.71	45.37	32.25	7.75	32.08	363	51 PEAK	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) PEAK_74 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>107.26</td><td>-----</td><td>-----</td><td>99.27</td><td>32.28</td><td>7.79</td><td>32.08</td><td>363</td><td>51 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	107.26	-----	-----	99.27	32.28	7.79	32.08	363	51 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2385.39	53.29	74.00	-20.71	45.37	32.25	7.75	32.08	363	51 PEAK																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2402.00	107.26	-----	-----	99.27	32.28	7.79	32.08	363	51 PEAK																																																																						
Avg	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2385.39</td><td>44.17</td><td>54.00</td><td>-9.83</td><td>36.25</td><td>32.25</td><td>7.75</td><td>32.08</td><td>363</td><td>51 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2385.39	44.17	54.00	-9.83	36.25	32.25	7.75	32.08	363	51 AVERAGE	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) AVG_54 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>104.98</td><td>-----</td><td>-----</td><td>96.99</td><td>32.28</td><td>7.79</td><td>32.08</td><td>363</td><td>51 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	104.98	-----	-----	96.99	32.28	7.79	32.08	363	51 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2385.39	44.17	54.00	-9.83	36.25	32.25	7.75	32.08	363	51 AVERAGE																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2402.00	104.98	-----	-----	96.99	32.28	7.79	32.08	363	51 AVERAGE																																																																						





Mode	12																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																											
ANT	2																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>45.85</td><td>74.00</td><td>-28.15</td><td>51.45</td><td>34.85</td><td>11.10</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>55.77</td><td>74.00</td><td>-18.23</td><td>57.51</td><td>36.33</td><td>13.09</td><td>51.16</td><td>391</td><td>65</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>50.61</td><td>54.00</td><td>-3.39</td><td>52.35</td><td>36.33</td><td>13.09</td><td>51.16</td><td>391</td><td>65</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	45.85	74.00	-28.15	51.45	34.85	11.10	51.55	---	---	Peak	2	7320.00	55.77	74.00	-18.23	57.51	36.33	13.09	51.16	391	65	Peak	3	7320.00	50.61	54.00	-3.39	52.35	36.33	13.09	51.16	391	65	Average	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>46.28</td><td>74.00</td><td>-27.72</td><td>51.88</td><td>34.85</td><td>11.10</td><td>51.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>57.23</td><td>74.00</td><td>-16.77</td><td>58.97</td><td>36.33</td><td>13.09</td><td>51.16</td><td>307</td><td>191</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>53.19</td><td>54.00</td><td>-0.81</td><td>54.93</td><td>36.33</td><td>13.09</td><td>51.16</td><td>307</td><td>191</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	46.28	74.00	-27.72	51.88	34.85	11.10	51.55	---	---	Peak	2	7320.00	57.23	74.00	-16.77	58.97	36.33	13.09	51.16	307	191	Peak	3	7320.00	53.19	54.00	-0.81	54.93	36.33	13.09	51.16	307	191	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																			
1	4880.00	45.85	74.00	-28.15	51.45	34.85	11.10	51.55	---	---	Peak																																																																																																																																	
2	7320.00	55.77	74.00	-18.23	57.51	36.33	13.09	51.16	391	65	Peak																																																																																																																																	
3	7320.00	50.61	54.00	-3.39	52.35	36.33	13.09	51.16	391	65	Average																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																			
1	4880.00	46.28	74.00	-27.72	51.88	34.85	11.10	51.55	---	---	Peak																																																																																																																																	
2	7320.00	57.23	74.00	-16.77	58.97	36.33	13.09	51.16	307	191	Peak																																																																																																																																	
3	7320.00	53.19	54.00	-0.81	54.93	36.33	13.09	51.16	307	191	Average																																																																																																																																	



Mode	13																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																										
ANT	2																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.34</td><td>51.73</td><td>74.00</td><td>-22.27</td><td>43.45</td><td>32.49</td><td>7.89</td><td>32.10</td><td>317</td><td>252</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2496.34	51.73	74.00	-22.27	43.45	32.49	7.89	32.10	317	252	PEAK	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>93.63</td><td>-----</td><td>-----</td><td>85.40</td><td>32.46</td><td>7.87</td><td>32.10</td><td>317</td><td>252</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2480.00	93.63	-----	-----	85.40	32.46	7.87	32.10	317	252	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2496.34	51.73	74.00	-22.27	43.45	32.49	7.89	32.10	317	252	PEAK																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	93.63	-----	-----	85.40	32.46	7.87	32.10	317	252	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>32.53</td><td>32.46</td><td>7.88</td><td>32.10</td><td>317</td><td>252</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.52	40.77	54.00	-13.23	32.53	32.46	7.88	32.10	317	252	AVERAGE	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>91.38</td><td>-----</td><td>-----</td><td>83.15</td><td>32.46</td><td>7.87</td><td>32.10</td><td>317</td><td>252</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2480.00	91.38	-----	-----	83.15	32.46	7.87	32.10	317	252	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2483.52	40.77	54.00	-13.23	32.53	32.46	7.88	32.10	317	252	AVERAGE																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	91.38	-----	-----	83.15	32.46	7.87	32.10	317	252	AVERAGE																																																																																



Mode	13																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																									
ANT	2																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-09-20 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484 2488 2492 2496 2500 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>52.94</td><td>74.00</td><td>-21.06</td><td>44.70</td><td>32.46</td><td>7.88</td><td>32.10</td><td>346</td><td>66</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.54	52.94	74.00	-21.06	44.70	32.46	7.88	32.10	346	66	PEAK	Level (dBuV/m) Date: 2024-09-20 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>100.02</td><td>-----</td><td>-----</td><td>91.79</td><td>32.46</td><td>7.87</td><td>32.10</td><td>346</td><td>66</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2480.00	100.02	-----	-----	91.79	32.46	7.87	32.10	346	66	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	2483.54	52.94	74.00	-21.06	44.70	32.46	7.88	32.10	346	66	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	100.02	-----	-----	91.79	32.46	7.87	32.10	346	66	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2024-09-20 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484 2488 2492 2496 2500 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>42.74</td><td>54.00</td><td>-11.26</td><td>34.50</td><td>32.46</td><td>7.88</td><td>32.10</td><td>346</td><td>66</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.52	42.74	54.00	-11.26	34.50	32.46	7.88	32.10	346	66	AVERAGE	Level (dBuV/m) Date: 2024-09-20 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.79</td><td>-----</td><td>-----</td><td>89.56</td><td>32.46</td><td>7.87</td><td>32.10</td><td>346</td><td>66</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2480.00	97.79	-----	-----	89.56	32.46	7.87	32.10	346	66	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	2483.52	42.74	54.00	-11.26	34.50	32.46	7.88	32.10	346	66	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	97.79	-----	-----	89.56	32.46	7.87	32.10	346	66	AVERAGE																																																																															



Mode	13																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																											
ANT	2																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>47.03</td><td>74.00</td><td>-26.97</td><td>52.52</td><td>34.88</td><td>11.14</td><td>51.51</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>51.24</td><td>74.00</td><td>-22.76</td><td>53.08</td><td>36.38</td><td>12.97</td><td>51.19</td><td>400</td><td>274</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>44.24</td><td>54.00</td><td>-9.76</td><td>46.08</td><td>36.38</td><td>12.97</td><td>51.19</td><td>400</td><td>274</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	47.03	74.00	-26.97	52.52	34.88	11.14	51.51	---	---	Peak	2	7440.00	51.24	74.00	-22.76	53.08	36.38	12.97	51.19	400	274	Peak	3	7440.00	44.24	54.00	-9.76	46.08	36.38	12.97	51.19	400	274	Average	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>45.97</td><td>74.00</td><td>-28.03</td><td>51.46</td><td>34.88</td><td>11.14</td><td>51.51</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>57.78</td><td>74.00</td><td>-16.22</td><td>59.62</td><td>36.38</td><td>12.97</td><td>51.19</td><td>356</td><td>335</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>53.46</td><td>54.00</td><td>-0.54</td><td>55.30</td><td>36.38</td><td>12.97</td><td>51.19</td><td>356</td><td>335</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	45.97	74.00	-28.03	51.46	34.88	11.14	51.51	---	---	Peak	2	7440.00	57.78	74.00	-16.22	59.62	36.38	12.97	51.19	356	335	Peak	3	7440.00	53.46	54.00	-0.54	55.30	36.38	12.97	51.19	356	335	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	4960.00	47.03	74.00	-26.97	52.52	34.88	11.14	51.51	---	---	Peak																																																																																																																																	
2	7440.00	51.24	74.00	-22.76	53.08	36.38	12.97	51.19	400	274	Peak																																																																																																																																	
3	7440.00	44.24	54.00	-9.76	46.08	36.38	12.97	51.19	400	274	Average																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	4960.00	45.97	74.00	-28.03	51.46	34.88	11.14	51.51	---	---	Peak																																																																																																																																	
2	7440.00	57.78	74.00	-16.22	59.62	36.38	12.97	51.19	356	335	Peak																																																																																																																																	
3	7440.00	53.46	54.00	-0.54	55.30	36.38	12.97	51.19	356	335	Average																																																																																																																																	



Mode	14																																																																																																																																																																																																																											
	LF																																																																																																																																																																																																																											
	2400-2483.5_Bluetooth LE LF_CH39_2480MHz																																																																																																																																																																																																																											
ANT	2																																																																																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																																																																																					
QP/ Peak	Level (dBuV/m) Date: 2024-09-25 FCC CLASS-B -6dB Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>51.34</td><td>18.77</td><td>40.00</td><td>-21.23</td><td>34.55</td><td>14.12</td><td>1.31</td><td>31.21</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>167.74</td><td>24.00</td><td>43.50</td><td>-19.50</td><td>36.78</td><td>15.90</td><td>2.35</td><td>31.03</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>359.80</td><td>32.77</td><td>46.00</td><td>-13.23</td><td>39.36</td><td>20.77</td><td>3.42</td><td>30.78</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>554.77</td><td>24.72</td><td>46.00</td><td>-21.28</td><td>26.49</td><td>24.99</td><td>4.24</td><td>31.00</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>803.09</td><td>30.72</td><td>46.00</td><td>-15.28</td><td>30.61</td><td>26.12</td><td>5.09</td><td>31.10</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>956.35</td><td>32.27</td><td>46.00</td><td>-13.73</td><td>30.52</td><td>27.17</td><td>5.58</td><td>31.00</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table> Level (dBuV/m) Date: 2024-09-25 FCC CLASS-B -6dB Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>46.49</td><td>17.89</td><td>40.00</td><td>-22.11</td><td>32.07</td><td>15.77</td><td>1.25</td><td>31.20</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>167.74</td><td>17.92</td><td>43.50</td><td>-25.58</td><td>30.70</td><td>15.90</td><td>2.35</td><td>31.03</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>385.02</td><td>28.73</td><td>46.00</td><td>-17.27</td><td>34.44</td><td>21.49</td><td>3.53</td><td>30.73</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>743.92</td><td>28.29</td><td>46.00</td><td>-17.71</td><td>28.49</td><td>25.82</td><td>4.91</td><td>30.93</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>799.21</td><td>31.67</td><td>46.00</td><td>-14.33</td><td>31.59</td><td>26.10</td><td>5.08</td><td>31.10</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>31.77</td><td>46.00</td><td>-14.23</td><td>29.99</td><td>27.19</td><td>5.59</td><td>31.00</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	51.34	18.77	40.00	-21.23	34.55	14.12	1.31	31.21	---	---	---	Peak	2	167.74	24.00	43.50	-19.50	36.78	15.90	2.35	31.03	---	---	---	Peak	3	359.80	32.77	46.00	-13.23	39.36	20.77	3.42	30.78	---	---	---	Peak	4	554.77	24.72	46.00	-21.28	26.49	24.99	4.24	31.00	---	---	---	Peak	5	803.09	30.72	46.00	-15.28	30.61	26.12	5.09	31.10	---	---	---	Peak	6	956.35	32.27	46.00	-13.73	30.52	27.17	5.58	31.00	---	---	---	Peak		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	46.49	17.89	40.00	-22.11	32.07	15.77	1.25	31.20	---	---	---	Peak	2	167.74	17.92	43.50	-25.58	30.70	15.90	2.35	31.03	---	---	---	Peak	3	385.02	28.73	46.00	-17.27	34.44	21.49	3.53	30.73	---	---	---	Peak	4	743.92	28.29	46.00	-17.71	28.49	25.82	4.91	30.93	---	---	---	Peak	5	799.21	31.67	46.00	-14.33	31.59	26.10	5.08	31.10	---	---	---	Peak	6	958.29	31.77	46.00	-14.23	29.99	27.19	5.59	31.00	---	---	---	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																															
		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																
1	51.34	18.77	40.00	-21.23	34.55	14.12	1.31	31.21	---	---	---	Peak																																																																																																																																																																																																																
2	167.74	24.00	43.50	-19.50	36.78	15.90	2.35	31.03	---	---	---	Peak																																																																																																																																																																																																																
3	359.80	32.77	46.00	-13.23	39.36	20.77	3.42	30.78	---	---	---	Peak																																																																																																																																																																																																																
4	554.77	24.72	46.00	-21.28	26.49	24.99	4.24	31.00	---	---	---	Peak																																																																																																																																																																																																																
5	803.09	30.72	46.00	-15.28	30.61	26.12	5.09	31.10	---	---	---	Peak																																																																																																																																																																																																																
6	956.35	32.27	46.00	-13.73	30.52	27.17	5.58	31.00	---	---	---	Peak																																																																																																																																																																																																																
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																	
1	46.49	17.89	40.00	-22.11	32.07	15.77	1.25	31.20	---	---	---	Peak																																																																																																																																																																																																																
2	167.74	17.92	43.50	-25.58	30.70	15.90	2.35	31.03	---	---	---	Peak																																																																																																																																																																																																																
3	385.02	28.73	46.00	-17.27	34.44	21.49	3.53	30.73	---	---	---	Peak																																																																																																																																																																																																																
4	743.92	28.29	46.00	-17.71	28.49	25.82	4.91	30.93	---	---	---	Peak																																																																																																																																																																																																																
5	799.21	31.67	46.00	-14.33	31.59	26.10	5.08	31.10	---	---	---	Peak																																																																																																																																																																																																																
6	958.29	31.77	46.00	-14.23	29.99	27.19	5.59	31.00	---	---	---	Peak																																																																																																																																																																																																																



Mode	15																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_Bluetooth-LE_CH18_2438MHz																																																																																																																																							
ANT	2																																																																																																																																							
Pol.	Horizontal					Vertical																																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2024-11-29 Frequency (MHz)					Level (dBuV/m) Date: 2024-11-29 Frequency (MHz)																																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 3250.58</td><td>48.56</td><td>74.00</td><td>-25.44</td><td>60.80</td><td>31.50</td><td>9.01</td><td>52.75</td><td>394 68 Peak</td></tr><tr><td>2 4876.00</td><td>45.42</td><td>74.00</td><td>-28.58</td><td>51.60</td><td>35.35</td><td>11.10</td><td>52.63</td><td>--- --- Peak</td></tr><tr><td>3 7314.00</td><td>56.88</td><td>74.00</td><td>-17.12</td><td>59.46</td><td>36.57</td><td>13.08</td><td>52.23</td><td>383 66 Peak</td></tr><tr><td>4 7314.00</td><td>51.61</td><td>54.00</td><td>-2.39</td><td>54.19</td><td>36.57</td><td>13.08</td><td>52.23</td><td>383 66 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 3250.58	48.56	74.00	-25.44	60.80	31.50	9.01	52.75	394 68 Peak	2 4876.00	45.42	74.00	-28.58	51.60	35.35	11.10	52.63	--- --- Peak	3 7314.00	56.88	74.00	-17.12	59.46	36.57	13.08	52.23	383 66 Peak	4 7314.00	51.61	54.00	-2.39	54.19	36.57	13.08	52.23	383 66 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 3250.58</td><td>50.73</td><td>74.00</td><td>-23.27</td><td>62.97</td><td>31.50</td><td>9.01</td><td>52.75</td><td>383 267 Peak</td></tr><tr><td>2 4876.00</td><td>45.63</td><td>74.00</td><td>-28.37</td><td>51.81</td><td>35.35</td><td>11.10</td><td>52.63</td><td>--- --- Peak</td></tr><tr><td>3 7314.00</td><td>58.38</td><td>74.00</td><td>-15.62</td><td>60.96</td><td>36.57</td><td>13.08</td><td>52.23</td><td>157 360 Peak</td></tr><tr><td>4 7314.00</td><td>53.46</td><td>54.00</td><td>-0.54</td><td>56.04</td><td>36.57</td><td>13.08</td><td>52.23</td><td>157 360 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 3250.58	50.73	74.00	-23.27	62.97	31.50	9.01	52.75	383 267 Peak	2 4876.00	45.63	74.00	-28.37	51.81	35.35	11.10	52.63	--- --- Peak	3 7314.00	58.38	74.00	-15.62	60.96	36.57	13.08	52.23	157 360 Peak	4 7314.00	53.46	54.00	-0.54	56.04	36.57	13.08	52.23	157 360 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																															
1 3250.58	48.56	74.00	-25.44	60.80	31.50	9.01	52.75	394 68 Peak																																																																																																																																
2 4876.00	45.42	74.00	-28.58	51.60	35.35	11.10	52.63	--- --- Peak																																																																																																																																
3 7314.00	56.88	74.00	-17.12	59.46	36.57	13.08	52.23	383 66 Peak																																																																																																																																
4 7314.00	51.61	54.00	-2.39	54.19	36.57	13.08	52.23	383 66 Average																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																
1 3250.58	50.73	74.00	-23.27	62.97	31.50	9.01	52.75	383 267 Peak																																																																																																																																
2 4876.00	45.63	74.00	-28.37	51.81	35.35	11.10	52.63	--- --- Peak																																																																																																																																
3 7314.00	58.38	74.00	-15.62	60.96	36.57	13.08	52.23	157 360 Peak																																																																																																																																
4 7314.00	53.46	54.00	-0.54	56.04	36.57	13.08	52.23	157 360 Average																																																																																																																																



Mode	16																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																																																																																	
ANT	2																																																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-11-29 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3303.17</td><td>48.50</td><td>74.00</td><td>-25.50</td><td>60.74</td><td>31.51</td><td>9.03</td><td>52.78</td><td>261</td><td>84</td><td>Peak</td></tr><tr><td>2</td><td>4956.00</td><td>45.46</td><td>74.00</td><td>-28.54</td><td>51.29</td><td>35.71</td><td>11.13</td><td>52.67</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7434.00</td><td>53.86</td><td>74.00</td><td>-20.14</td><td>56.54</td><td>36.60</td><td>12.99</td><td>52.27</td><td>105</td><td>278</td><td>Peak</td></tr><tr><td>4</td><td>7434.00</td><td>46.76</td><td>54.00</td><td>-7.24</td><td>49.44</td><td>36.60</td><td>12.99</td><td>52.27</td><td>105</td><td>278</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	3303.17	48.50	74.00	-25.50	60.74	31.51	9.03	52.78	261	84	Peak	2	4956.00	45.46	74.00	-28.54	51.29	35.71	11.13	52.67	---	---	Peak	3	7434.00	53.86	74.00	-20.14	56.54	36.60	12.99	52.27	105	278	Peak	4	7434.00	46.76	54.00	-7.24	49.44	36.60	12.99	52.27	105	278	Average	Level (dBuV/m) Date: 2024-11-29 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3303.17</td><td>50.87</td><td>74.00</td><td>-23.13</td><td>63.11</td><td>31.51</td><td>9.03</td><td>52.78</td><td>266</td><td>330</td><td>Peak</td></tr><tr><td>2</td><td>4956.00</td><td>45.55</td><td>74.00</td><td>-28.45</td><td>51.38</td><td>35.71</td><td>11.13</td><td>52.67</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7434.00</td><td>56.56</td><td>74.00</td><td>-17.44</td><td>59.24</td><td>36.60</td><td>12.99</td><td>52.27</td><td>274</td><td>155</td><td>Peak</td></tr><tr><td>4</td><td>7434.00</td><td>50.38</td><td>54.00</td><td>-3.62</td><td>53.06</td><td>36.60</td><td>12.99</td><td>52.27</td><td>274</td><td>155</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	3303.17	50.87	74.00	-23.13	63.11	31.51	9.03	52.78	266	330	Peak	2	4956.00	45.55	74.00	-28.45	51.38	35.71	11.13	52.67	---	---	Peak	3	7434.00	56.56	74.00	-17.44	59.24	36.60	12.99	52.27	274	155	Peak	4	7434.00	50.38	54.00	-3.62	53.06	36.60	12.99	52.27	274	155	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																									
	1	3303.17	48.50	74.00	-25.50	60.74	31.51	9.03	52.78	261	84	Peak																																																																																																																																																						
2	4956.00	45.46	74.00	-28.54	51.29	35.71	11.13	52.67	---	---	Peak																																																																																																																																																							
3	7434.00	53.86	74.00	-20.14	56.54	36.60	12.99	52.27	105	278	Peak																																																																																																																																																							
4	7434.00	46.76	54.00	-7.24	49.44	36.60	12.99	52.27	105	278	Average																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																										
1	3303.17	50.87	74.00	-23.13	63.11	31.51	9.03	52.78	266	330	Peak																																																																																																																																																							
2	4956.00	45.55	74.00	-28.45	51.38	35.71	11.13	52.67	---	---	Peak																																																																																																																																																							
3	7434.00	56.56	74.00	-17.44	59.24	36.60	12.99	52.27	274	155	Peak																																																																																																																																																							
4	7434.00	50.38	54.00	-3.62	53.06	36.60	12.99	52.27	274	155	Average																																																																																																																																																							




Appendix D. Duty Cycle Plots

Ant label	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Sample1 <Ant.1>	Bluetooth LE 1Mbps	84.8	2.12	0.472	1KHz
	Bluetooth LE 2Mbps	56.91	1.07	0.935	1KHz
Sample 2 <Ant.2>	Bluetooth LE 1Mbps	84.8	2.12	0.472	1KHz
	Bluetooth LE 2Mbps	56.68	1.06	0.943	1KHz


For Ant.1 :

Bluetooth LE 1Mbps

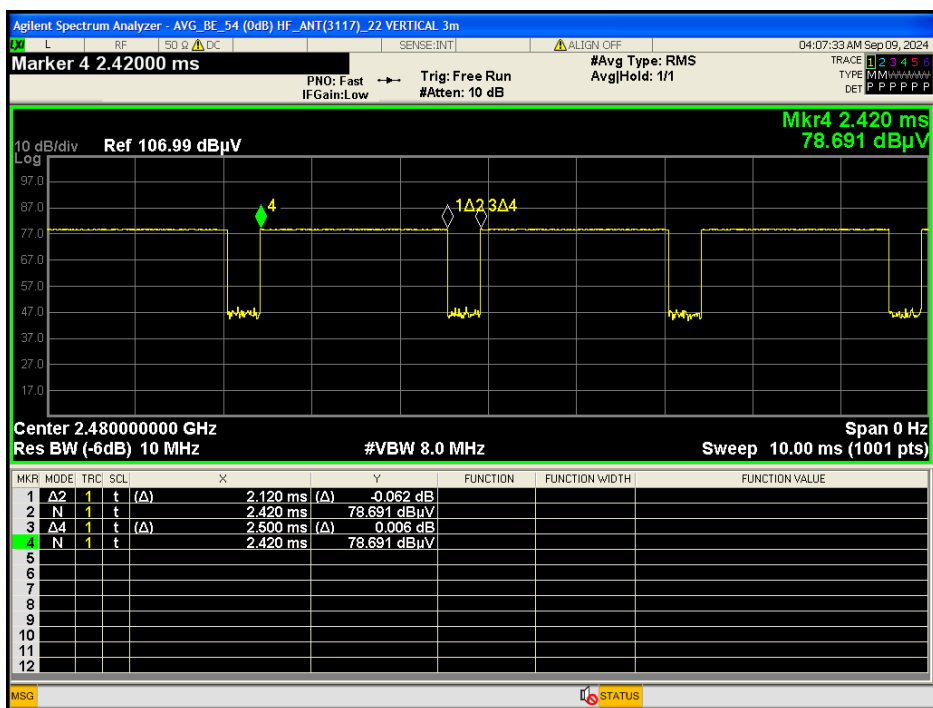




Bluetooth LE 2Mbps

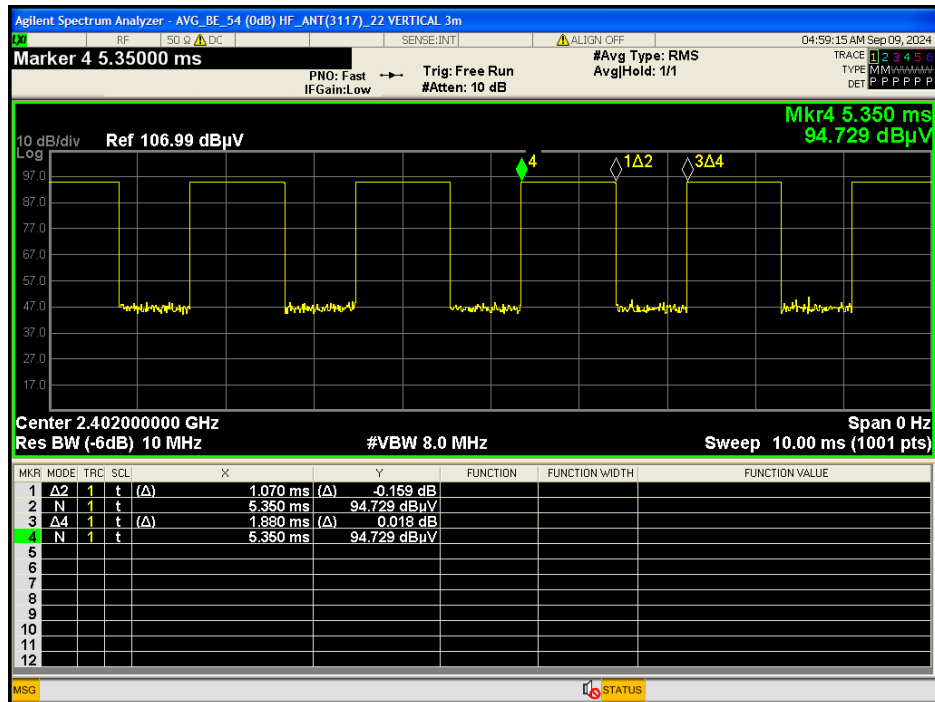

For Ant.2 :

Bluetooth LE 1Mbps

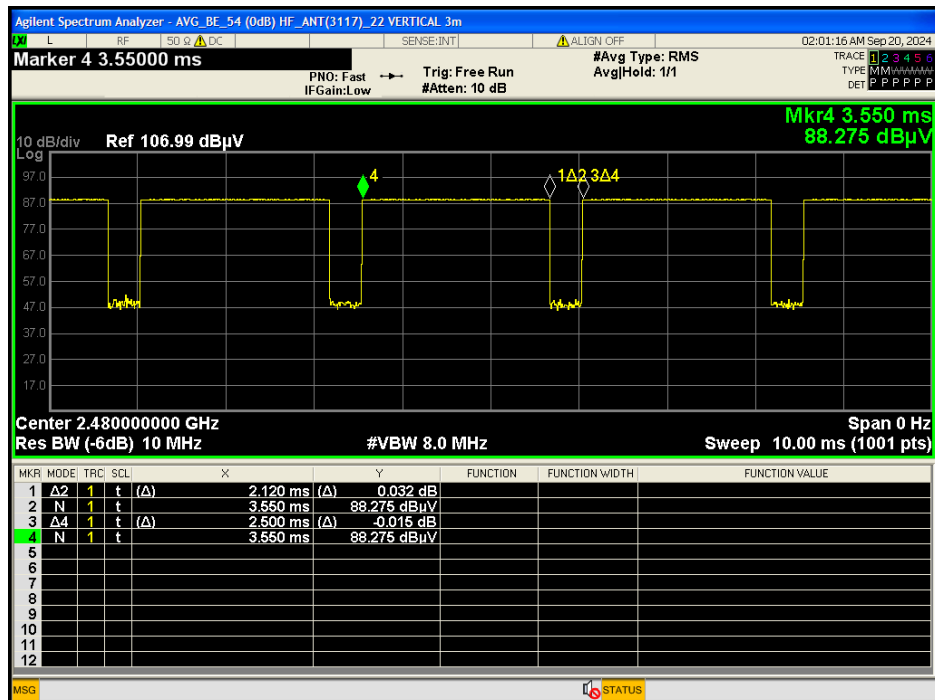

Bluetooth LE 2Mbps

