



Basics

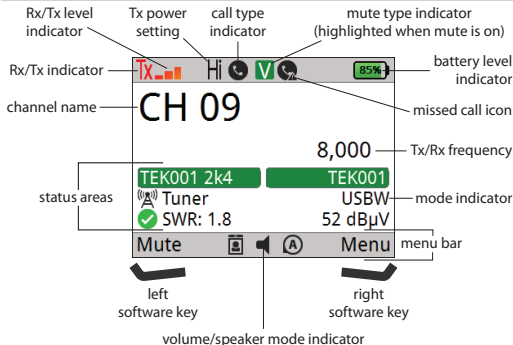

Fixed channel operation

- To operate on a fixed channel:
- Go to the channel screen, stop scanning, then select a channel.
 - Press **PTT** to tune the antenna, if required.

Discreet mode switch

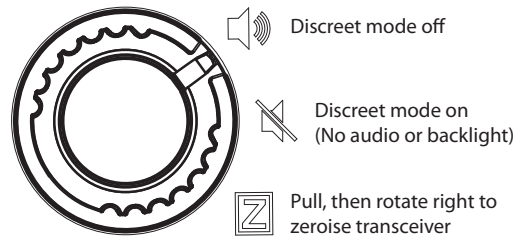

Keys


	Volume down/up (when is present)
	Select channel
	Scroll left/up/down/right
	Menu/action
	Selection
Press	Start call
Hold (for 2 sec)	Go to Stations list
	End call, start/stop scan
	Mute on/off
	Manual tune screen
	Next speaker mode
	Next Digital Voice Rate
	Free tune receive
	Set transmit power level
	Select mute type
	Toggle between Analogue and Secure/DV
	Go to GPS screen
	Toggle Channel/Station screens
	Go to Adjust Display Brightness screen
	Function Select: Self Tests Screen/Macros Screen

Calling

Call Types

- Selective
- Get Status
- Message
- Channel Test
- Send Position
- Phone
- Get Position
- Alert
- ALE Sounding
- SMS
- Voice Message
- TOD Request
- TOD Broadcast

Making a Station Call

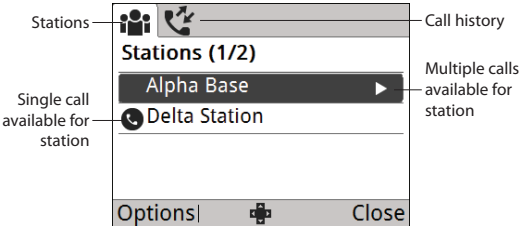- To make a call using one of your pre-defined stations:
- Go to the channel screen, then **hold CALL** or press Key **0**.
- 


The screenshot shows the 'Stations (1/2)' list with 'Alpha Base' and 'Delta Station'. Labels indicate:

 - Stations:** The list of stations.
 - Single call available for station:** Points to 'Delta Station'.
 - Call history:** Points to the top of the list.
 - Multiple calls available for station:** Points to the 'Alpha Base' entry.
- Scroll to the station that you want to call.
 - If there are multiple calls available for the station, press **▶** or **CALL**, then scroll to the desired call type.
 - Press **CALL**.
 - Respond to any prompts, then press **CALL**.

Making a call from the Channel screen

To make a call:

- Go to the channel screen, then press **CALL**.

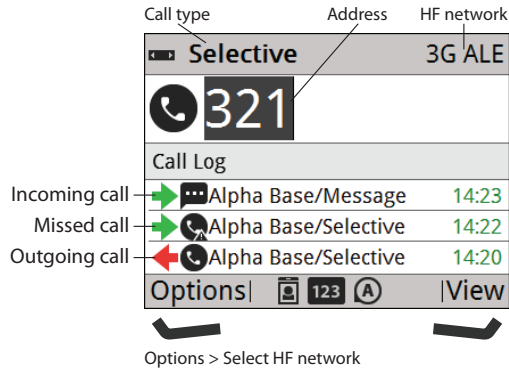

- Press **Left Arrow** or **Right Arrow** to scroll to the call type that you want to use.
- Enter a Station ID to call.
- If you want to return or repeat a call from the Call Log, press **Down Arrow** to scroll to the entry.
- Press **CALL**.

Making a call from the Call History

To make a call from the call History:

- Go to the channel screen, *hold* **CALL** or press key **0**.
- Ensure that the top tab is selected, then press **Right Arrow** to see the Call History.
- Scroll to the call that you want to return or repeat, then press **CALL**.

Making an alert call

CAUTION: Ensure that all information required is set up for the alert station.

To make an alert call:

- Hold*  for 2 sec, then follow any prompts.

Viewing missed calls

To view a missed call:

- Go to the channel screen, *hold* **CALL**, or press key **0**, then press **Right Arrow** to see the Call History.
- Scroll to the missed call that you want to view, then press **OK**.

Navigating

Navigating the menu structure

To navigate the menu structure:

- To move through the menu structure, press **Up Arrow**, **Down Arrow**, **Left Arrow** or **Right Arrow** to highlight the icon that you want to select, then press **OK**.
- To move through a list of entries at the lowest level of the menu structure, press **Up Arrow** or **Down Arrow**.
- To go to the top level in the menu structure, do one of the following:
 - Press  (**Close**) to return to the top level of the menu structure, one level at a time.
 - Press PTT to exit to the channel screen, then press  (**Menu**) to enter the top level of the menu structure.

Finding a word or value

NOTE: Find is available for selected icons.

To find a word or value:

- Highlight the icon in which you want to search, then press  (**Find**).
- Start entering the letter and/or number on which you want to search.
- Enter more characters to refine your search.

- Scroll to the entry or value that you want, then press **OK**. You are taken to the entry or name level of the user data containing the character.

Text editing functions

-  Press to delete a single character of *hold* to clear all the text in the field
-  Change character-entry mode
-  Select special character (*press/hold*)
-  Enter a space
- PTT** Abort editing/exit

Shortcuts

-  + **0** Adjust Display Brightness
-  + **1** Toggle next available theme
-  + **2** Toggle advanced view
-  + **3** Select language
-  +  Abandon mode

References

Sentry®-H 6110-MP Transceiver Operator Guide (Codan part number 15-04200-EN)