


Meraki Dual-Band Patch Antenna, 8 / 6.5 dBi (MA-ANT-25)

The Cisco Meraki MA-ANT-25 patch antenna is a 8 / 6.5 dBi, MIMO, dual-band 2.4 and 5 GHz antenna ideal for providing client coverage over focused areas or creating backhaul links. It is designed for use with Meraki APs that have N-type connectors.



Signal Coverage Pattern

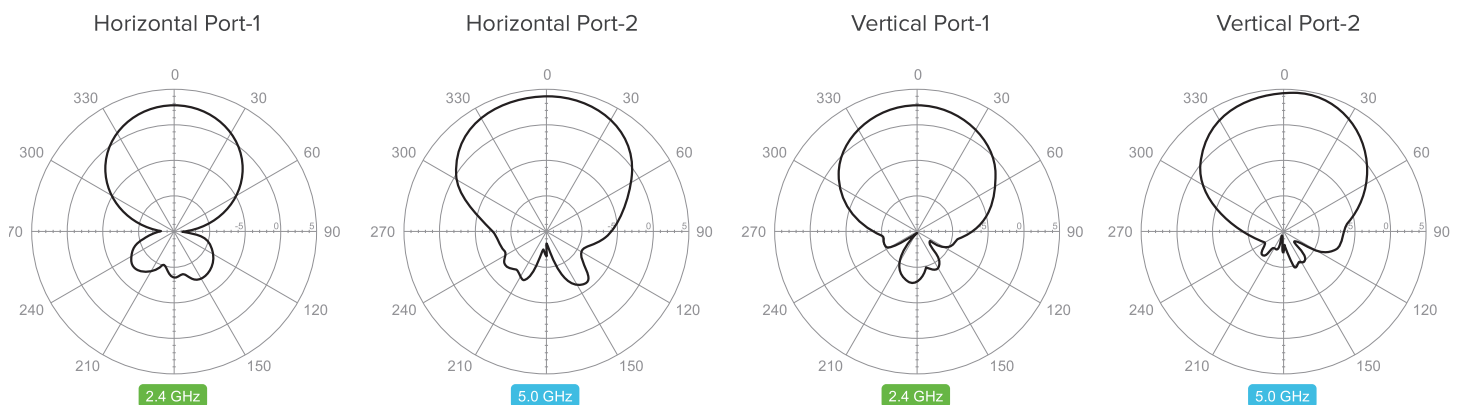

Specifications

Electrical	Physical and Environmental
Antenna type: sector	Dimensions: 7.1 x 7.1 x 1.6" (180 mm x 180 mm x 1.8 mm)
Frequency range: 2.400 – 2.500, 5.150 – 5.875 GHz	Weight: 1.1 lbs (512 g)
Gain: 8 / 6.5 dBi	Material: UV resistant plastic
Polarization: linear, vertical / horizontal	Temperature: -40° F – 158° F (-40° C – 70° C)
Half power beamwidth / horizontal: 60° / 75°	Connector: 2 x N-type
Cables	Warranty
Cables with two N-type connectors included	1 year hardware warranty included
Cable length: 12 inches	
Mounting	Regulatory
Mounting hardware and cables included	Certified for use with the MR72, MR74, and MR84
Mounts to walls and poles	