

PRODUCT NAME: **Solar LED Stone with Bluetooth Speaker(twins paring system)**

**Below with underline are tips for the SKU which is set of 2pack, not for 1pack**

The 1 pack does not being paired by default, user has to pair them manually

Master

The Master and Vice has been paired by default

Step 1 first use does not require pairing, have to open the Master first by shortly press, to connect Bluetooth

Step 2 to open the Vice by shortly press

Note1: Bluetooth will be automatically turned off If not connected within 1 hour, and the product will enter power saving mode. Please reconnect Bluetooth.

Note2: Timer & light sensor function

Timer & light sensor function designed for light only, when button B is turned on, these 2 function will be turned on by default, at the same time light will flash around 5s to indicate that this mode has been on.

Automatically turn on the light at night and work for 6 hours

Stone speaker being charged once it's in Day Time under sunlight, Bluetooth can work, Light will not work until it get into Night Time. If you want to check the light, please bring it back to Dark light environment during Day Time or cover the solar panel before turning the button B on.

Note3:

If you exit the pairing mode when using, need to get back to pairing function again, to make 2 speakers be paired successfully, and then open the Bluetooth device; before pairing, the phone Bluetooth list can only appear a Bluetooth name, if there are more than one, please delete, otherwise it can not be paired.

#### **1.PARTS:**

Check to make sure you have the following: INCLUDED:

- 1) LED Stone speaker × 2 (for SKU set of 2)
- 2) USB Charging Cable × 2
- 3) User Manual × 1

- 1) LED Stone speaker × 1 (for SKU set of 1)
- 2) USB Charging Cable × 1
- 3) User Manual × 1

#### **2.Specification:**

- Material: PE plastic
- Water resistance of LED lights: IP44
- Light battery: rechargeable battery (x1 ,Built-in,non-replaceable)
- Color: Multi color variation, 3 modes(Breathing effect/Running circles/Running in a Chain)


Manufacturer: **POWERBEAUTY(DONGGUAN)INDUSTRIAL CO.,LTD**  
ADD: NO.1, Eastern Industry Park, Shujiu Village, Changping Town, Dongguan City,  
Guangdong Province, China (PC:523380)  
After-sale service hotline: sales3@powerbeauty.com



- Bluetooth distance: 10 meters (33feet)
- Charging time: 3.5 ~ 5 hours via USB charge A whole day in good sunlight via Solar charge
- Working Time: 4-6 hours for Music & Light, 38 hours for Light only
- Charger voltage : 5V 2A or 1A

### 3.Function:

- 1) Color change
- 2) with Bluetooth Speaker
- 3) rechargeable ,convenient for charging by Solar Or USB cable
- 4) with paring function, any 2 of speaker can be paired and control by 1 mobile
- 5) Stone speaker being charged once it's in Day Time under sunlight, Bluetooth can work, Light will not work until it get into Night Time. If you want to check the light, please bring it back to Dark light environment during Day Time or cover the solar panel before turning the button B on.
- 6) Light will be Bright up automatically at Night when it's being outdoor.
- 7) Memory function is for pairing Mode only, not for light.

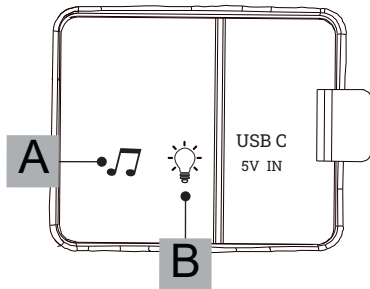

#### Operating by “A” button on the bottom(Bluetooth Mode)

- 1) Turn On: by shortly Press to turn the Bluetooth ON, come with electronic beep
- 2) Turn OFF: by long pressing 2-3s turn it off, come with electronic beep
- 3) Pairing mode: by Double pressing,come with electronic beep(If both items paired last time before turn off, they will pair themselves automatically when next time opened. The speaker comes with memory function, it is with same setting mode as last time )
- 4) Bluetooth will be automatically turned off If not connected within 1 hour,and the product will enter power saving mode. Please press and hold on again to reconnect Bluetooth
- 5) If you exit the pairing mode when using, need to get back to pairing function again, to make 2 speakers be paired successfully, and then open the Bluetooth device; before pairing, the phone Bluetooth list can only appear a Bluetooth name, if there are more than one, please delete, otherwise it can not be paired.

#### Operating by “B” button on the bottom(light Mode)

Color: Multi color variation, 3 modes(Breathing effect/Running circles/Running in a Chain)

Shortly press to get into 3 modes


- 1) Turn On: by shortly press
- 2) Turn Off: by long press for 2-3s

- 3) Different color change mode: by shortly press
- 4) Tips: Timer & light sensor function will be turned on by default when this button is On ,at the same time light will flash around 5s to indicate that this mode has been on.  
Automatically turn on the light at night and work for 6 hours ,  
Stone speaker being charged once it's in Day Time under sunlight, Bluetooth can work, Light will not work until it get into Night Time. If you want to check the light, please bring it back to Dark light environment during Day Time or cover the solar panel before turning the button B on.
- 5) Indicators,charging mode is in Red, full of Charge mode is in Green, Bluetooth mode is in Blue

### BATTERY CHARGING

Before the product is used charge the battery for 6 to 8 hours by:

1. Charge the light with provided USB cable which is compatible with any computer Or cell phone 5Volt out put charger
2. Connect the USB cable to computer USB port
3. Insert the USB cable to USB jack of lamp
4. Monitoring the charging indicator light is in Red(it will turn to green when it is fully charged).
5. Covering the charge cap after it is fully charged.
6. Low power level, indicator light will show up in Red and come with electronic beep, it will disappear when the power level is high enough.

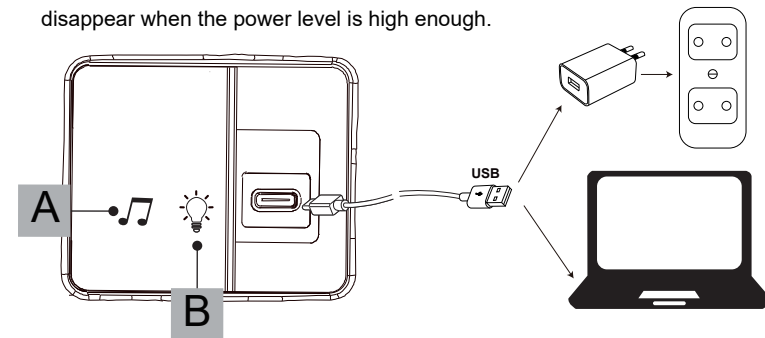

### CONNECTING VIA BLUETOOTH:

Make sure the led BT speaker is powered On before connecting your device.

- 1) To turn on the Button A on top by shortly touching ,there will be an audible activation beep once in Bluetooth Pairing Mode. Bluetooth indicator keep flashing in Blue.
- 2) To turn on the Bluetooth of your mobile phone, select “ **UUFFOO-5** ” from your device's Bluetooth Setting Menu. Another audible beep will sound once your device is connected.
- 3) 2 ways to disconnect your Bluetooth Device, to turn of the Bluetooth switch of your mobile phone,there will be an audible deactivation beep indicating that the device has been disconnected from Bluetooth Mode. or directly turn of you item.

**Remarks: Bluetooth will be automatically turned off If not connected within 1 hour,and the product will enter power saving mode. Please press and hold on again to reconnect Bluetooth.**

## TO PAIR 2 SPEAKERS

(make 2 of speakers paired first before opening your Bluetooth device, than open the Bluetooth device and connect it with speaker)

### 2.1. to pair 2 speakers.

- 1) turn on any 2 of speaker by shortly press button A.
- 2) double pressing button A from any one of the speaker after both were turned on, there will be one beep notice. then it is able to hands off.  
the double pressed one will become master and Bluetooth indicator will start flashing and trying to pair with the vice one. since paired successfully, the indicator of master speaker keep flashing quickly and vice's keep flashing slowly. Also will be beep notice.
- 3) Now you can connect your Bluetooth device (Mobile) to the speakers via Bluetooth. Once connected and unplay Music or Pause the music, the Bluetooth indicator light for Master One glows in fixed blue, vice's keep flashing slowly.
- 4) Since Bluetooth connected, and during playing Music, Bluetooth indicator of both items are Off.
- 5) During Pairing mode, If you turn off the Master by long press button A, the music of Vice one will go off as well, but the light will keep on.
- 6) During pairing mode, If you turn off the vice speaker by press the button A during pairing mode, but the main speaker still works, the pairing mode ends after 10s and the main speaker works individually.
- 7) after the bluetooth pairing succeeded, if want to cancel pairing, pls long press 2s to turn off the bluetooth key (button A); because don't have cancel pairing function

### 2.2. Second time to pair 2 speakers (Memory function for master and vice)

If both items paired last time before turn off, they will pair themselves automatically when next time opened. The speaker comes with memory function, it is with same setting mode as last time.

**CAUTION:** The built-in rechargeable battery is not replaceable. Do not remove or replace it, do not throw it in the trash or in a fire. Do not dispose device in the standard garbage disposal sites. Dispose of the device at available Battery Recycling sites after fully discharging battery. Not doing so may violate local disposal laws and regulations. Please refer to local regulations for proper battery disposal.

**WARNING:** ▪ Keep the USB +adapter out of reach of children.

- Never attempt to open the light bottom

These products and their packaging are not toys; please keep out of reach of children.

- The charger is not waterproof and must be kept in a dry location at all times
- This product is designed to be used for outdoor and indoor, please remind waterproof rating is IP44 (charging port closed)
- Disconnect the USB Cable from mains power when not in use.
- Do not stand or jump on this product.
- Do not use this product if it is cracked or damaged.

**\*\*Keep the product away from chemicals and heat, Do not attempt to open the product.**

## Care and maintenance

1. Always TURN OFF the light after use.
  2. for battery, Operation Temperature Charge : 0~45°C (Charge at a very low temperature such as below 0°C, will be get a lower capacity and reduce cycle life of the battery)
- Storage temperature for a long time : 0~25°C
- Do not storage exceed half year, Must charge once when storage for three months.



### Environmental Protection

The symbol on the product dictates that Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

**FCC Caution:** Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

### NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### FCC Radiation Exposure Statement:

The equipment complies with FCC Radiation exposure limit set forth for uncontrolled environment. The device shall be operated and installed without restriction.