

# ***ROADKING***<sup>®</sup>




RKING3000  
Premium Mono

# Bluetooth® Headset User Manual

## **Contents:**

Product Overview .....	3
Basic Operation .....	4
Bluetooth Pairing and Connection .....	5
Connection with Two Devices .....	6
LED Indicator .....	7
Charging .....	8
Product Specifications .....	9
Notes and Q & A .....	10-11

## Product Overview

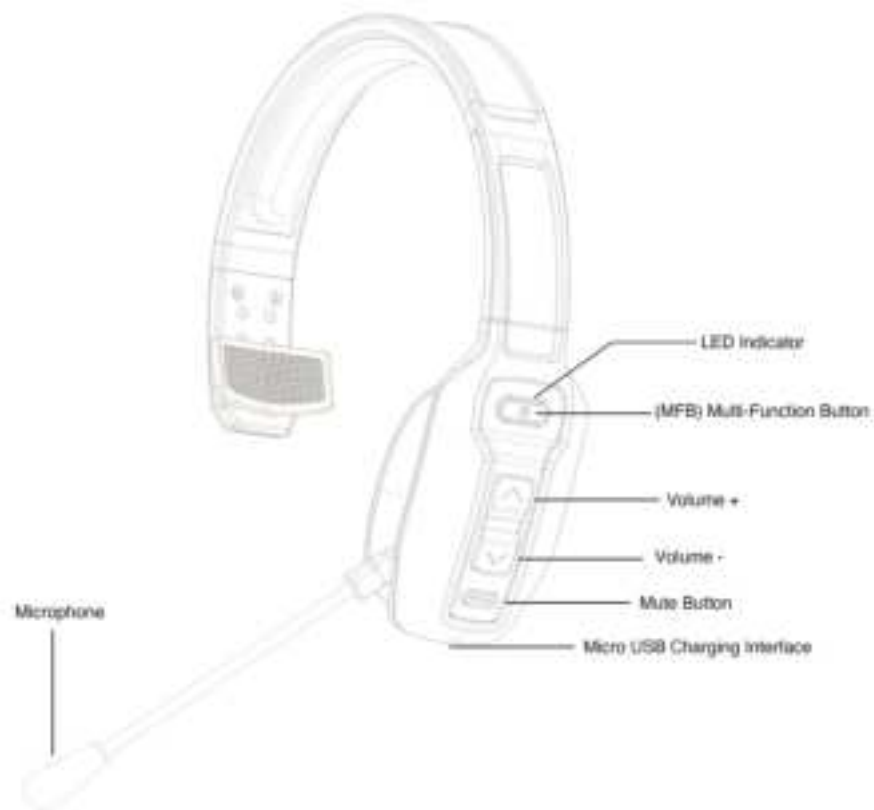

### Package Contents:

- A. Bluetooth headset RKING3000 x 1
- B. Micro USB charging cable x 1
- C. User manual x 1
- D. Car charger x 1
- E. Sponge microphone cover x 1
- F. Drawstring bag x 1

## Basic Operation

Button	Function	Operation Instructions
MFB	Power on	When device is off, press and hold the MFB for 3 seconds to power on. The RKING3000 will automatically enter into the pairing state and reconnect to previously paired phone.
	Power off	When device is on, press and hold the MFB for 5 seconds to power off.
	Pairing	When device is off, press and hold the MFB for 5-7 seconds or double-click the MFB to pair to your phone.
	Play / Pause	When playing music, click the MFB to play/pause the music.
	Last number redial	Double-click the MFB to dial the last number called.
	Voice dial	Hold down the MFB for 2 seconds, then release to start the phone's voice dial function.
	Audio switch	When on a call, hold down the MFB for 1 second to switch the audio between phone and the Bluetooth headset.
	Answer a call	When receiving a call, click the MFB to answer.
	End a call	To end a call, click the MFB.
	Reject a call	To decline an incoming call, hold down the MFB for 1 second.
Volume +	Volume up	When talking or playing music, click the Volume + button to increase volume.
	Next song	When playing music, hold down the Volume + button to skip to the next song.
Volume -	Volume down	When talking or playing music, click the Volume - button to decrease volume.
	Previous song	When playing music, hold down the Volume - button to go back to the previous song.

Mute button	Mute microphone	During a call, click the Mute button to mute your microphone. Click the Mute button again to turn off mute.
-------------	-----------------	---

## Bluetooth Pairing and Connection

- A. Press and hold the MFB for 5-7 seconds to power on and automatically enter into pairing mode. The red and blue lights will flash alternately.
- B. Search and click "RK3000" to connect the headset to your phone's Bluetooth. Once connected, the blue LED light will flash slowly.
- C. All functions such as answering calls, playing music, skipping songs, increasing/decreasing volume, etc. can be controlled through the Multi Function Button (MFB), Volume + button, Volume - button and the Mute button, located on the headset.



## Connection with Two Devices

- A. Connect the first phone to the headset, then turn off the Bluetooth function on the first phone.
- B. You'll see the red & blue LED lights flash alternately.
- C. Turn on the Bluetooth function on the second device. Search and click "RK3000" on the second phone's Bluetooth list. The LED will slowly flash blue once connected.
- D. Turn the first phone's Bluetooth back on and reconnect to "RK3000". The headset will now be connected to two phones.



### Note:

Music can only be played from one phone at a time. When you want to play music from the other phone, you will need to pause or close the music of the previous phone. The same applies during talking status.


## LED Indicator

Mode	LED Indicator
Power on	The blue LED light flashes 3 times
Power off	The red LED light flashes for 1 second
Pairing mode	The red & blue LED flash alternately
Clearing pairing records	The purple LED light flashes 1 time
Reconnection state	The blue LED light flashes twice every 5 seconds
Connected standby mode	The blue LED light flashes once every 10 seconds
Playing music	The blue LED light flashes twice every 10 seconds
Talking	The blue LED light flashes twice every 10 seconds
Charging	The red LED light is normally on
Full charge	The blue LED light is normally on
Low battery	The red LED light flashes

## Charging

Red light flashes when RKING3000 has low battery. Please charge immediately for about 1.5 hours. When the red light is off and the solid blue light is on, the battery is fully charged.

1. When the RKING3000 is not in use, please charge at least once every two months.
2. If headset is on during charging, it will automatically shut down and reset.

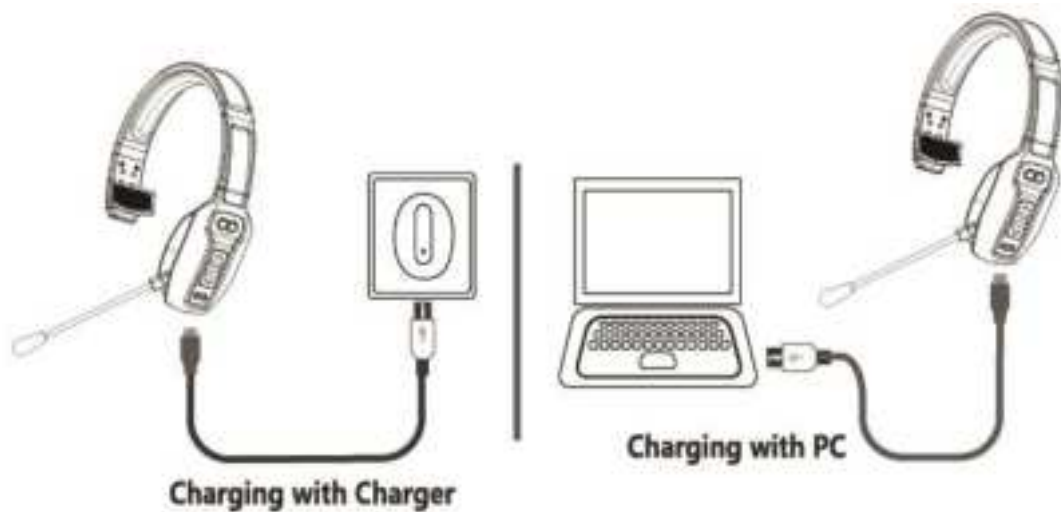



## Product Specifications

Bluetooth Version	V5.2
Bluetooth Chip	BT8926B2
Operation Range	32 feet
Bluetooth Protocols	HSP,HFP,A2DP,AVRCP
Decoding Mode	SBC
Built-in Battery	400mAh/3.7V
Stand by Time	400 hours
Headset Net Weight	.31 lbs
Charging Time	About 1.5 hours
Play Time	About 30 hours (70% volume)
Talk Time	About 30 hours (70% volume)
Headset Dimension	7.59" x 6.18" x 2.12"

Actual use time will differ from environment and music.

## **Notes and Q & A**

### **A. How to reconnect and operate when connection fails?**

When RKING3000 connects to your phone successfully the first time, it will search and reconnect to the paired device automatically going forward. If it fails to connect, repair the phone to reconnect.

### **B. How to delete paired records?**

When powered on, press and hold the Volume + and the MFB button at the same time to clear the pairing record. The purple indicator light will flash once indicating the record has been cleared. When various connection exceptions occur, try clearing the pairing record.

### **C. When will it be automatically powered off?**

In the pairing mode, it will be powered off if there is no connection for more than 5 minutes or the battery is low.

### **D. When will the low battery alarm be given, and what prompts will be given?**

When the headset battery is low, a prompt will sound every 3 minutes until it is charged.

### **E. What is the password for pairing?**

Some devices require a password for pairing. Please try 0000, 8888, 1111, or 1234.

### **F. What devices can you use to charge?**

Car charger, travel charger, or computer USB with DC voltage of 5V and current of more than 1A can be used to charge the RKING3000.

### **G. What should you do if there are some exceptions, such as connection exceptions, etc.?**

Plug in the charging cable and the headset can be turned off and reset.



## **FCC Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## **IC Statement**

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

ONE-YEAR LIMITED WARRANTY For support, product and warranty information, please visit [www.roadprobrands.com](http://www.roadprobrands.com)

RoadKing® and RoadPro® are registered trademarks owned by DAS Brands, LLC and its affiliated companies. The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by DAS Companies, Inc. is under license. All other trademarks, registered trademarks, copyrights and logos are the property of their respective owners. ©2022 DAS Companies, Inc. and/or affiliates.