Product Instruction

Fitness walker

Model: CS-WP6





Please read the instruction carefully before using

Content

1.	Security cautions	1
2.	Quality Assurance Commitment	.2
3.	Configuration list and technical parameters	.2
4.	Product parts	.3
5.	Assembly instructions	.3
6.	Functional operation instructions	.5
7.	Warm-up exercise	6
8.	Maintenance Guidelines	8
9.	Fault code	8

Thank you for purchasing our product, our products will help to improve your health.

1. Security cautions

- In order to ensure your safety and avoid accidents, please read the instructions carefully before
 use.
- This product is indoor use only, please do not make it or use it outdoors; the treadmill should be
 placed in a flat and clean position, do not put it in a thick carpet or near water area, there should
 be 3-6ft barrier-free safety area behind the treadmill.
- This product is for adults, minors need adult care. It is forbidden for those who feel unwell or mentally handicapped or lack common sense to use it. Unless they are under the supervision or guidance of the person responsible for their safety regarding the use of the product.
- If the power cord is damaged, in order to avoid danger, it must be replaced by the manufacturer or professional maintenance personnel.
- This product is only used for 100V-120V AC voltage. Please use the power socket with safe ground line. The installation and grounding of the grounding plug must be consistent with the parameters of the user's area. If the plug and socket are incompatible, please arrange qualified electricians or after-sales personnel to handle it.
- Check all parts before use to ensure that the screw and nut are locked
- When using it, please wear comfortable and tight clothes to avoid the clothes being hung by the machine. Don't let children or pets come near to avoid accidents.
- Avoid all moving parts with both hands. Do not place hands or feet in the space under the running belt.
- This product is designed for family use only, but not suitable for professional training and testing, and can not be used for medical purposes.
- The heart rate display of this product does not provide data for medical purpose.
- This product is only for one person on the running belt.
- Before cleaning and maintenance, please shut down and unplug the power plug.
- Shut down the machine and unplug the power plug when you leave.
- Please use the spare parts provided by the original factory. It is strictly forbidden to replace them privately.
- This product is of HC grade, and maximum user's weight is 200lbs.

2. Quality Assurance Commitment

- We ensure that the product is made of high quality materials.
- In normal use, if there is a problem, we will be responsible for the warranty.
- The warranty period is one year (from the date of purchase). If you buy products with quality problems, please contact our customer service within 12 months. Please do not deal with them without permission.
- The followings are not covered by the warranty:
- Damage caused by external factors.

- Use non-original accessories.
- Privately handled incorrectly.
- Not follow the instructions.
- This pledge is valid only for private use by families and is not applicable to professional training such as gyms.

If you need to buy non-warranty accessories, please contact customer service. Please provide the following information when ordering:

- Instructions.
- Product model.
- Fittings serial number.
- Certificate of purchase date.

Before the confirmation of our customer service, please do not send the products to our company, and send them back without permission. Our company does not bear any cost.

3. Configuration list and technical parameters


1. Walkingpad configuration

Parts Name	Sketch (for reference)	QTY
Walkingpad machine		1
Remote controller		1
Instructions		1
Hardware package		1
Silicone oil		1

2. Technical parameters

Para name	Parameters	Para name	Parameters
Packing dimension	50.79*22.64*5.5 inch	Product size	48.43*19.3*4.75 inch
Running area	15*40.55 inch	maximum power	380 W
Speed range	0.6-3.8 mph	Max capacity	200lbs
Net weight	37.4 lbs	Gross weight	43.4 lbs

4. Product parts

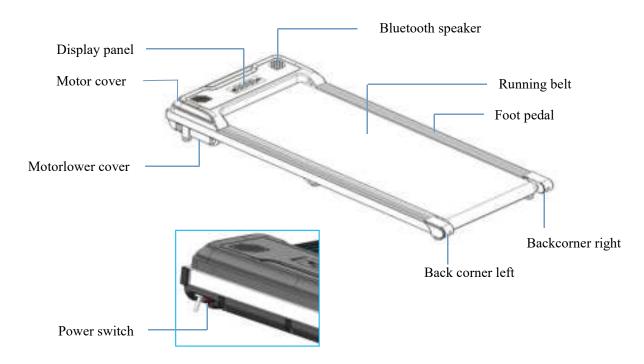

5. Assembly instructions




Out of the box, take out the accessories and the machine from the box, and put the machine on a flat ground, connect it to the power and use it.

6. Functional operation instructions

Function Description

- 1: Start/stop button on the remote control, speed up/down.
- 2: The speed of the remote control is 0.2 mph speed acceleration/deceleration every time you press the plus/minus button.
- 3: Bluetooth music, Bluetooth name MAXFREE00001-65000.
- 4: Speed display 0.6-3.8 mile, calories display 000-999KCAL, time display 00-99 minutes, The mileage shows 0.00-99.9 mile.
- 5: After 5 minutes of standby, it will enter the dormant state, and the display will turn off.

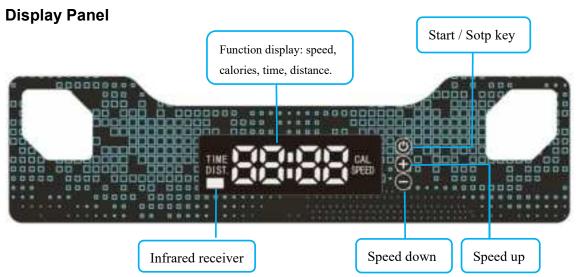

Infrared receiver: Please point the remote to this area when using the remote controller.

Display screen: SPEED will display when adjusting speed; SPEED/CAL/TIME/DIST. Will be displayed in loop by 3 seconds interval.

Button function:

- Button: By pressing this button, the treadmill starts running with lowest speed under standby status. And the treadmill stops running under running status.
 - + Button: Short press-Increase the speed by 0.2mph

Long press-Continually increase the speed by 0.2mph

- Button: Short press-Decrease the speed by 0.2mph


Long press-Continually decrease the speed by 0.2mph

Note: the buttons aside the display screen is for backup using only(when remote controller not working). For safety reason, the user of the treadmill should first stand on the running belt, and another adult should help to turn the machine on and adjust it to a proper speed. When finishing running, another adult need to help to press the Stop button to stop the treadmill, and then walk off the treadmill after it stops. The accidental injury caused by operation not in accordance with the correct use requirements has nothing to do with the treadmill factory.

Remote controller



◆ Need to pull out the remote control insulation paper before use

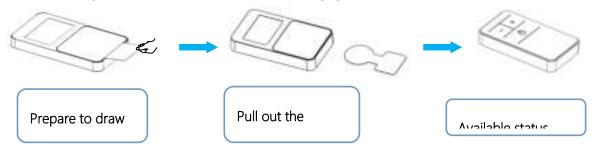

Remote control instructions:

- User: When the host is in standby mode, press by key and the machine will run from a low speed of 0.6 mile, then press by key to stop the machine.

 (le start/stop function loop)
 - + Key: Each time you press the + key during operation, the speed will increase by 0.2 mph; long press the + key to continuously increase the speed at 0.2 mph.
 - -Key: Press the-key once during operation, the speed will decrease by 0.2 mph; long press the-key to continuously decrease the speed at 0.2 mph.

Mobile phone Bluetooth music connection operation

Open the Bluetooth search address from "maxfree 00001 to 65000" numbers: for example: search for the number in the address " maxfree 00008" and click on the maxfree 00008 Bluetooth icon

maxfree 00008

If the next step is paired or the password appears, just enter 0000 and click on the pair.

Want to pair with maxfree - Audio? Allow access to your contacts and call history Cancel Yes

Pairing success

maxfree 00008 [SBC]
connected/full power/Using

Note: Bluetooth music will be automatically connected next time after the first connection to Bluetooth.

Mobile phone Bluetooth music release operation

Click on the link to find "Unpair"

Remame

maxfree 00008

Unpair

7. Warm-up exercise

Before exercising, it's better to do stretching exercises first. A successful exercise plan must include warm-up, aerobic and relaxation exercises. The number of exercises should be at least two or three times a week. You can take a day off for exercise. After a few months, you can increase the number of exercises to four to five days a week.

Warm-up is an important part of your fitness exercise. Warm-up before every exercise. Moderate warming-up can prepare your body for the next more intense exercise, because warming-up can help muscle warm up and stretch, improve blood circulation and pulse, and send more oxygen into muscle. Repeated warm-up exercise can also reduce muscle soreness after aerobic exercise. We recommend the following warm-up and relaxation exercises.

 Stretch downward: Bend your knees slightly and bend your body forward slowly. Relax your back and shoulders and touch your toes with both hands. Hold for 10 to 15 seconds, then relax. Repeat three times. Figure1



Figure 1

 Stretch your ankles: Sit on a clean cushion and straighten one leg. Put the other leg inward so that it is close to the straight leg. Try to touch your toes with your hands. Keep it for 10 to 15 seconds. Then relax. Repeat each leg three times.
 Figure 2



Figure 2

3. Extension of the calf and foot tendons: body forward hands against the wall the left leg arches forward, the right leg is straight, the left leg is on the ground, then bend your left leg and hold it for 10 to 15 seconds, then relax, repeat each leg three times. Figure 3



Figure 3

4. Head movement: 1-tilt your head to the right and feel the left neck muscle stretch; 2-turn head to the back; turn head to the left; 4-turn your head to front of the chest. then relax and do it three times.

Figure 4



Figure 4

5. Waist movement: stretch your arms to the left and right, then slowly lift it up, over your head. Put your right arm as far as possible to the ceiling. Straighten, hold for 1 second, and feel the stretch of your right muscle. Repeat the same action on the left arm.
Figure 5



Figure 5

8. Maintenance guide



Warning: Be sure to unplug the power plug of the machine before maintaining the product.

- Use cloth to clean product surface.
- Full cleaning will prolong the service life of the machine.
- Clean the dust regularly to keep the parts clean. Clean the exposed parts on both sides of the running belt. This will reduce the accumulation of impurities in the running belt. Keep your sneakers clean. Avoid bringing foreign bodies under your running belt and wearing your running board and belt. The surface of the running belt should be scrubbed with a soapy wet cloth. Please be careful not to splash water on the electrical components and under the running belt.
- Check and lock all parts of the treadmill regularly, replace defective parts and/or leave the equipment idle for repair.

1. Adjusting the Running Belt

If you are using a walking machine, you can adjust the belt tightness to improve the slippage or non-fluidity of the running belt.

Adjusting running has two functions: tightening adjustment and belt center position adjustment. Running belt has been adjusted when it is out of the factory, but after use, the running belt will be stretched, which will deviate from the center position and cause the running belt to rub the foot sidebars and rear cover damage. It is normal for the running belt to be stretched during use.

When the product is running under no load, it is normal for the running belt to have a side deviation of no more than 5mm.


Adjusting Running Belt Method

◆The running belt shifts to the left




Adjustment method: With the power turned off, take a 5mm hexagon wrench and turn the left rear roller bolt 1/4 turn to the right to tighten the running belt. Then the machine is powered on and the test running belt is centered. Follow this method until the running belt is centered.

◆The running belt shifts to the right



Adjustment method: With the power turned off, take a 5mm hexagon wrench and turn the right rear roller bolt 1/4 turn to the right to tighten the running belt. Then the machine is powered on and the test running belt is centered. Follow this method until the running belt is centered.



Adjustment method: With the power turned off, take a 5mm hexagonal wrench and turn the left and right bolts of the rear drum 1/4 turn to the right at the same time to tighten the running belt. Then the machine is powered on to test the tightness of the running belt. Follow this method until the tightness of the running belt is moderate.

Note: When you use a walking machine, the pressure on the running belt is not balanced due to the difference in the force used by the two feet when running, causing the running belt to deviate from the center. This kind of deviation is normal. When no one is running on the running belt, it will return to the center.

The running belt cannot be adjusted too tight. This will damage the running belt, increase the pressure on the front/rear rollers, cause damage to the roller bearings, etc., cause abnormal noise or other problems.

- 2. Add lubricating oil to the walking machine
- The refueling position is on the lower surface in the middle of the running belt. (As shown below)
- Cut the mouth of the oil bottle into a small mouth, not too large, and able to inject.
- Raise the running belt so that the oil bottle is extended to the bottom of the running belt and the oil is
 injected into the middle of the running board. Put down the running belt, press the oil injection part
 with your hand, and rotate the running belt to spread the oil evenly on the running board.
- After turning on the machine, wait one minute for the oil to be applied evenly, and then use the treadmill.



Note: Please turn off the power of the machine before refueling the running belt.

9. Trouble code

Code	Causes	Resolutions
E01	Poor communication	Check that the connection between the electronic meter
	between electronic	and the controller is not properly connected.
	meter and controller	2. The main IC of the controller contacts badly and is
		re-tightened.
		3. Controller power supply abnormal, change controller
E02	Explosion-proof and	1. If the motor is open or in bad contact, replace the motor
	impact-proof	or check the connecting terminals.
	protection	Power tube breakdown, replace it or the controller.
E05	Over current	1. Overload.
	protection	2. The resistance of the treadmill is too heavy and needs to
E06	Overload protection	be lubricated.
		3. The motor is damaged, replace it.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant

to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

ISED Statement

English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES - 3 (B)/NMB - 3(B).

French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux RSS exemptés de licence d'Innovation, Sciences et Développement économique Canada.

L'exploitation est soumise aux deux conditions suivantes :

- (1) Cet appareil ne doit pas provoquer d'interférences.
- (2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

l'appareil numérique du ciem conforme canadien peut - 3 (b) / nmb - 3 (b).

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.

This equipment should be installed and operated with minimum distance 20cm between the radiator & vour body.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.