





Radiation Pattern - (2.4G)

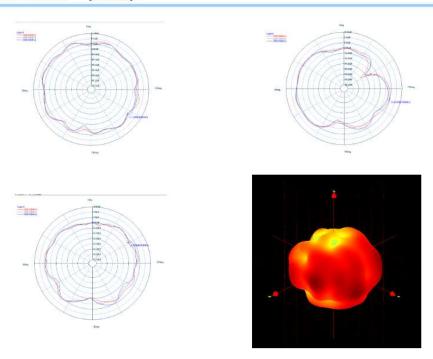


Radiation Pattern (5G)









4: ANT Performance

Frequency	Efficiency	Efficiency (dB)	Gain (dBI)
2400MHz	58%	-2.4	2. 3
2410MHz	56%	-2.5	2. 4
2420MHz	57%	-2.4	2. 2
2430MHz	58%	-2.4	2. 4
2440MHz	56%	-2.5	2. 3
2450MHz	56%	-2.5	2. 4
2460MHz	53%	-2.7	2. 3
2470MHz	56%	-2.5	2. 2
2480MHz	56%	-2.5	2. 2
2490MHz	54%	-2.7	2. 1
2500MHz	55%	-2.6	2. 0

Frequency	Efficiency	Efficiency (dB)	Gain (dBi)
5150MHz	55%	-2. 6	4. 4
5200MHz	54%	-2. 7	4. 1
5250MHz	51%	-2. 9	4
5300MHz	49%	-3. 1	4
5350MHz	49%	-3. 1	4. 1
5400MHz	50%	-3. 0	4. 1
5450MHz	52%	-2. 9	4.3
5500MHz	51%	-2. 9	4. 2
5550MHz	50%	-3. 0	4. 1
5600MHz	54%	-2.7	4.2
5650MHz	53%	-2. 7	4.3
5700MHz	54%	-2. 7	4.3
5750MHZ	52%	-2. 8	4. 4
5800MHZ	50%	-3. 0	4.3
5850MHZ	53%	-2. 7	4. 4

manufacturer: Tonly Technology Co., Ltd. Tongqiao Factory

address: A&B Building, NO. 88, North Of Luen Fat Road, Tongqiao Industrial

Base, Zhongkai High-tech Development Zone, Huizhou City,

Guangdong Province, P.R.China

Model: WiFi1-V1.0