

Hearing Enhancement
Wireless Stereo Earphones



User Manual

Product specification


Bluetooth version: 5.3
Battery input: DC 5V
Earphone battery: 40mAh
Charge case battery: 380mAh
Working time: about 6-7 hour
Working current: <7mA
Maximum OSPL90: <115dB±3dB
EQ Input Noise: <15 dB

Operation instructions


Power on default mode: Bluetooth mode
Touch and hold L (or R) side 2 sec then release. Switch
Hearing enhancement mode/Bluetooth mode

Hearing mode:
Touch once to increase the volume of the auxiliary
listening device by one level. When you hear the "du
du du" prompt, the volume reaches its maximum.
Continuing to touch, the auxiliary listening device
volume will reach its minimum and then increase in a
loop.

Bluetooth mode:
Touch twice on L: Previous song
Touch twice on R: Next song
Touch once L/R: Play/Pause Answer/End a call



Product schematic

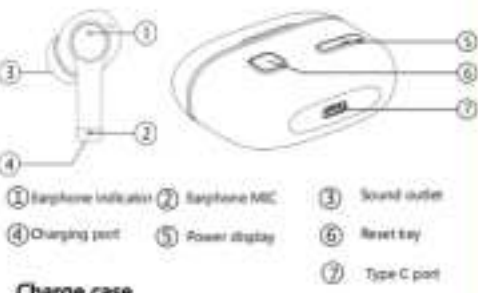

Charge case
When charging: The battery indicator light is flashing,
and it stays on continuously after charging is
completed
Charge earphone: The battery indicator light stays on
and goes off after 1 minute

Earphone
When charging: Blue light stay on.
Earphone pairing: green and blue flash in both 2 earbuds,
and once paired successfully, lights turn off.
Connect successfully: lights turn off.
Charging time: about 40-60 minutes.



Suggestion

1. Please fully charge the new machine before use,
when charging with charge case
please use the 5V/1A charger. Please don't use the fast
charger which over 5V, to avoid damage on the charge
case.

2. To ensure the battery life of the earphone, the
earphones and the charge case should be charged once
in a month.

Pairing for operating

Step 1: Open the cover and remove the earphones, which
will automatically turn on. After wearing the earphones,
they will automatically enter the auxiliary listening mode.
touch the headphones for 2 seconds and switch to
Bluetooth mode. Both earphones are operated similarly,
and after operation, the earphones will automatically pair.
Step 2: At this point, open the mobile phone's Bluetooth
to search earphones' bluetooth name the connect with it.

⚠ When the earphones connect to the same device
again, open the lid of charge case it will turn on
automatically then reconnect with the device, voice
prompt " Connected ".

Turn on the earphone
Method A. Touch and hold the area for 5 seconds.
Method B. Open the lid of the charge case, they will
automatically power on, and enter automatic pairing.

Turn off the earphone
Method A. Touch and hold the area for 5 seconds.
Method B. Put earphones into the charge case, they
will automatically shut down and enter charging.

Calling

When connected with mobile phone, touch once any
earphone to answer current call. Touch 2 seconds to
reject the call. If you want to end the current call, touch
once any earphone to stop.

FAQ

A. When the earphones can't be turned on
Check if the earphone has power (after the charge case is
connected to the USB, and the earphone is charged in
the charge case for more than 1 hour).

**B. When the earphones have only one side sound or
earphones can't pair successfully**
1. Make sure that both earphones are powered and can
be turned on normally.
2. Touch 5 seconds to turn on the earphones or take the
earphone out of the charge case (when the charge
case is powered) the earphone will automatically
power on, earphones automatically enter the pairing
mode. When the earphone's LED will turn off, the pairing
is successful.

C. When the mobile phone cannot find the device
1. Confirm that the two earphones are turned on.
2. Check if the earphone is connected to other devices.
3. Change an area and reconnect it again.

**D. When the earphone is stuck or disconnect while
talking or playing music**
1. The earphone is low on battery.
2. The distance between the mobile phone and the
earphone is more than 10 meters.
3. There is large area of signal obstruction between the

mobile phone and the earphone, such as a wall.
4. The left and right ears are not paired and synchronized,
and need to be shut down and re-paired.

**E. After the charging compartment runs out of battery,
the earbuds may automatically turn on and produce a
high-pitched noise while in the case.**
In this case, you can manually turn off the earbuds by
long-pressing the touch button or charge the case to
resolve the issue.

Attention

1. Please ensure that the earbuds are properly worn
before turning on the assistive listening function, as
improper usage may cause feedback.
2. After use, please turn off the assistive listening
function by touching the control button and then
store the earbuds into the charging case. Failure to
turn off the assistive listening function before storing
may cause feedback.
3. Please don't change the built-in battery by yourself.
4. Please store device in dry area away from water or rain.
5. Please don't expose the earphone to excessive
heat to avoid battery damage.
6. Please don't disassemble the earphones.

Warning

1. This product cannot fully replace a medical hearing
aid and is not recommended for use by minors.
2. Do not play music while driving or cycling, as it may
lead to traffic accidents.

FCC Warning
This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired
operation.

NOTE 1: This equipment has been tested and found to
comply with the limits for a Class B digital device,
pursuant to part 15 of the FCC Rules. These limits are
designed to provide reasonable protection against
harmful interference in a residential installation. This
equipment generates, uses and can radiate radio
frequency energy and, if not installed and used in
accordance with the instructions, may cause harmful
interference to radio communications. However, there
is no guarantee that interference will not occur in a
particular installation. If this equipment does cause
harmful interference to radio or television reception,
which can be determined by turning the equipment off
and on, the user is encouraged to try to correct the
interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and
receiver.
- Connect the equipment into an outlet on a circuit
different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV
technician for help.
NOTE 2: Any changes or modifications to this unit not
expressly approved by the party responsible for
compliance could void the user's authority to operate
the equipment.
The device has been evaluated to meet general RF
exposure requirement. The device can be used in
portable exposure condition without restriction.

Made in China



68*120mm