

Feature

- ※ High gain
- ※ Omani-directional
- ※ Wide bandwidth

Application

※GSM850/900/DCS/PCS/WCDMA B1/B2/B4/B5/B8

LTE B1/B2/B3/B4/B5/B7/B8/B12/B17/B20/B28/B38/B40/B41/B66


Name and address of the antenna manufacturer	Model number of the antenna
Shenzhen Weichuang Communication Technology Co., Ltd 1-3/F, Building 8, Tongfu Estate Industrial Zone, Dalang Community, Dalang Street, Longhua District, Shenzhen (Shenzhen Headquarters)	CL6-ANT0-XX-WTT-XXXX CL6-ANT1-XX-WTT-XXXX CL6-ANT2-XX-WTT-XXXX CL6-ANT12-XX-WTT-XXXX CL6-ANT13-XX-WTT-XXXX CL6-ANT14-XX-WTT-XXXX (XX:Version-Date)

TYPE		
Transmitter Frequency		GSM 850/WCDMA B5/LTE B5 : 824 – 849 MHz
		GSM 900/WCDMA B8/LTE B8: 880 – 915 MHz
		DCS /WCDMA B4/LTE B3/B4/B66: 1710 – 1785 MHz
		PCS/WCDMA B2/LTE B2:1850-1910MHz
		WCDMA B1/LTE B1 : 1920 – 1980MHz
		LTE B7 :2496-2565MHz
		LTE B40 :2300-2400MHz
		LTE B38/B41 :2565-2645MHz
		LTE B12/B17:699-716MHz
		LTE B20:832-862MHz
		LTE B28:710-755MHz
		GSM 850/WCDMA B5/LTE B5: 869 – 894 MHz
		GSM 900/WCDMA B8/LTE B8: 925 – 960 MHz
		DCS/LTE B3: 1805 – 1880 MHz
Receiver Frequency		WCDMA 4/LTE B4: 2110-2155 MHz
		PCS/WCDMA B2/LTE B2:1930-1990MHz
		WCDMA B1/LTE B1/B66: 2110–2170MHz
		LTE B7:2620-2690MHz
		LTE B40 :2300-2400MHz
		LTE B38/41:2565-2645MHz
		LTE B12/17:729-746MHz
		LTE B20:791-821MHz
		LTE B28:758-803MHz
		GSM850/900: 32+/-2dBm
		DCS/PCS: 30+/-2dBm
		LTEB1/B2/B3/B4/B5/B7/B8/B12/B20/B17/B28/B38/B40/B41/B66: 23+/-2dBm
		WCDMA B1/B2/B4/B5/ B8: 23+/-2dBm
RF-Output Power (E.I.R.P)		GSM 850/WCDMA B5/LTE B5: -4.5dBi
		GSM 900/WCDMA B8/LTE B8: -4.56dBi
		DCS /WCDMA B4/LTE B3/B4/B66: -3.09dBi
		PCS/WCDMA B2/LTE B2: -3.77dBi
		WCDMA B1/LTE B1: -0.21dBi
		LTE B7/B38/B41: -7.79dBi
		LTE B40 : -5.84dBi
		LTE B20 : -4.65dBi
		LTE B12/B17/B28:-5.78dBi
Antenna Gain	ANT2	GSM 850/WCDMA B5/LTE B5: -4.5dBi
		GSM 900/WCDMA B8/LTE B8: -4.56dBi
		DCS /WCDMA B4/LTE B3/B4/B66: -3.09dBi
		PCS/WCDMA B2/LTE B2: -3.77dBi
		WCDMA B1/LTE B1: -0.21dBi
		LTE B7/B38/B41: -7.79dBi
		LTE B40 : -5.84dBi
		LTE B20 : -4.65dBi
		LTE B12/B17/B28:-5.78dBi


Type of Modulation	ANT1	LTE B1 -10.46dBi
		LTE B3 -6.43dBi
	ANT0	GSM 850/WCDMA B5/LTE B5: -8.92dBi
		GSM 900/WCDMA B8/LTE B8: -8.4dBi
		DCS /WCDMA B4/LTE B3/B4/B66: -3.77dBi
		PCS/WCDMA B2/LTE B2: -4.74dBi
		WCDMA B1/LTE B1: -3.32dBi
		LTE B7/B38/B41: -1.43dBi
		LTE B40 : -1.98dBi
		LTE B20 : -7.49dBi
		LTE B12/B17/B28:-8.96dBi
	ANT14	WIFI 2.4G/BT:-2.41dBi
		WIFI 5G:-1.82dBi
	ANT12	GPS(L1):-1.37dBi
	ANT13	WIFI 2.4G/BT:-4.51dBi
		WIFI 5G: -4.31dBi

※ Antenna Gain


ANT2

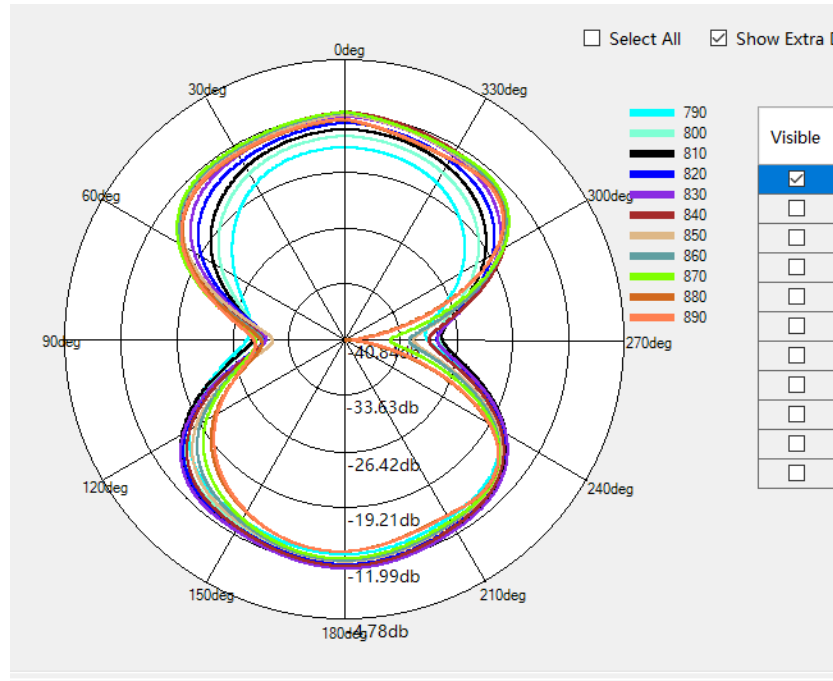


GSM850/WCDMA B5/ LTE B5/B20 Phi=0deg

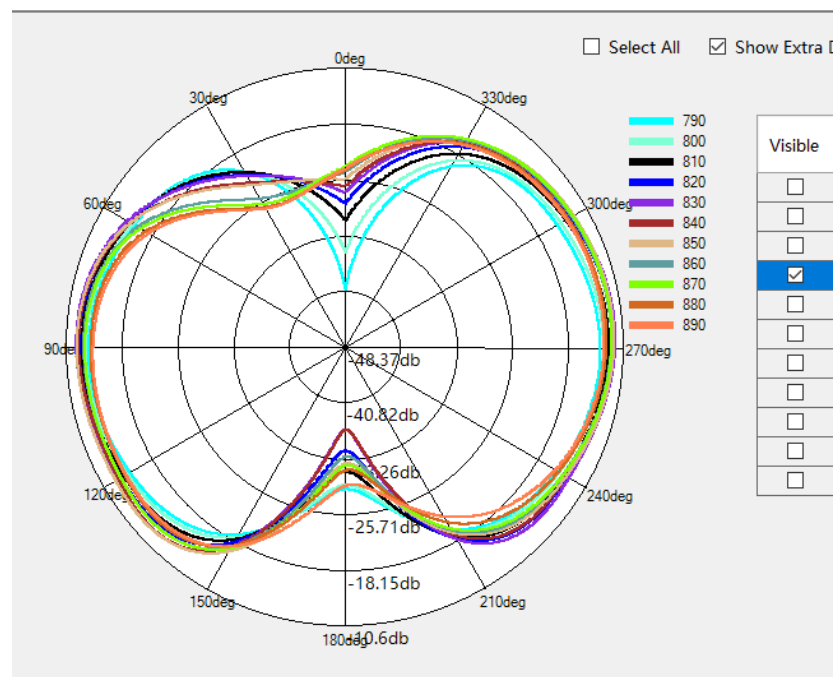


GSM850/WCDMA B5/ LTE B5/B20 Phi=90deg

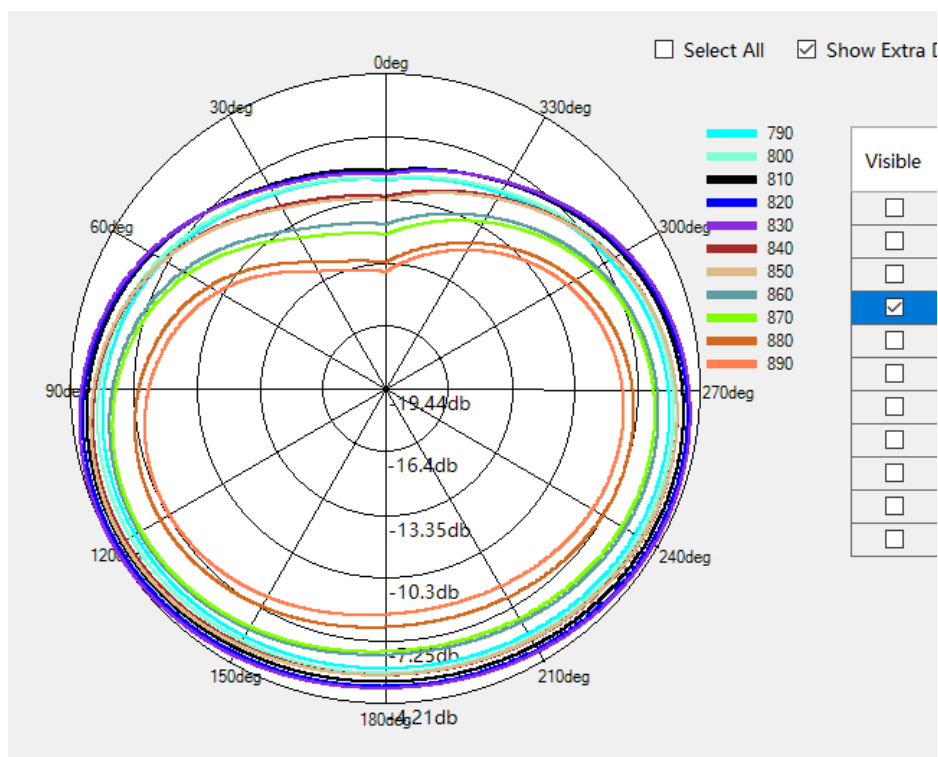


GSM850/WCDMA B5/ LTE B5/B20 Theta=90deg

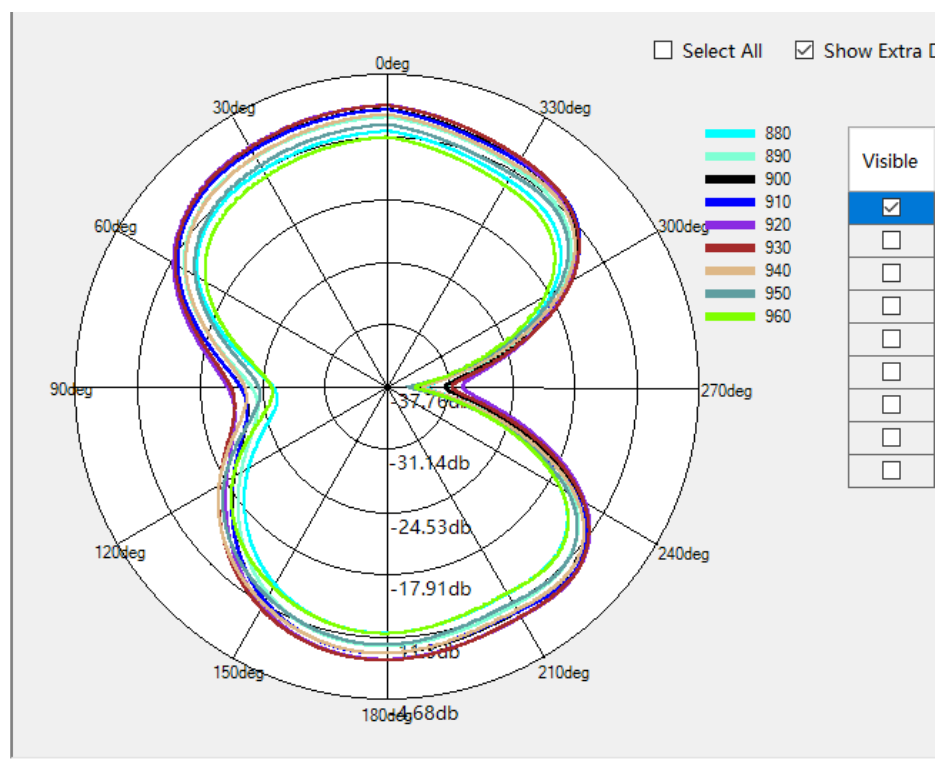


LTE B8 G900 W8 Phi=0deg

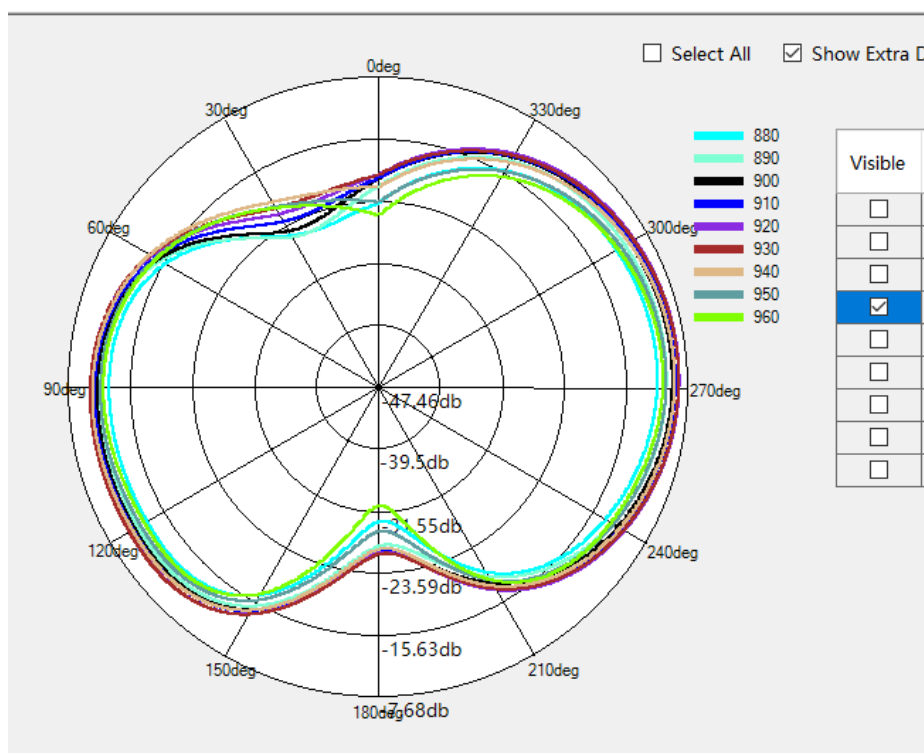


LTE B8 G900 W8 Phi=90deg

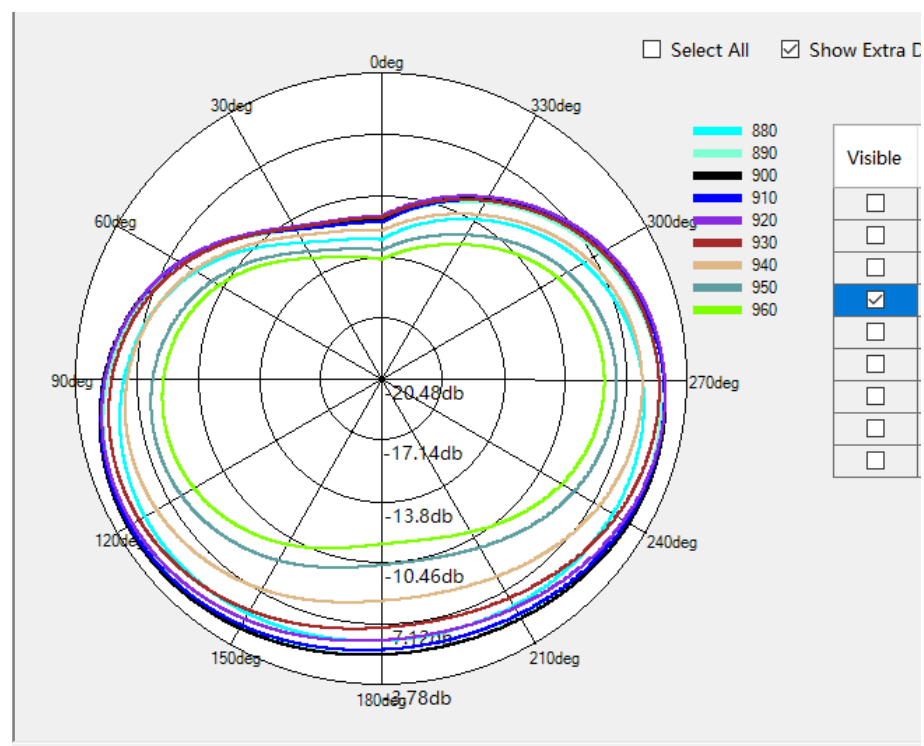


LTE B8 G900 W8 Theta=90deg

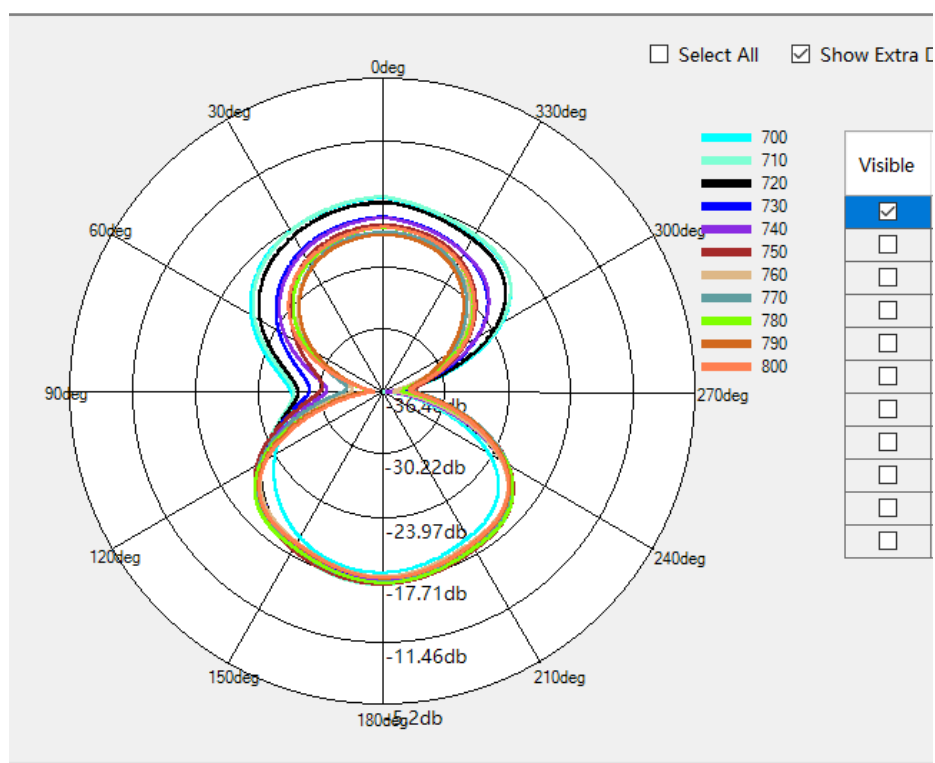


LTEB12/B17/B28 Phi=0deg

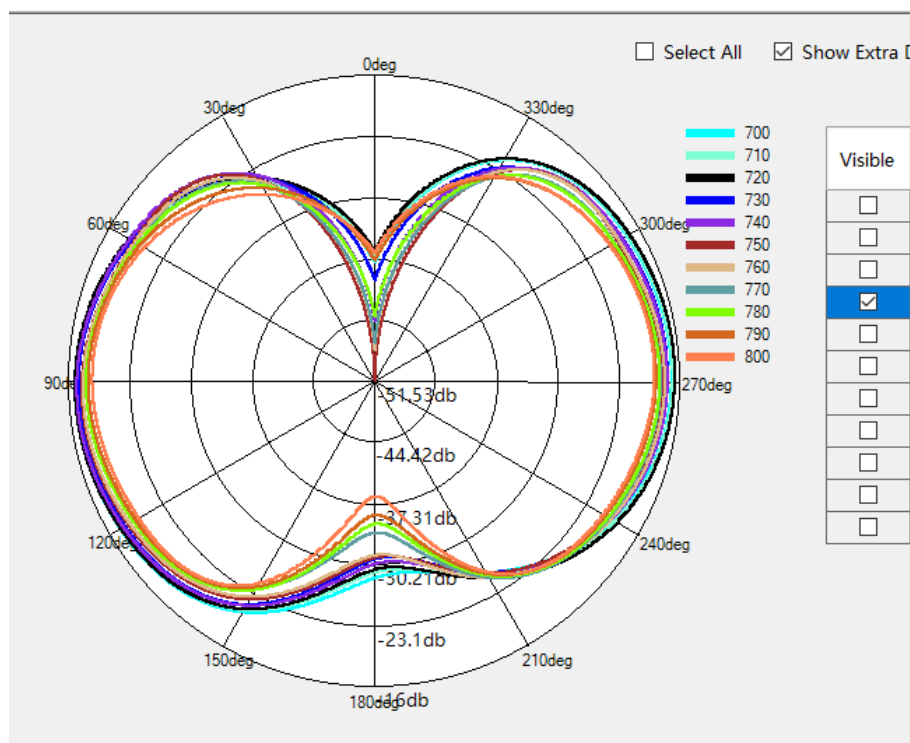


LTEB12/B17/B28 Phi=90deg

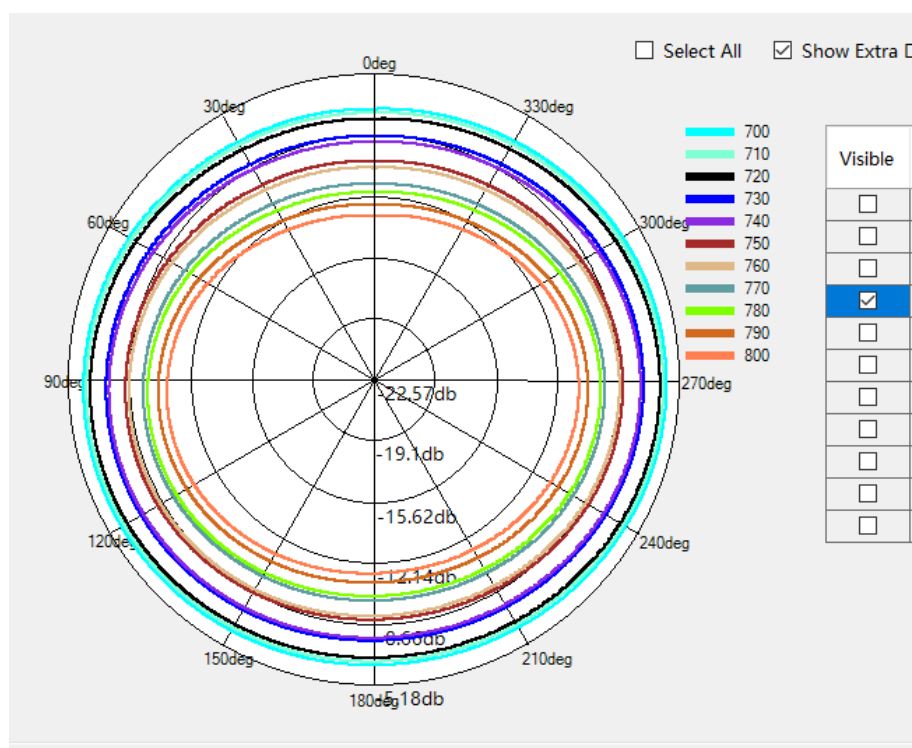


LTEB12/B17/B28 Theta=90deg

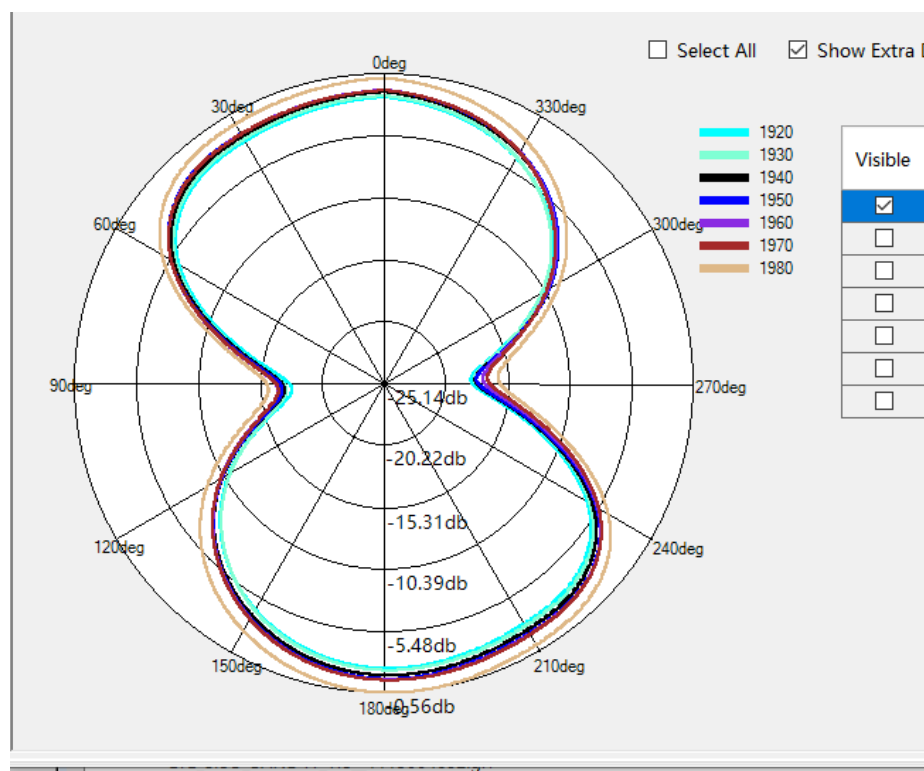


LTE B1 W1 Phi=90deg

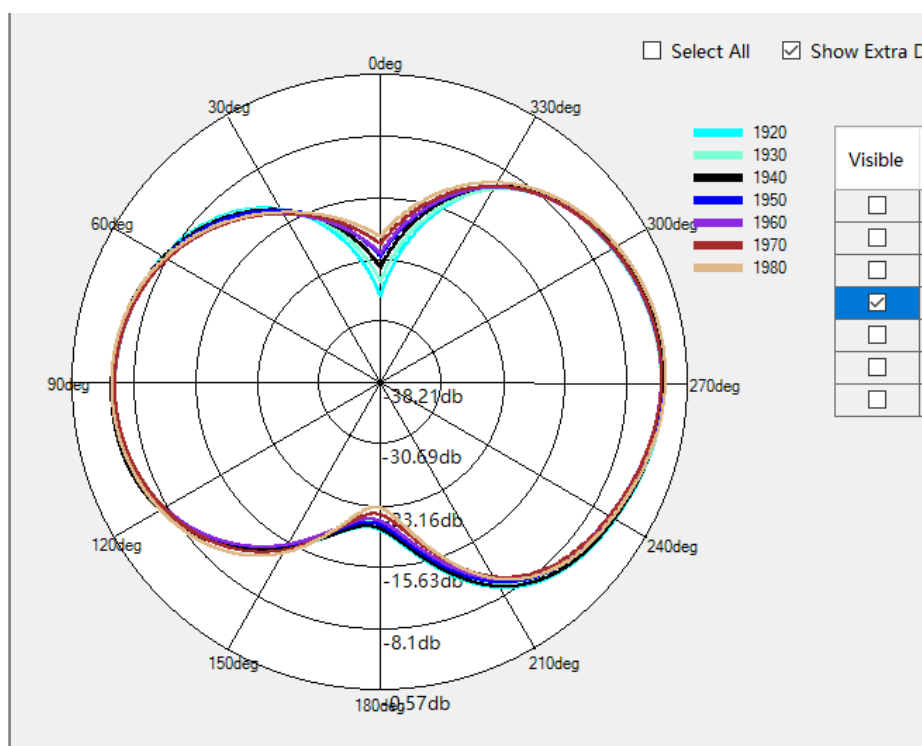


LTE B1 W1 Phi=90deg

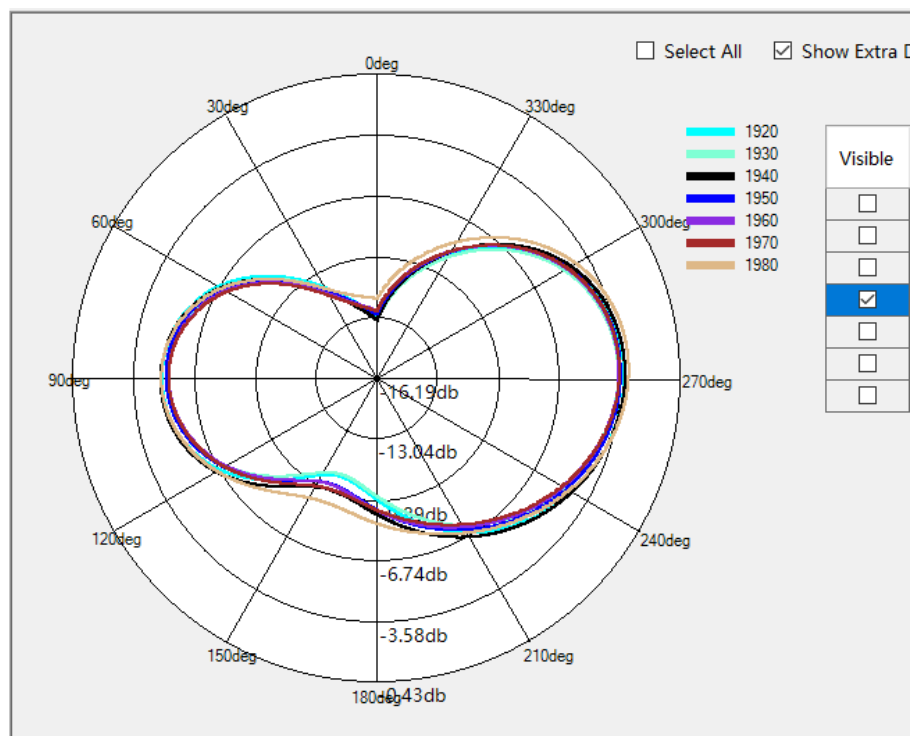


LTE B1 W1 Theta=90deg

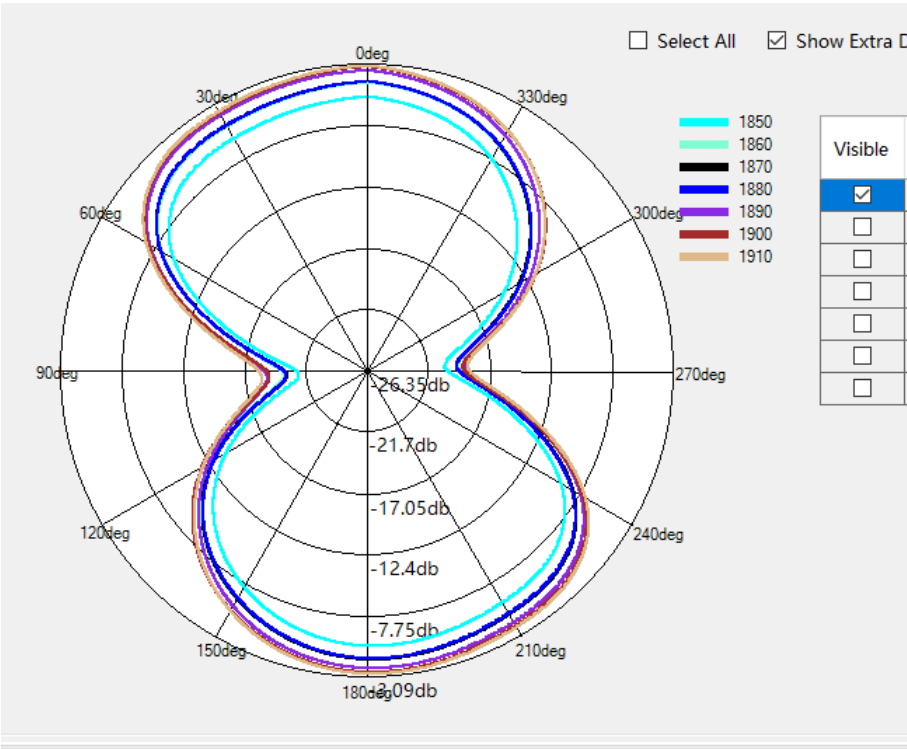


LTE B2 G1900 W2 Phi=0deg

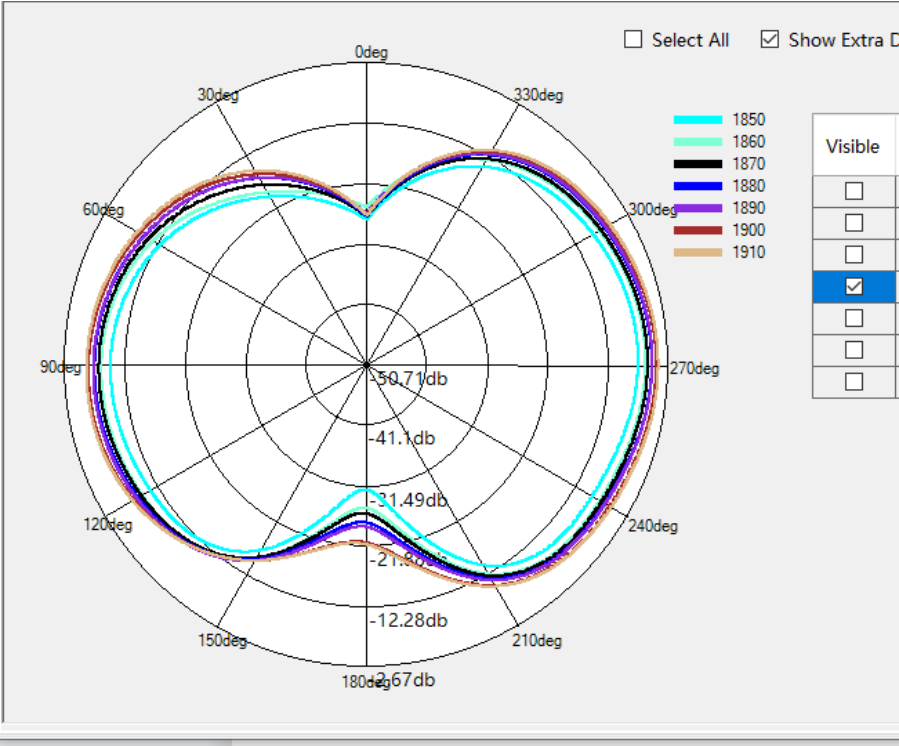


LTE B2 G1900 W2 Phi=90deg

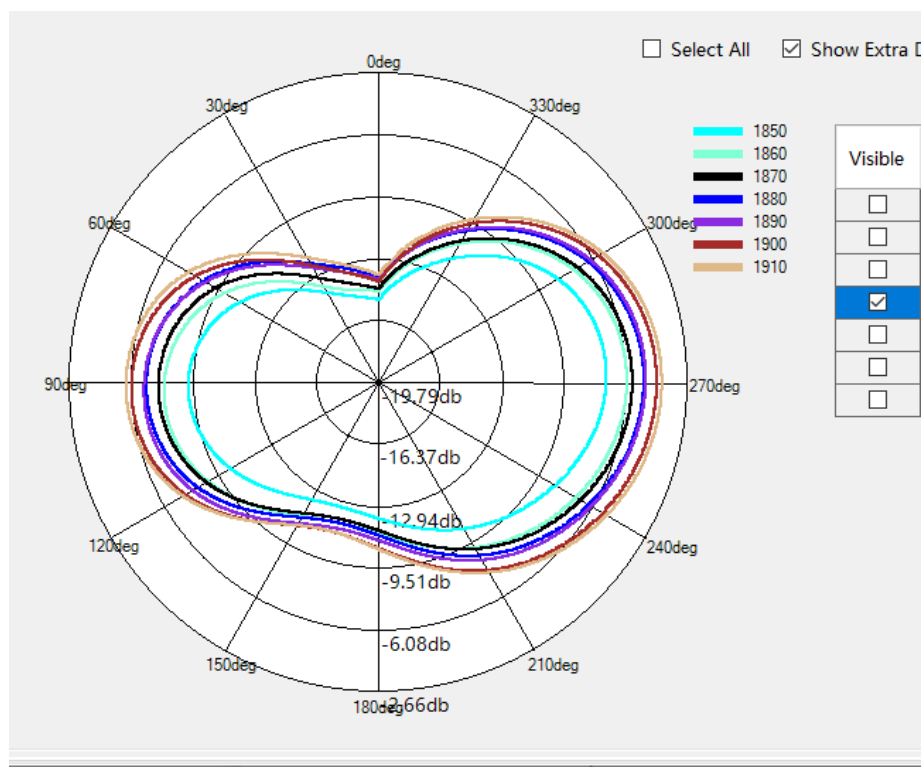


LTE B2 G1900 W2 Theta=90deg

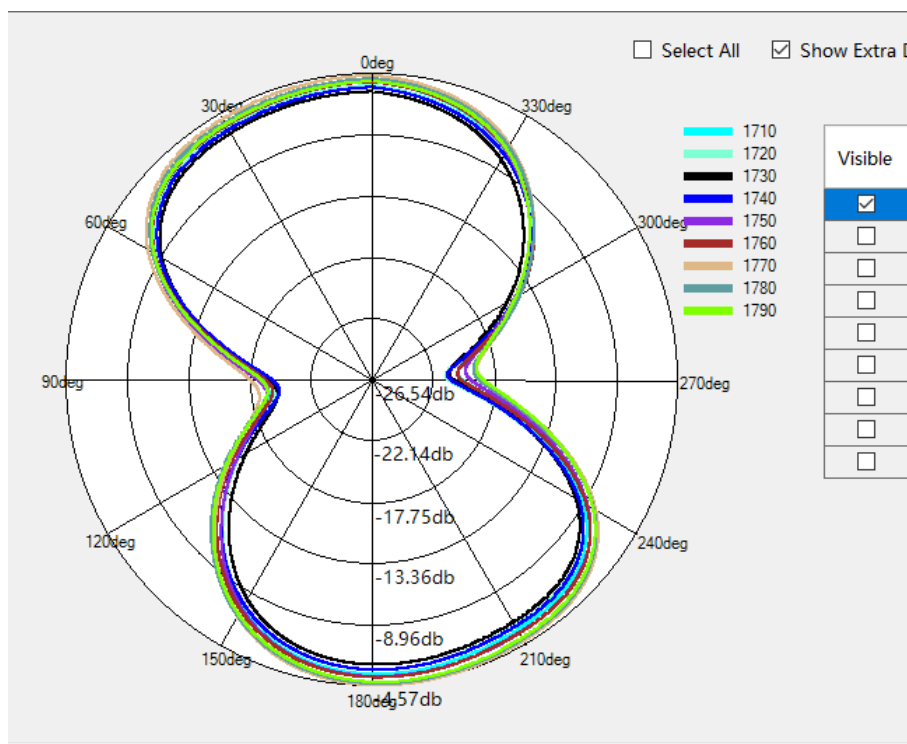


LTE B3 B4 B66 G1800 W4 Phi=0deg

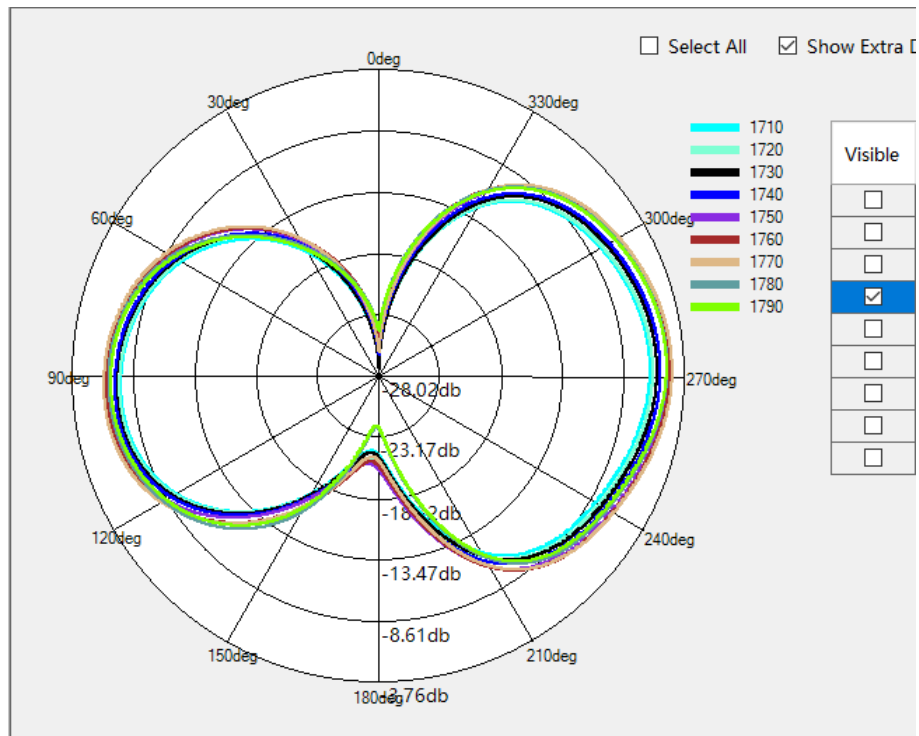


LTE B3 B4 B66 G1800 W4 Phi=90deg

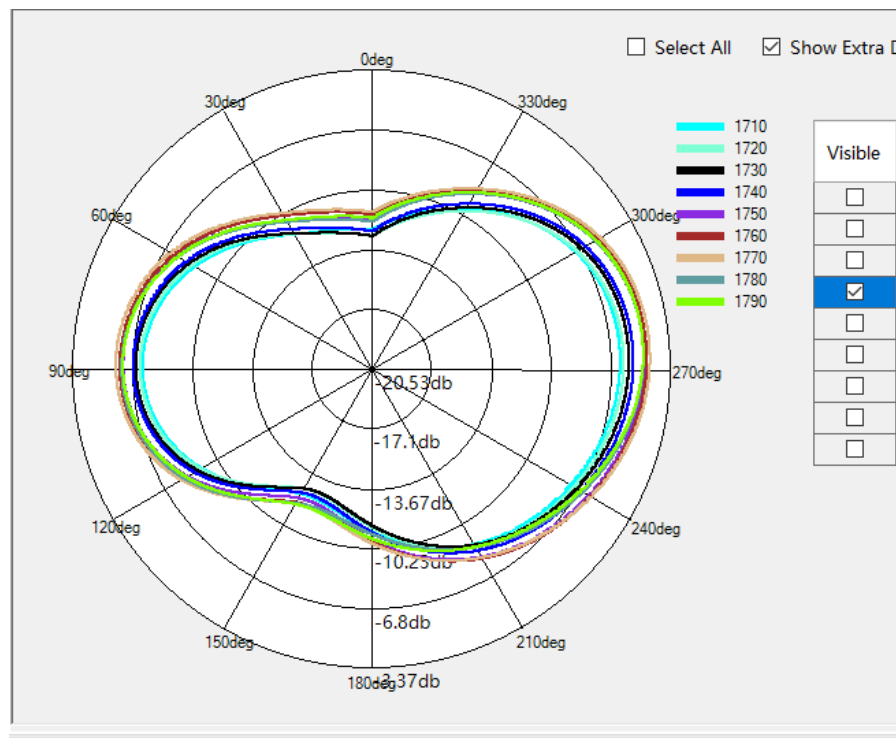


LTE B3 B4 B66 G1800 W4 Phi=90deg

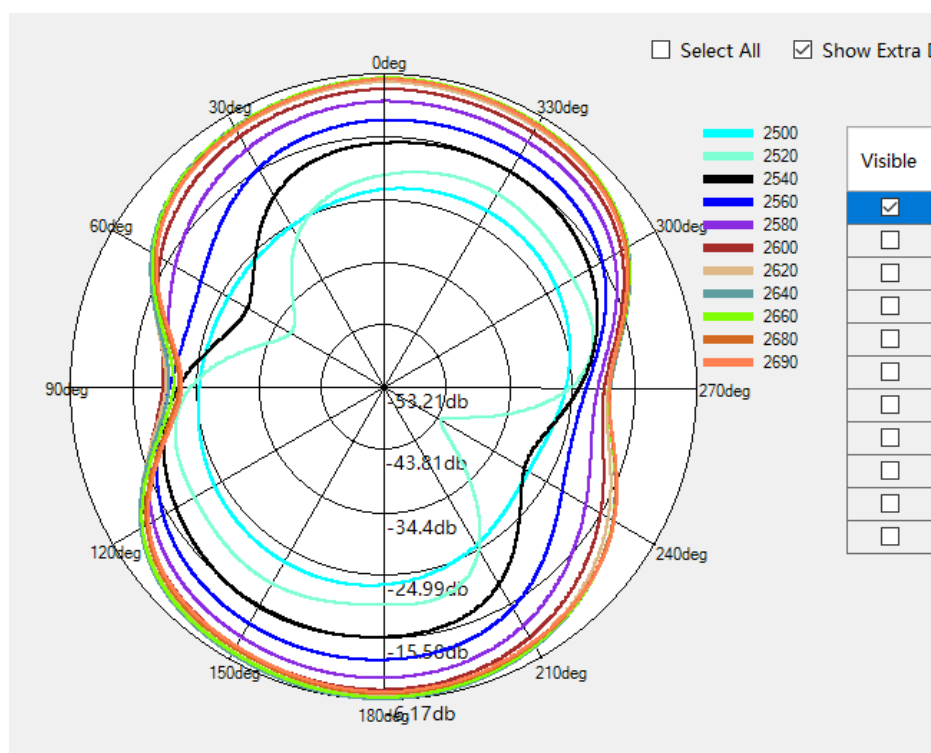


LTE B7 B38 B41 Phi=0deg

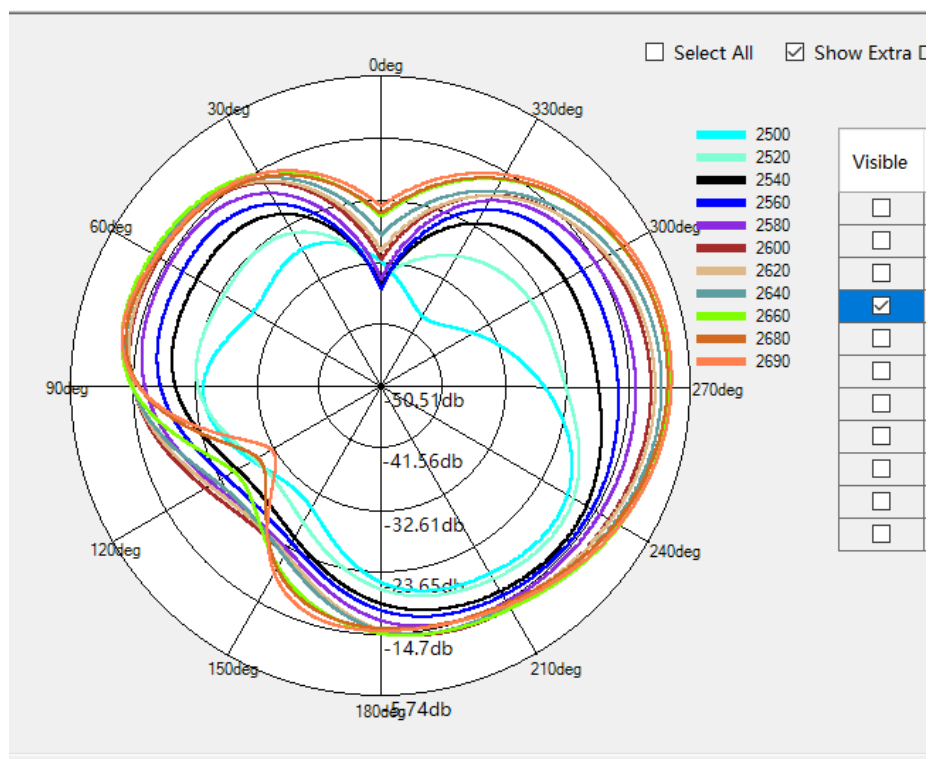


LTE B7 B38 B41 Phi=90deg

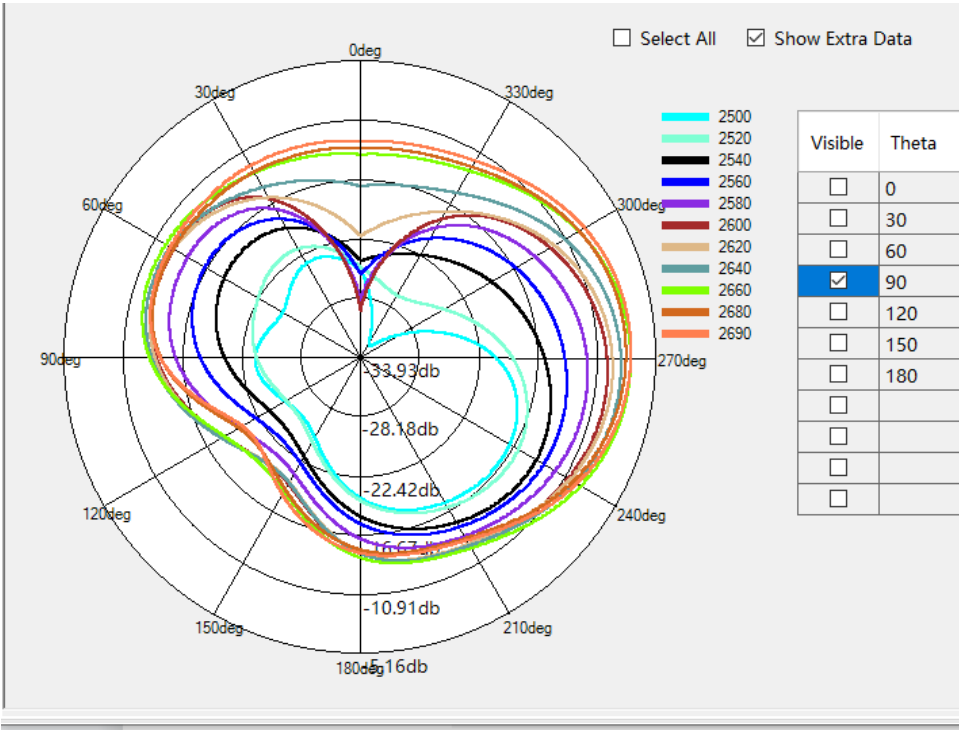


LTE B7 B38 B41 Theta=90deg

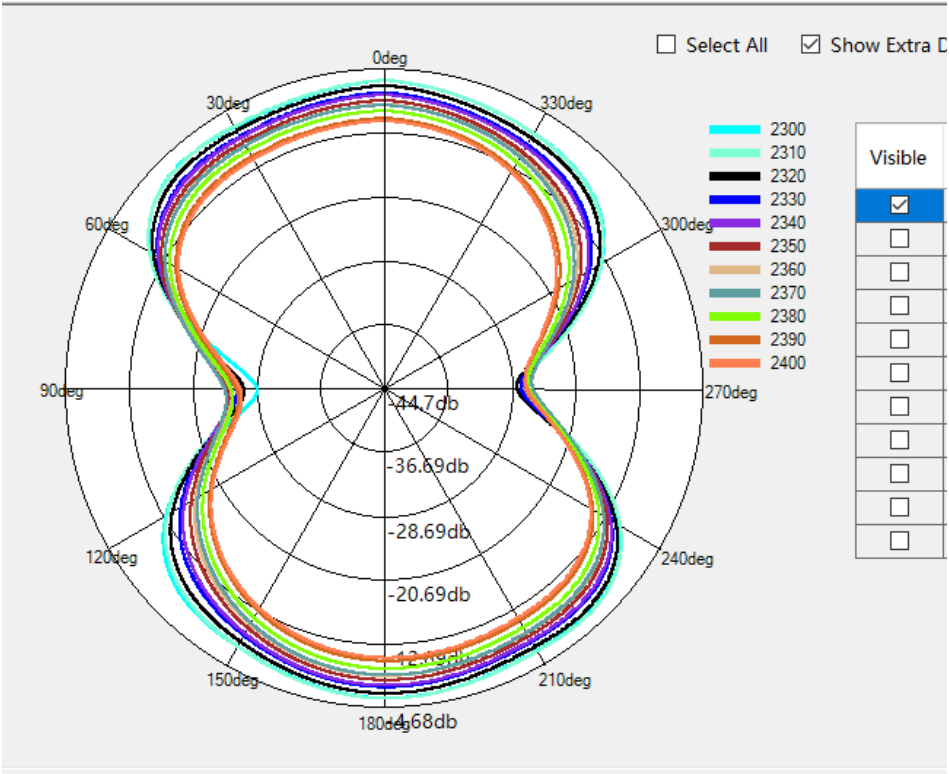

LTE B40 Phi=0deg

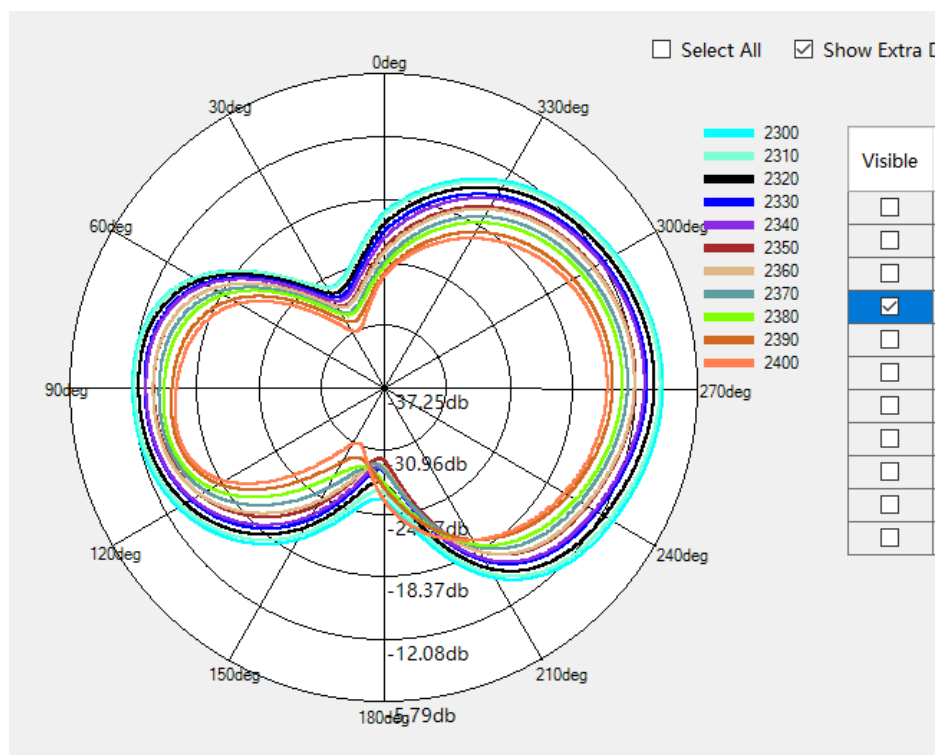


LTE B40 Phi=90deg

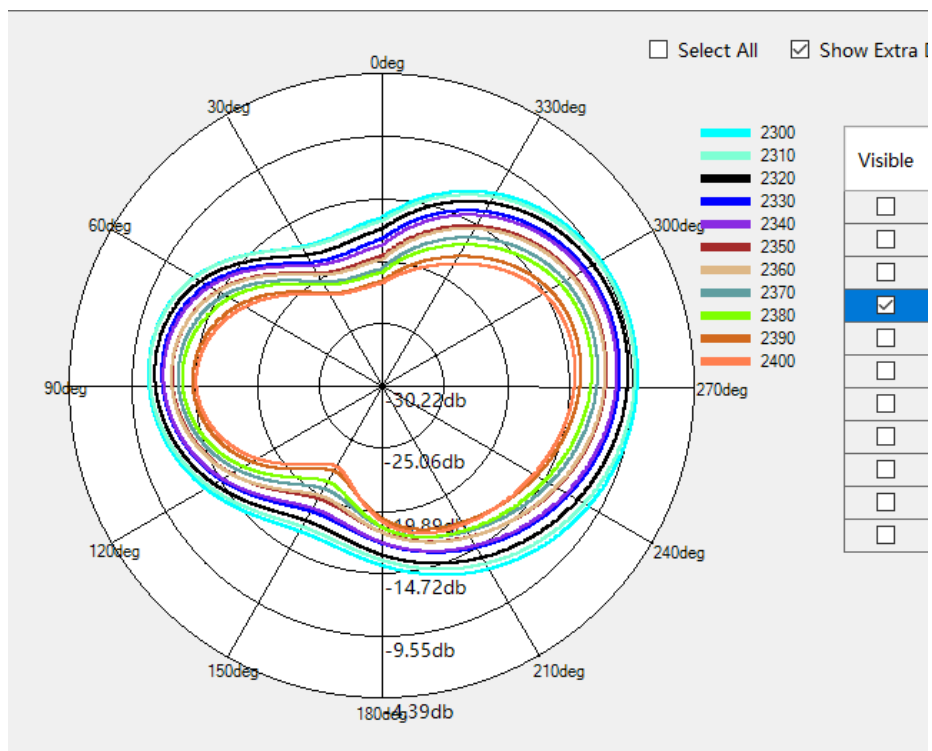


LTE B40 Theta=90deg


ANT0

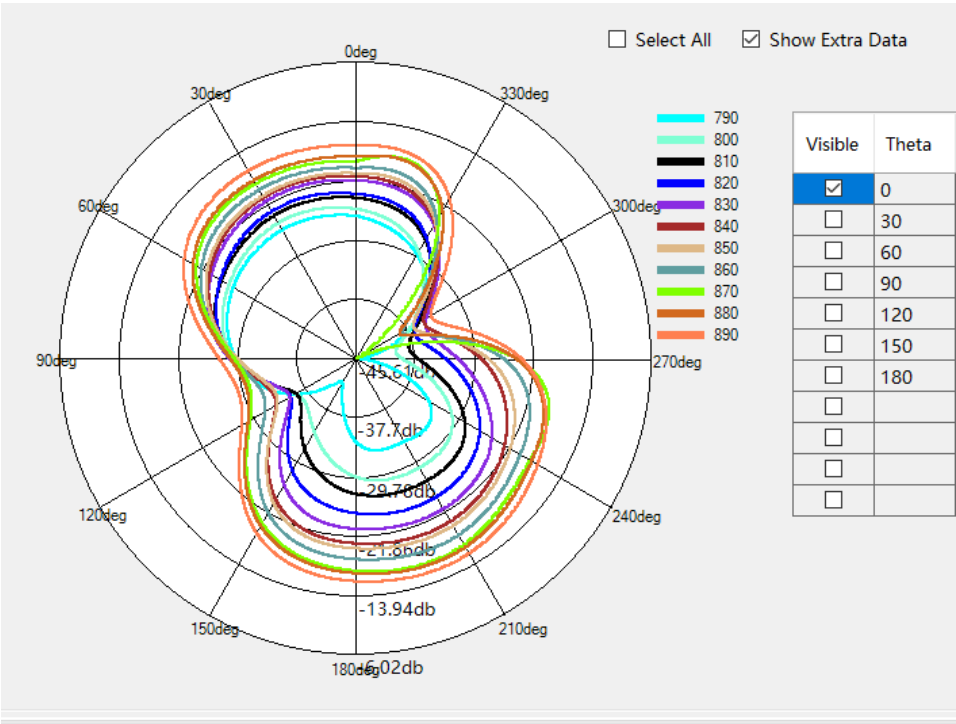


GSM850/WCDMA B5/LTE B5/B20 Phi=0deg

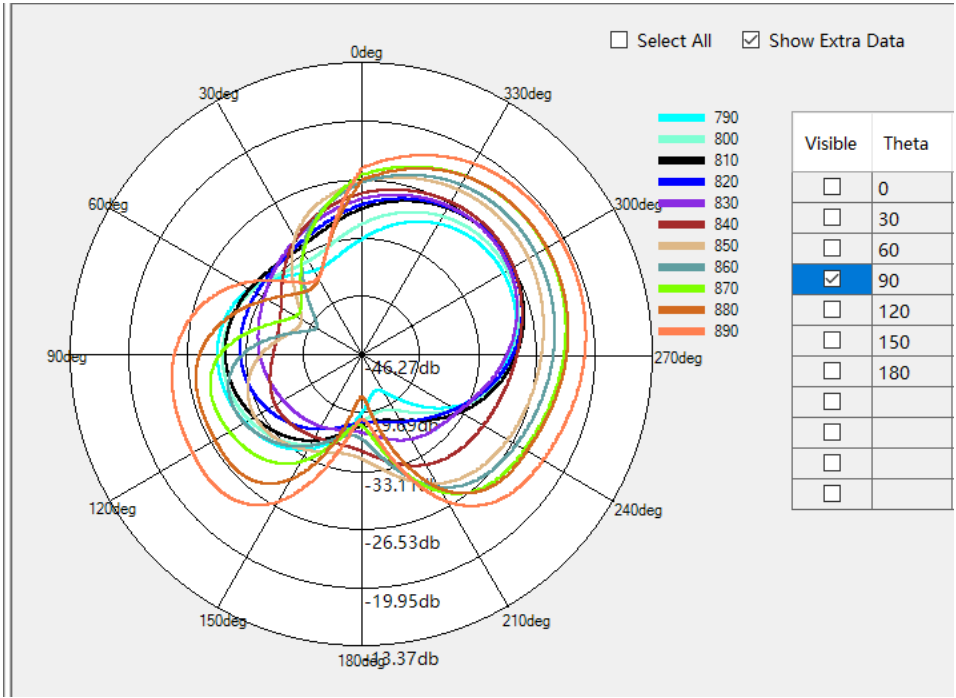


GSM850/WCDMA B5/LTE B5/B20 Phi=90deg

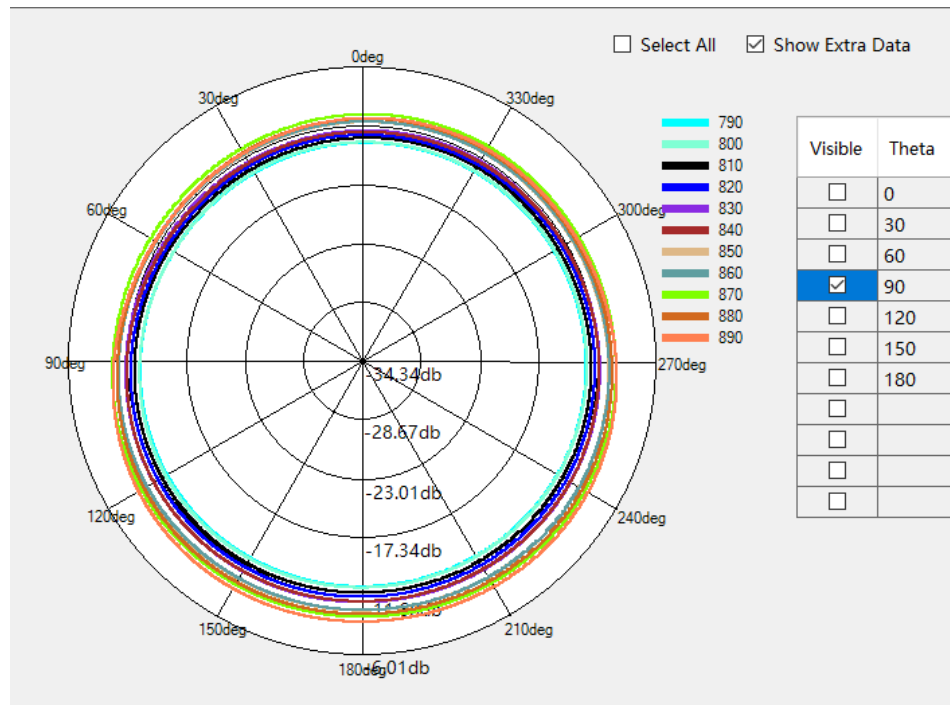


GSM850/WCDMA B5/LTE B5/B20 Theta=90deg

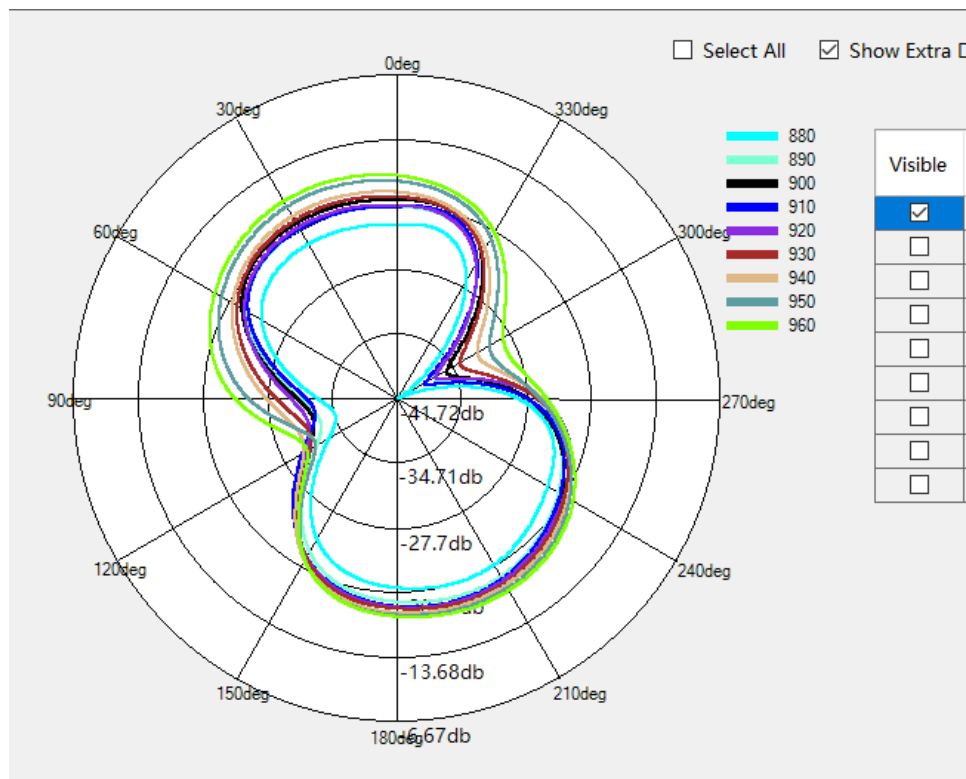


LTE B8 G900 W8 Phi=0deg

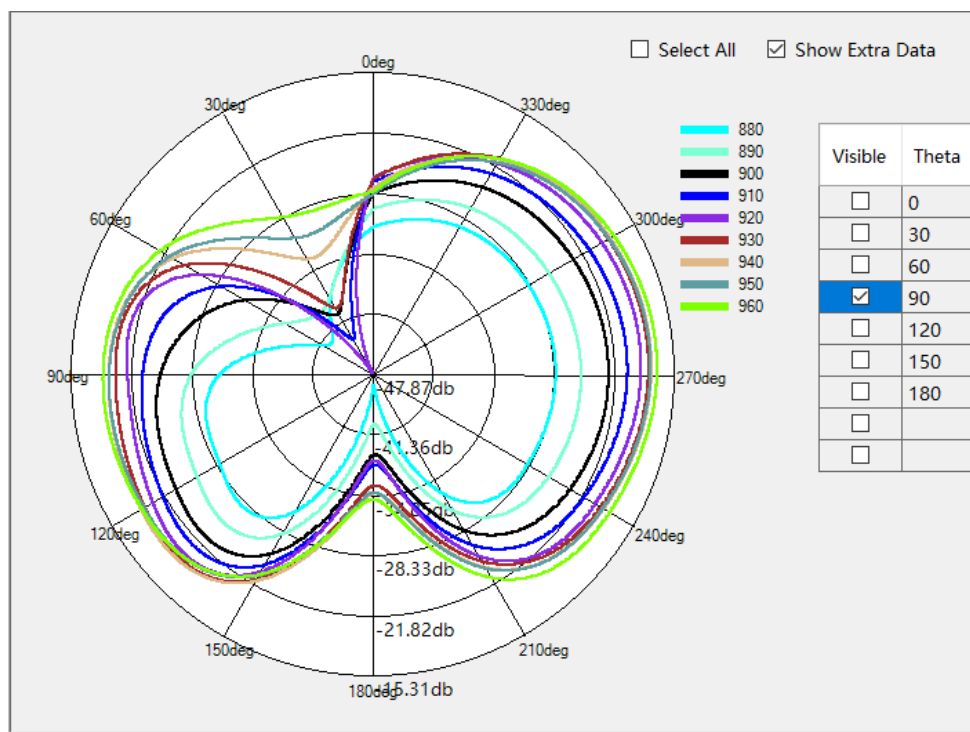


LTE B8 G900 W8 Phi=90deg

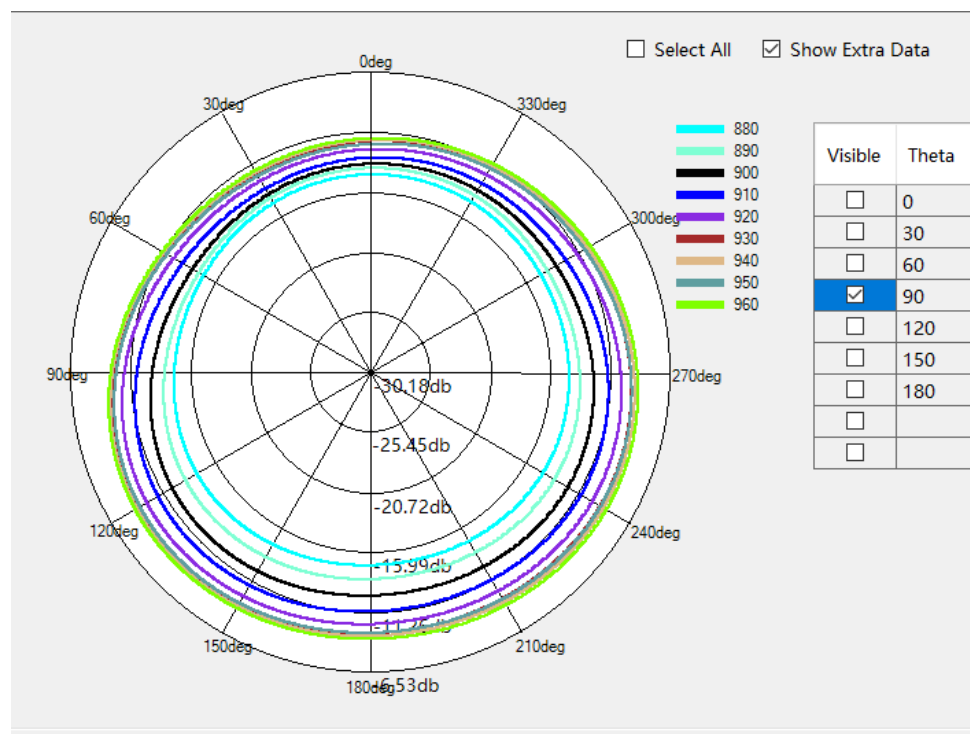


LTE B8 G900 W8 Theta=90deg

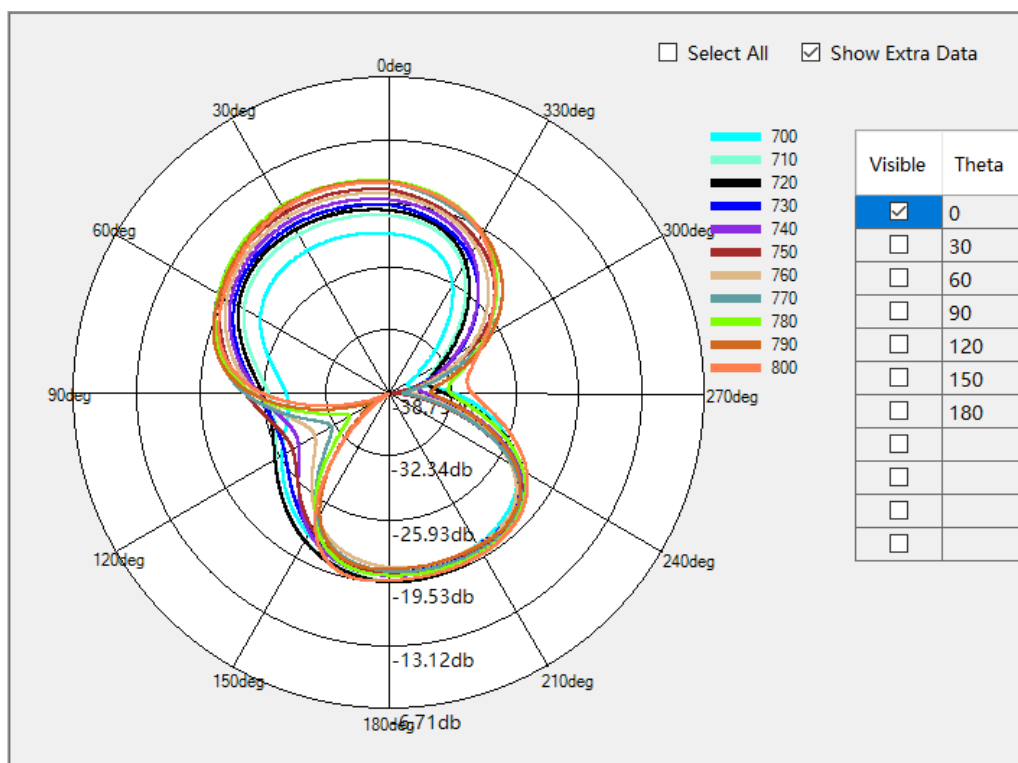


LTEB12/B17/B28 Phi=0deg

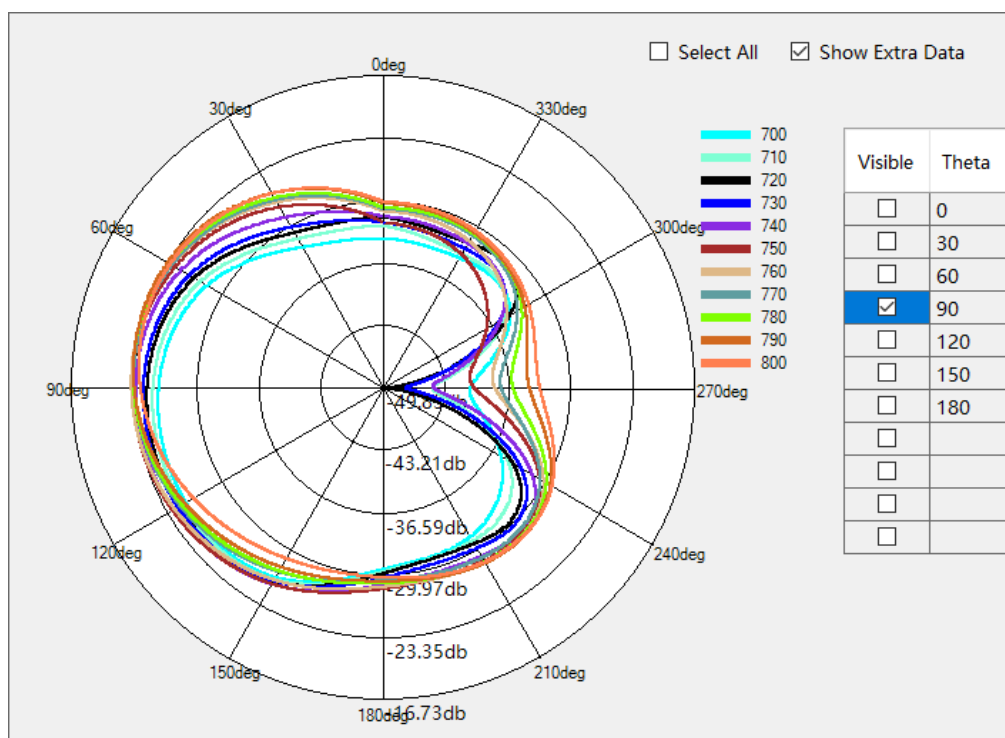


LTEB12/B17/B28 Phi=90deg

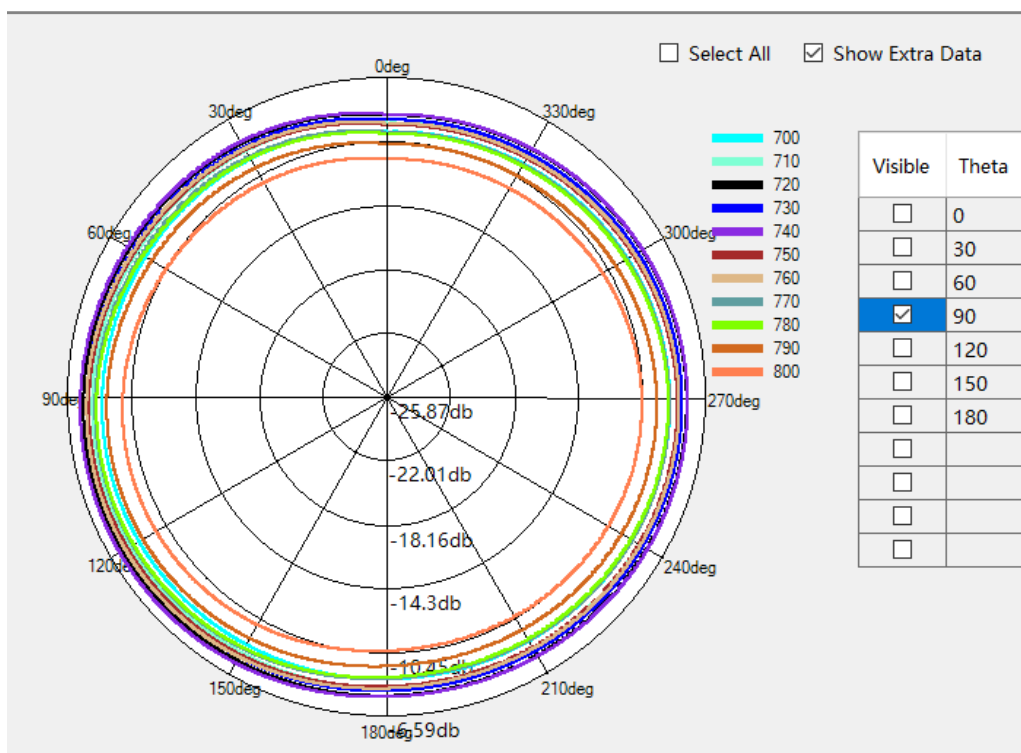


LTEB12/B17/B28 Theta=90deg

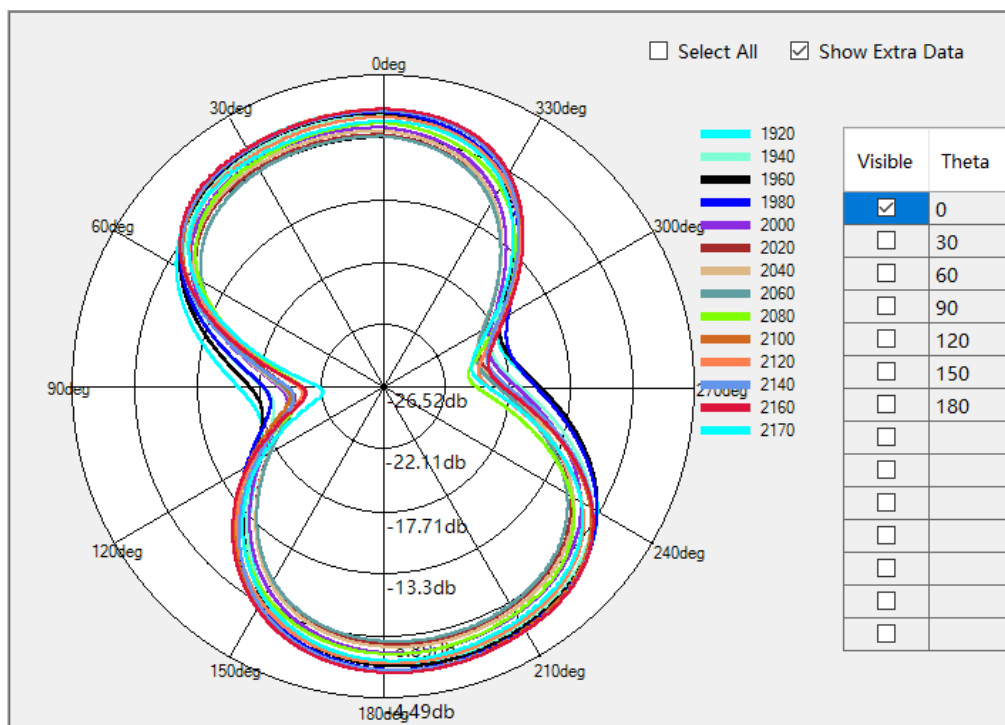


LTE B1 W1 Phi=90deg

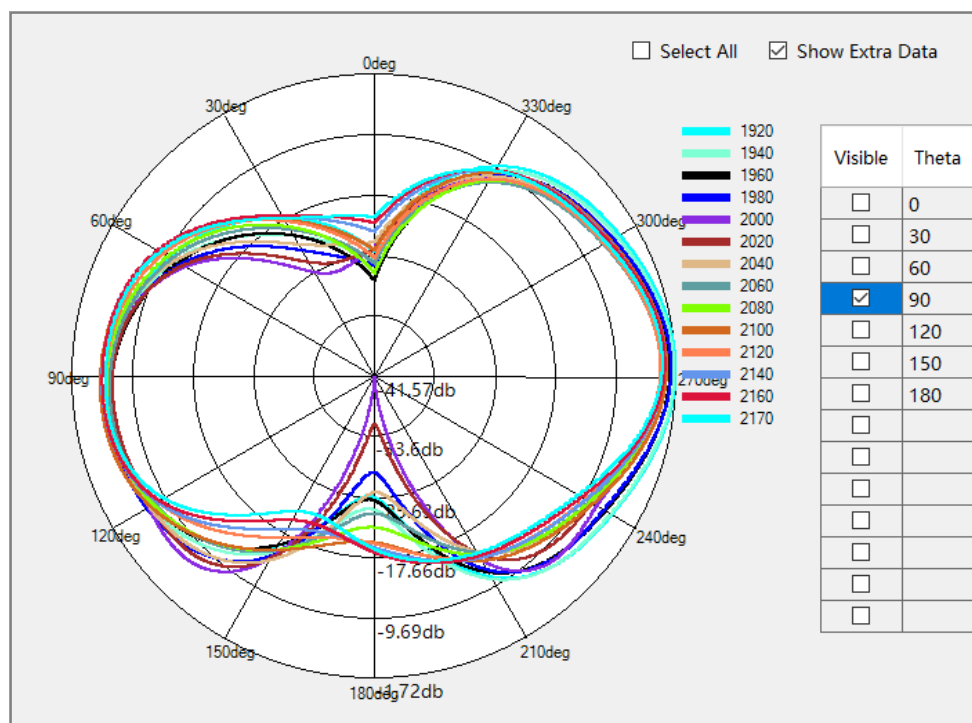


LTE B1 W1 Phi=90deg

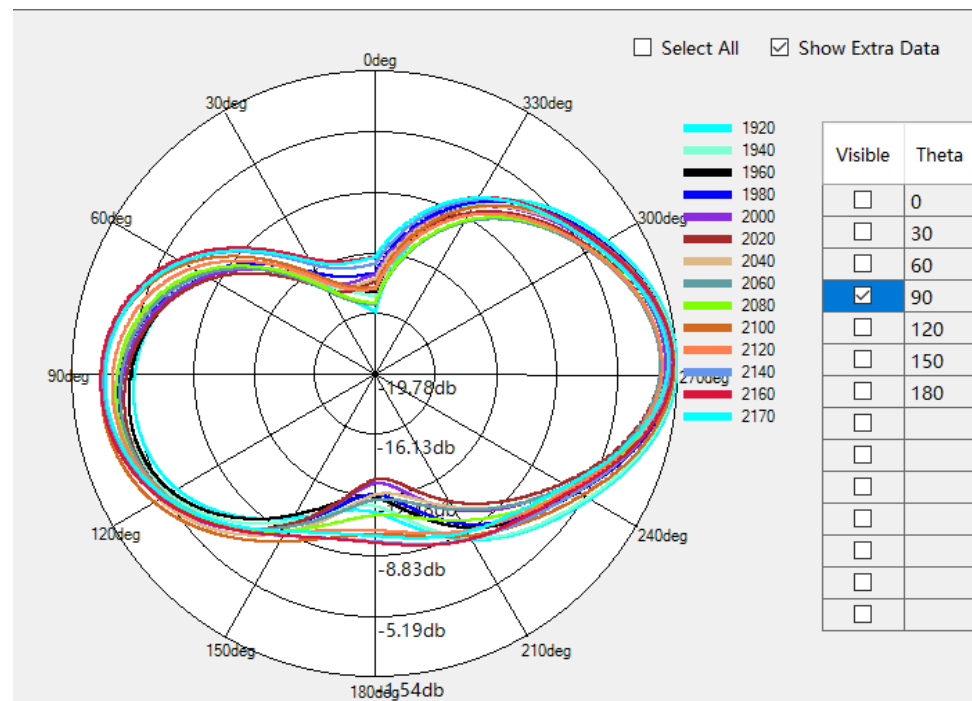


LTE B1 W1 Theta=90deg

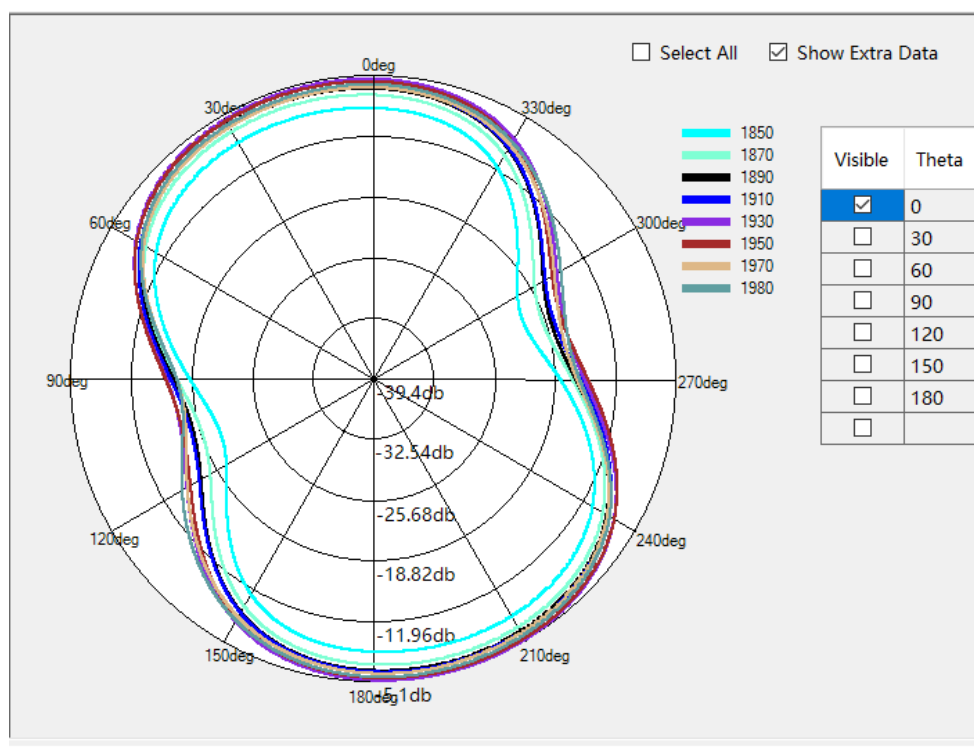


LTE B2 G1900 W2 Phi=0deg

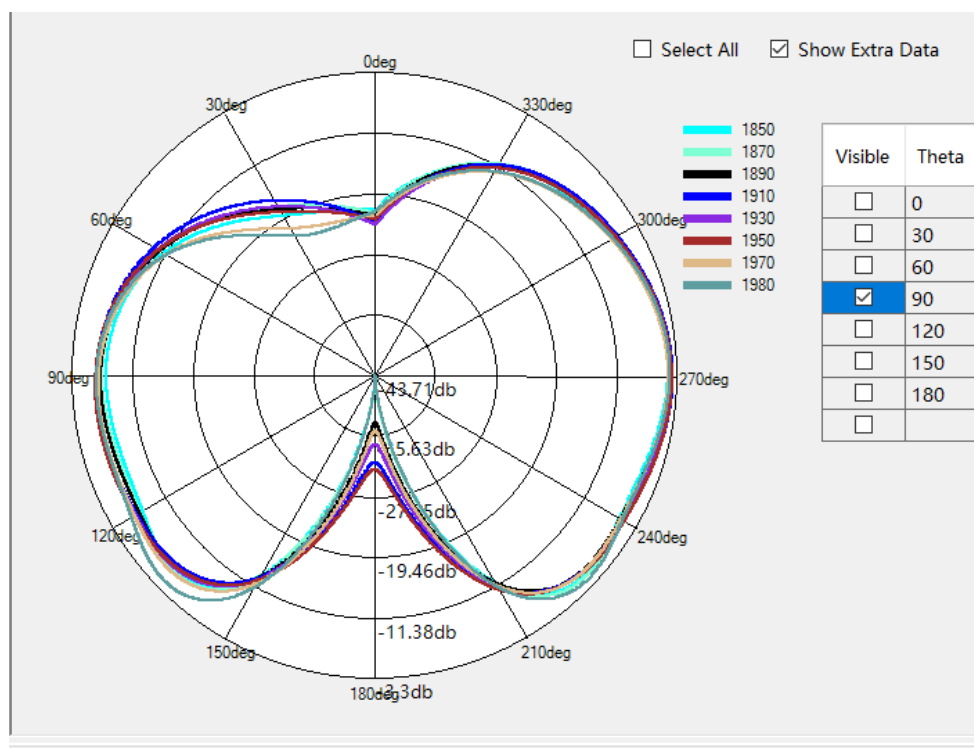


LTE B2 G1900 W2 Phi=90deg

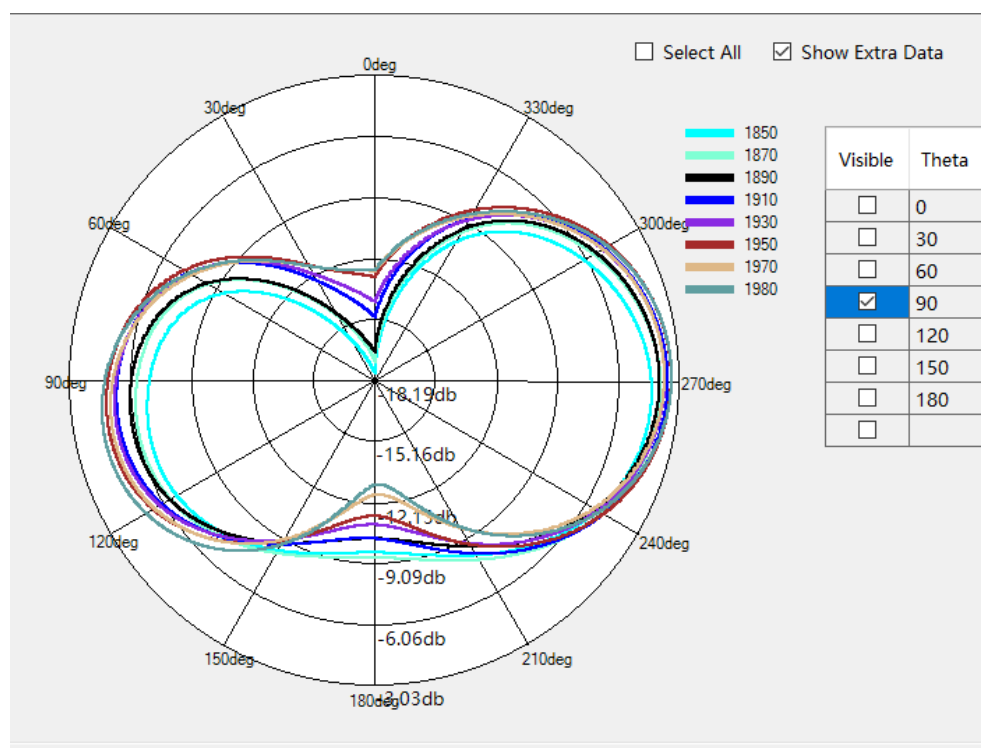


LTE B2 G1900 W2 Theta=90deg

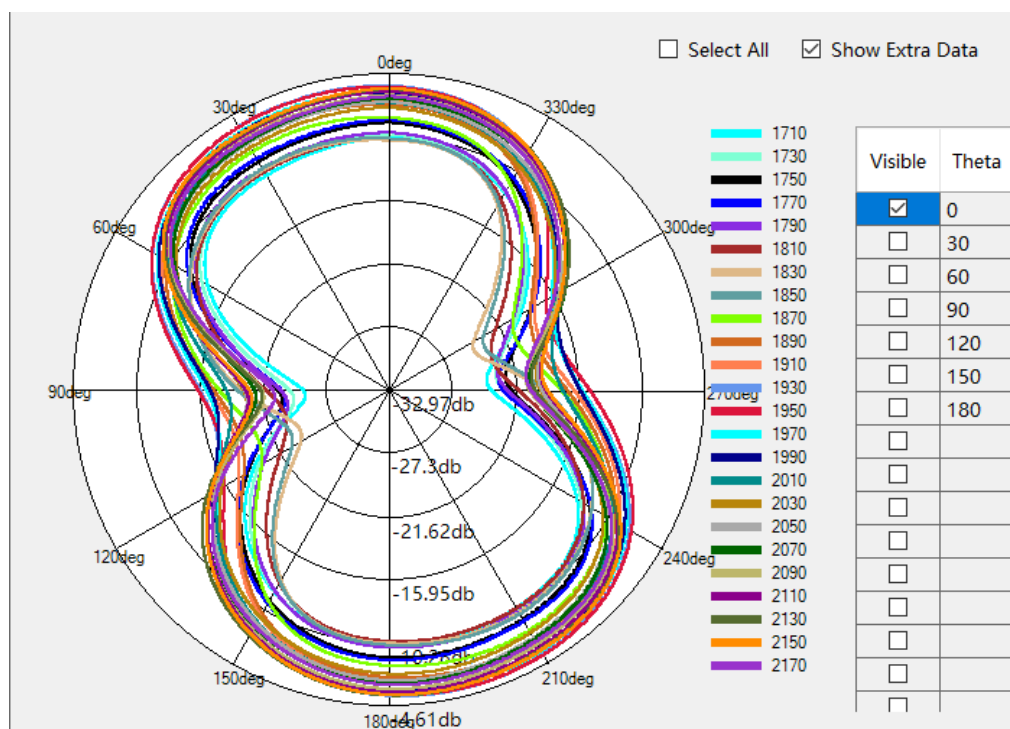


LTE B3 B4 B66 G1800 W4 Phi=0deg

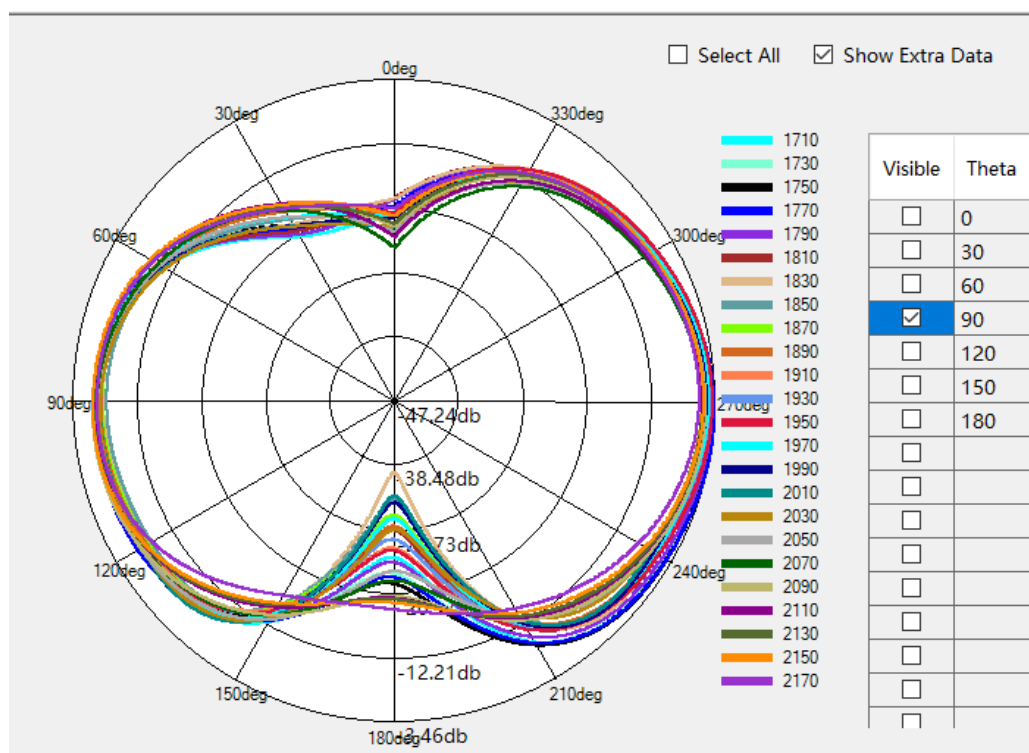


LTE B3 B4 B66 G1800 W4 Phi=90deg

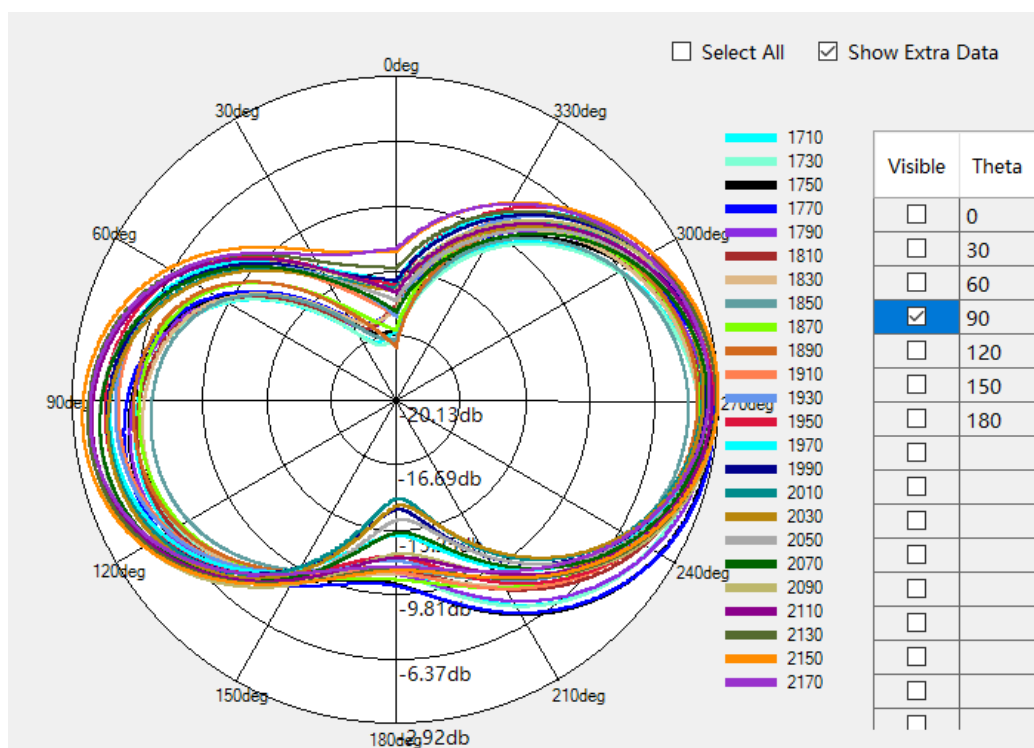


LTE B3 B4 B66 G1800 W4 Phi=90deg

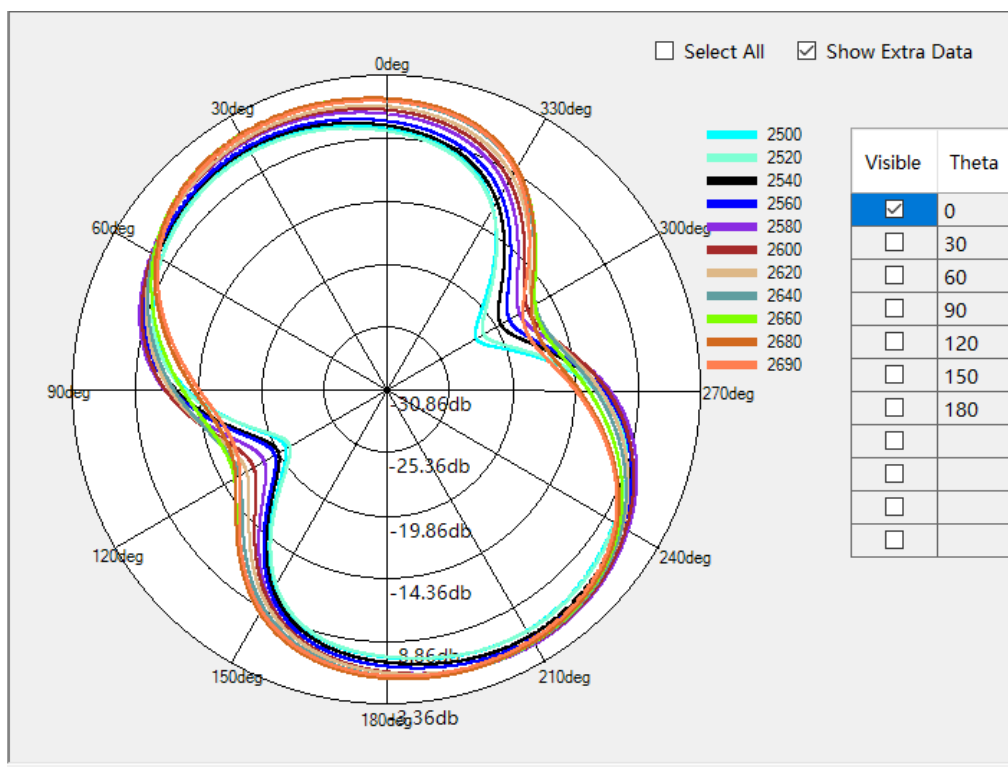


LTE B7 B38 B41 Phi=0deg

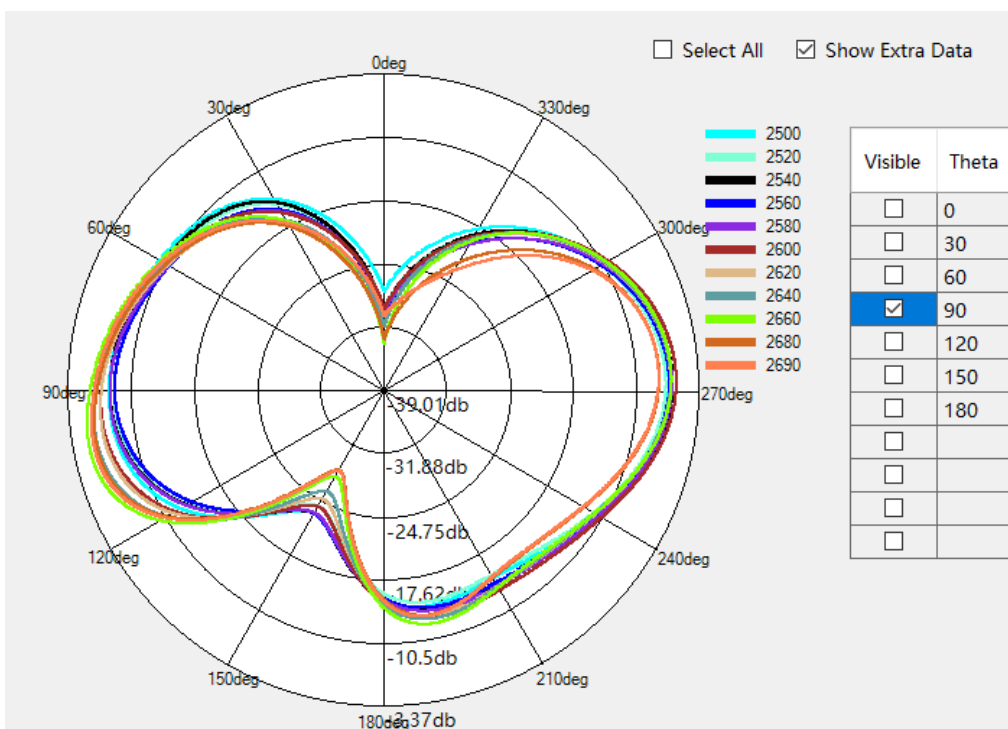


LTE B7 B38 B41 Phi=90deg

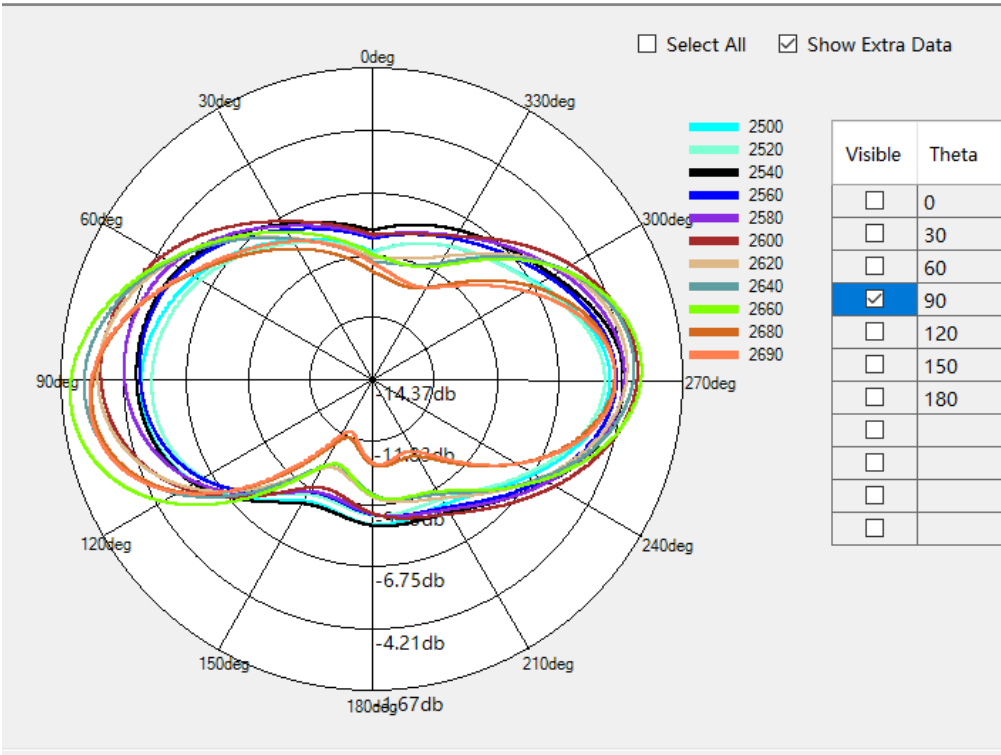


LTE B7 B38 B41 Theta=90deg

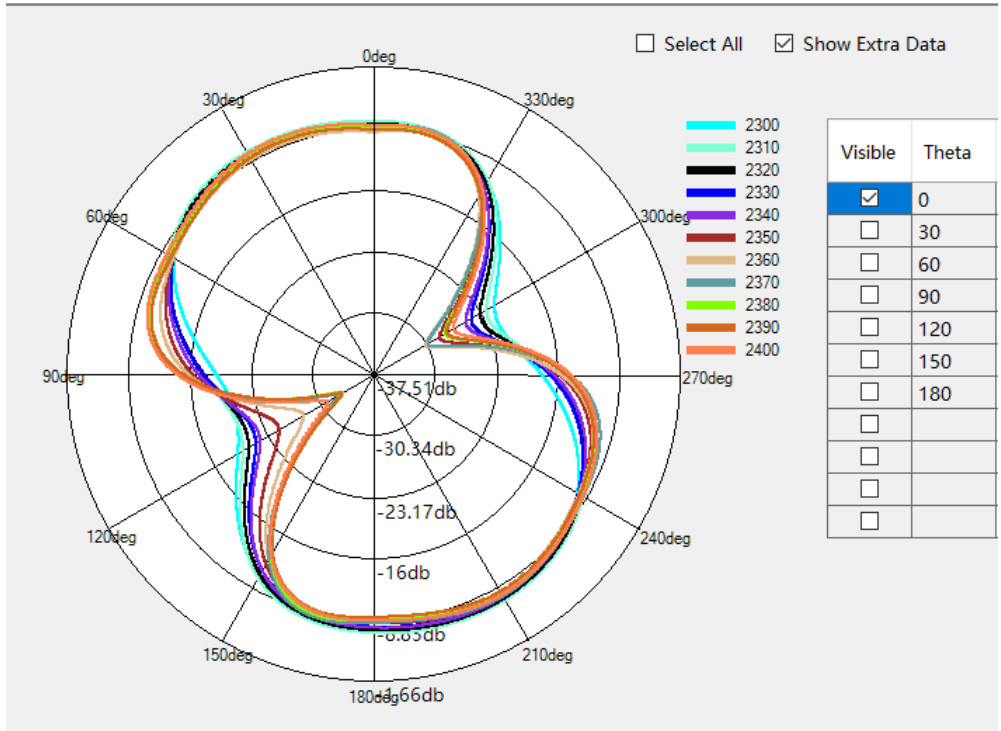

LTE B40 Phi=0deg

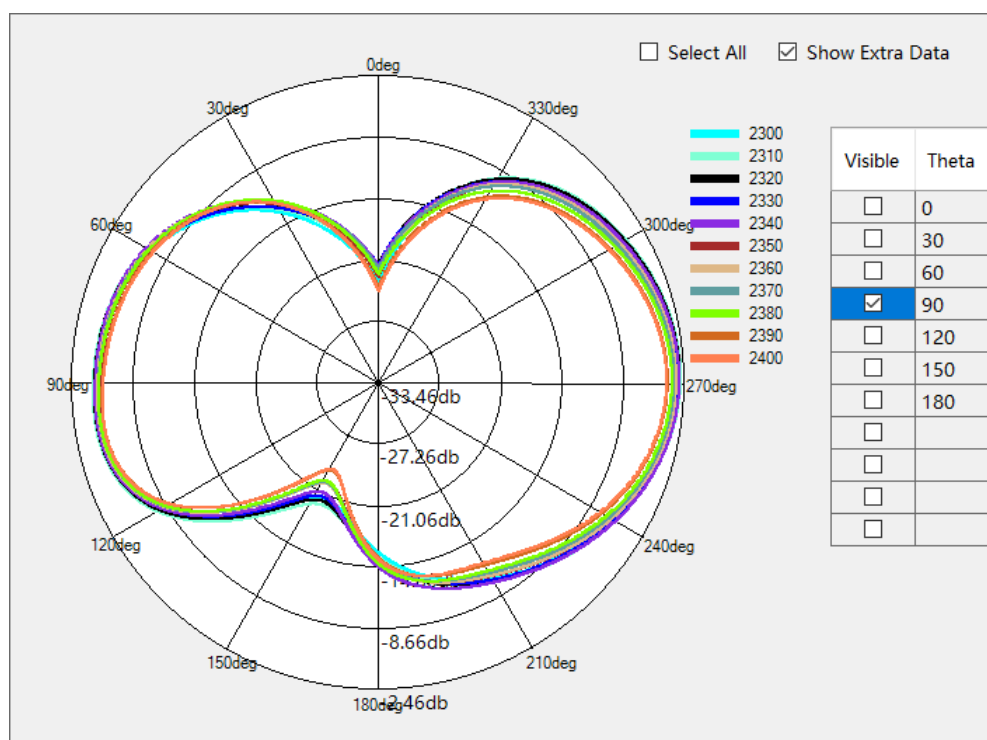


LTE B40 Phi=90deg

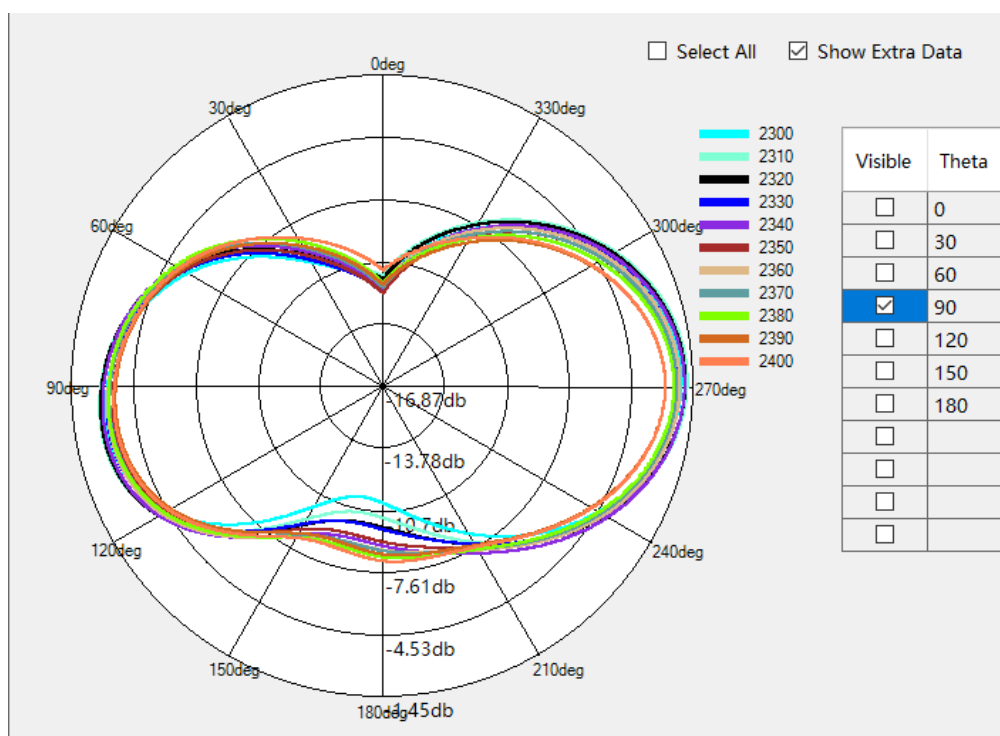


LTE B40 Theta=90deg


ANT13

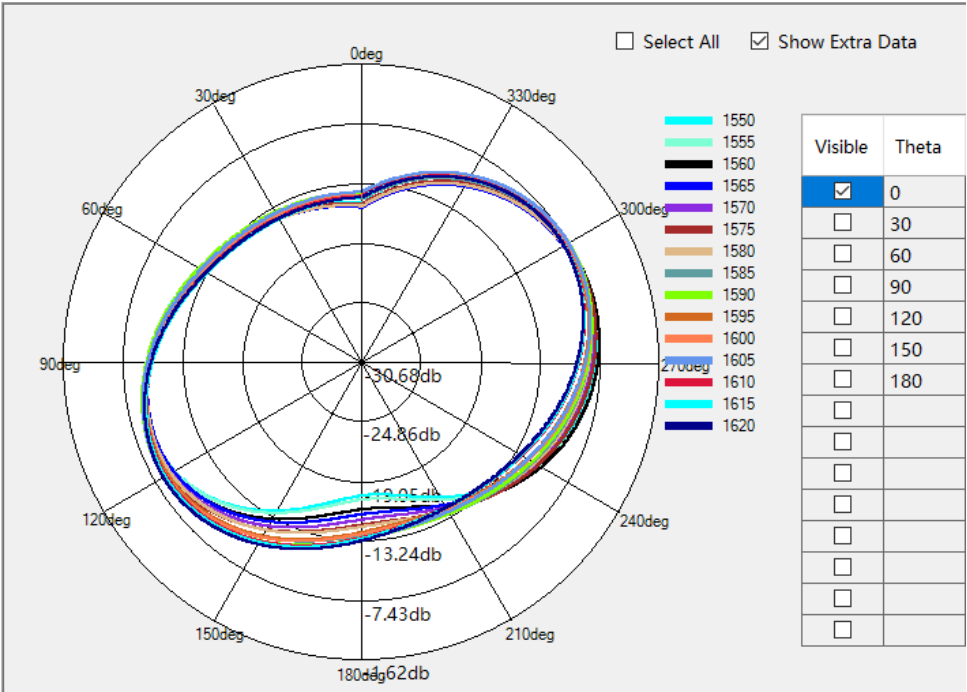

GPS Phi=0deg

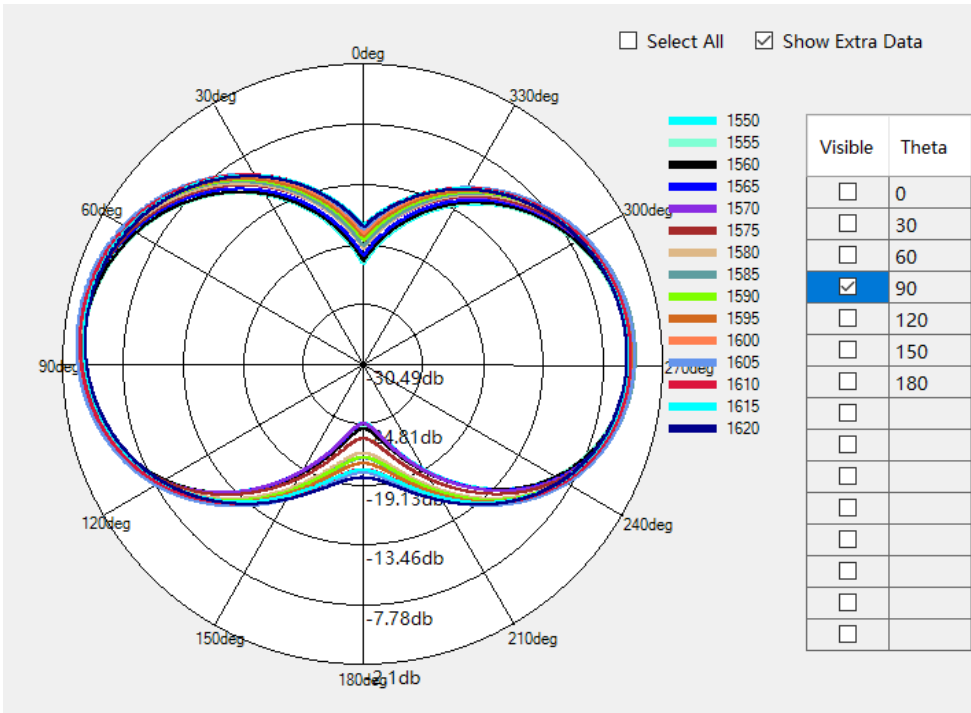


GPS Phi=90deg

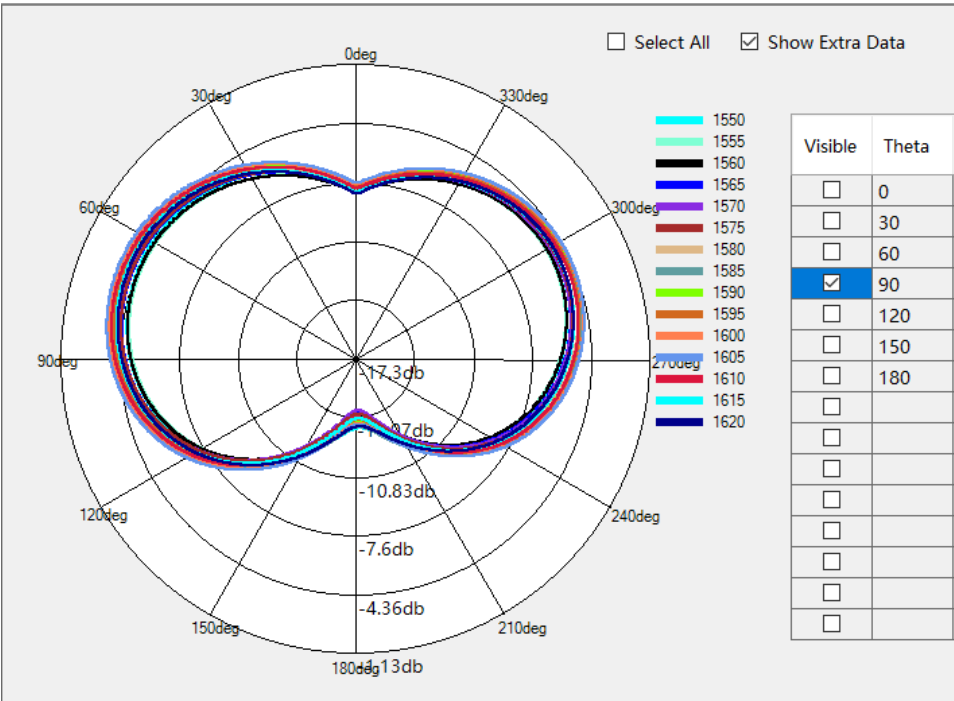


GPS Theta=90deg


ANT12

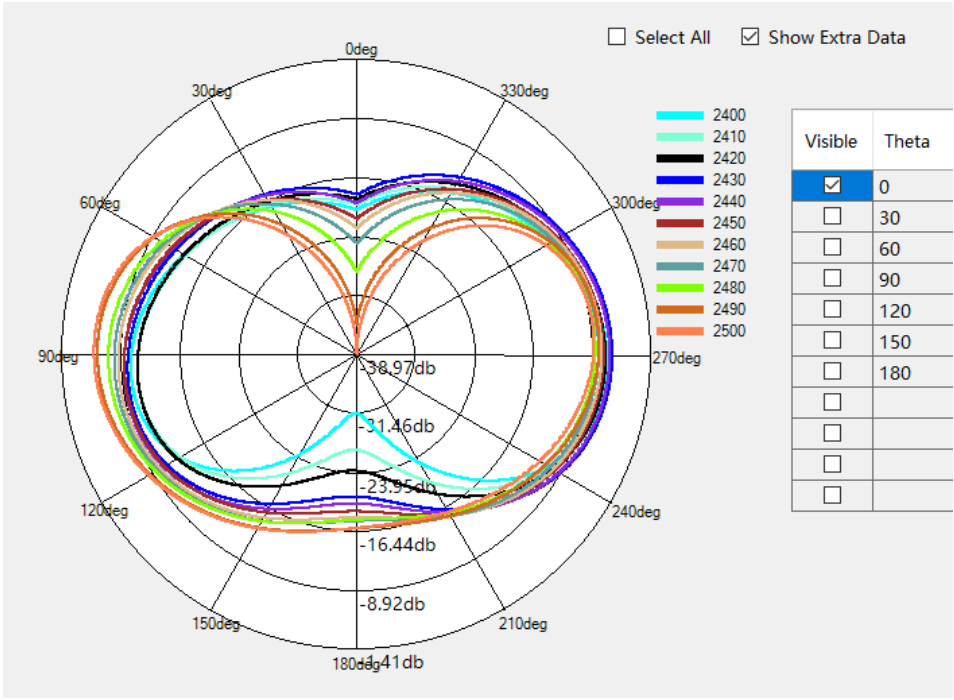


2.4G/BT Phi=0deg

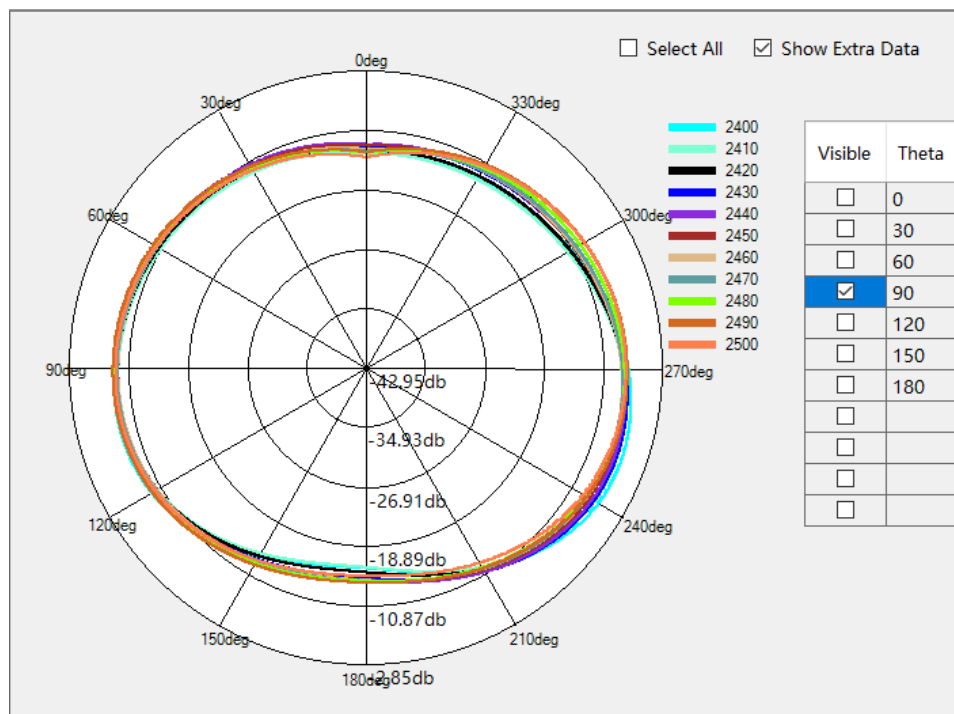


2.4G/BT Phi=90deg

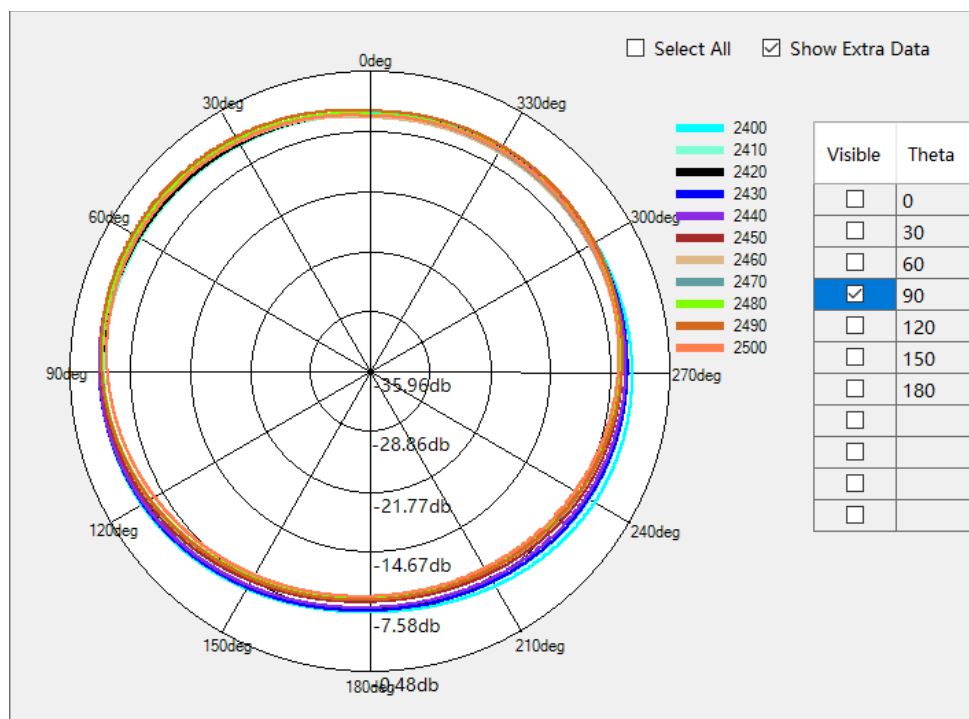


2.4G/BT Theta=90deg

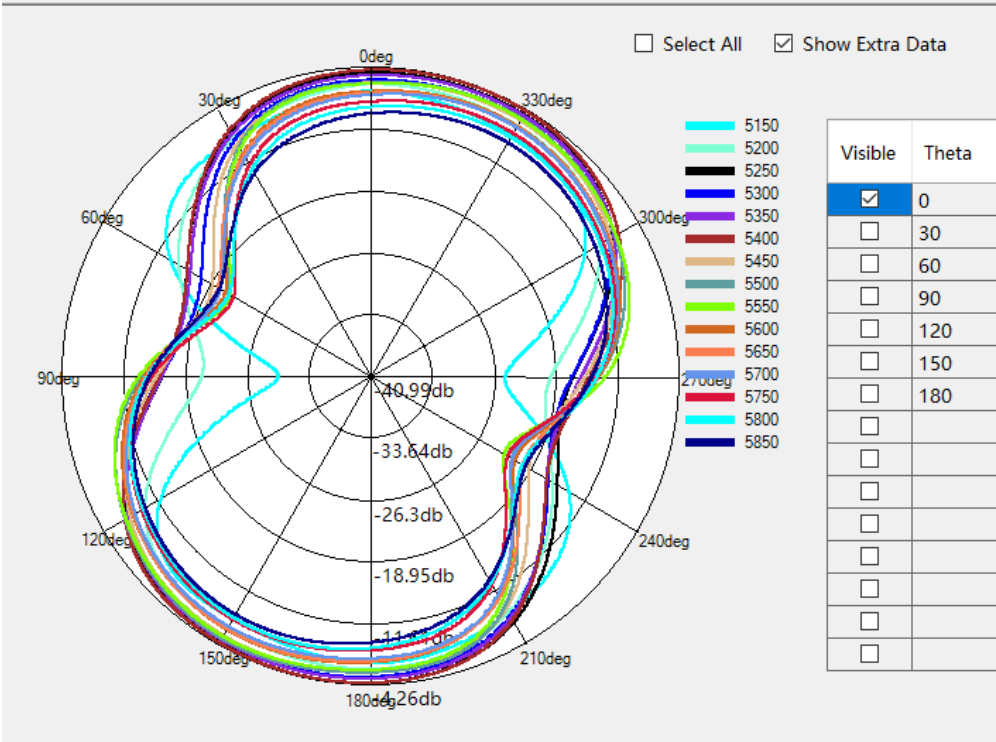

5G Phi=0deg

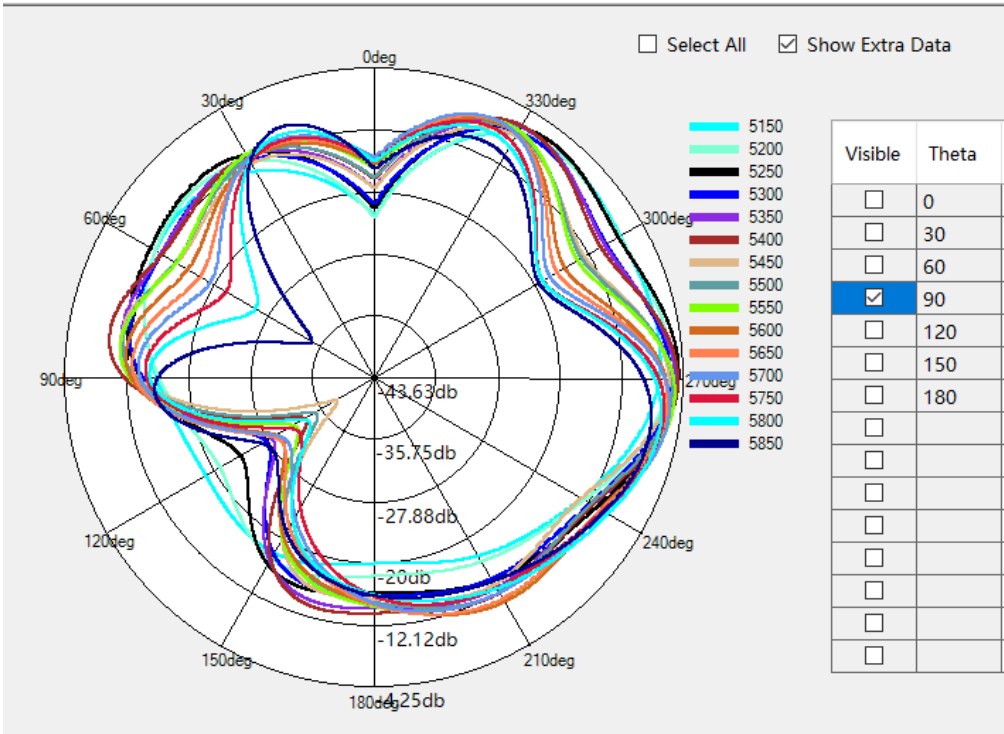


5G Phi=90deg

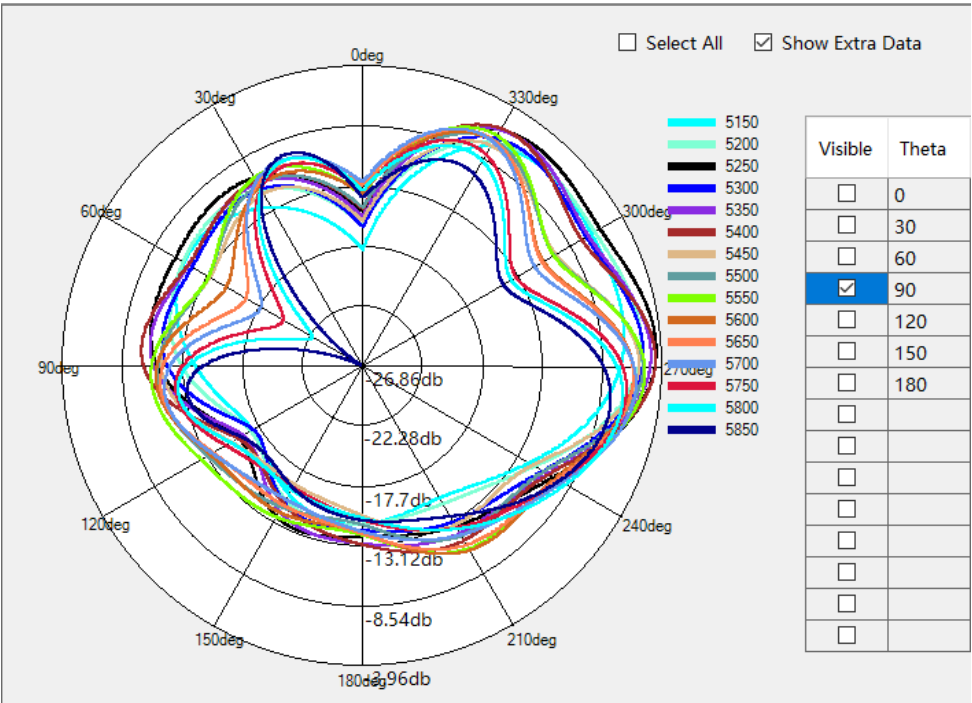


5G Theta=90deg


ANT 14

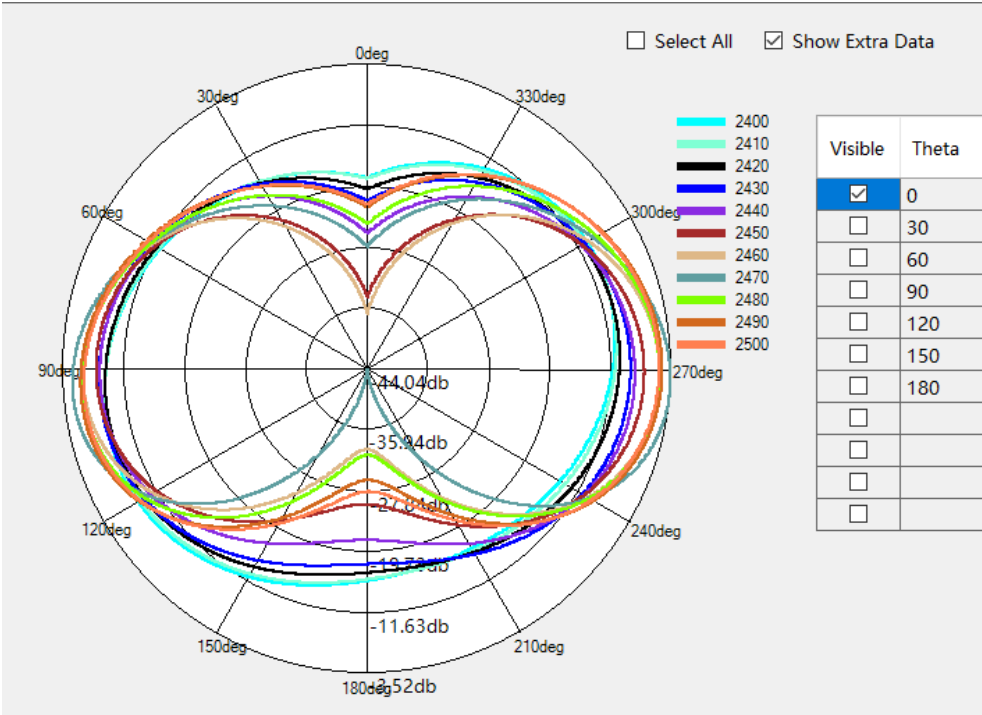


2.4G/BT Phi=0deg

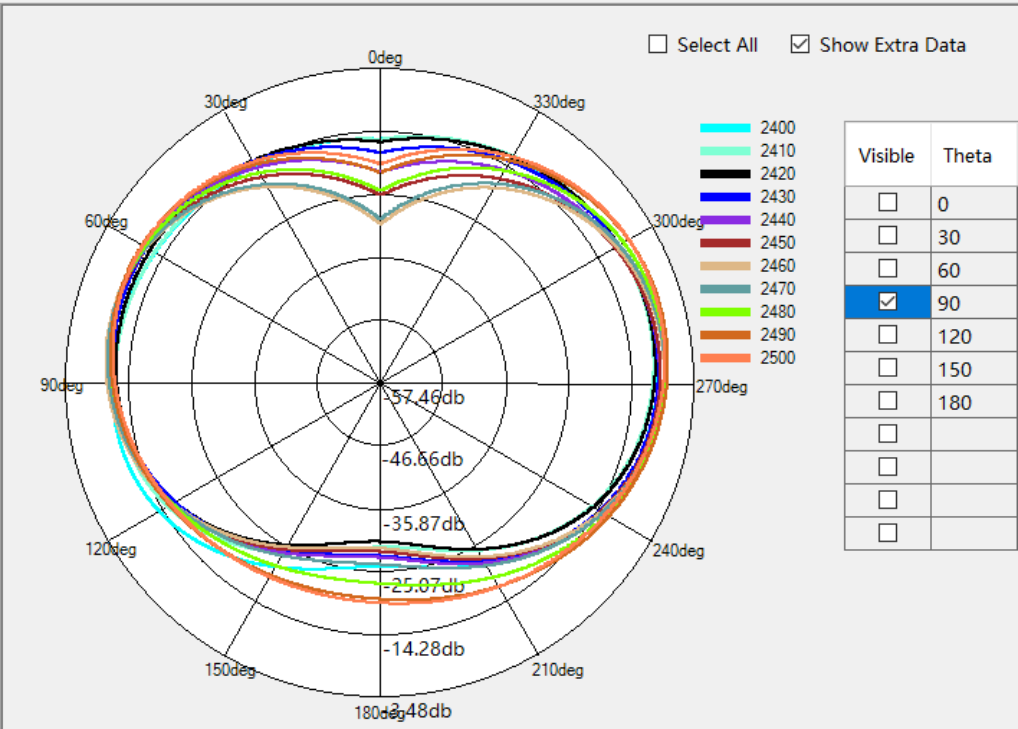


2.4G/BT Phi=90deg

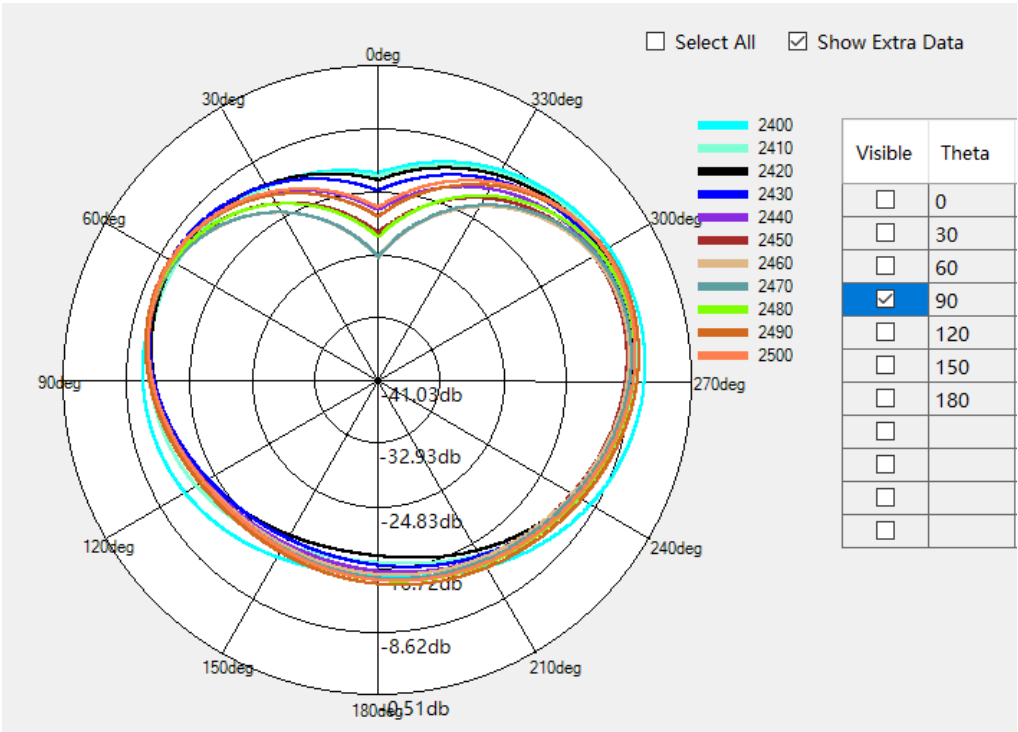


2.4G/BT Theta=90deg

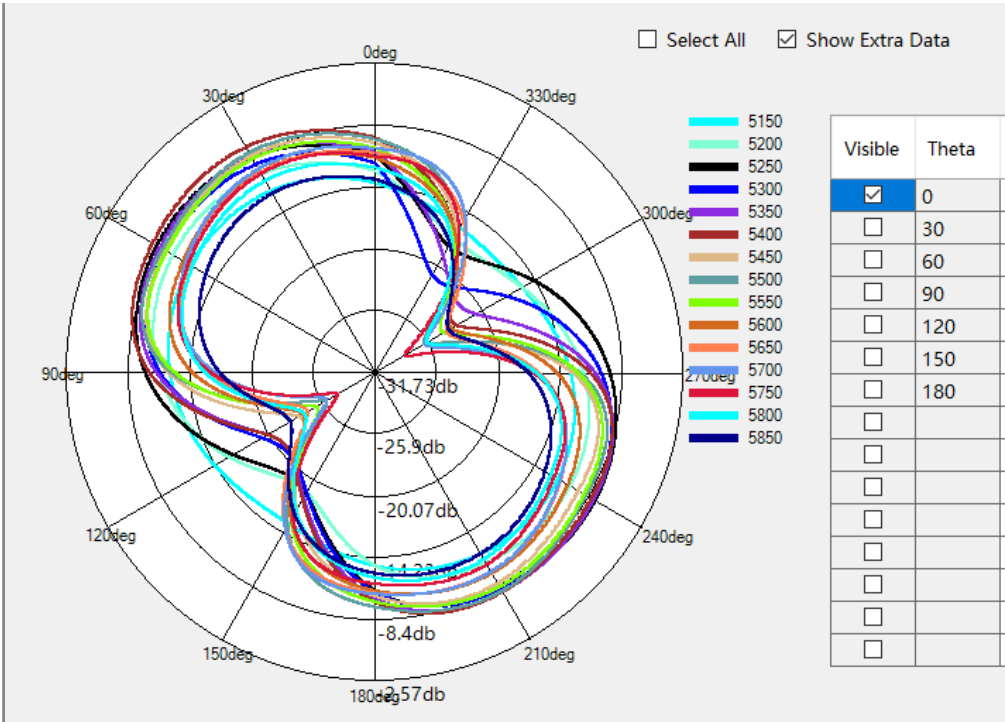

5G Phi=0deg

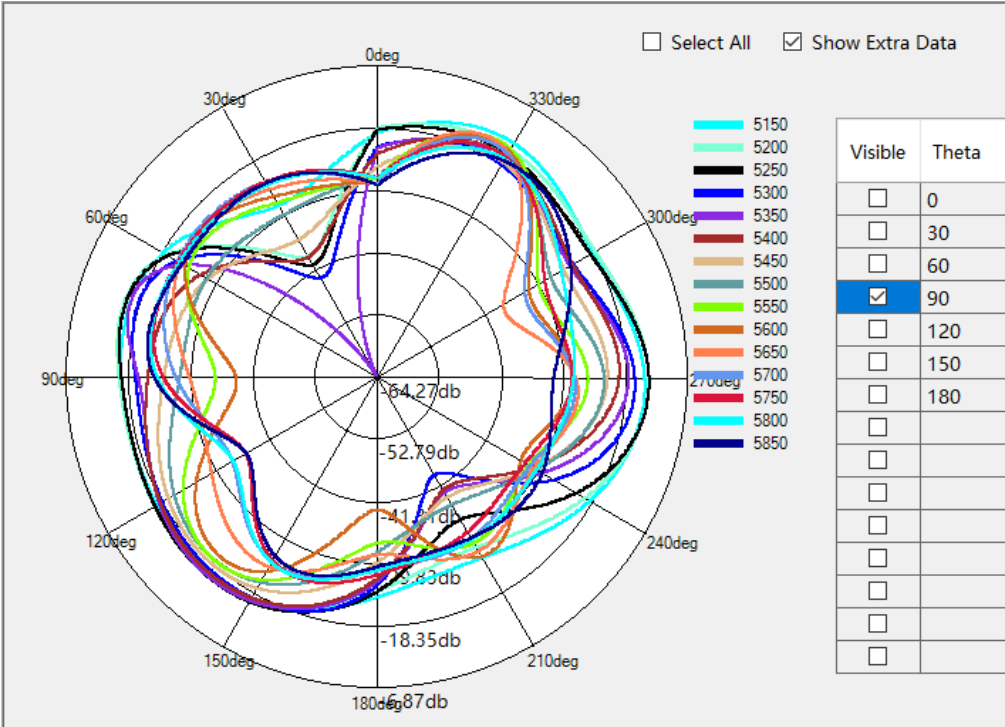


5G Phi=90deg

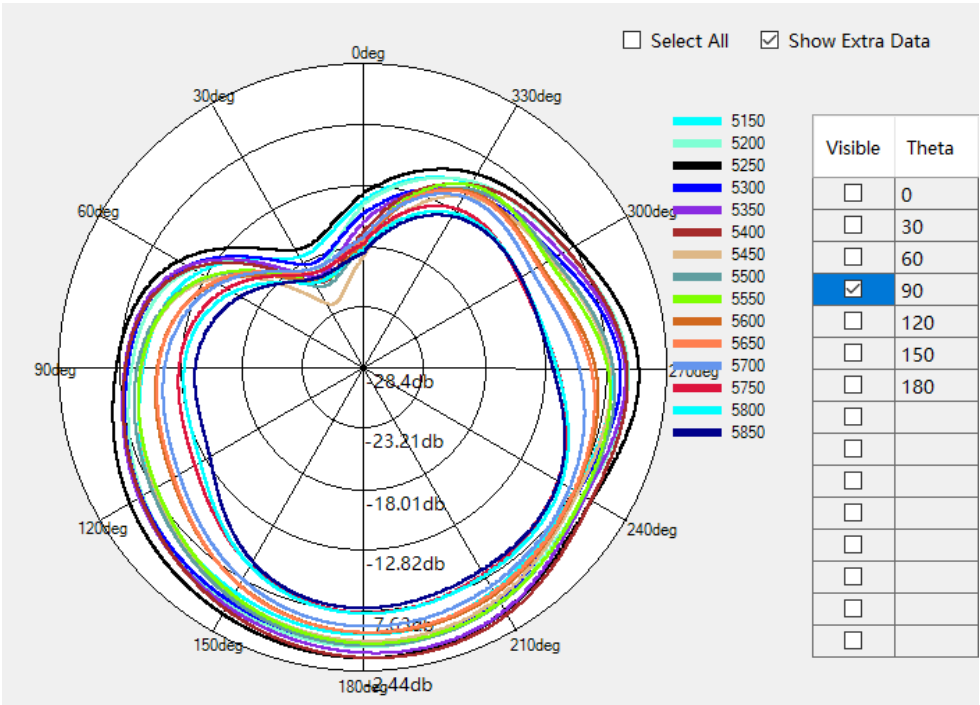


5G Theta=90deg


ANT 1

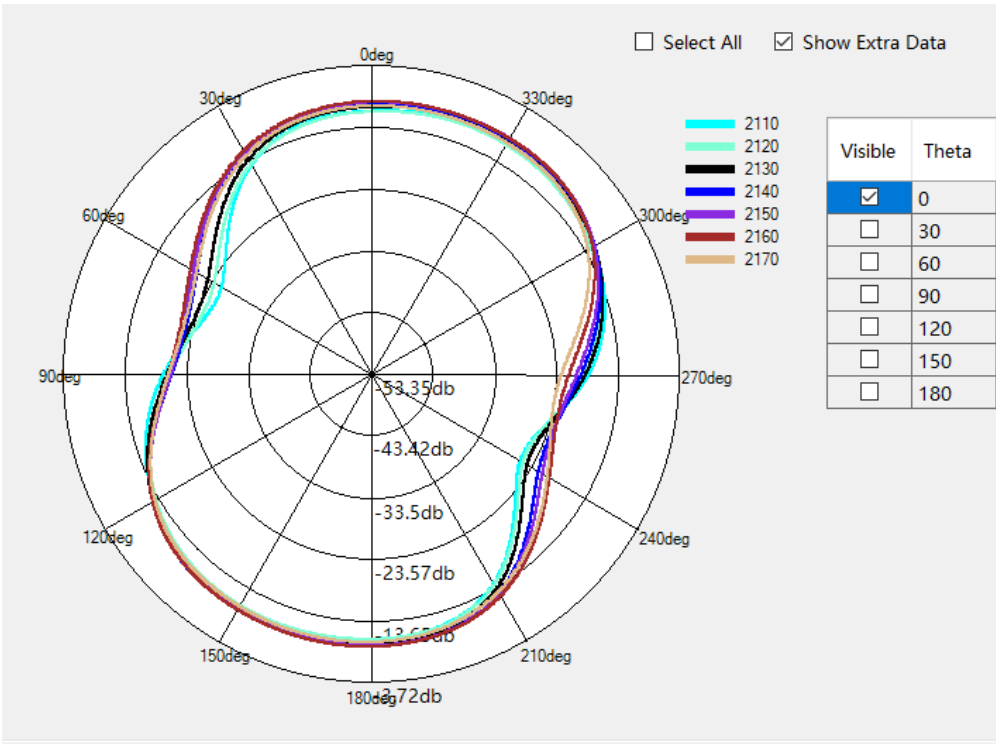


B1 Phi=0deg

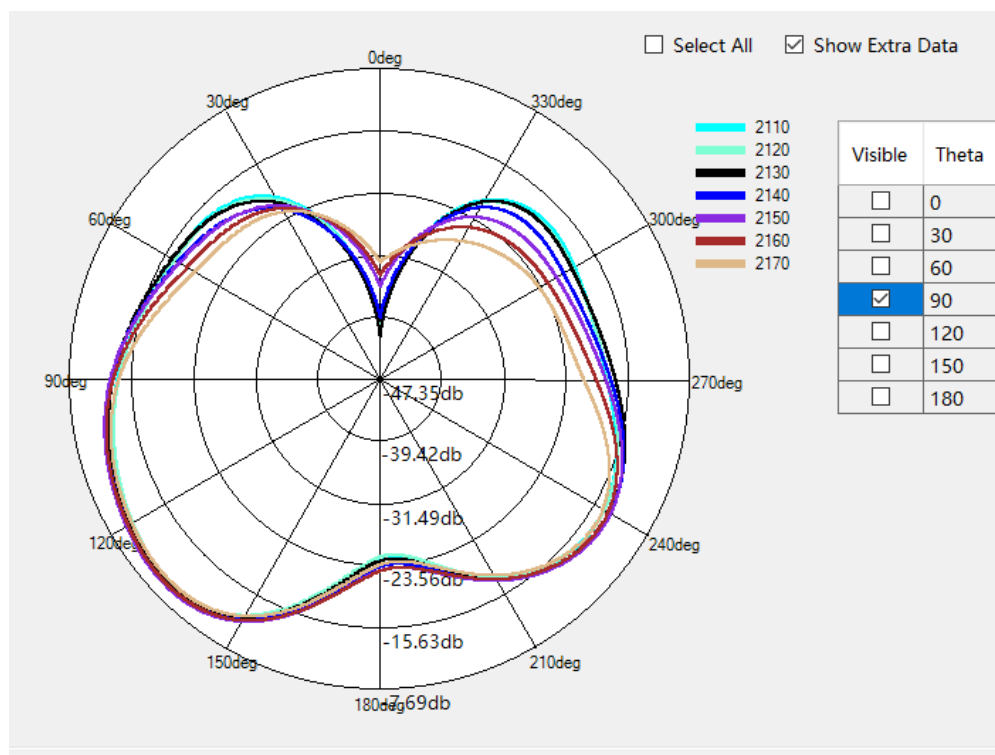


B1 Phi=90deg

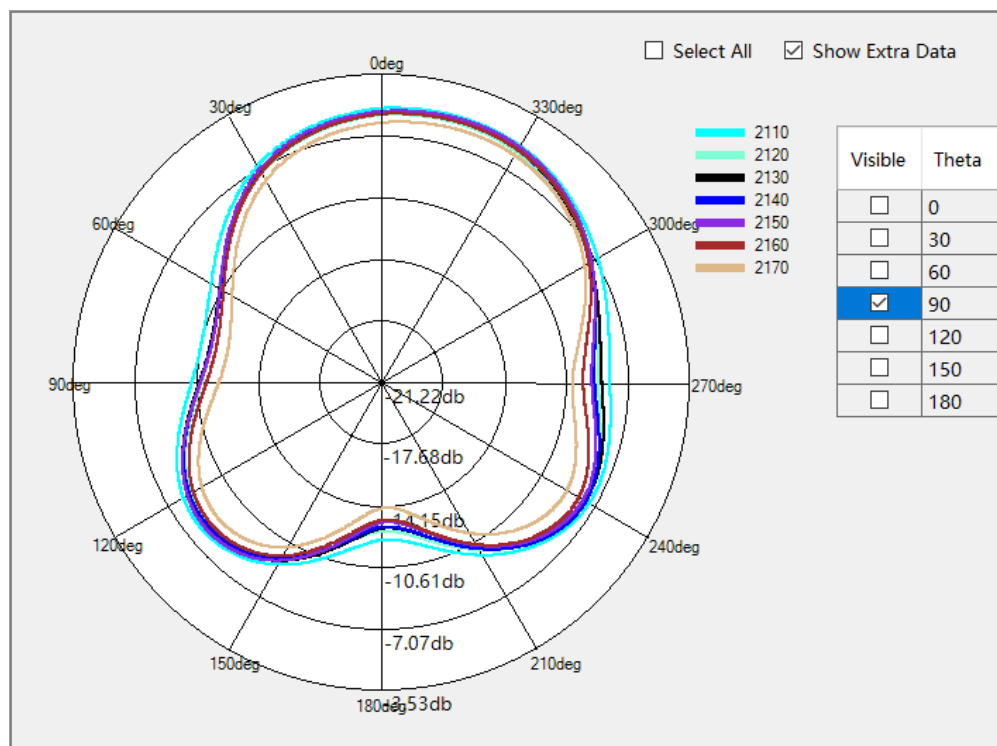


B3 Theta=90deg

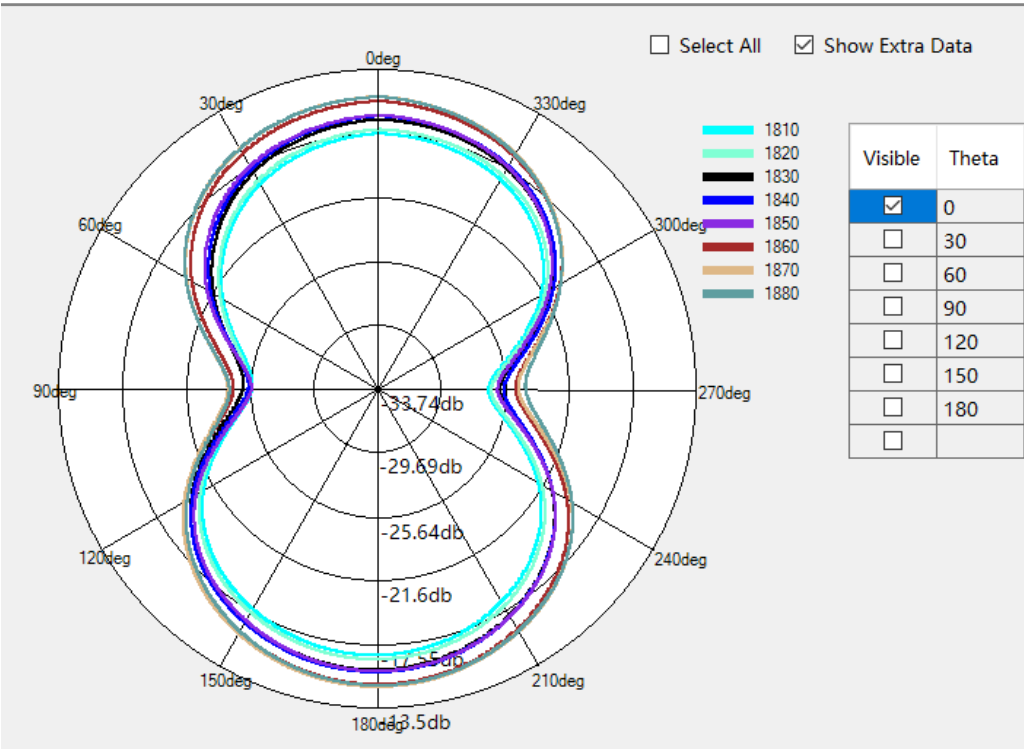

B1 Phi=0deg

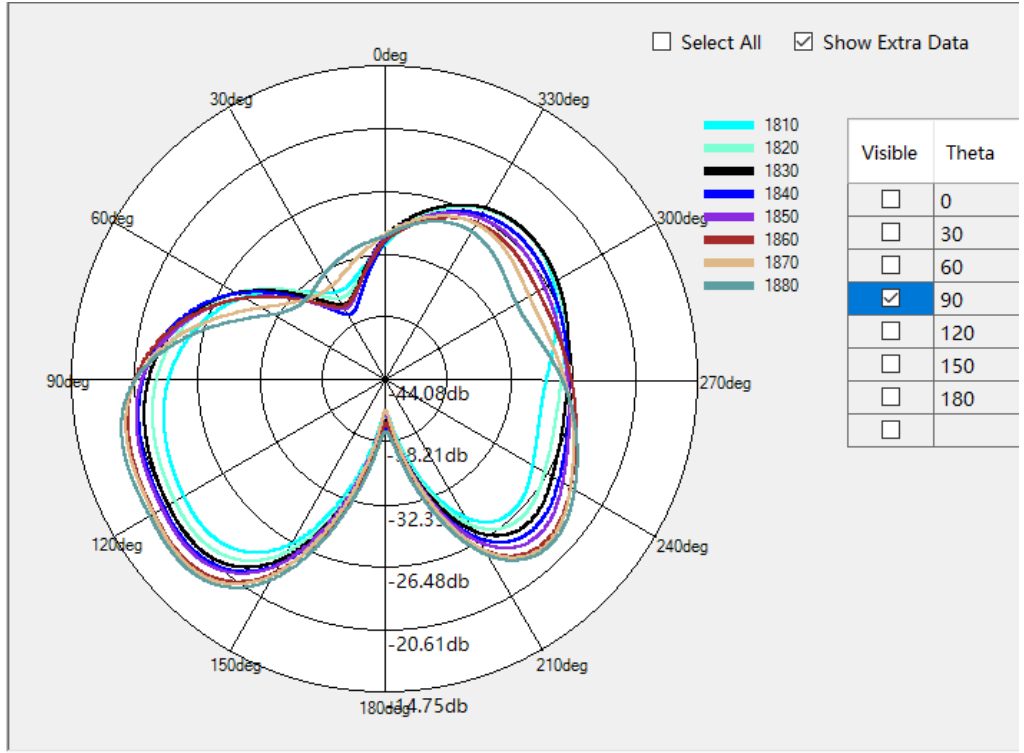

B3 Phi=90deg

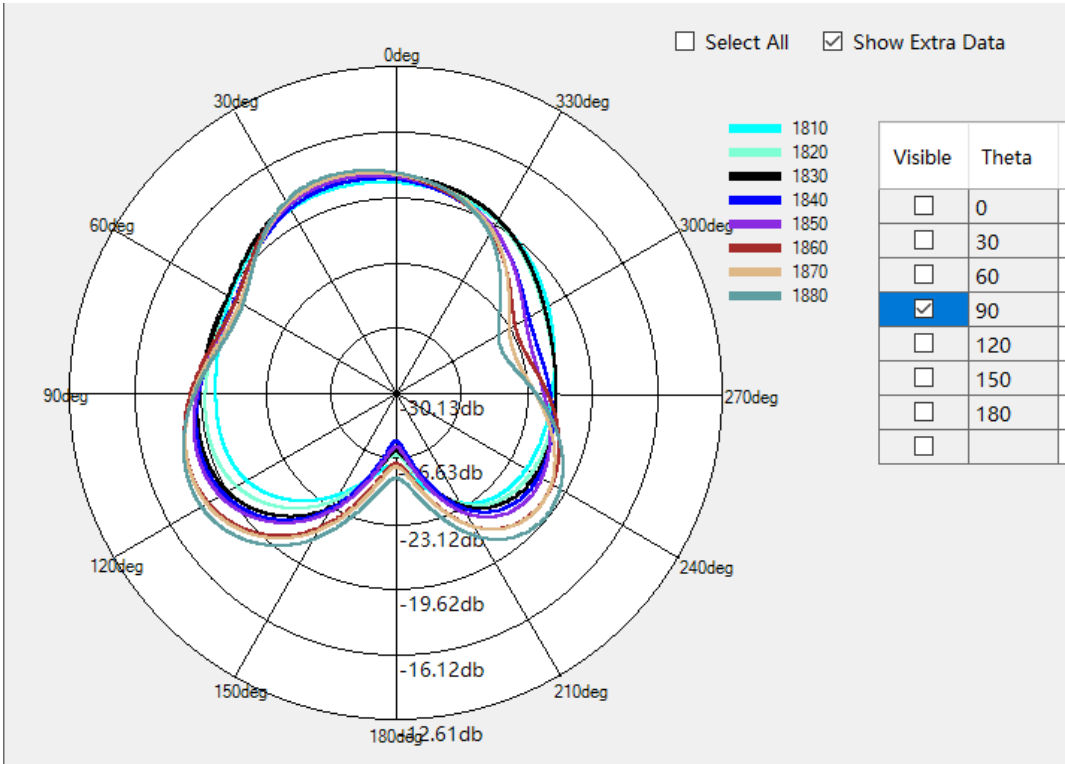

B3 Theta=90deg

PREPARED BY	CHECKEDBY	APPROVAL BY	S.R.NO	
			DATE:	2023/11/15