

# XKT28 产品说明书\_80g书写纸\_黑白印刷\_风琴折\_60X90mm

英

MONSTER®




Monster Airmars XKT28  
True wireless Bluetooth headphone  
instruction manual


## PRODUCT PARAMETERS

- Bluetooth version ----- V5.4
- Transmission distance -----  $\geq 10\text{m}$
- Driver diameter -----  $\Phi 10\text{mm}$
- Driver Impedance -----  $32\Omega \pm 15\%$
- Sensitivity -----  $118 \pm 3\text{dB}$
- Frequency response -----  $20\text{Hz} - 20\text{kHz}$
- Battery capacity(Charging case) -----  $400\text{mAh}$  3.7V
- Battery capacity(Headphone) -----  $35\text{mAh}$  3.7V
- Charging time(Charging case) -----  $\approx 2$  hours
- Music playtime(Headphone) -----  $\approx 4$  hours
- Music playtime with charging case -----  $\approx 18$  hours

## PRODUCT SCHEMATIC DESCRIPTION

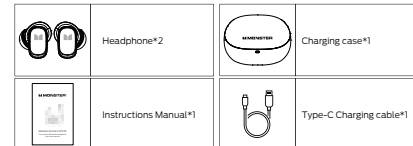


## PRODUCT SCHEMATIC DESCRIPTION

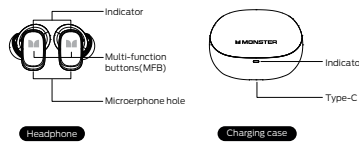

## Charge the charging case

Connect the charging case to the 5V power adapter with Type-C charging cable.



Rated input: 5V $\approx$ 30mA(Headphone) Rated input: 5V $\approx$ 300mA(Charging case)

**Warm tip: When the charging box cover is closed, the charging box indicator light flashes ice blue, please charge the charging box.**

## Indicator guide

Mode	Describe	Sound prompt
Power On	The ice blue light of the headset blinks 3 times	"Power on"
Power Off	The red indicator of the headset is on for 1 second	"Power off"
Pairing	The red and blue indicators on the headset blink alternately	"Pairing"
Connected	Headphones LED indicator is off.	"Connected"
Disconnected	The red and blue indicators on the headset blink alternately	"Disconnected"
Low Battery	The red indicator on the headset blinks	"Battery low"
Headphones placed in charging case	The red indicator of the headphone is on The ice blue indicator light of the charging case is bright	---
Charging case low power	Boîte de charge ice blue indicator clignotant	---
Charging case charged	The charging case indicator blinks red	---
Charging case fully charged	The indicator of the charging case keeps on red	---

## PRODUCT OPERATING INSTRUCTIONS

### 1. Power on

- Method 1: Open the cover of the charging case and the headphones turn on automatically.
- Method 2: Long press the MFB button of the left/right headphones for about 3 seconds to power on the headphones.


### 2. Power off

- Method 1: Put the headphones back in the charging case, close the charging case cover, and turn off the headphones.
- Method 2: The device automatically shuts down after 3 minutes of disconnection from the Bluetooth device.

### 3. Pairing

- Step one: Open the cover of the charging case and the headphones turn on automatically.
- Step two: Open the Bluetooth list of smart devices, search for "Monster Airmars XKT28" to pair, and the connection is successful. After that, you will hear the "Connected" tone

\* Headphones will try reconnecting to the device within 3 minutes when connection is lost.



## NOTE

- \* Fully charge the headphones and power off before an intended not-in-use period.
- \* Unplug the charging cable after charging.

## Operation

### Normal

- Voice assistant: Press and hold left MFB for 2 seconds
- Volume +: Click right MFB
- Volume -: Click left MFB

## Music playback

- Pause/Play: Double click Left/Right MFB
- Last song: Three hits left MFB
- Next song: Three hits right MFB

## Phone

- Answer: Double click the left/right MFB
- Reject: Long press left/right MFB for 2 S
- Hang up: Double click the left/right MFB

## Game/Music/ANC/Transparent switch: connected device

- Game mode: Press and hold right earphone MFB for 2 seconds enter Game mode
- Music mode: Press and hold right earphone MFB for 2 seconds enter Music mode
- ANC mode: Press and hold right earphone MFB for 2 seconds enter ANC mode
- Transparent mode: Press and hold right earphone MFB for 2 seconds enter transparent mode

## RESTORE FACTORY SETTINGS

If the headset is not paired with the Bluetooth device after the headset is turned on, the left/right headset is paired successfully. After clicking the left/right headset for 5 times, the left/right ear is turned off (all information about pairing and connection is cleared).

## PRECAUTIONS

1. Take out the earphone from the charging box, without pressing any button, the earphone will automatically turn on, connect or pair, put the earphone into the charging box, and the charging box will automatically charge your headphones. Turn them off.
2. Often clean, long life, if not used for a long time, it is recommended to charge once every 15 days to extend battery life, and the charging part of the headset is often used with cotton swabs Alcohol wipe, can help smooth charging, avoid bad contact, affect the use experience.
3. The battery (battery pack or battery combination) shall not be exposed to lighting, baking or similar overheating environment; Do not disassemble, knock, squeeze or throw in the fire, if there is serious swelling, do not continue to use; Do not place in high temperature environment; Do not use after soaking water.
4. Because this product adopts wireless connection mode, it is affected by environment, mobile phone brand, usage behavior and other factors in daily use. It may be normal to have a brief, slight sound delay during the playing of music.

## Warnings

1. Do not use headphones at high volume for an extended period of time.
2. Keep the headphones away from dust and water.
3. Do not disassemble the headphones and accessories, otherwise warranty will be voided.
4. Keep headphones away from any impact or vibration.
5. Do not use any chemical solvents or cleaning agent on the headphones.

Name of the Parts	Hazardous Substances					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
Housing	O	O	O	O	O	O
Loudspeakers	O	O	O	O	O	O
PCBA	X	O	O	O	O	O
Accessories	X	O	O	O	O	O

This table is compiled according to SJ/T 11364

O: Indicates that this hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in GB/T 26572.

X: Indicates that this hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in GB/T 26572.

## FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm from the radiator and your body.



FCC ID: 2ABPV-Q5MXXT28

Environment Friendly Use Period (EFUP)

This logo refers to the period (10 years) during which the hazardous substances in electronic and electrical products will not leak or mutate so that the use of these [substances] will not result in any severe environmental pollution, any bodily injury or damage to any assets.

## WARRANTY SERVICE

Dear user, this warranty card is the proof of your future warranty application, please cooperate with the seller to fill it out and keep it for future use!

### User Info

User name	Email	
Contact number	Postal code	

### Mailing address

Product information		
Product name	Product number	
Product barcode / Serial number / Batch number		

### Vendor information

Name	
Address	
Contact number	Postal code
Sales date	Invoice number
Remark	

