


J51-CY 五国语言

成品尺寸：60*110mm 骑马钉

J51 Bluetooth Transmitter Receiver

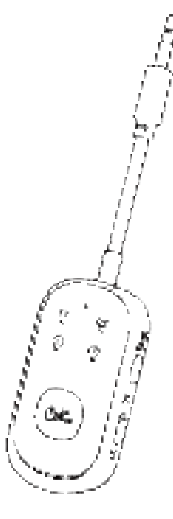


User Manual

EN

Specifications:

Bluetooth Version: V5.3
Operation Frequency Range: 2.4GHz-2.48GHz
Output Power Category: Class1
Bluetooth Mode: HFP/HSP/A2DP/AVRCP
Range: Up to 33ft
Battery: 250mAh
Working Current: 20-25mA
Charge Voltage: DC 5.0V
Charge Current: 15

Product Diagram:

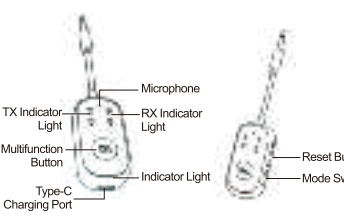


Charge the Device:

1. Before first use, please fully charge the product. The indicator light will remain red during charging and turn off when charging is complete.
2. When the device is in the power mode, the indicator light will flash red. Please charge it promptly using a DC 5V power source only (do not use a power source higher than 5V).

Note:

If not used for a long period of time, please charge at least once every three months.

Transmitter and Receiver Mode:




Transmitter Mode (TX): Used to transmit audio from a wired headphone jack, such as an airplane, TX, or headset at the port, to your headphones or Bluetooth earphones. In transmitter mode, it can only be paired with your Bluetooth earphones and is not compatible with phones, MP3 players, tablets, etc.

Receiver Mode (RX): Used to receive Bluetooth audio from devices such as smartphones or tablets and transmit it to the connected audio system (e.g., car) (only via the AUX-in port). In receiver mode, it can only be paired with your Bluetooth-enabled phone, MP3 player, tablet, etc., and is not compatible with Bluetooth earphones or Bluetooth speakers.


Transmitter Mode: Pair with Bluetooth headphones or Bluetooth speakers:

1. Slide the switch to the "TX" side, and the rear indicator light will flash blue and red, indicating it is in pairing mode.
The blue light fast flashing


2. Turn on your Bluetooth earphones or Bluetooth speaker and ensure they are in pairing mode.



3. This product will pair with your Bluetooth earphones, and when the indicator light flashes blue every 5 seconds, it indicates a successful pairing.




4. Now you can enjoy your music from your non-Bluetooth media device through the Bluetooth speaker/Bluetooth earphones!




Pair with second Bluetooth headphones or Bluetooth speakers:

1. After pairing with the first Bluetooth earphone, long-press the reset button for 3 seconds. The indicator light will flash blue and red, indicating entering pairing mode.
The indicator light flashes blue and red

2. Turn on the second Bluetooth earphone and ensure it is in pairing mode.




3. This product will pair with your Bluetooth earphones. When the blue indicator light flashes every 5 seconds, it indicates a successful pairing.




Receiver Mode: Pairing with your Bluetooth-enabled smartphone, tablet, etc.:

1. Slide the switch to the "RX" side. The indicator light rapidly flashes red and blue, indicating it is in pairing mode.
Red and blue lights flashing


2. Enable the Bluetooth function on your smartphone and search for "J51" to connect.




4. Now you can pair two earphones simultaneously with the product, allowing you to enjoy it with a friend.

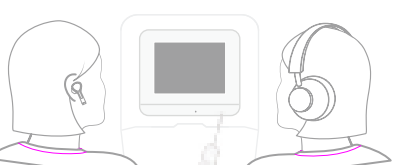

3. Connect the product to your input port, such as headphones/speakers or car stereo system, using the provided 3.5mm audio cable.

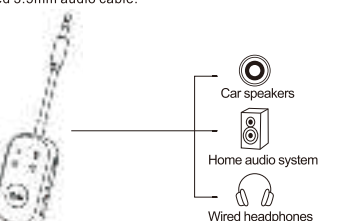


4. Now you can wirelessly enjoy music or answer hands-free calls.



Pair with second smartphones, tablets, etc.

1. After successfully pairing with the first smartphone, turn off the Bluetooth function of the first smartphone, and the product will enter the pairing mode again.
2. Turn on the Bluetooth function of the second smartphone, search for "J51" and connect.



3. Turn on the Bluetooth function of the first smartphone, and select "J51" in your pairing history.
4. Now, two smartphones are connected to the receiver at the same time.

Instructions:

Function	Operations
Power On	Long press the MFB for 2 seconds
Power Off	Long press the MFB for 5 seconds
Play/Pause/Resume/Stop	Press the MFB once
Recall the last number/Repeat # call	Press the MFB twice
Activate Siri on mobile phone	Triple press the MFB
Switching between call and headphones mode	Long press the MFB for 2 seconds
Clear pairing information	Triple-click the reset button while connected in RX/TX mode

Auto Connect:

The product will automatically pair with the last connected device when next turned on. (Before turning on the Bluetooth receiver, turn on the Bluetooth of your smart device.)

Auto Power Off:

The product will power off automatically if not paired with any device in 5 minutes.

Trouble Shooting:

Q1: The product cannot pair with your Bluetooth-enabled phone, MP3, etc.

1. Make sure the switch is slid to the "RX" side.
2. Check the Bluetooth list on your phone, MP3 player, etc., and re-pair.

Q2: The product cannot pair with Bluetooth speakers/Bluetooth earphones.

1. Make sure the switch is slid to the "TX" side.
2. Make sure that only one Bluetooth speaker or Bluetooth earphone is turned on in your vicinity.

Q1: The range of Bluetooth or the sound quality is not good.

The Bluetooth signal can be blocked by surrounding objects and reduce the audio quality, please put the right position without a barrier between the adapter and your phone (or other devices).

Q4: Why is there a delay?

There is a data transmission process between the two devices, which can sometimes cause a perceived delay. This is a common issue with all Bluetooth devices and Bluetooth 5.3.

Q5: Why does the indicator light not light up after selecting the mode?

Please ensure that the product is fully charged before use.

Packing List:

Bluetooth Transmitter and Receiver * 1
Type-C Charging Cable * 1
User Manual * 1

FCC Compliance Statement:


Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a class B digital device, under Part 15 of the FCC rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

Correct Disposal Of This Product:

 (Waste Electrical & Electronic Equipment)
The marking shown on the product or its literature indicates that it should not be disposed of with other household wastes at the end of its working life.
To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of waste and recycle it responsibly to promote the sustainable reuse of material resources.
Household users should contact the retailer where they purchased the product or their local government office for details of where and how they can take this product for environmentally friendly recycling.
Business users should contact their suppliers and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.