

EN

Reloop RMX-30 BT

Mixer

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

IC warning:

This device contains licence-exempt transmitter(s)/receiver(s)/ that comply with Innovation Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- 1) this device may not cause interference and
- 2) this device must accept any interference, including interference that may cause undesired operation of the device.

Radiation Exposure: This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment; To maintain compliance with IC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

Déclaration de l'ISED Canada:

Cet appareil contient des tasmittre (s) / récepteur (s) sans licence / conformes à l'innovationRSS exemptes de licence de Sciences et Développement économique Canada.

L'opération est sous réserve des deux conditions suivantes :

- 1) cet appareil ne peut pas causer d'interférences et
- 2) ce dispositif doit accepter toute interférence, y compris peut provoquer le fonctionnement indésirable de l'appareil.

Exposition aux rayonnements : Cet équipement est conforme aux radiations du Canada limites d'exposition pour un environnement incontrôlé noncé d'exposition RF Pour maintenir le respect des guides d'exposition RF d'IC, cquipment doit être installé et actionné avec une distance minimale de 20cm le radiateur de votre corps. Cet appareil et ses antennes ne doivent pas être co-localisé ou en opération en conjonction avec toute autre antenne ou émetteur.

Operation Manual

ATTENTION! For your own safety, please read this operation manual carefully before the initial operation! All persons involved in the installation, setting-up, operation, maintenance and service of this device must be appropriately qualified and observe this operation manual in detail. This product complies with the requirements of the applicable European and national regulations. Conformity has been proven. The respective statements and documents are deposited at the manufacturer.

WARNING!

To prevent fire or avoid an electric shock do not expose the device to water or fluids!
Never open the housing!

Keep information for further reference!

Reloop Trademark

Global Distribution GmbH & Co. KG

Schuckertstr. 28

48153 Muenster / Germany

© 2024

UK Distribution:

Henley Designs Ltd.

Unit B, Park 34, Collet


OX11 7WB, Didcot, Oxfordshire, UK

Japanese Distribution:

3-Channel Bluetooth Mixer

Voltage AC 100 - 240 V, 50/60 Hz

Ginza Jujilya Co., Ltd.

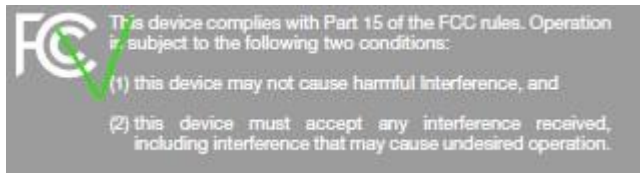

Before operating this equipment we ask you to carefully study and observe all instructions. Please remove the RMX-30 BT from its packaging. Check before an initial operation to make sure that the device has not been visibly damaged during transport. If you detect any damage to the power cable or the casing, do not operate the device. Contact your specialized dealer.

SAFETY INSTRUCTIONS

CAUTION! Please exercise particular caution when handling power voltage. This voltage rating may lead to a critical electrical shock! Any damage caused by the non-observance of this operation manual excludes any warranty claims. The manufacturer is not liable for any damage to property or for personal injury caused by improper handling or non-observance of the safety instructions.

- This device left the factory in perfect condition. To maintain this condition and to ensure a risk-free operation the user must observe the safety instructions and warnings contained in this operation manual.
- For reasons of safety and certification (CE) the unauthorized conversion and/or modification of the device is prohibited. Please note that in the event of damage caused by the manual modification to this device, any warranty claims are excluded.
- The inside of the device does not contain any parts which require maintenance, with the exception of worn parts that can be exchanged from the outside. Qualified staff must carry out maintenance, otherwise, the warranty does not apply!

- The AC inlet acts as a disconnect device. Ensure that power is not applied until the unit is fully set up. Always connect the mains plug last. Ensure that the mains switch is in the OFF position when connecting the unit to the power supply.
- Only use cables that comply with regulations. Observe that all jacks and bushes are tightened and correctly hooked up. Refer to your dealer if you have any questions.
- Ensure that when setting up the product the power cable is not squashed or damaged by sharp edges.
- Disconnect the device when not in use and before cleaning! Be sure to hold the power plug by the body. Never pull the power cord!
- Position the device on a horizontal and stable base.
- Avoid any concussions or violent impact when installing or operating the device.
- When selecting the location of installation make sure that the device is not exposed to excessive heat, humidity, and dust. Be sure that no cables lie around openly. You will endanger your own safety and that of others!
- Do not rest any containers filled with liquid that could easily spill onto the device or its immediate vicinity. If, however, fluids should access the inside of the device, immediately disconnect the power plug. Have the device checked by a qualified service technician before reuse. Damage caused by fluids inside the device is excluded from the warranty.
- Do not operate the device under extremely hot (in excess of 35° C) or extremely cold (below 5° C) conditions. Keep the device away from direct exposure to the sun and heat sources such as radiators, ovens, etc. (even during transport in a closed vehicle). Never cover the cooling fan or vents. Always ensure sufficient ventilation.
- The device must not be operated after being taken from a cold environment into a warm environment. The condensation caused at this moment may destroy your device. Do not switch on or operate the device until it has reached ambient temperature!

- Controls and switches should never be treated with spray-on cleaning agents and lubricants. This device should only be cleaned with a damp cloth. Never use solvents or cleaning fluids with a petroleum base for cleaning.
- When relocating, the device should be transported in its original packaging.
- At commercial facilities, the regulations for the prevention of accidents as stipulated by the organization of professional associations must be observed.
- At schools, training facilities, hobby and self-help workshops the operation of the device must be monitored with responsibility by trained staff.
- Keep this operation manual in a safe place for later reference in the event of questions or problems.

APPLICATION IN ACCORDANCE WITH REGULATIONS

- This device is a mixing console which can regulate and mix low level audio signals. The device is thereby connected between a signal source and an audio amplifier or active speakers, respectively.
- If the device is used for other purposes than those described in the operation manual, damage can be caused to the product, leading to the exclusion of warranty rights. Moreover, any other application that does not comply with the specified purpose harbors risks such as short circuits, fires, electrical shocks, etc.
- The serial number determined by the manufacturer must never be removed to uphold the warranty rights.

MAINTENANCE

- Check the technical safety of the device regularly for damage to the power cable or the casing, as well as for wear out of wear parts such as buttons and switches.
- If it is to be assumed that a safe operation is no longer feasible then the device must be disconnected and secured against accidental use. Always disconnect the power cable from the outlet!

- It must be assumed that a safe operation is no longer feasible if the device bears visible defects, if the device no longer functions, following longer storage under unfavorable conditions or after major transport stress.

[GRAFIK OVERVIEW]

DESIGNATIONS

1. Signal Input Switch
2. Gain
3. 3-Band Equalizer
4. Linefader
5. Crossfader
6. Bluetooth Button
7. Mic Level
8. Mic Equalizer
9. Cue Mix
10. Cue Level
11. Cue Select Button
12. Master Volume
13. Master Signal LED
14. Headphone Output
15. Microphone Input
16. On/Off Switch
17. Mains Connection
18. Master Out XLR
19. Master Out RCA
20. Rec Out RCA
21. Channel Inputs
22. GND Grounding Screw

CONNECTION

1. LINE SIGNALS

Connect your line sources (DC player, controller, etc.) to the corresponding Line/CD Channel Inputs for channels 1-3 (21).

2. PHONO SIGNALS

Connect your phono sources to the corresponding Phono Channel Inputs of channels 1-3 (21). Connect your turntables' grounding cables to the GND grounding screws (22).

3. MICROPHONE CONNECTION

Connect your microphone to the Microphone Input (15).

4. HEADPHONES

Connect your headphones to the Headphone Output (14).

5. MASTER OUT

Connect your sound system to Master Out XLR Balanced (18) or RCA Unbalanced (19).

6. POWER SUPPLY

Connect the power cable to the Mains Connection (17). Connect the power cable to your power outlet.

7. RECORD OUT

Connect a recording device of your choice to Rec Out RCA (20). The record output delivers a steady signal which is independent from the master output.

OPERATION

1. POWER ON

After all connections have been carried out, you can turn on the device via the On/Off Switch (16).

2. SIGNAL INPUT SELECT

Via the Signal Input Switch (1) you can select between phono, line and Bluetooth sources. Please observe the captions of the signal input switches.

3. GAIN

Via the Gain Knobs (2) you can adjust the input volume for the respective channel.

4. EQUALIZER

With the 3-Band Equalizers (3) you can adjust low, mid and high frequencies for the respective channel.

5. LINEFADER

The Linefaders (4) are used to adjust the output volume for the respective channel.

6. CROSSFADER

With the Crossfader (5) it is possible to switch between the left and right crossfader channel.

7. MIC

You can adjust the volume via the Mic Level Knob (7). The signal is directly routed to the Master Output. You can equalize the Mic signal with the Mic Equalizer (8).

8. MONITORING

Via the Cue Mix Knob (9) you can determine the volume balance between the selected channel and master signal. This way you can simulate a mix via your headphones. Use the Cue Level Knob (10) to adjust your headphones volume. Via the Cue Select Buttons (11) you can determine which channel you would like to monitor.

9. MASTER SECTION

Via the Master Volume Knob (12) you can adjust the master output volume. Make sure that the LED (13) for the master signal is only visible in the yellow range.

10. BLUETOOTH CONNECTION

Use the Bluetooth Button (6) to connect your RMX-30 BT wirelessly via Bluetooth to an external playback device. Upon successful connection, the Bluetooth Button (6) will be permanently lit.

NOTE: Please also refer to your playback device's manual.

If the RMX-30 BT is not connected to a Bluetooth device, the Bluetooth Button (6) will blink.

NOTE: If the RMX-30 BT is not connected to a Bluetooth device for more than 30 minutes, the Bluetooth connection will be turned off automatically. In this case the Bluetooth Button (6) will not be lit. If you would like to reactivate the Bluetooth function, press the Bluetooth Button (6) for approximately two seconds.

TECHNICAL DATA

Power Supply: AC 100 - 240 V, 50/60 Hz

Power Consumption: 3.5 W

Frequency Response: 20 Hz - 20 kHz

Inputs: 2x Phono RCA, 4x Line RCA, Mic TS, 1x Bluetooth In

Outputs: Master XLR Balanced, Master RCA Unbalanced, Rec RCA, Headphone 6.3 mm Jack

EQ Range at 100 Hz, 1 kHz, 10 kHz

Dimensions (W x D x H): 255 x 306 x 106 mm (potentiometers: 21.5 mm)

Weight: 2.59 kg

SCOPE OF DELIVERY

RMX-30 BT, power cord, instruction manual

Reloop

a division of Global Distribution GmbH & Co. KG
Schuckertstraße 28
48153 Muenster / Germany
www.reloop.com

Subject to alterations.
Illustrations similar to original product.
Misprints expected.

Declaration of Conformity with regard to the Radio Equipment Directive 2014/53/EU

Manufacturer: Global Distribution GmbH & CO. KG Schuckertstraße 28, 48153 Münster, Germany

English: Hereby, "Global Distribution GmbH & CO. KG" declares that the radio equipment type [*] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://www.reloop.com/product-compliance>

Suomi: "Global Distribution GmbH & CO. KG" vakuuttaa, että radiolaitetyyppi [*] on direktiivin 2014/53/EU mukainen. EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: <https://www.reloop.com/product-compliance>

Nederlands: Hierbij verklaar ik, "Global Distribution GmbH & CO. KG", dat het type radioapparatuur [*] conform is met Richtlijn 2014/53/EU. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: <https://www.reloop.com/product-compliance>

Français: Le soussigné, "Global Distribution GmbH & CO. KG", déclare que l'équipement radioélectrique du type [*] est conforme à la directive 2014/53/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante: <https://www.reloop.com/product-compliance>

Svenska: Härmed försäkrar "Global Distribution GmbH & CO. KG" att denna typ av radioutrustning [*] överensstämmer med direktiv 2014/53/EU. Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: <https://www.reloop.com/product-compliance>

Dansk: Hermed erklærer "Global Distribution GmbH & CO. KG", at radioudstyrstypen [*] er i overensstemmelse med direktiv 2014/53/EU.

EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse: <https://www.reloop.com/product-compliance>

Deutsch: Hiermit erklärt "Global Distribution GmbH & CO. KG", dass der Funkanlagentyp [*] der Richtlinie 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: <https://www.reloop.com/product-compliance>

Ελληνικά: Με την παρούσα ο/η "Global Distribution GmbH & CO. KG", δηλώνει ότι ο ραδιοεξοπλισμός [*] πληροί την οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: <https://www.reloop.com/product-compliance>

Italiano: Il fabbricante, "Global Distribution GmbH & CO. KG", dichiara che il tipo di apparecchiatura radio [*] è conforme alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: <https://www.reloop.com/product-compliance>

Español: Por la presente, "Global Distribution GmbH & CO. KG" declara que el tipo de equipo radioeléctrico [*] es conforme con la Directiva 2014/53/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: <https://www.reloop.com/product-compliance>

Português: O(a) abaixo assinado(a) "Global Distribution GmbH & CO. KG" declara que o presente tipo de equipamento de rádio [*] está em conformidade com a Diretiva 2014/53/UE. O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet: <https://www.reloop.com/product-compliance>

Čeština: Tímto "Global Distribution GmbH & CO. KG" prohlašuje, že typ rádiového zařízení [*] je v souladu se směrnicí 2014/53/EU. Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese: <https://www.reloop.com/product-compliance>

Eesti: Käesolevaga deklareerib "Global Distribution GmbH & CO. KG", et käesolev raadioseadme tüüp [*] vastab direktiivi 2014/53/EL nõuetele. ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: <https://www.reloop.com/product-compliance> 35NOTES

Magyar: "Global Distribution GmbH & CO. KG" igazolja, hogy a [*] típusú rádióberendezés megfelel a 2014/53/EU irányelvnek. Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen: <https://www.reloop.com/product-compliance>

Latviešu valoda: Ar šo "Global Distribution GmbH & CO. KG" deklarē, ka radioiekārta [*] atbilst Direktīvai 2014/53/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē: <https://www.reloop.com/product-compliance>

Lietuvių kalba: Aš, "Global Distribution GmbH & CO. KG", patvirtinu, kad radijo įrenginių tipas [*] atitinka Direktyvą 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu:
<https://www.reloop.com/product-compliance>

Malti: B'dan, "Global Distribution GmbH & CO. KG", niddikjara li dan it-tip ta' tagħmir tar-radju [*] huwa konformi mad-Direttiva 2014/53/UE. It-test kollu tad-dikjarazzjoni ta' konformità tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li ġej: <https://www.reloop.com/product-compliance>

Slovenčina: "Global Distribution GmbH & CO. KG" týmto vyhlasuje, že rádiové zariadenie typu [*] je v súlade so smernicou 2014/53/EÚ. Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese:
<https://www.reloop.com/product-compliance>

Slovenščina: "Global Distribution GmbH & CO. KG" potrjuje, da je tip radijske opreme [*] skladen z Direktivo 2014/53/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: <https://www.reloop.com/product-compliance>

Română: Prin prezenta, "Global Distribution GmbH & CO. KG" declară că tipul de echipamente radio [*] este în conformitate cu Directiva 2014/53/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet:
<https://www.reloop.com/product-compliance>

български: С настоящото "Global Distribution GmbH & CO. KG" декларира, че този тип радиосъоръжение [*] е в съответствие с Директива 2014/53/ЕС. Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: <https://www.reloop.com/product-compliance>

Polski: "Global Distribution GmbH & CO. KG" niniejszym oświadcza, że typ urządzenia radiowego [*] jest zgodny z dyrektywą 2014/53/UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym:
<https://www.reloop.com/product-compliance>

Norsk: Herved "Global Distribution GmbH & CO. KG" erklærer at radioutstyr type [*] er i samsvar med direktiv 2014/53/EU. Den fullstendige teksten i EU-samsvarserklæringen er tilgjengelig på følgende internettadresse:
<https://www.reloop.com/product-compliance>

Íslenska: Hér með "Global Distribution GmbH & CO. KG" lýsir yfir að tegund þráðlausan búnað [*] er í samræmi við tilskipun 2014/53/ESB. The fullur texti af ESB-samræmisýfirlýsingu er í boði á eftirfarandi veffangi:
<https://www.reloop.com/product-compliance>

Hrvatski: "Global Distribution GmbH & CO. KG" ovime izjavljuje da je radijska oprema tipa [*] u skladu s Direktivom 2014/53/EU. Cjeloviti tekst EU izjave o

sukladnosti dostupan je na sljedećoj internetskoj adresi: <https://www.reloop.com/product-compliance>

Türk: Burada. "Global Distribution GmbH & CO. KG" radyo ekipmani turunun [*]
2014/53/EU direktiflerine uyumlu oldugunu beyan eder. Avrupa uyumluluk beyaninin
tam metni belirtilen internet sitesinde mevcuttur:
<https://www.reloop.com/product-compliance>