



Wi-Fi Dual-Lens Camera **Quick Start Guide**

2 White LEDs 3 Reset button

4 SD card slot

Camera introduction

⑤ Call buttons 6 Lens Speaker 8 Power supply


2. Please insert the camera adapter, press and hold the reset button for 5 seconds to reset the camera until you hear "Di-". continue to wait for "Di-" 2 times, the camera will complete



Register an account: Click "Register" > enter your email address, set your APP passcode, check the verification code, and wait for the verification to be completed and then jump directly to the Note: if you don't want register an account, it can't remote, but


Sign up & Login

you canuse stand alone mode to view the camera. This mode




WiFi connection

Please insert the camera adapter, press and hold the reset button for 5 seconds to reset the camera until you hear "Di-" continue to wait for "Di-" 2 times, the camera will complete the

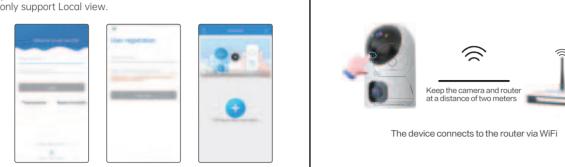

1. In the APP: click "+" > select "WiFi connection". 2. Check "Hear the device announce didi"; Click "Next".

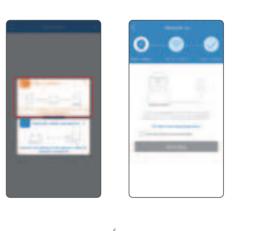


3. Follow the prompts shown in the app (please connect WiFi to JAA-*** and go back to the Cam720 APP).



4. Enter the correct password for the WiFi connection of your phone and click "Next". 5. When the device is connected, pls wait patiently until


camerais online",then click the video to view.

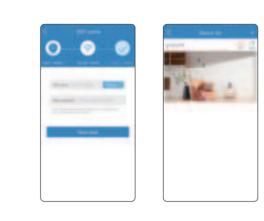

. Please confirm that the Bluetooth function is turned on. 2. After resetting the camera, wait for it "Di" two sounds, until camera completes self-test.

Bluetooth configuration


3. In the APP: Click "+" and wait for 1-2 seconds for the APP to automatically search for the camera Bluetooth signal.



Only 5MP devices support Bluetooth configuration

4. Select the Bluetooth signal of the camera, input the WiFi password and click Next.

5. Wait patiently during Bluetooth network configuration, please Note: Please ignore if you don't need for Bluetooth network configuration. If you need to use it again, please close APP then



® ® ®

3 More function settings 4 Switch image effects 12 Cruise settings

Return to the device list

Share the device

5 Turn on the microphone 6 Screenshot to save the image 7 Open the full-screen image Screen recording feature 9 Turn on voice intercom 10 PTZ rotation contro 11 Preset point settings (13) Screen recording feature 14 Turn on cloud play 5 SD card Playback 16 Message List 17 User information ¹⁸ Subscribe Cloud storage 19 Add more cameras 20 More functions setup Start Live video



7 Image inverted settings 8 Choose a call mode





 Enable/Disable Auto tracking 10 Indicator light switch (11) Choose night vision mode

12 Set the time zone (3) Switch WIFI network (4) Camera information 15 Camera version number






Switch image effects Turn on the microphone 4 Turn on voice interco Screen recording feature Close the video window Turn off full-screen images

Note: Tap the small screen 3 times in a row to switch the lens



After pressing the call button, "CAM720" will push the invitation notification, and after opening, click "Answer" to achieve a

Note: Make sure that the message push function in the detection alarm settings is turned on, otherwise the CMA720 cannot push information.

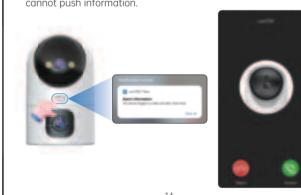




Playback


Turn on the playback function and two Record method available: SDcard record(8-128G) and Cloud Record. SD card record supports 3 record modes: 24/7 continuous, motion-triggered, scheduled record.

Download CAM720 APP from APP store or Google play, or by

Scanning the QR code above.




use a 6mm drill bit to get the hole, and then fill the rubber stopper to insert into the hole.

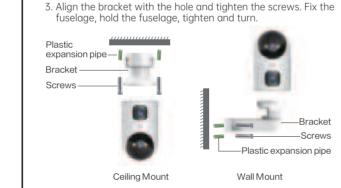

Bracket mounting

Share your camera with your friends and families 1. This camera can be placed on the desktop, or do ceil or Wall 1.Your friend should have an account of cam720 APP.

> 2.in main account, enter the Email of the friend APP account or scanthe QR code of the account to share it. 5.Freely set the permission on this shared account.

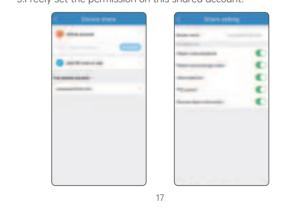


Share


Detection alarm settings

. Zoned area vigilance detection, the red part represents the planned warning area.

> mobile phone in time through the APP background. 3. Sound alarm warns suspicious characters to leave as soon as

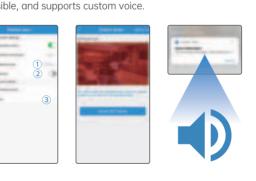

2. Warning information push, alarm information is pushed to the

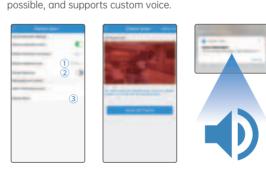

How to use it correctly

1. This product is suitable for indoor scenes, "not waterproof" please avoid outdoor installation.

2. It should be installed in a ventilated environment as much as possible to avoid unstable factors caused by long-term closed high temperature replacement. 5. The camera and the router should be controlled within 10

meters of the partition wall, and the open environment should be kept within 20 meters. 4. When using at night, do not place items in front of the camera lens and do not face the wall, glass window, mirror, etc., so as not to block the reflection of infrared rays and affect the image

5. The installation area should be away from high-power equipment to avoid signal interference and affect the use After all steps above completed, check router settings, such as: "blacklist", "firewall", "Device Internet restrictions", etc.

31 digits, and letter case;

Q2: How to do if the camera is offline always? A2: Please check conneciton of the camera adapter and socket, or replace the power supply. Check the wifi signal strength, make camera closer to router.

A3: Please use share funtion to other users.

Q3: How could multiple users view at the same time?

Q1: What should I do if WiFi configuration failed?

A1: Make sure GPS Location service is on and "Allow" is selected

Check the WiFi password is entered correctly, no more than

FCC Statement

his equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protecequipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the nstructions, may cause harmful interference to radio communiations. However, there is no guarantee that interference will ot occur in a particular installation. If this equipment does cause

harmful interference to radio or television reception, which can

be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause

undesired operation. Changes or modifications not expressly approved by the party esponsible for compliance could void the user's authority to

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be nstalled and operated with minimum distance 20cm between the radiator & your body.



Need some help? E-mail: technicalreply@qacctv.com market@qacctv.com

By scanning the QR code below to access Youtube, Selectthe right operation video for your camera according to APPand

After-sale Service & Tech Support

for user guides, FAQs, warranty & more

Model of the camera Or message seller to get the operation



