

Antenna Datasheet

Product OC: Y0REB0CA9FA

Version: 1.1

Date: 2025-04-15

Product Name: Wi-Fi & BT & GNSS Antenna

Key Features:

Frequency Band: 2400–2500 MHz, 5150–5850 MHz, 1565–1586 MHz

Dimensions: 66 mm × 21 mm × 0.75 mm

Efficiency: Up to 54.65% (Wi-Fi ANT)

RoHS and REACH Compliant

Contents

Contents	1
1 Specification.....	2
1.1. Electrical.....	2
1.2. Mechanical & Environmental	2
1.3. Antenna Assembly	3
2 Drawing	4
3 Detailed Performance	5
3.1. S-Parameter Test	5
3.1.1. VSWR.....	5
3.2. Radiation Performance Test.....	7
3.2.1. Efficiency & Peak Gain.....	7
3.2.2. 3D & 2D Radiation Pattern.....	8
4 Packaging	11
Contact Us.....	13
Legal Notices	14
Revision History	16

1 Specification

Test Condition: Assembled in test device

1.1. Electrical

Electrical	
Frequency Range	2400–2500 MHz, 5150–5850 MHz, 1565–1586 MHz
Antenna Type	Wi-Fi & BT: PIFA; GPS: Dipole
Impedance	50 Ω
Polarization	Linear
Radiation Pattern	Omni-directional
VSWR-WIFI	≤ 3.70
Peak Gain- WIFI	1.25 dBi
VSWR-GNSS	≤ 1.71
Peak Gain-GNSS	2.05 dBi

1.2. Mechanical & Environmental

Mechanical	
Antenna Dimensions	66 mm \times 21 mm \times 0.75 mm
Material & Color	FR 4 & Green
Cable Type & Length	Φ 1.13 White and 35 mm & Φ 0.81 Black and 33 mm
Connector Type	RF 4
Weight	Typ. 1.9 g
Mounting Type	Adhesive

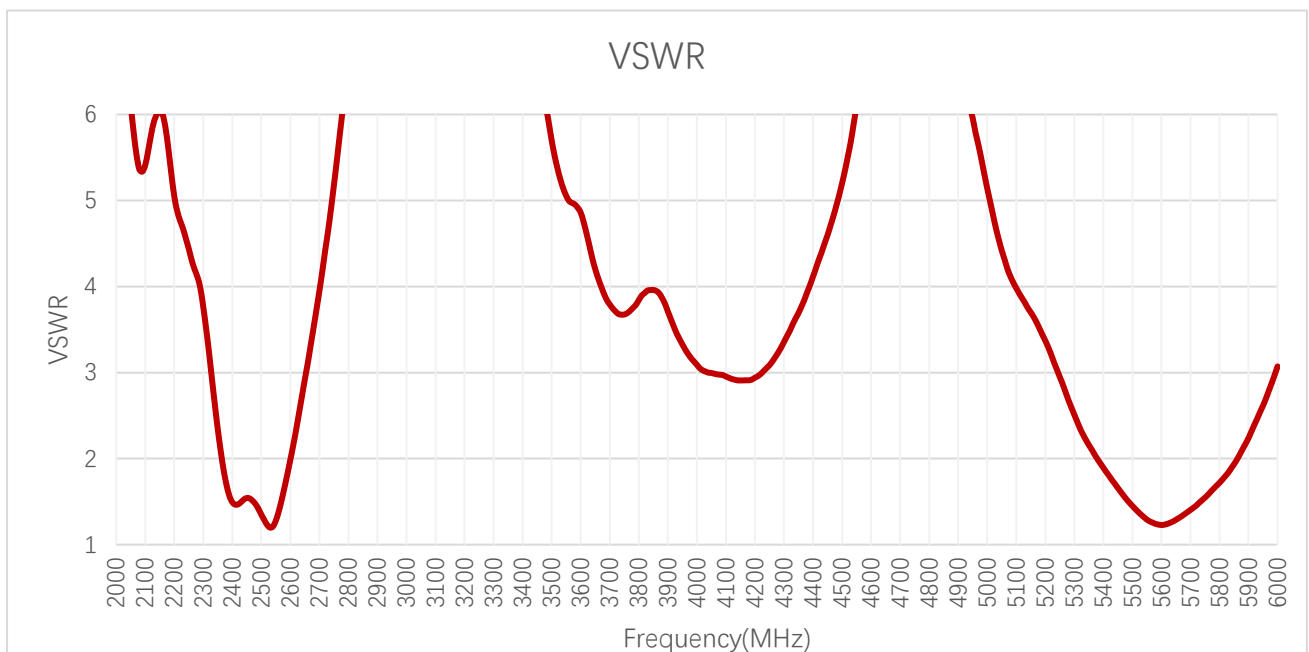
Environmental	
Operation Temperature	-40 °C to +85 °C
Storage Temperature	-40 °C to +85 °C
RoHS & REACH Compliant	Yes

3 Detailed Performance

- Network Analyzer: Keysight E5071C (Device number: QTB6331E; Calibration date: 2023-12-27; Due date: 2025-06-26)
- Chamber: OTA RayZone 2800 GTS (Device number: QTA0709; Calibration date: 2024-07-14; Due date: 2025-07-13)
- Testing Software: Libra
- Product Name: Wi-Fi & BT & GNSS Antenna
- Test Engineer: *Weston Zhang*


3.1. S-Parameter Test

3.1.1. VSWR



VSWR – Wi-Fi

Frequency (MHz)	2400	2450	2500	5150	5250	5350	5450	5550	5650	5750	5850
VSWR	1.49	1.54	1.35	3.70	2.95	2.16	1.66	1.45	1.29	1.55	1.93

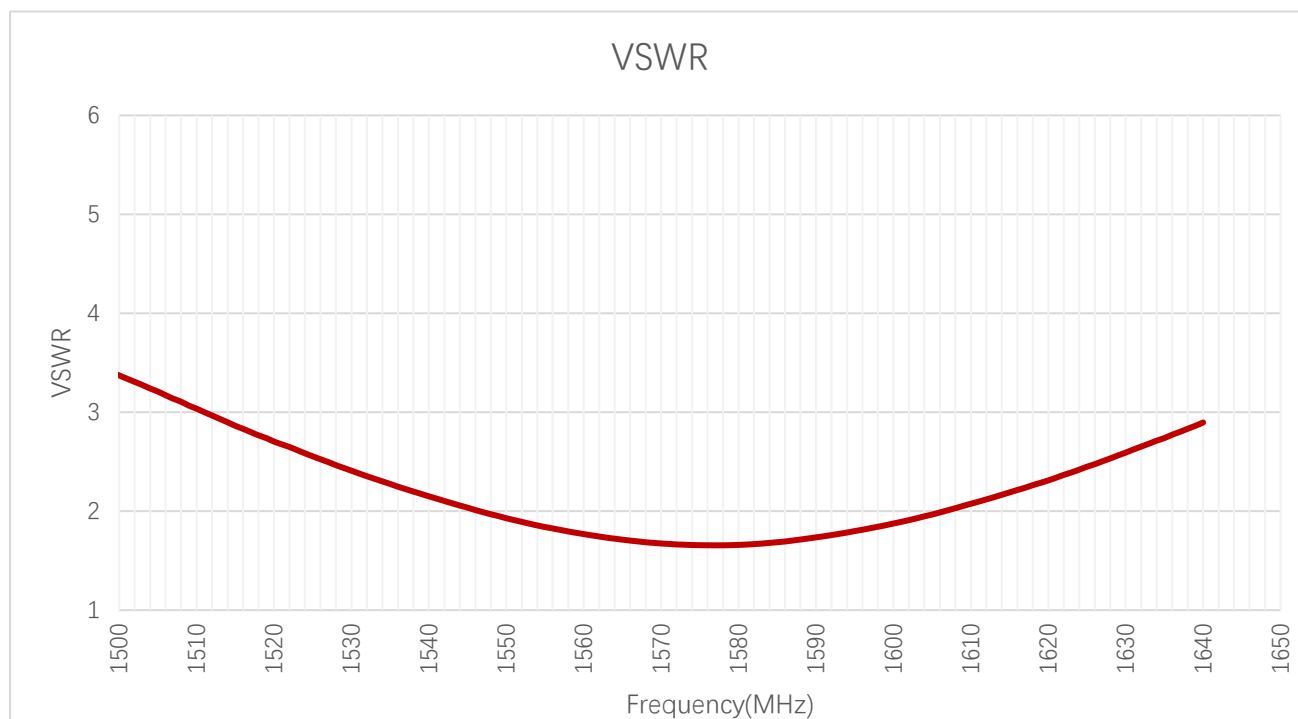

VSWR – GNSS

Frequency (MHz)	1164	1176	1189	1565	1575	1586
VSWR	-	-	-	1.71	1.66	1.69

3.2. Radiation Performance Test

3.2.1. Efficiency & Peak Gain

● Wi-Fi ANT

Frequency (MHz)	Peak Gain (dBi)	Efficiency (%)	Frequency (MHz)	Peak Gain (dBi)	Efficiency (%)
2400	-0.76	39.75	5150	0.62	29.84
2410	-0.98	38.92	5200	1.06	33.25
2420	-0.63	39.08	5250	1.25	35.37
2430	-0.37	38.79	5300	1.19	37.80
2440	-0.21	38.77	5350	1.07	41.77
2450	-0.06	39.52	5400	0.91	43.66
2460	0.16	40.36	5450	0.62	43.70
2470	0.33	41.32	5500	0.85	48.16
2480	0.45	41.83	5550	0.61	50.07
2490	0.56	42.26	5600	0.81	52.15
2500	0.63	42.28	5650	0.52	49.61
MAX	0.63		5700	0.92	50.99
			5750	0.82	52.60
			5800	0.32	50.13
			5850	0.82	51.26
			MAX	1.25	


● GPS ANT

Frequency (MHz)	Peak Gain (dBi)	Efficiency (%)
1565	2.02	49.14
1567	2.03	48.81
1569	2.04	48.62
1571	2.05	48.52
1573	2.05	48.33
1575	2.05	47.96
1577	2.05	47.59
1579	2.02	47.35
1581	2.00	47.02
1583	1.97	46.70
1585	1.95	46.52
MAX	2.05	





3.2.2. 3D & 2D Radiation Pattern

- Test Condition: Assembled in test device
- Test Chamber: GL-G-1

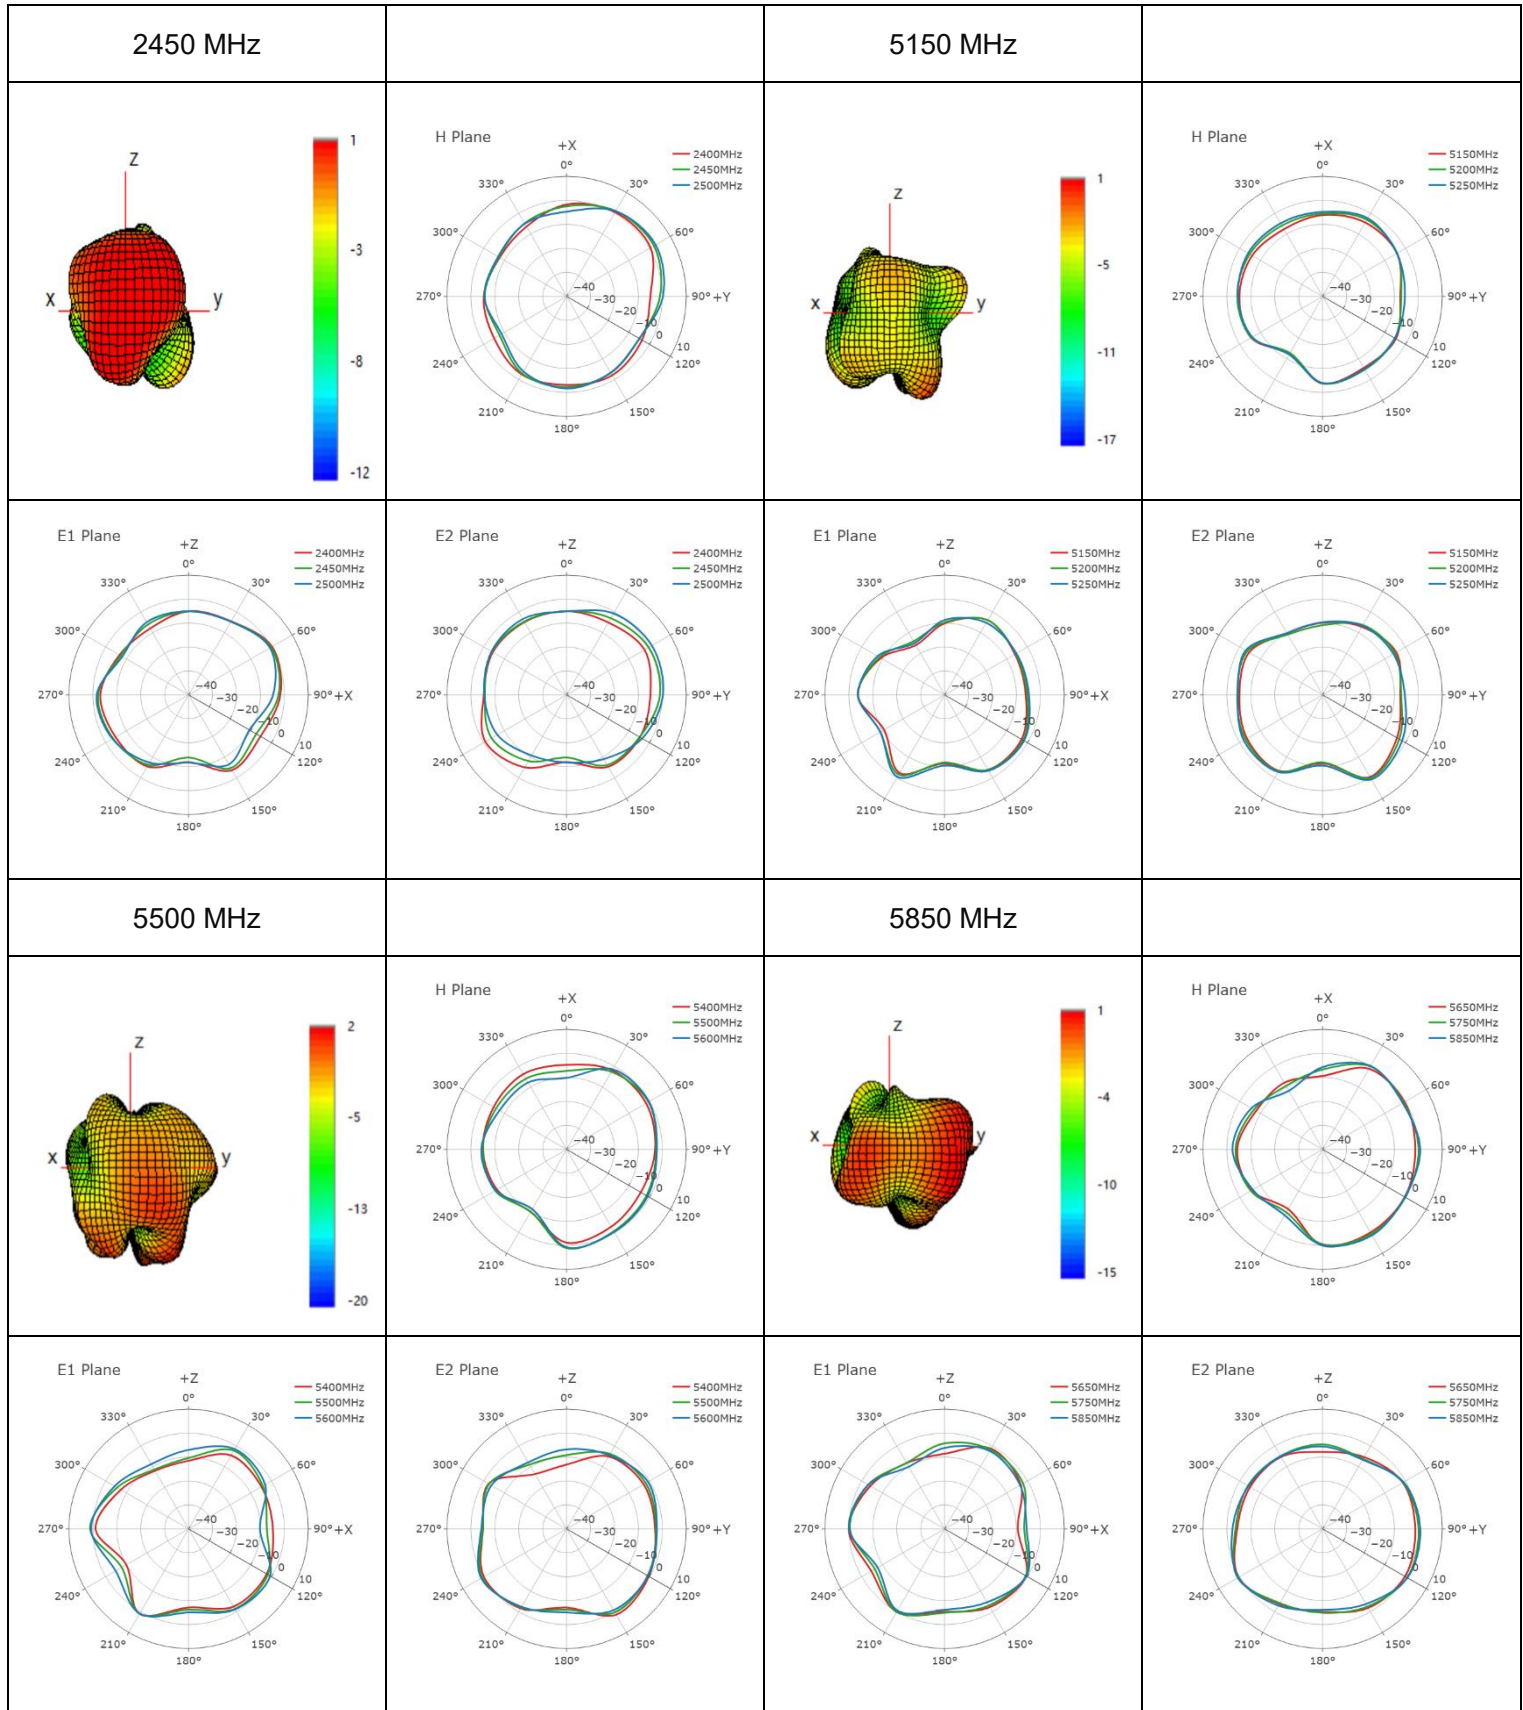● **Wi-Fi ANT**



● GPS ANT

1575 MHz			
			
			

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<http://www.quectel.com/support/sales.htm>.

For technical support, or to report documentation errors, please visit:

<http://www.quectel.com/support/technical.htm>.

Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under
- d) development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- e) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2025. All rights reserved.

Revision History

Version	Date	Author	Note
-	2025-04-02	Weston ZHANG/ Steven MO/ Riva REN/ Rainey LIAO	Creation of the document
1.0	2025-04-02	Weston ZHANG/ Steven MO/ Riva REN/ Rainey LIAO	First official release
1.1	2025-04-15	Weston ZHANG/ Steven MO/ Riva REN/ Rainey LIAO	Update the product name



www.quectel.com

1.1 NFC Antenna

NFC Frequency Band : 13.553 - 13.567 MHz

Modulation Type : ASK

Supported Card Type : A / B

NFC Antenna Type : Loop Antenna

NFC Antenna size : 86.8 * 104.78 mm