



IN THE BOX

EARBUDS

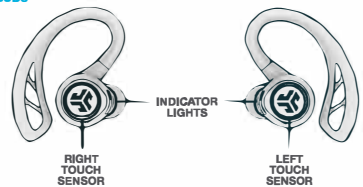


CHARGING CASE

USB CHARGE OUTPUT
For charging other devices

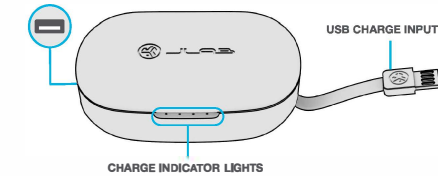

EAR TIPS



TROUBLESHOOTING:

No audio in left earbud or earbuds are disconnected from each other (Manual Reset)

- 1 Enter your Bluetooth device settings and forget the Epic Air Sport. Fig A
- 2 Take out ONE earbud from the charging case. Press and hold the power button 3+ seconds to power OFF. Press and hold once more for 15+ seconds. Earbud will turn on then flash white and power OFF. Once OFF, place back in the charging case. Fig C
- 3 Repeat for other earbud. Take out from the charging case. Press and hold the power button 3+ seconds to power OFF. Press and hold once more for 15+ seconds. Earbud will turn ON then flash white and power OFF. Once OFF, place back in the charging case. Fig C
- 4 Take both earbuds out of the charging case. Wait for Left earbud to turn solid white and Right to blink blue/white. You are now ready to pair to your Bluetooth device. Refer to CONNECTING BLUETOOTH.

Bluetooth device does not connect/reconnect

- 1 Enter your Bluetooth device settings and forget the Epic Air Sport. Fig A
- 2 On your device, turn OFF then ON Bluetooth. Fig B
- 3 Take the earbuds out of the case. Wait for Left to turn solid white and Right blinking blue/white.
- 4 Select "JLab Epic Air Sport" in device settings to reconnect.

Instructional videos at:
JLABAUDIO.COM

3 MONTHS
FREE
TIDAL

With purchase. Visit jlabaudio.com/tidal

Warm-up Your Headphones

Optional: Burn-in your audio equipment with the JLab Audio App or access the burn-in method at: jlabaudio.com/burnin



JLab Audio + Burn-in Tool

US Compliance

FCC Information

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

If you cannot eliminate the interference, the FCC requires that you stop using your product. Changes or modifications not expressly by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure statement. The device can be used in portable exposure condition without restriction.

EU Compliance



PEAQ LLC dba JLab Audio hereby declares that this device is in compliance with the essential requirements and other relevant provisions of the RED directive.

A copy of the EU Declaration of Conformity is available at jlabaudio.com/compliance

JLab Audio

2281 Las Palmas Drive, Suite 101, Carlsbad, CA 92011, USA



The symbol above indicates that this product and/or battery should not be disposed of with household waste. When you decide to dispose of this product and/or its battery, do so in accordance with local environmental laws and guidelines.

Battery Caution & Disposal Information

Please take care of your battery. Do not: disassemble, burn, puncture, crush or bend your battery. Improper operation of the battery may produce smoke. In such an event, ventilate the area. Extinguish any flames with carbon dioxide, dry-powder fire extinguisher, or cover with sand or mud. Take care to avoid conditions of excessive moisture for prolonged periods and do not immerse in water. Do not expose to temperatures above 50°C/122°F. Charge battery fully before storage or if stored for longer than three months.

Disposal
At the end of its life, please take care to dispose of this product responsibly. Electronic products and batteries contain materials that can be harmful to the environment. Please do not dispose to unsorted waste. Take your electronic waste to a designated collection or recycling facility to be recycled properly. Your local council authority will be able to tell you where your nearest facilities are. There may be one at your local super market.

Contact Us

If you're unsatisfied with your purchase, please contact us and we'll take care of you! You can contact our US based customer support team:


Website: jlabaudio.com/contact

Email: support@jlabaudio.com

Phone U.S.: +1 (408) 445-7219 (M-F 8am-5pm PT)

Phone U.K.: +44 (20) 3884 3322 (M-F 1600-0100 GMT)


Visit jlabaudio.com/warranty to initiate a return or exchange.

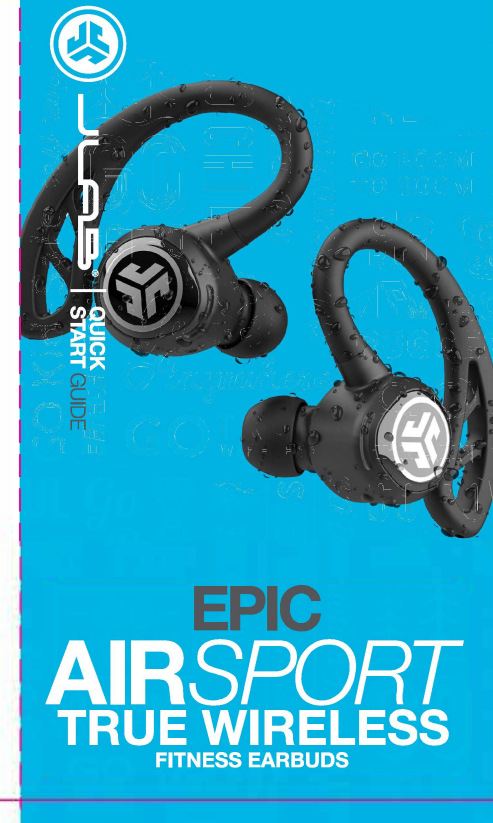

FIRST TIME SETUP


1 AUTO-CONNECTING EARBUDS

- A. Take earbuds out of the charging case and remove stickers.
- B. Press and hold both Power Buttons 2+ seconds to turn ON. The Left earbud turns solid white and Right earbud blinks blue/white indicating ready to pair to your device.

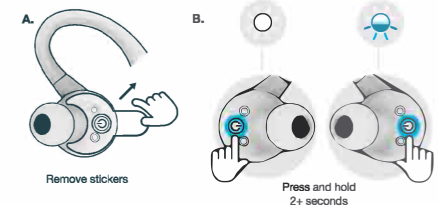

2 CONNECTING BLUETOOTH


Select "JLab Epic Air Sport" in your device settings. Voice prompt "Bluetooth connected" followed by solid white lights will indicate you are connected.

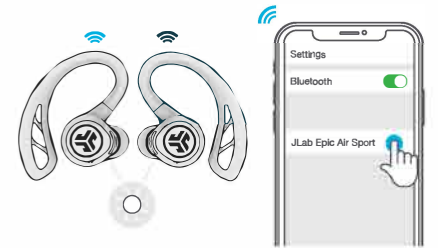

ADDING NEW/ADDITIONAL BLUETOOTH DEVICES:

Turn OFF Bluetooth from any previously connected device. Turn ON Bluetooth from new device. Take earbuds out of the case. Earbuds will automatically enter Bluetooth Pairing. Select "JLab Epic Air Sport" in new device settings to connect.

CONTROLS

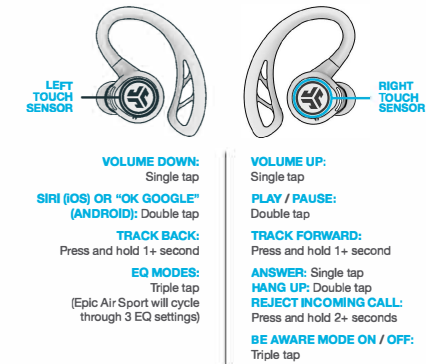



POWER ON: Press and hold 1+ second
POWER OFF: Press and hold 3+ seconds
BLUETOOTH PAIRING: (See FIRST TIME SETUP)

CUSTOM EQ³ SOUND MODES




AUTO-POWER ON/OFF

- 1 Placing the earbuds in the charging case will power OFF earbuds and start charging. Blue lights indicate earbuds are charging and will turn OFF when fully charged.

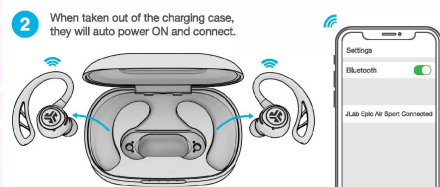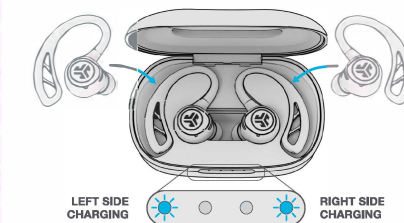

CHARGING CASE


Connect the Epic Air Sport to computer or USB 5V 1A (or less) output device.

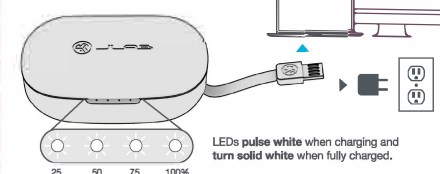

VOICE PROMPTS

"Hello": Power ON
"Earbuds joined": Earbuds paired to each other
"Ready to Pair": Epic Air Sport are ready to pair to Bluetooth device
"Bluetooth Connected": Earbud is connected to device

FITTING

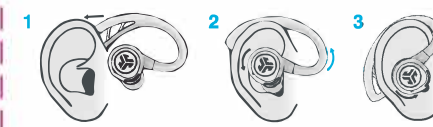

WARNING

Fully dry off the earbuds before placing in the charging case. If the earbuds are damp or wet, this will cause damage to the charging case. The warranty will be voided if the charging case shows damage by water/sweat.

Do not deform the ear hooks. The ear hooks are a flexible silicone but also have an internal hard structure for the antenna. Prying on the ear hook may break or damage the antenna.

QUICK TIPS

- The Bluetooth connection is established from the right earbud. For the most stable connection, keep the device near right hand side or in right pocket.
- If you prefer to wear only one earbud, you must wear the right earbud as this is the main earbud connected to Bluetooth.
- Choosing the correct ear tip makes a significant improvement in audio quality due to the proper seal for the driver. Test all ear tips for best results.
- Only ONE Bluetooth device can be connected at a time. Turn off Bluetooth from unwanted devices and turn on Bluetooth from chosen device to connect.

For full User Manual and troubleshooting, please visit JLABAUDIO.COM

OFFICIAL AUDIO PARTNER OF MAJOR LEAGUE SOCCER
#FINDYOURGO

QUICK START GUIDE

For full User Manual
+ other JLab products visit
JLABAUDIO.COM



	Date: 05.21.19
PROJECT: Epic Air Sport Wireless QSG	
STOCK: 220g, MATTE	
INK: 4/4 CMYK / CMYK	
FLAT SIZE: 17.52" x 5.9843"	
FOLDED SIZE: 3.4938" x 5.9843"	