

Model: FT5DR

Page 1 of 75

TEST REPORT

For

144/430MHz DIGITAL/ANALOG TRANSCEIVER (Bluetooth)

In conformity with

FCC Part 15C / RSS-247 Issue 2

Model Name: FT5DR

FCC ID: K6620825X21 ISED Cert No.: 511B-20825X21

Report No.: WE210415BC2-32

Issue Date: 28 Jun. 2021

Prepared for

YAESU MUSEN CO.,LTD.

Tennozu Parkside Building 2-5-8 Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-0002 Japan

Prepared by

SGS Japan Inc.

3-5-23, Kitayamata, Tsuzuki-ku, Yokohama, 224-0021, Japan

Telephone: +81+(0)45- 550-3520 FAX: +81+(0)45- 592-7506

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 2 of 75

Table of Contents

1 G	General information	
1.1	Product description from supplier	3
1.2	Test(s) performed/ Summary of test result	3
1.3	Test facility	4
1.4	Measurement uncertainty	4
1.5	Summary of test results	5
1.6	Setup of equipment under test (EUT)	
1.	.6.1 Test configuration of EUT	
1.	.6.2 Operating condition:	6
1.	.6.3 Setup diagram of tested system	7
1.7	Equipment modifications	
1.8	Deviation from the standard	
2 T	Test procedure and test data	8
2.1		
2.	.1.1 Occupied Bandwidth (99 %)	
2.2	Hopping Carrier Frequency Separation	
2.3	Number of Hopping Channel	
2.4	Average Time of Occupancy	
2.5	Peak Output Power	
2.6	Conducted Spurious Emissions.	
2.7	Radiated emissions (for restricted frequency band)	27
2.8	AC power line conducted emissions	59
2.9	Radiated emissions (Receiver)	
2.10		
	•	
3 T	Test setup photographs	72
3.1	Radiated emissions	72
3.2	AC power line conducted emissions	
3.3	RF conducted test.	
= =		
4 I	ist of utilized test equipment / calibration	75

History

Report No.	Date	Revisions	Issued By
WE210415BC2-31	28 Jun. 2021	Initial Issue	T. Kato
WE210415BC2-32	05 Jul. 2021	Add the comment about output power setting (Sec 1.1) Revise the limit of frequency separation (Sec. 2.2) Revise the limit of peak output power (Sec. 2.5)	T. Kato

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 3 of 75

General information

1.1 Product description from supplier

: 144/430MHz DIGITAL/ANALOG TRANSCEIVER Test item

Manufacturer : YAESU MUSEN CO., LTD.

: 43 Utsuroda, Morijuku, Sukagawa-shi, Fukushima-ken 962-0001 Japan Address

Model : FT5DR FCC ID : K6620825X21 ISED No. : 511B-20825X21 Serial number

: 6 (for radiated test) 5 (for conducted test)

Hardware version : SPP01

: 82.34 (Main), 0.00 (Sub), 7.11 (DSP) Software version

: 2402 - 2480 MHz Operating frequency

Modulation : GFSK, $\pi/4$ -DQPSK, 8DPSK (Bluetooth BDR/EDR)

Antenna Gain : +2.14 dBi (Manufacturer's declare)

Output power setting : Default and the power setting is not adjustable (Manufacturer's declare)

Receipt date of EUT : 08 Jun. 2021 Nominal power source voltages : DC 7.4 V (Battery)

Test(s) performed/ Summary of test result 1.2

Test specification(s) : FCC CFR 47 Part 15 Subpart C

RSS-247 Issue 2 / RSS-Gen Issue 5

: ANSI C63.10: 2013 Test method(s)

Test(s) started : 08 Jun. 2021 : 14 Jun. 2021 Test(s) completed

Summary of test result : Complied

Note: The above judgment is only based on the measurement data and it does not include the measurement uncertainty. Accordingly, the statement below is applied to the test result.

The EUT complies with the limit required in the standard in case that the margin is not less than the measurement uncertainty in the Laboratory.

Compliance of the EUT is more probable than non-compliance is case that the margin is less than the measurement uncertainty in the Laboratory.

Test engineer

T. Kato (Testing engineer, RF/EMC Lab.)

Reviewer

K. Onishi (Testing leader, RF/EMC Lab.)

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instruction if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 4 of 75

Test facility

The Federal Communications Commission has reviewed the technical characteristics of the test facilities at SGS Japan Inc., located in 472, Nippa-cho, Kohoku-ku, Yokohama, 223-0057, Japan, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948. The description of the test facilities has been filed under registration number 319924 at the Office of the Federal Communications Commission. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The list of all public test facilities is available on the Internet at http://www.fcc.gov.

Registered by Innovation, Science and Economic Development Canada (ISED): The registered CAB identifier is JP0009.

Accredited by National Voluntary Laboratory Accreditation Program (NVLAP) for the emission tests stated in the scope of the certificate under Certificate Number 200780-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.



1.4 Measurement uncertainty

The treatment of uncertainty is based on the general matters on the definition of uncertainty in "Guide to the expression of uncertainty in measurement (GUM)" published by ISO. The Lab's uncertainty is determined by referring ETSI TR 100 028-1 V1.4.1.

The uncertainty of the measurement result in the level of confidence of approximately 95% (k=2) is as follows;

AC Conducted emission Radiated emission

 $: \pm 3.3 \text{ dB} (150 \text{ kHz} - 30 \text{ MHz})$ $= \pm 6.7 \text{ dB } (9 \text{ kHz} - 30 \text{ MHz})$ $: \pm 5.2 \text{ dB } (30 \text{ MHz} - 1000 \text{ MHz})$ $: \pm 4.3 \text{ dB} (1 \text{ GHz} - 6 \text{ GHz})$ $: \pm 4.4 \text{ dB} (6 \text{ GHz} - 18 \text{ GHz})$ $: \pm 4.5 \text{ dB} (18 \text{ GHz} - 26 \text{ GHz})$

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 5 of 75

1.5 Summary of test results

Requirement	Section in FCC	Section in RSS-247	Result	Section in this report
Occupied Bandwidth (20 dB)	15.247 (a)(1)	6.7 (RSS-Gen)	Complied	2.1
Occupied Bandwidth (99 %)	-	6.7 (RSS-Gen)	Complied	2.1.1
Hopping Carrier Frequency Separation	15.247 (a)(1)	5.1 (b)	Complied	2.2
Number of Hopping Channel	15.247 (a)(1)(iii)	5.1 (d)	Complied	2.3
Average Time of Occupancy	15.247 (a)(1)(iii)	5.1 (d)	Complied	2.4
Peak Output Power	15.247 (b)(1)	5.4 (b)	Complied	2.5
Conducted Spurious Emissions	15.247(d)	5.5	Complied	2.6
Transmitter Radiated Spurious Emissions	15.205(b)/15.209	8.9/8.10 (RSS-Gen)	Complied	2.7
AC power line conducted emissions	15.207	8.8 (RSS-Gen)	N/A (*)	2.8
Radiated Emissions (Receiver)	-	7.3 (RSS-Gen)	Complied	2.9
AC power line conducted emissions (Receiver)	-	7.2 (RSS-Gen)	N/A (*)	2.10

(*) EUT is powered by the battery.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。

> SGS Japan Inc. 3-5-23, Kitayamata, Tsuzuki-ku, Yokohama 224-0021, Japan t +81(0) 45 550 3520 f +81(0) 45 592 7506 URL: www.s URL: www.sgsgroup.jp



Model: FT5DR Page 6 of 75

Setup of equipment under test (EUT)

1.6.1 Test configuration of EUT

Equipment(s) under test

No.	Item	Manufacture	Model No.	Serial No.
1A	144/430MHz DIGITAL/ANALOG TRANSCEIVER (for Radiated test)	YAESU MUSEN CO., LTD.	FT5DR	6
1B	144/430MHz DIGITAL/ANALOG TRANSCEIVER (for Conducted test) (*)	YAESU MUSEN CO., LTD.	FT5DR	5

^(*) The antenna cable loss information with this sample was applied from the manufacturer.

Support Equipment(s)

٠.		(*)			
	No.	Item	Manufacture	Model No.	Serial No.
	2	Li-ion Battery Pack	YAESU MUSEN CO., LTD.	SBR-14LI	Q37
	3	Microphone	YAESU MUSEN CO., LTD.	SSM-17A	YTS07

Connected cable(s)

No.	Item	From	То	Cable Shielded	Ferrite Core	Length [m]
A	Mic. Cable	1	2	No	No	0.4

1.6.2 **Operating condition:**

- Tx (2402MHz): The EUT is in normal transmission mode at 2402MHz (DH5/2DH5/3DH5)
- Tx (2440MHz): The EUT is in normal transmission mode at 2441MHz (DH5/2DH5/3DH5)
- Tx (2480MHz): The EUT is in normal transmission mode at 2480MHz (DH5/2DH5/3DH5)
- Rx (2402MHz): The EUT is in normal receiving mode at 2402MHz
- Rx (2440MHz): The EUT is in normal receiving mode at 2441MHz
- Rx (2480MHz): The EUT is in normal receiving mode at 2480MHz

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。

> SGS Japan Inc. 3-5-23, Kitayamata, Tsuzuki-ku, Yokohama 224-0021, Japan t +81(0) 45 550 3520 f +81(0) 45 592 7506 URL: www.sgsgroup.jp



Model: FT5DR Page 7 of 75

1.6.3 Setup diagram of tested system

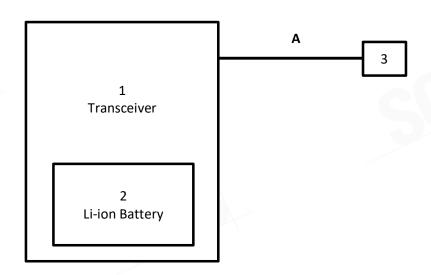

1.7 Equipment modifications

No modifications have been made to the equipment in order to achieve compliance with the applicable standards described in clause 1.2.

1.8 Deviation from the standard

No deviations from the standards described in clause 1.2.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 8 of 75

Test procedure and test data

Occupied Bandwidth (20 dB)

Test setup

Test setup is the following drawing. The antenna port of EUT was connected to the spectrum analyzer.



Test procedure

Spectrum analyzer is set as below according to ANSI C63.10 clause 6.9.2

- RBW: 1 to 5 % of OBW - VBW $> 3 \times RBW$ - Span : OBW x 2 to 5 - Trace: Max hold

Limitation

There are no limitations.

The measurement value is used for the emission designator.

Test equipment used (refer to List of utilized test equipment)

TR06	CL31	-

Test results

Tested sample: 1B

Transmission Frequency [MHz]	Occupied Bandwidth [MHz] DH5	Occupied Bandwidth [MHz] 2DH5	Occupied Bandwidth [MHz] 3DH5
2402	0.890	1.255	1.269
2441	0.890	1.240	1.262
2480	0.891	1.240	1.261


This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 9 of 75

[Chart]

Operating condition: Tx 2402 MHz DH5

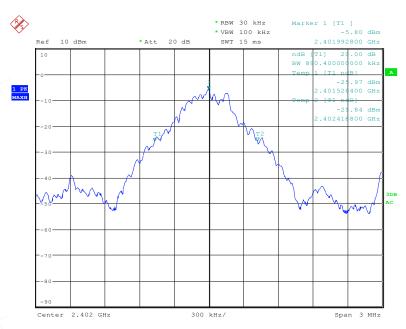

Tested Date: 08 Jun. 2021 Temperature: 23 degC 66 % 1014 hPa Humidity: Atmos. Press:

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 10 of 75

2.1.1 Occupied Bandwidth (99 %)

Test setup

Test setup is the following drawing. The antenna port of EUT was connected to the spectrum analyzer.



Test procedure

Spectrum analyzer is set as below according to ANSI C63.10 clause 6.9.3

- RBW: 1 to 5 % of OBW - $VBW > 3 \times RBW$ - Span : OBW x 1.5 to 5 - Trace: Max hold

Limitation

There are no limitations.

The measurement value is used for the emission designator.

Test equipment used (refer to List of utilized test equipment)

TR06 C	CL31	-
--------	------	---

Test results

Tested sample: 1B

Transmission Frequency	Occupied Bandwidth [MHz]	Occupied Bandwidth [MHz]	Occupied Bandwidth [MHz]
[MHz]	DH5	2DH5	3DH5
2402	0.873	1.209	1.208
2441	0.860	1.170	1.164
2480	0.859	1.164	1.156


This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 11 of 75

[Chart]

Operating condition: Tx 2402 MHz DH5

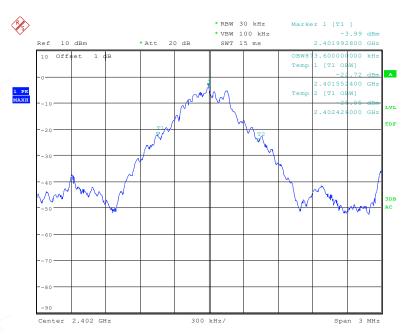

Tested Date: 08 Jun. 2021 Temperature: 23 degC 66 % 1014 hPa Humidity: Atmos. Press:

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 12 of 75

Hopping Carrier Frequency Separation 2.2

Test setup

Test setup is the following drawing. The antenna port of EUT was connected to the spectrum analyzer.

Spectrum **EUT** Antenna Port Analyzer

Test procedure

Spectrum analyzer is set as below according to ANSI C63.10 clause 7.8.2

- RBW: about 30% of OBW

- VBW > RBW

- Trace: Max hold

Applicable rule and limitation

FCC 15.247 (a)(1) RSS-247 Sec. 5.1 (b)

Frequency hopping systems operating in the 2400 - 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Limit: more than 864 kHz (2/3 of 20 dB OBW)

Test equipment used (refer to List of utilized test equipment)

TR06	CL31	
1100	СДЗТ	

Test results - **Complied with require**ment

Test Data

Tested sample: 1B


Frequency Separation [kHz]	Result
1000	Pass

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 13 of 75

[Chart]

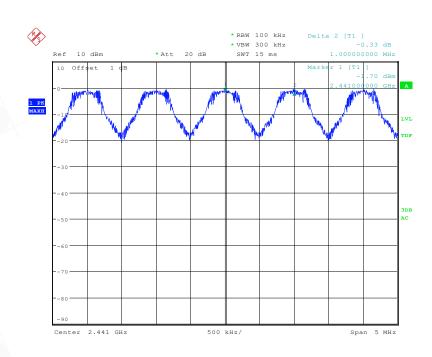

Tested Date: 08 Jun. 2021 Temperature: 23 degC Humidity: 66 % Atmos. Press: 1014 hPa

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR

Page 14 of 75

2.3 Number of Hopping Channel

Test setup

Test setup is the following drawing. The antenna port of EUT was connected to the spectrum analyzer.

EUT Antenna Port Spectrum Analyzer

Test procedure

Spectrum analyzer is set as below according to ANSI C63.10 clause 7.8.3

- RBW: about 30% of OBW

- VBW > RBW

- Trace: Max hold

Applicable rule and limitation

FCC 15.247 (a)(1)(iii) RSS-247 Sec. 5.1 (d)

Frequency hopping systems in the 2400 - 2483.5 MHz band shall use at least 15 channels.

Test equipment used (refer to List of utilized test equipment)

TR06	CL31	
------	------	--

Test results - **Complied with requirement**

Test Data

Tested sample: 1B


Number of channel	Result
79	Pass


This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Model: FT5DR Page 15 of 75

[Chart]









08 Jun. 2021 Tested Date: Temperature: 23 degC 66 % 1014 hPa Humidity: Atmos. Press:

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 16 of 75

Average Time of Occupancy

Test setup

Test setup is the following drawing. The antenna port of EUT was connected to the spectrum analyzer.

Spectrum **EUT** Antenna Port Analyzer

Test procedure

Spectrum analyzer is set as below according to ANSI C63.10 clause 7.8.4

- RBW < Channel separation

- Trace: Max hold

Applicable rule and limitation

FCC 15.247 (a)(1)(iii) RSS-247 Sec. 5.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test equipment used (refer to List of utilized test equipment)

TR06	CL31	
------	------	--

Test results - Complied with requirement

Test Data

Tested sample: 1B

Observed Frequency	Pulse width [ms]	Observation Time [s]	The number of pulse (*)	Time of occupancy [s]	Result
2441 MHz (DH1)	0.384	31.6	66	0.253 (*)	Pass
2441 MHz (DH3)	1.638	31.6	21	0.343 (*)	Pass
2441 MHz (DH5)	2.876	31.6	12	0.345 (*)	Pass

The number of pulse was captured within a period of 10% observation time. The test result was calculated as below

Average time of occupancy


= (The number of captured pulse) x (Single Pulse width) x (100% / 10%)


This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 17 of 75

DH5 [Chart]

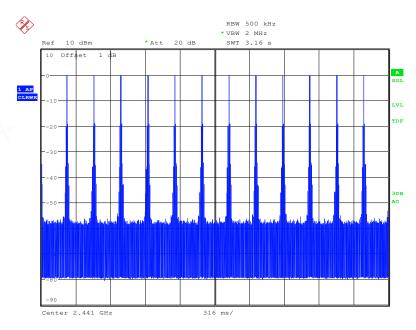

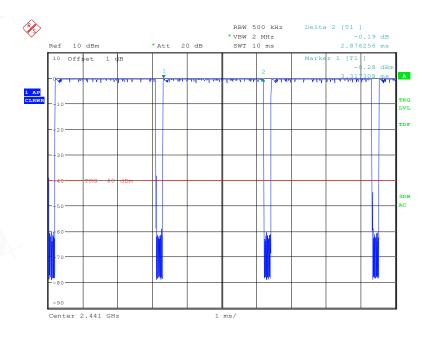

Tested Date: 08 Jun. 2021 Humidity: 66 %

Temperature: 23 degC 1014 hPa Atmos. Press:

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 18 of 75

Peak Output Power

Test setup

Test setup is the following drawing. The antenna port of EUT was connected to the spectrum analyzer.

Spectrum **EUT** Antenna Port Analyzer

Test procedure

Spectrum analyzer is set as below according to ANSI C63.10 clause 7.8.5

- RBW > OBW - VBW > RBW

- Span: about 5 times of OBW - Trace: Max hold

Applicable rule and limitation

FCC 15.247(b)(1) RSS-247 Sec. 5.4 (b)

For frequency hopping systems operating in the 2400 - 2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 w (+30 dBm)

For all other frequency hopping systems in the 2400 -2483.5 MHz band : 0.125 w (+21 dBm)

Test equipment used (refer to List of utilized test equipment)

TR06	CL31	

Test results - Complied with requirement

Test Data

Tested sample: 1B

Transmission Frequency [MHz]	Output Power DH5 [dBm]	Output Power 2DH5 [dBm]	Output Power 3DH5 [dBm]	Limit [dBm]	Result
2402	-2.7	-3.3	-3.2	21	Pass
2441	-0.1	-1.2	-1.0	21	Pass
2480	-0.5	-2.0	-1.7	21	Pass


This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 19 of 75

[Chart]

Operating condition: Tx 2402 MHz DH5

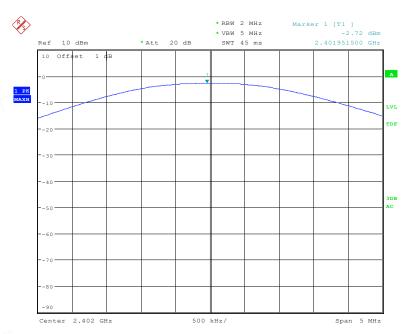

Tested Date: 08 Jun. 2021 Temperature: 23 degC Humidity: 66 % Atmos. Press: 1014 hPa

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 20 of 75

Conducted Spurious Emissions

Test setup

Test setup is the following drawing. The antenna port of EUT was connected to the spectrum analyzer.

Spectrum **EUT** Antenna Port Analyzer

Test procedure

Spectrum analyzer is set as below according to ANSI C63.10 clause 7.8.8

- RBW: 100 kHz - VBW: 300 kHz - Detector : Peak - Trace: Max hold

Limitation

FCC 15.247(d) RSS-247 Sec. 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test equipment used (refer to List of utilized test equipment)

Test results - Complied with requirement

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 21 of 75

Test Data

Tested sample: 1B

Operating mode: Tx 2402 MHz (DH5)

wing mode. 11/2 1/11/2 (E110)						
Frequency	Spurious level	Carrier level	20dB below			
[MHz]	[dBm]	[dBm]	[dBm]			
2399.153	-40.59	-2.98	-22.98			
2399.987	-38.58	-2.98	-22.98			

Note: All other emissions have more than 20 dB margin.

Operating mode: Tx 2402 MHz (2DH5)

Frequency	Spurious level	Carrier level	20dB below
[MHz]	[dBm]	[dBm]	[dBm]
2400.008	-43.48	-4.07	-24.07

Note: All other emissions have more than 20 dB margin.

Operating mode: Tx 2402 MHz (3DH5)

Frequency [MHz]	Spurious level [dBm]	Carrier level [dBm]	20dB below [dBm]
2399.994	-41.46	-4.05	-24.05
4804.000	-55.91	-4.05	-24.05

Note: All other emissions have more than 20 dB margin.

Operating mode: Tx 2441 MHz (DH5)

u	ting mode. 1x 2441 Will2 (B115)						
Ī	Frequency	Spurious level	Carrier level	20dB below			
	[MHz]	[dBm]	[dBm]	[dBm]			
ĺ	4882.400	-52.86	-0.48	-20.48			
Ī							

Note: All other emissions have more than 20 dB margin.

Operating mode: Tx 2441 MHz (2DH5)

Frequency	Spurious level	Carrier level	20dB below
[MHz]	[dBm]	[dBm]	[dBm]
4882.000	-56.21	-2.34	-22.34

Note: All other emissions have more than 20 dB margin.

Operating mode: Tx 2441 MHz (3DH5)

Frequency	Spurious level	Carrier level	20dB below
[MHz]	[dBm]	[dBm]	[dBm]
4882.000	-52.80	-2.34	-22.34

Note: All other emissions have more than 20 dB margin.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 22 of 75

Operating mode: Tx 2480 MHz (DH5)

Frequency	Spurious level	Carrier level	20dB below
[MHz]	[dBm]	[dBm]	[dBm]
4960.000	-54.87	-0.93	-20.93

Note: All other emissions have more than 20 dB margin.

Operating mode: Tx 2480 MHz (2DH5)

Frequency [MHz]	Spurious level [dBm]	Carrier level [dBm]	20dB below [dBm]
-	-	-	
-	-	-	-


Note: All emissions have more than 20 dB margin.


Operating mode: Tx 2480 MHz (3DH5)

Frequency	Spurious level	Carrier level	20dB below
[MHz]	[dBm]	[dBm]	[dBm]
-		-	-
_	-	-	- \

Note: All emissions have more than 20 dB margin.

[Chart] Tx 2402MHz (DH5)








This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Model: FT5DR Page 23 of 75

















This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Model: FT5DR Page 24 of 75














This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Model: FT5DR Page 25 of 75

[Band edge]


Tx 2402 MHz DH5





Tx 2402 MHz 2DH5






This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Model: FT5DR Page 26 of 75

Tx 2402 MHz 3DH5







Tested Date: 08 Jun. 2021 Humidity: 66 %

Temperature: 23 degC 1014 hPa Atmos. Press:

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 27 of 75

Radiated emissions (for restricted frequency band)

Test setup

Test setup was implemented according to the method of ANSI C63.10 clause 6.

Test procedure

Measurement procedures were implemented according to the method of ANSI C63.10 clauses 6. The test receiver is set as below

[9 - 150 kHz]

RBW: 200 Hz, Detector: QP

[150 kHz - 30 MHz]

RBW: 9 kHz, Detector: QP

[30 - 1000 MHz]

RBW: 120 kHz, Detector: QP

[above 1000 MHz]

RBW: 1 MHz, Detector: Ave/PK

Applicable rule and limitation

RSS-Gen Sec. 8.10

FCC 15.205 restricted bands of operation

Except as shown in paragraph 15.205 (d) of this section, only spurious emissions are permitted in any of

the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.490 - 0.510	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	38.6 -

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in FCC 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in FCC 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 28 of 75

FCC 15.209 / RSS-Gen Sec. 8.9 Field strength limits

Frequency [MHz]	Field Strength [µV/m]	Measurement Distance [m]	Field Strength [dBµV/m]
30 - 88	100	3	40.0
88 –216	150	3	43.5
216 – 960	200	3	46.0
Above 960	500	3	53.9

In the emission table above, the tighter limit applies at the band edges.

The emission limits shown in the above table are based on measurements employing a quasi-peak detector.

Test results - Complied with requirement

Test equipment used (refer to List of utilized test equipment)

AC11	CL71	TR10	PR15	BA10	CL38	CL39	PR16
DH07	SH05	SH01	LP05	LPF1	HPF11	AT33	

Test software used

EMI1 Ver. 6.1

Calculation method

The Correction Factor and Result are calculated as followings.

Correction Factor [dB/m] = Ant. Factor [dB/m] + Loss [dB] - Gain [dB]Result $[dB\mu V/m] = Reading [dB\mu V] + Correction Factor [dB/m]$

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 29 of 75

Test Data (below 30MHz)

Tested sample: 1A


Worst operating mode: Tx 2441MHz DH5 Z-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
	<u>-</u>	-	-	-	-	-	-		-
_	-	-	-	-	ı	-	-	-	ı

Note: All emissions were under noise floor.

[Chart]

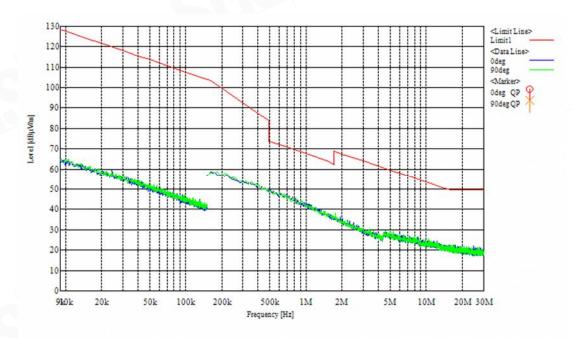

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 30 of 75

Test Data (30 - 1000MHz)

Tested sample: 1A

Operating mode: Tx 2402MHz DH5 X-plane

[Emission level]

LEITHOU	sion icver								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	323.999	37.3	14.1	8.0	30.2	29.2	46.0	16.8	Hori.
2	331.999	39.1	14.3	8.0	30.2	31.2	46.0	14.8	Hori.
3	339.999	37.8	14.6	8.0	30.2	30.2	46.0	15.8	Hori.
4	343.999	37.8	14.7	8.0	30.2	30.3	46.0	15.7	Hori.
5	347.999	36.7	14.8	8.1	30.2	29.4	46.0	16.6	Hori.
6	351.999	36.1	14.9	8.2	30.3	28.9	46.0	17.1	Hori.
7	511.999	27.2	17.4	8.5	30.1	23.0	46.0	23.0	Hori.
8	515.999	27.0	17.4	8.5	30.1	22.8	46.0	23.2	Hori.
9	575.999	21.3	18.2	8.7	30.1	18.1	46.0	27.9	Hori.

Operating mode: Tx 2402MHz DH5 Y-plane

[Emission level]

L	order rever								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	331.999	37.1	14.3	8.0	30.2	29.2	46.0	16.8	Hori.
2	336.000	35.9	14.4	8.0	30.2	28.1	46.0	17.9	Hori.
3	343.999	36.8	14.7	8.0	30.2	29.3	46.0	16.7	Hori.
4	351.999	36.2	14.9	8.2	30.3	29.0	46.0	17.0	Hori.
5	479.999	28.1	17.0	8.4	30.2	23.3	46.0	22.7	Hori.
6	852.924	23.6	20.2	9.5	29.7	23.6	46.0	22.4	Hori.

Operating mode: Tx 2402MHz DH5 Z-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	312.000	28.4	13.8	7.9	30.2	19.9	46.0	26.1	Hori.
2	331.999	29.3	14.3	8.0	30.2	21.4	46.0	24.6	Hori.
3	927.645	20.4	20.7	9.8	29.0	21.9	46.0	24.1	Hori.
4	419.999	28.5	16.3	8.3	30.2	22.9	46.0	23.1	Vert.
5	479.999	30.2	17.0	8.4	30.2	25.4	46.0	20.6	Vert.
6	515.999	27.1	17.4	8.5	30.1	22.9	46.0	23.1	Vert.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 31 of 75

Operating mode: Tx 2441MHz DH5 X-plane

[Emission level]

LEITIBE	sion icverj								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	331.999	37.5	14.3	8.0	30.2	29.6	46.0	16.4	Hori.
2	336.000	37.7	14.4	8.0	30.2	29.9	46.0	16.1	Hori.
3	339.999	37.2	14.6	8.0	30.2	29.6	46.0	16.4	Hori.
4	343.999	38.4	14.7	8.0	30.2	30.9	46.0	15.1	Hori.
5	348.000	36.4	14.8	8.1	30.2	29.1	46.0	16.9	Hori.
6	351.999	36.9	14.9	8.2	30.3	29.7	46.0	16.3	Hori.
7	519.999	25.3	17.5	8.6	30.1	21.3	46.0	24.7	Hori.
8	830.771	25.2	20.1	9.5	29.8	25.0	46.0	21.0	Hori.

Operating mode: Tx 2441MHz DH5 Y-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	331.999	35.5	14.3	8.0	30.2	27.6	46.0	18.4	Hori.
2	343.999	37.0	14.7	8.0	30.2	29.5	46.0	16.5	Hori.
3	348.000	35.3	14.8	8.1	30.2	28.0	46.0	18.0	Hori.
4	351.999	36.2	14.9	8.2	30.3	29.0	46.0	17.0	Hori.
5	519.999	23.2	17.5	8.6	30.1	19.2	46.0	26.8	Hori.
6	816.001	24.4	20.0	9.4	29.9	23.9	46.0	22.1	Hori.

Operating mode: Tx 2441MHz DH5 Z-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	416.000	27.7	16.3	8.3	30.3	22.0	46.0	24.0	Vert.
2	483.999	27.6	17.1	8.4	30.2	22.9	46.0	23.1	Vert.
3	686.770	20.7	18.9	9.1	30.2	18.5	46.0	27.5	Vert.
4	960.000	19.0	21.1	9.9	28.6	21.4	46.0	24.6	Vert.

Note: All other emissions are under noise floor.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 32 of 75

Operating mode: Tx 2480MHz DH5 X-plane

[Emission level]

	non rever								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	319.999	38.6	14.0	8.0	30.2	30.4	46.0	15.6	Hori.
2	324.000	40.3	14.1	8.0	30.2	32.2	46.0	13.8	Hori.
3	327.999	39.5	14.2	8.0	30.2	31.5	46.0	14.5	Hori.
4	332.000	39.0	14.3	8.0	30.2	31.1	46.0	14.9	Hori.
5	336.000	38.6	14.4	8.0	30.2	30.8	46.0	15.2	Hori.
6	343.999	38.3	14.7	8.0	30.2	30.8	46.0	15.2	Hori.
7	351.999	36.5	14.9	8.2	30.3	29.3	46.0	16.7	Hori.
8	507.999	26.0	17.3	8.5	30.1	21.7	46.0	24.3	Hori.
9	827.078	23.5	20.1	9.5	29.8	23.3	46.0	22.7	Hori.
10	845.539	25.6	20.2	9.5	29.7	25.6	46.0	20.4	Hori.

Tx 2480MHz DH5 Y-plane Operating mode:

[Emission level]

J	Limss	sion icverj								
	No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
	1	320.000	37.3	14.0	8.0	30.2	29.1	46.0	16.9	Hori.
	2	324.000	37.9	14.1	8.0	30.2	29.8	46.0	16.2	Hori.
	3	343.999	36.2	14.7	8.0	30.2	28.7	46.0	17.3	Hori.
ı	4	348.000	33.9	14.8	8.1	30.2	26.6	46.0	19.4	Hori.
ı	5	623.999	22.3	18.6	8.9	30.2	19.6	46.0	26.4	Hori.
	6	812.309	22.9	20.0	9.4	29.9	22.4	46.0	23.6	Hori.

Operating mode: Tx 2480MHz DH5 Z-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	307.999	32.6	13.6	7.9	30.2	23.9	46.0	22.1	Hori.
2	590.604	20.6	18.4	8.8	30.1	17.7	46.0	28.3	Hori.
3	864.000	23.4	20.3	9.6	29.6	23.7	46.0	22.3	Hori.
4	407.999	27.6	16.2	8.3	30.3	21.8	46.0	24.2	Vert.
5	960.000	19.2	21.1	9.9	28.6	21.6	46.0	24.4	Vert.

Note: All other emissions are under noise floor.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 33 of 75

Operating mode: Tx 2402MHz 2DH5 X-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	320.000	38.5	14.0	8.0	30.2	30.3	46.0	15.7	Hori.
2	323.999	40.7	14.1	8.0	30.2	32.6	46.0	13.4	Hori.
3	331.999	39.2	14.3	8.0	30.2	31.3	46.0	14.7	Hori.
4	339.999	37.9	14.6	8.0	30.2	30.3	46.0	15.7	Hori.
5	347.999	36.8	14.8	8.1	30.2	29.5	46.0	16.5	Hori.
6	515.999	27.0	17.4	8.5	30.1	22.8	46.0	23.2	Hori.
7	846.852	23.5	20.2	9.5	29.7	23.5	46.0	22.5	Hori.

Operating mode: Tx 2402MHz 2DH5 Y-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	323.999	37.7	14.1	8.0	30.2	29.6	46.0	16.4	Hori.
2	328.000	33.9	14.2	8.0	30.2	25.9	46.0	20.1	Hori.
3	331.999	36.6	14.3	8.0	30.2	28.7	46.0	17.3	Hori.
4	336.000	33.5	14.4	8.0	30.2	25.7	46.0	20.3	Hori.
5	339.999	36.8	14.6	8.0	30.2	29.2	46.0	16.8	Hori.
6	347.999	36.0	14.8	8.1	30.2	28.7	46.0	17.3	Hori.
7	849.232	23.7	20.2	9.5	29.7	23.7	46.0	22.3	Hori.

Operating mode: Tx 2402MHz 2DH5 Y-plane [Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	323.999	30.5	14.1	8.0	30.2	22.4	46.0	23.6	Hori.
2	660.308	21.3	18.8	9.0	30.2	18.9	46.0	27.1	Hori.
3	865.749	21.9	20.3	9.6	29.6	22.2	46.0	23.8	Hori.
4	411.999	28.8	16.2	8.3	30.3	23.0	46.0	23.0	Vert.
5	491.999	26.3	17.1	8.5	30.1	21.8	46.0	24.2	Vert.
6	559.999	25.8	18.0	8.7	30.1	22.4	46.0	23.6	Vert.
7	747.922	21.1	19.4	9.3	30.2	19.6	46.0	26.4	Vert.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 34 of 75

Operating mode: Tx 2441MHz 2DH5 X-plane

[Emission level]

LEITHOU									
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	319.999	38.9	14.0	8.0	30.2	30.7	46.0	15.3	Hori.
2	324.000	39.3	14.1	8.0	30.2	31.2	46.0	14.8	Hori.
3	340.000	37.3	14.6	8.0	30.2	29.7	46.0	16.3	Hori.
4	415.999	29.6	16.3	8.3	30.3	23.9	46.0	22.1	Hori.
5	573.146	20.7	18.2	8.7	30.1	17.5	46.0	28.5	Hori.
6	864.001	24.3	20.3	9.6	29.6	24.6	46.0	21.4	Hori.

Tx 2441MHz 2DH5 Y-plane Operating mode:

[Emission level]

LEITHOU											
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.		
1	324.000	36.0	14.1	8.0	30.2	27.9	46.0	18.1	Hori.		
2	332.000	34.6	14.3	8.0	30.2	26.7	46.0	19.3	Hori.		
3	340.000	34.6	14.6	8.0	30.2	27.0	46.0	19.0	Hori.		
4	348.000	33.9	14.8	8.1	30.2	26.6	46.0	19.4	Hori.		
5	351.999	34.3	14.9	8.2	30.3	27.1	46.0	18.9	Hori.		
6	521.159	21.3	17.5	8.6	30.1	17.3	46.0	28.7	Hori.		

Operating mode: Tx 2441MHz 2DH5 Z-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.		
1	296.000	28.9	13.3	7.9	30.2	19.9	46.0	26.1	Hori.		
2	340.000	26.3	14.6	8.0	30.2	18.7	46.0	27.3	Vert.		
3	960.000	19.1	21.1	9.9	28.6	21.5	46.0	24.5	Vert.		

Note: All other emissions are under noise floor.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。

SGS Japan Inc. 3-5-23, Kitayamata, Tsuzuki-ku, Yokohama 224-0021, Japan t +81(0) 45 550 3520 f +81(0) 45 592 7506 URL: www.s



Model: FT5DR Page 35 of 75

Operating mode: Tx 2480MHz 2DH5 X-plane

[Emission level]

	Emission rever										
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.		
1	319.999	39.2	14.0	8.0	30.2	31.0	46.0	15.0	Hori.		
2	324.000	41.1	14.1	8.0	30.2	33.0	46.0	13.0	Hori.		
3	332.000	40.3	14.3	8.0	30.2	32.4	46.0	13.6	Hori.		
4	340.000	38.7	14.6	8.0	30.2	31.1	46.0	14.9	Hori.		
5	845.367	23.8	20.2	9.5	29.7	23.8	46.0	22.2	Hori.		
6	864.476	24.8	20.3	9.6	29.6	25.1	46.0	20.9	Hori.		

Tx 2480MHz 2DH5 Y-plane Operating mode:

[Emission level]

L	[Emission level]									
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.	
1	320.000	39.0	14.0	8.0	30.2	30.8	46.0	15.2	Hori.	
2	324.000	37.9	14.1	8.0	30.2	29.8	46.0	16.2	Hori.	
3	415.999	29.9	16.3	8.3	30.3	24.2	46.0	21.8	Hori.	
4	571.885	20.8	18.2	8.7	30.1	17.6	46.0	28.4	Hori.	
5	764.999	22.4	19.6	9.3	30.1	21.2	46.0	24.8	Hori.	
6	852.924	23.4	20.2	9.5	29.7	23.4	46.0	22.6	Hori.	

Operating mode: Tx 2480MHz 2DH5 Z-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	320.000	32.5	14.0	8.0	30.2	24.3	46.0	21.7	Hori.
2	324.000	31.6	14.1	8.0	30.2	23.5	46.0	22.5	Hori.
3	845.456	22.9	20.2	9.5	29.7	22.9	46.0	23.1	Hori.
4	352.000	27.2	14.9	8.2	30.3	20.0	46.0	26.0	Vert.
5	479.999	29.5	17.0	8.4	30.2	24.7	46.0	21.3	Vert.
6	487.999	28.5	17.1	8.5	30.1	24.0	46.0	22.0	Vert.
7	575.999	25.4	18.2	8.7	30.1	22.2	46.0	23.8	Vert.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。

> SGS Japan Inc. 3-5-23, Kitayamata, Tsuzuki-ku, Yokohama 224-0021, Japan t +81(0) 45 550 3520 f +81(0) 45 592 7506 URL: www.s URL: www.sgsgroup.jp



Model: FT5DR Page 36 of 75

Operating mode: Tx 2402MHz 3DH5 X-plane

[Emission level]

LLIIIIS	[Emission level]									
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.	
1	323.999	40.8	14.1	8.0	30.2	32.7	46.0	13.3	Hori.	
2	331.999	39.3	14.3	8.0	30.2	31.4	46.0	14.6	Hori.	
3	339.999	38.5	14.6	8.0	30.2	30.9	46.0	15.1	Hori.	
4	347.999	37.4	14.8	8.1	30.2	30.1	46.0	15.9	Hori.	
5	515.999	26.8	17.4	8.5	30.1	22.6	46.0	23.4	Hori.	
6	854.284	23.9	20.2	9.5	29.7	23.9	46.0	22.1	Hori.	
7	864.001	24.7	20.3	9.6	29.6	25.0	46.0	21.0	Hori.	

Operating mode: Tx 2402MHz 3DH5 Y-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	177.231	26.5	10.4	7.3	30.2	14.0	43.5	29.5	Hori.
2	180.923	24.7	10.5	7.3	30.2	12.3	43.5	31.2	Hori.
3	324.000	37.4	14.1	8.0	30.2	29.3	46.0	16.7	Hori.
4	331.999	36.6	14.3	8.0	30.2	28.7	46.0	17.3	Hori.
- 5	340.000	36.7	14.6	8.0	30.2	29.1	46.0	16.9	Hori.
6	348.000	36.0	14.8	8.1	30.2	28.7	46.0	17.3	Hori.

Operating mode: Tx 2402MHz 3DH5 Z-plane

[Emission level]

N	o. Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	316.000	31.1	13.9	8.0	30.2	22.8	46.0	23.2	Hori.
2	848.269	22.3	20.2	9.5	29.7	22.3	46.0	23.7	Hori.
3	339.999	29.3	14.6	8.0	30.2	21.7	46.0	24.3	Vert.
4	415.999	29.3	16.3	8.3	30.3	23.6	46.0	22.4	Vert.
5	487.999	29.7	17.1	8.5	30.1	25.2	46.0	20.8	Vert.
6	543.999	26.0	17.8	8.6	30.1	22.3	46.0	23.7	Vert.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 37 of 75

Operating mode: Tx 2441MHz 3DH5 X-plane

[Emission level]

	mon rever								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	324.000	39.1	14.1	8.0	30.2	31.0	46.0	15.0	Hori.
2	332.000	38.7	14.3	8.0	30.2	30.8	46.0	15.2	Hori.
3	343.999	36.5	14.7	8.0	30.2	29.0	46.0	17.0	Hori.
4	419.999	29.1	16.3	8.3	30.2	23.5	46.0	22.5	Hori.
5	523.999	25.0	17.6	8.6	30.1	21.1	46.0	24.9	Hori.
6	871.386	24.0	20.3	9.6	29.5	24.4	46.0	21.6	Hori.

Tx 2441MHz 3DH5 Y-plane Operating mode:

[Emission level]

L	mon ieverj								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	319.999	36.7	14.0	8.0	30.2	28.5	46.0	17.5	Hori.
2	324.000	37.6	14.1	8.0	30.2	29.5	46.0	16.5	Hori.
3	340.000	35.3	14.6	8.0	30.2	27.7	46.0	18.3	Hori.
4	351.999	35.0	14.9	8.2	30.3	27.8	46.0	18.2	Hori.
5	577.801	20.6	18.3	8.7	30.1	17.5	46.0	28.5	Hori.
6	827.078	23.1	20.1	9.5	29.8	22.9	46.0	23.1	Hori.

Operating mode: Tx 2441MHz 3DH5 Z-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	319.999	33.9	14.0	8.0	30.2	25.7	46.0	20.3	Hori.
2	407.999	28.2	16.2	8.3	30.3	22.4	46.0	23.6	Vert.
3	479.999	28.8	17.0	8.4	30.2	24.0	46.0	22.0	Vert.
4	535.999	26.1	17.7	8.6	30.1	22.3	46.0	23.7	Vert.
5	845.540	20.3	20.2	9.5	29.7	20.3	46.0	25.7	Vert.
6	960.000	19.0	21.1	9.9	28.6	21.4	46.0	24.6	Vert.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 38 of 75

Operating mode: Tx 2480MHz 3DH5 X-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	315.999	36.5	13.9	8.0	30.2	28.2	46.0	17.8	Hori.
2	319.999	39.5	14.0	8.0	30.2	31.3	46.0	14.7	Hori.
3	323.999	40.0	14.1	8.0	30.2	31.9	46.0	14.1	Hori.
4	331.999	38.2	14.3	8.0	30.2	30.3	46.0	15.7	Hori.
5	339.999	37.2	14.6	8.0	30.2	29.6	46.0	16.4	Hori.
6	871.386	23.8	20.3	9.6	29.5	24.2	46.0	21.8	Hori.

Tx 2480MHz 3DH5 Y-plane Operating mode:

[Emission level]

LEITHOU	mon ieverj								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	315.999	36.8	13.9	8.0	30.2	28.5	46.0	17.5	Hori.
2	320.000	38.5	14.0	8.0	30.2	30.3	46.0	15.7	Hori.
3	324.000	37.6	14.1	8.0	30.2	29.5	46.0	16.5	Hori.
4	756.924	23.1	19.5	9.3	30.2	21.7	46.0	24.3	Hori.
5	779.078	22.4	19.7	9.3	30.1	21.3	46.0	24.7	Hori.
6	845.540	23.3	20.2	9.5	29.7	23.3	46.0	22.7	Hori.

Operating mode: Tx 2480MHz 3DH5 Z-plane

[Emission level]

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	304.000	32.0	13.5	7.9	30.2	23.2	46.0	22.8	Hori.
2	316.000	31.0	13.9	8.0	30.2	22.7	46.0	23.3	Hori.
3	356.000	24.4	15.0	8.2	30.3	17.3	46.0	28.7	Vert.
4	407.999	28.3	16.2	8.3	30.3	22.5	46.0	23.5	Vert.
5	479.999	29.1	17.0	8.4	30.2	24.3	46.0	21.7	Vert.
6	527.999	26.5	17.6	8.6	30.1	22.6	46.0	23.4	Vert.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 39 of 75

[Chart]

Tx 2480MHz 2DH5 X-plane

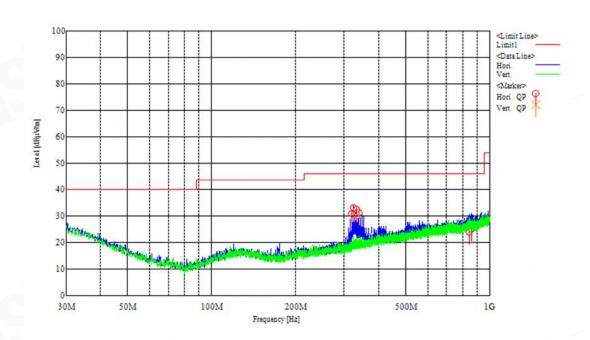

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 40 of 75

Test Data (1 – 12.4GHz)

Tested sample: 1A

Operating mode: Tx 2402MHz DH5 X-plane

[Emission level]

_	Dilli	bbion ie verj										
	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	4804.000	45.0	36.3	3.0	48.0	39.9	73.9	53.9	25.9	14.0	Hori.
	2	4804.000	47.9	41.1	3.0	50.9	44.7	73.9	53.9	23.0	9.2	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2402MHz DH5 Y-plane

[Emission level]

N	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	4804.000	47.2	40.2	3.0	50.2	43.8	73.9	53.9	23.7	10.1	Hori.
	2	4804.000	45.8	38.0	3.0	48.8	41.6	73.9	53.9	25.1	12.3	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Tx 2402MHz DH5 Z-plane Operating mode:

[Emission level]

No	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	4804.000	44.9	35.9	3.0	47.9	39.5	73.9	53.9	26.0	14.4	Hori.
2	4804.000	47.0	40.3	3.0	50.0	43.9	73.9	53.9	23.9	10.0	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 41 of 75

Operating mode:

Tx 2441MHz DH5 X-plane

[Emission level]

N	Vo.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	4882.000	46.8	39.9	3.3	50.1	43.8	73.9	53.9	23.8	10.1	Hori.
	2	4882.000	48.9	43.7	3.3	52.2	47.6	73.9	53.9	21.7	6.3	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2441MHz DH5 Y-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	4882.000	51.2	46.8	3.3	54.5	50.7	73.9	53.9	19.4	3.2	Hori.
2	4882.000	49.2	43.8	3.3	52.5	47.7	73.9	53.9	21.4	6.2	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2441MHz DH5 Z-plane

[Emission level]

_		bbien ie verj										
	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	4882.000	47.5	41.1	3.3	50.8	45.0	73.9	53.9	23.1	8.9	Hori.
	2	4882.000	50.7	46.1	3.3	54.0	50.0	73.9	53.9	19.9	3.9	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。

> SGS Japan Inc. 3-5-23, Kitayamata, Tsuzuki-ku, Yokohama 224-0021, Japan t +81(0) 45 550 3520 f +81(0) 45 592 7506



Model: FT5DR Page 42 of 75

Operating mode:

Tx 2480MHz DH5 X-plane

[Emission level]

N	o.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	1	4960.000	47.8	41.7	3.7	51.5	46.0	73.9	53.9	22.4	7.9	Hori.
2	/	4960.000	47.9	42.1	3.7	51.6	46.4	73.9	53.9	22.3	7.5	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2480MHz DH5 Y-plane

[Emission level]

N	lo.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	4960.000	51.1	47.1	3.7	54.8	51.4	73.9	53.9	19.1	2.5	Hori.
	2	4960.000	46.8	40.8	3.7	50.5	45.1	73.9	53.9	23.4	8.8	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2480MHz DH5 Z-plane

[Emission level]

	No.	Frequency	Reading PK	Reading Ave	C.Factor	Result PK	Result Ave	Limit PK	Limit Ave	Margin PK	Margin Ave	Ant.
	NO.	[MHz]	[dBµV]	Aνε [dBμV]	[dB]		[dBµV/m]				[dB]	Allı.
	1	4960.000	46.5	39.7	3.7	50.2	44.0	73.9	53.9	23.7	9.9	Hori.
I	2	4960.000	51.0	46.8	3.7	54.7	51.1	73.9	53.9	19.2	2.8	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 43 of 75

Operating mode:

Tx 2402MHz 2DH5 X-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	4804.000	45.7	35.5	3.0	48.7	39.1	73.9	53.9	25.2	14.8	Hori.
2	4804.000	46.4	36.9	3.0	49.4	40.5	73.9	53.9	24.5	13.4	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2402MHz 2DH5 Y-plane

[Emission level]

ſ	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBuV/m]	Limit Ave [dBuV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	4804.000	47.5	39.0	3.0	50.5	42.6	73.9	53.9	23.4	11.3	Hori.
	2	4804.000	46.3	36.8	3.0	49.3	40.4	73.9	53.9	24.6	13.5	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2402MHz 2DH5 Z-plane

[Emission level]

	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	4804.000	45.2	35.4	3.0	48.2	39.0	73.9	53.9	25.7	14.9	Hori.
Ī	2	4804.000	47.4	39.2	3.0	50.4	42.8	73.9	53.9	23.5	11.1	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 44 of 75

Operating mode:

Tx 2441MHz 2DH5 X-plane

[Emission level]

No	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	Result PK [dBµV/m]	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	4882.000	46.1	37.0	3.3	49.4	40.9	73.9	53.9	24.5	13.0	Hori.
2	4882.000	48.1	39.9	3.3	51.4	43.8	73.9	53.9	22.5	10.1	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2441MHz 2DH5 Y-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	4882.000	49.3	41.5	3.3	52.6	45.4	73.9	53.9	21.3	8.5	Hori.
2	4882.000	46.2	37.6	3.3	49.5	41.5	73.9	53.9	24.4	12.4	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2441MHz 2DH5 Z-plane

[Emission level]

	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
ľ	1	4882.000	45.6	36.2	3.3	48.9	40.1	73.9	53.9	25.0	13.8	Hori.
I	2	4882.000	48.8	41.0	3.3	52.1	44.9	73.9	53.9	21.8	9.0	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 45 of 75

Operating mode:

Tx 2480MHz 2DH5 X-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	4960.000	45.4	35.4	3.7	49.1	39.7	73.9	53.9	24.8	14.2	Hori.
2	4960.000	47.1	39.0	3.7	50.8	43.3	73.9	53.9	23.1	10.6	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2480MHz 2DH5 Y-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	4960.000	49.6	42.4	3.7	53.3	46.7	73.9	53.9	20.6	7.2	Hori.
2	4960.000	45.3	35.9	3.7	49.0	40.2	73.9	53.9	24.9	13.7	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Tx 2480MHz 2DH5 Z-plane Operating mode:

[Emission level]

_		serem re . er										
	No.	Frequency [MHz]	Reading PK [dBuV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	4960.000	45.1	35.5	3.7	48.8	39.8	73.9	53.9	25.1	14.1	Hori.
	2	4960.000	48.6	40.9	3.7	52.3	45.2	73.9	53.9	21.6	8.7	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 46 of 75

Operating mode:

Tx 2402MHz 3DH5 X-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	4804.000	44.9	35.5	3.0	47.9	39.1	73.9	53.9	26.0	14.8	Hori.
2	4804.000	46.6	37.5	3.0	49.6	41.1	73.9	53.9	24.3	12.8	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2402MHz 3DH5 Y-plane

[Emission level]

]	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBuV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	4804.000	47.1	38.3	3.0	50.1	41.9	73.9	53.9	23.8	12.0	Hori.
	2	4804.000	46.1	37.1	3.0	49.1	40.7	73.9	53.9	24.8	13.2	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2402MHz 3DH5 Z-plane

[Emission level]

		serem re . er										
	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	4804.000	45.9	37.1	3.0	48.9	40.7	73.9	53.9	25.0	13.2	Hori.
Ī	2	4804.000	48.8	40.5	3.0	51.8	44.1	73.9	53.9	22.1	9.8	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 47 of 75

Operating mode: Tx 2441MHz 3DH5 X-plane

[Emission level]

	bbron te verj										
No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	4882.000	45.9	36.2	3.3	49.2	40.1	73.9	53.9	24.7	13.8	Hori.
2	4882.000	48.4	40.8	3.3	51.7	44.7	73.9	53.9	22.2	9.2	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2441MHz 3DH5 Y-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	4882.000	49.1	41.6	3.3	52.4	45.5	73.9	53.9	21.5	8.4	Hori.
2	4882.000	45.7	36.3	3.3	49.0	40.2	73.9	53.9	24.9	13.7	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2441MHz 3DH5 Z-plane

[Emission level]

_		serem re . er										
	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	4882.000	46.2	37.2	3.3	49.5	41.1	73.9	53.9	24.4	12.8	Hori.
	2	4882.000	49.4	41.5	3.3	52.7	45.4	73.9	53.9	21.2	8.5	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 48 of 75

Operating mode:

Tx 2480MHz 3DH5 X-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	4960.000	46.4	36.7	3.7	50.1	41.0	73.9	53.9	23.8	12.9	Hori.
2	4960.000	47.1	38.6	3.7	50.8	42.9	73.9	53.9	23.1	11.0	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2480MHz 3DH5 Y-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	4960.000	49.2	41.4	3.7	52.9	45.7	73.9	53.9	21.0	8.2	Hori.
2	4960.000	46.2	35.9	3.7	49.9	40.2	73.9	53.9	24.0	13.7	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Tx 2480MHz 3DH5 Z-plane Operating mode:

[Emission level]

	No.	Frequency	Reading	Reading	C.Factor	Result	Result	Limit	Limit	Margin	Margin	A mt
	NO.	[MHz]	PK [dBµV]	Ave [dBµV]	[dB]	PK [dBµV/m]	Ave [dBµV/m]	PK [dBµV/m]	Ave [dBµV/m]	PK [dB]	Ave [dB]	Ant.
	1	4960.000	45.0	34.3	3.7	48.7	38.6	73.9	53.9	25.2	15.3	Hori.
I	2	4960.000	49.0	41.0	3.7	52.7	45.3	73.9	53.9	21.2	8.6	Vert.

Note: All other emissions are under noise floor.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 49 of 75

[Chart]

TX 2480MHz DH5 Y-plane

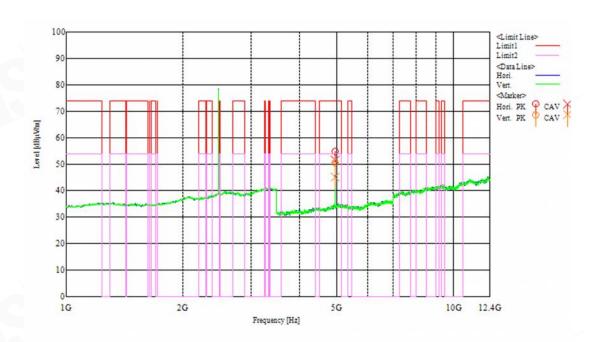

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 50 of 75

Test Data (above 12.4GHz)

Tested sample: 1A


Worst operating mode: Tx 2441MHz DH5 Z-plane

[Emission level]

- 4		22101110										
	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
I	4	-	-	ı	-	i	-	1	-	j	1	<u> </u>
	_	-	-	-	-	-	-	-	-		-	-

Note: All emissions were under noise floor.

[Chart]

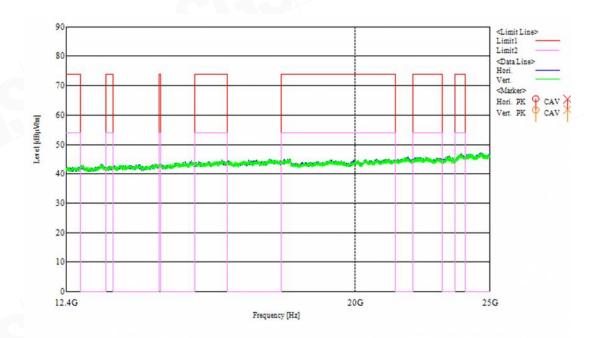

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 51 of 75

Restricted bandedge measurement

Tested sample: 1A

Operating mode: Tx 2402MHz DH5 X-plane

[Emission level]

-												
	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	2390.000	44.2	30.0	6.1	50.3	36.7	73.9	53.9	23.6	17.2	Hori.
2	2	2390.000	43.7	30.1	6.1	49.8	36.8	73.9	53.9	24.1	17.1	Vert.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2402MHz DH5 Y-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	2390.000	43.6	30.0	6.1	49.7	36.7	73.9	53.9	24.2	17.2	Vert.
-	-	-	-	-	-	-	-	-	-	-	-

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2402MHz DH5 Z-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	Result PK [dBµV/m]	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	2390.000	43.2	30.0	6.1	49.3	36.7	73.9	53.9	24.6	17.2	Hori.
-	-	-	-	-	M-\	\-	-	-	-	-	-

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 52 of 75

Operating mode:

Tx 2402MHz 2DH5 X-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	Result PK [dBµV/m]	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	2390.000	43.8	30.1	6.1	49.9	36.8	73.9	53.9	24.0	17.1	Vert.
-	-	-	-	-	-	-	-	-	-	-	_

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode:

Tx 2402MHz 2DH5 Y-plane

[Emission level]

ĺ	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBuV]	C.Factor [dB]	PK	Result Ave [dBuV/m]	Limit PK [dBuV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	1	2390.000	43.8	30.1	6.1	49.9	36.8	73.9	53.9	24.0	17.1	Vert.
	-	-	-	-	0-4	-	-	-	-	-	1	-

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode:

Tx 2402MHz 2DH5 Z-plane

[Emission level]

	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
Ц	1	2390.000	43.4	30.1	6.1	49.5	36.8	73.9	53.9	24.4	17.1	Hori.
I	-	-	-	-	-	-	-	-	-	-	-	-

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。

> SGS Japan Inc. 3-5-23, Kitayamata, Tsuzuki-ku, Yokohama 224-0021, Japan t +81(0) 45 550 3520 f +81(0) 45 592 7506

URL: www.sgsgroup.jp



Model: FT5DR Page 53 of 75

Operating mode:

Tx 2402MHz 3DH5 X-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	2390.000	43.8	30.0	6.1	49.9	36.7	73.9	53.9	24.0	17.2	Hori.
2	2390.000	43.3	30.1	6.1	49.4	36.8	73.9	53.9	24.5	17.1	Vert.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode:

Tx 2402MHz 3DH5 Y-plane

[Emission level]

-												
	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
Ī	1	2390.000	43.1	30.1	6.1	49.2	36.8	73.9	53.9	24.7	17.1	Vert.
	1	-	-	-	0-4	-	-	-	-	-	-	-

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode:

Tx 2402MHz 3DH5 Z-plane

[Emission level]

	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
Ц	1	2390.000	44.4	30.1	6.1	50.5	36.8	73.9	53.9	23.4	17.1	Hori.
I	-	-	-	-	-	-	-	-	-	-	-	-

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.


This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 54 of 75

[Chart]

Tx 2402MHz 3DH5 Z-plane

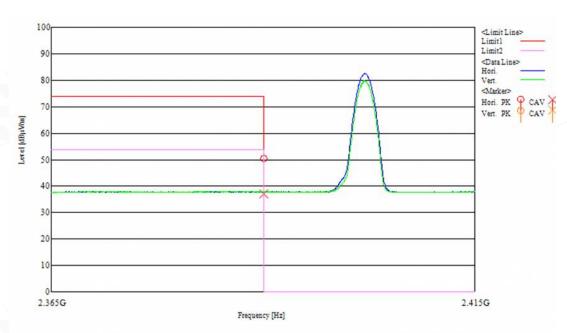

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 55 of 75

Tested sample: 1A

Operating mode: Tx 2480MHz DH5 X-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	Result PK [dBµV/m]	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	2483.500	44.5	30.4	6.9	51.4	37.9	73.9	53.9	22.5	16.0	Vert.
-	-	-	-	-	-	-	-	-	-	-	-

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2480MHz DH5 Y-plane

[Emission level]

	шш	ssion icverj										
	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
Ī	1	2483.500	44.1	30.4	6.9	51.0	37.9	73.9	53.9	22.9	16.0	Hori.
	2	2483.500	44.4	30.4	6.9	51.3	37.9	73.9	53.9	22.6	16.0	Vert.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2480MHz DH5 Z-plane

[Emission level]

J	ш	ssion icver										
	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	Result PK [dBµV/m]	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
Ī	1	2483.500	44.1	30.4	6.9	51.0	37.9	73.9	53.9	22.9	16.0	Hori.
		ı	-	ı	1	-	-	1	1	ı	i	ı

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 56 of 75

Operating mode: Tx 2480MHz 2DH5 X-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	Result PK [dBµV/m]	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	2483.500	43.6	30.3	6.9	50.5	37.8	73.9	53.9	23.4	16.1	Vert.
-	-	-	-	-	-	-	-	-	-	-	_

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2480MHz 2DH5 Y-plane

[Emission level]

	bbron ie verj										
No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
1	2483.500	43.7	30.3	6.9	50.6	37.8	73.9	53.9	23.3	16.1	Vert.
-	-	-	-		-	-	-	-	-	-	-

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode: Tx 2480MHz 2DH5 Z-plane

[Emission level]

No.	Frequency [MHz]	Reading PK	Reading Ave	C.Factor [dB]	PK	Result Ave	Limit PK	Limit Ave	Margin PK	Margin Ave	Ant.
		[dBµV]	[dBµV]		[dBµV/m]	[dBµV/m]	[dBµV/m]	[dBµV/m]	[dB]	[dB]	
1	2483.500	44.1	30.3	6.9	51.0	37.8	73.9	53.9	22.9	16.1	Hori.
2	2483.500	43.6	30.3	6.9	50.5	37.8	73.9	53.9	23.4	16.1	Vert.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 57 of 75

Operating mode:

Tx 2480MHz 3DH5 X-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	Result PK [dBµV/m]	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.	
1	2483.500	43.3	30.3	6.9	50.2	37.8	73.9	53.9	23.7	16.1	Vert.	
-	-	-	-	-	-	-	-	-	-	-	_	

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode:

Tx 2480MHz 3DH5 Y-plane

[Emission level]

-												
	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
Ī	1	2483.500	43.5	30.3	6.9	50.4	37.8	73.9	53.9	23.5	16.1	Hori.
I	2	2483.500	43.8	30.3	6.9	50.7	37.8	73.9	53.9	23.2	16.1	Vert.

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

Operating mode:

Tx 2480MHz 3DH5 Z-plane

[Emission level]

	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
I	1	2483.500	43.5	30.3	6.9	50.4	37.8	73.9	53.9	23.5	16.1	Hori.
ſ	-	-	-	-	-	-	-	-	-	-	-	-

Note: Duty cycle compensation (92.9% = 0.6 dB) is added to the average result.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。


> SGS Japan Inc. 3-5-23, Kitayamata, Tsuzuki-ku, Yokohama 224-0021, Japan t +81(0) 45 550 3520 f +81(0) 45 592 7506



Model: FT5DR Page 58 of 75

[Chart]

Tx 2480MHz DH5 Z-plane

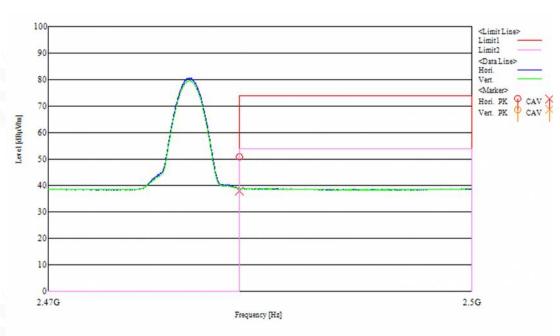

[Test Day1]

Tested Date: 11 Jun. 2021 Temperature: 21 degC 67 % 1016 hPa Humidity: Atmos. Press:

[Test Day2]

Tested Date: 14 Jun. 2021 Temperature: 21 degC 1005 hPa Humidity: 65 % Atmos. Press:

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 59 of 75

AC power line conducted emissions

Test setup

Test setup was implemented according to the method of ANSI C63.10 clause 6.2.

Test procedure

Measurement procedures were implemented according to the method of ANSI C63.10 clause 6.2.

Applicable rule and limitation

FCC 15.207 RSS-Gen Sec. 8.8

AC power line conducted emissions limits

Frequency of Emission	Conducted emissi	ons Limit [dBµV]
[MHz]	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

^{*} Decreases with the logarithm of the frequency. The lower limit applies at the band edges.

Test equipment used (refer to List of utilized test equipment)

_	_	_

Test software used

EMI Ver. 6.1

Calculation method

The Correction Factor and Result are calculated as followings.

Correction Factor [dB] = ISN Factor [dB] + Loss [dB] Result $[dB\mu V]$ = Reading $[dB\mu V]$ + Correction Factor [dB]

Test results – *This item was not tested.*

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 60 of 75

Test Data

Operating mode: -[Emission level]

	Freq. [MHz]	Reading QP [dBµV]	Reading Ave [dBµV]	Factor [dB]	Result QP [dBµV]	Result Ave [dBµV]	Limit QP [dBµV]	Limit Ave [dBµV]	Margin QP [dB]	Margin Ave [dB]	Line
-	-	-	-	-	-	-	-	-	-	-	-
-	-))-	-	-	-	-	-	-	-		<u> </u>

[Chart]

Operating mode: -

Tested Date: Humidity: - % Temperature: - degC Atmos. Press: - hPa

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 61 of 75

2.9 Radiated emissions (Receiver)

Test setup

Test setup was implemented according to the method of ANSI C63.4 clause 6 "General requirements for EUT equipment arrangements and operation", clause 8.2 and Annex H.3 "Radiated emission measurements setup".

Test procedure

Measurement procedures were implemented according to the method of ANSI C63.4 clauses 8.2.

The EUT is place on a non-conducted table which is 0.8 m height from a ground plane and the measurement antenna to EUT distance is 3 meters. The turn table is rotated for 360 degrees to determine the maximum emission level.

The antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

The spectrum analyzer and receiver are set to the followings;

RBW=100 kHz (up to 1000 MHz) or 1 MHz (above 1000 MHz),

VBW= 300 kHz (up to 1000 MHz) or 3 MHz (above 1000 MHz)

Final measurement is carried out with a receiver RBW of 120 kHz (up to 1000 MHz), or 1 MHz (above 1000 MHz).

Applicable rule and limitation

RSS-Gen Sec.7.3 Radiated emissions limits

Frequency [MHz]	Field Strength [μV/m]	Measurement Distance [m]	Field Strength [dBµV/m]
30 - 88	100	3	40.0
88 –216	150	3	43.5
216 – 960	200	3	46.0
Above 960	500	3	53.9

In the emission table above, the tighter limit applies at the band edges.

The emission limits shown in the above table are based on measurements employing a QP detector (up to 1000 MHz) or AVE/PEAK detector (above 1000 MHz).

Test results - Complied with requirement

Test equipment used (refer to List of utilized test equipment)

AC11	TR10	CL71	PR15	BA10	CL38	CL39	PR16
DH07							

Test software used

EMI1 Ver. 6.1

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 62 of 75

Calculation method

The Correction Factor and Result are calculated as followings.

Correction Factor [dB/m] = Ant. Factor [dB/m] + Loss [dB] - Gain [dB]Result $[dB\mu V/m]$ = Reading $[dB\mu V]$ + Correction Factor [dB/m]

Test Data (below 1GHz)

Tested sample: 1A

Operating mode: Rx 2402MHz X-plane

[Emission level]

LEITHOL	non ie veij										
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.		
1	176.250	22.7	10.4	7.1	30.2	10.0	43.5	33.5	Hori.		
2	319.999	40.5	14.0	7.7	30.2	32.0	46.0	14.0	Hori.		
3	339.999	36.9	14.6	7.7	30.2	29.0	46.0	17.0	Hori.		
4	347.999	36.9	14.8	7.9	30.2	29.4	46.0	16.6	Hori.		
5	559.998	21.4	18.0	8.4	30.1	17.7	46.0	28.3	Hori.		
6	819.501	25.2	20.0	9.0	29.9	24.3	46.0	21.7	Hori.		

Rx 2402MHz Y-plane Operating mode:

[Emission level]

Elimesion level									
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	319.999	35.1	14.0	7.7	30.2	26.6	46.0	19.4	Hori.
2	339.999	35.4	14.6	7.7	30.2	27.5	46.0	18.5	Hori.
3	347.999	35.9	14.8	7.9	30.2	28.4	46.0	17.6	Hori.
4	411.999	30.1	16.2	8.1	30.3	24.1	46.0	21.9	Hori.
5	597.393	20.6	18.5	8.5	30.1	17.5	46.0	28.5	Hori.
6	969.739	19.0	21.1	9.3	28.5	20.9	53.9	33.0	Hori.

Operating mode: Rx 2402MHz Z-plane

[Emission level]

_	Diffic	mon rever								
	No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
	1	303.999	30.7	13.5	7.6	30.2	21.6	46.0	24.4	Hori.
4	2	319.999	30.2	14.0	7.7	30.2	21.7	46.0	24.3	Hori.
	3	960.000	19.0	21.1	9.3	28.6	20.8	46.0	25.2	Hori.

Note: All other emissions are under noise floor.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 63 of 75

Operating mode: Rx 2441MHz X-plane

[Emission level]

LDIIIIO	mon rever								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	320.000	35.6	14.0	7.7	30.2	27.1	46.0	18.9	Hori.
2	331.999	36.8	14.3	7.7	30.2	28.6	46.0	17.4	Hori.
3	339.999	37.6	14.6	7.7	30.2	29.7	46.0	16.3	Hori.
4	347.999	37.5	14.8	7.9	30.2	30.0	46.0	16.0	Hori.
5	403.999	31.4	16.1	8.0	30.3	25.2	46.0	20.8	Hori.
6	507.999	26.6	17.3	8.3	30.1	22.1	46.0	23.9	Hori.
7	809.317	23.8	20.0	9.0	29.9	22.9	46.0	23.1	Hori.

Operating mode: Rx 2441MHz Y-plane

[Emission level]

LEmiss	sion icverj								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	339.999	35.8	14.6	7.7	30.2	27.9	46.0	18.1	Hori.
2	347.999	36.7	14.8	7.9	30.2	29.2	46.0	16.8	Hori.
3	355.999	33.2	15.0	7.9	30.3	25.8	46.0	20.2	Hori.
4	403.999	31.0	16.1	8.0	30.3	24.8	46.0	21.2	Hori.
5	487.999	27.2	17.1	8.3	30.1	22.5	46.0	23.5	Hori.
6	893.539	21.1	20.4	9.2	29.3	21.4	46.0	24.6	Hori.

Operating mode: Rx 2441MHz Z-plane

[Emission level]

	7011 10 1 01								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	936.700	20.5	20.8	9.3	28.9	21.7	46.0	24.3	Hori.
2	403.999	30.0	16.1	8.0	30.3	23.8	46.0	22.2	Vert.

Note: All other emissions are under noise floor.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 64 of 75

Operating mode: Rx 2480MHz X-plane

[Emission level]

	seron rever								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	320.000	37.4	14.0	7.7	30.2	28.9	46.0	17.1	Hori.
2	331.999	37.7	14.3	7.7	30.2	29.5	46.0	16.5	Hori.
3	339.999	38.2	14.6	7.7	30.2	30.3	46.0	15.7	Hori.
4	347.999	38.0	14.8	7.9	30.2	30.5	46.0	15.5	Hori.
5	515.999	26.0	17.4	8.3	30.1	21.6	46.0	24.4	Hori.
6	845.494	24.0	20.2	9.1	29.7	23.6	46.0	22.4	Hori.

Rx 2480MHz Y-plane Operating mode:

[Emission level]

	mon rever								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	320.000	36.3	14.0	7.7	30.2	27.8	46.0	18.2	Hori.
2	339.999	36.3	14.6	7.7	30.2	28.4	46.0	17.6	Hori.
3	347.999	36.8	14.8	7.9	30.2	29.3	46.0	16.7	Hori.
4	355.999	33.6	15.0	7.9	30.3	26.2	46.0	19.8	Hori.
5	403.999	30.9	16.1	8.0	30.3	24.7	46.0	21.3	Hori.
6	945.232	21.3	20.9	9.3	28.8	22.7	46.0	23.3	Hori.

Operating mode: Rx 2480MHz Z-plane

[Emission level]

	non rever								
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	960.000	21.1	21.1	9.3	28.6	22.9	46.0	23.1	Hori.
2	419.999	28.1	16.3	8.1	30.2	22.3	46.0	23.7	Vert.
3	487.999	28.9	17.1	8.3	30.1	24.2	46.0	21.8	Vert.

Note: All other emissions are under noise floor.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。

SGS Japan Inc. 3-5-23, Kitayamata, Tsuzuki-ku, Yokohama 224-0021, Japan t +81(0) 45 550 3520 f +81(0) 45 592 7506 URL: www.s


URL: www.sgsgroup.jp



Model: FT5DR Page 65 of 75

[Chart]

Rx 2402MHz X-plane

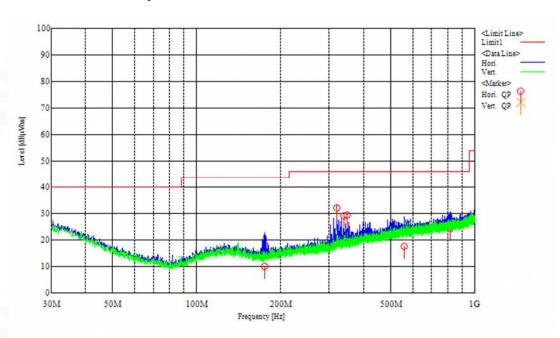

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。



Model: FT5DR Page 66 of 75

Test Data (1 – 12.4 GHz)

Tested sample: 1A

Operating mode: Rx 2402MHz X-plane

[Emission level]

- 4	Dilli	bbron ie verj										
	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	Result PK [dBµV/m]	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	\-	-	-	-	-	ı	-	-	-	j	-	<u>.</u>
	-	-	-	-	-	-	-	1	1		-	1

Note: All emissions are under noise floor.

Operating mode: Rx 2402MHz Y-plane

[Emission level]

No	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBuV]	C.Factor [dB]	Result PK [dBuV/m]	Result Ave [dBµV/m]	Limit PK [dBuV/m]	Limit Ave [dBuV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

Note: All emissions are under noise floor.

Operating mode: Rx 2402MHz Z-plane

[Emission level]

	beren reverj										
No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
-	-	-	-	-		_	-	-	i	-	-
-	-	-	-	-	-		-	-	-	-	-

Note: All emissions are under noise floor.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 67 of 75

Operating mode: Rx 2441MHz X-plane

[Emission level]

	moston tever										
N	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
-	\ -	-	-	-	-	-	-	-	-	- \	-
_	-	-	-	-	-	-	-	-	-	-	_

Note: All emissions are under noise floor.

Operating mode: Rx 2441MHz Y-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	ı

Note: All emissions are under noise floor.

Operating mode: Rx 2441MHz Z-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
_	-	-	-	-	-	-	-	-		-	-
-	-	-	-	-	-	-	-	-	-	-	-

Note: All emissions are under noise floor.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 68 of 75

Operating mode:

Rx 2480MHz X-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	\ -	-	-	-	-	-	-	-	-	- \	-
-	-	-	-	-	-	-	-	-	i	-	_

Note: All emissions are under noise floor.

Operating mode:

Rx 2480MHz Y-plane

[Emission level]

No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	PK	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	6-1	1-1-		-	-	-	-	-

Note: All emissions are under noise floor.

Operating mode:

Rx 2480MHz Z-plane

[Emission level]

1	No.	Frequency [MHz]	Reading PK [dBµV]	Reading Ave [dBµV]	C.Factor [dB]	Result PK [dBµV/m]	Result Ave [dBµV/m]	Limit PK [dBµV/m]	Limit Ave [dBµV/m]	Margin PK [dB]	Margin Ave [dB]	Ant.
	-	-	-	-	-	-	-	1	1	•	-	-
	-	-	-	-	-	-	-	1	1	-	-	-

Note: All emissions are under noise floor.


This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 69 of 75

[Chart]

Rx 2441MHz Z-plane

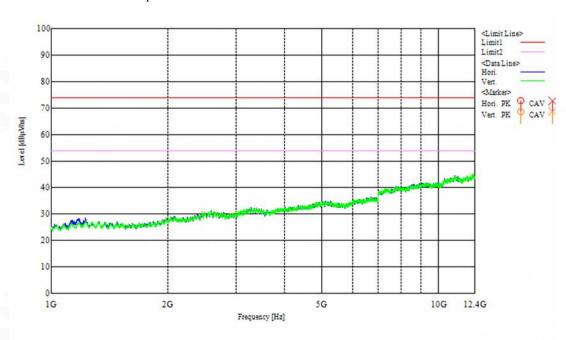

Tested Date: 14 Jun. 2021 Temperature: 21 degC 1005 hPa Humidity: 65 % Atmos. Press:

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 70 of 75

2.10 AC power line conducted emissions (Receiver)

Test setup

Test setup was implemented according to the method of ANSI C63.4 clause 6 "General requirements for EUT equipment arrangements and operation" and Annex H.1 "AC power line conducted emission measurements setup".

Test procedure

Measurement procedures were implemented according to the method of ANSI C63.4 clauses 7, clause 13.1.3 and Annex H.2 "AC power line conducted emission measurements".

Exploratory measurements were used the spectrum analyzer to identify the frequency of the emission that has the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable positions, and with a typical system equipment configuration and arrangement.

Final ac power line conducted emission measurements were performed based on the exploratory tests. The EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit are selected for the final measurement.

When the measurement value is grater than average limitation the average detection measurements were performed.

Applicable rule and limitation

RSS-Gen Sec.7.3 AC power line conducted emissions limits

Frequency of Emission	Conducted emissions Limit [dBµV]				
[MHz]	Quasi-peak	Average			
0.15 - 0.5	66 to 56 *	56 to 46 *			
0.5 - 5	56	46			
5 - 30	60	50			

^{*} Decreases with the logarithm of the frequency. The lower limit applies at the band edges.

Test equipment used (refer to List of utilized test equipment)



Test software used

EMI Ver. 6.1

Calculation method

The Correction Factor and Result are calculated as followings.

Correction Factor [dB] = ISN Factor [dB] + Loss [dB] Result $[dB\mu V]$ = Reading $[dB\mu V]$ + Correction Factor [dB]

Test results – *This item was not tested.*

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sos.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 71 of 75

Test Data

Operating mode: -

[Emission level]

	Freq. [MHz]	Reading QP [dBµV]	Reading Ave [dBµV]	Factor [dB]	Result QP [dBµV]	Result Ave [dBµV]	Limit QP [dBµV]	Limit Ave [dBµV]	Margin QP [dB]	Margin Ave [dB]	Line
-	-	-	-	-	-	-	-	-	-	-	-
	-		-	ı	-	ı	ŀ	-	-		<u> </u>

[Chart]

Tested Date:

- % Humidity:

Temperature: - degC Atmos. Press: - hPa

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT5DR Page 75 of 75

List of utilized test equipment / calibration

		1				
ID No.	Kind of Equipment	Manufacturer	Model No.	Serial Number	Cal. Date	Cal. until
AC11(EM)	Anechoic Chamber	TDK	-		2020/8/11	2021/8/31
AC11(EG)	Anechoic Chamber	TDK	-	-	2020/8/1	2021/8/31
BA10	Bilogical Antenna	TESEQ	CBL6111D	32342	2021/6/15	2022/6/30
CL71	RF Cable for RE	RFT	-	-	2021/1/18	2022/1/31
DH07	DRG Horn Antenna	A.H. Systems	SAS-571	1939	2021/2/27	2023/2/28
LP05	Loop Antenna	ETS-Lindgren	6502	00143302	2021/3/9	2022/3/31
PR15	Pre. Amplifier	Anritsu	MH648A	6201156141	2021/6/15	2022/6/30
PR16	Pre. Amplifier (1-26G)	Agilent Technologies	8449B	3008A01538	2021/3/9	2022/3/31
TR10	Test Receiver (F/W: 2.26)	Rohde & Schwarz	ESR26	101313	2021/3/22	2022/3/31
CL31	RF Cable 1 m	Junkosha	M W X 2 2 1	1303S118	2021/1/27	2022/1/31
CL38	RF Cable 2 m	Junkosha	MWX221	1603S626	2021/1/27	2022/1/31
CL39	RF Cable 5 m	SUHNER	SUCOFLEX 126E	523222	2021/1/27	2022/1/31
HPF11	High Pass Filter (3500MHz)	Wainwright	(6-2765-3500-26500	2	2021/5/12	2022/5/31
LPF1	Low Pass Filter (1000MHz)	M -City	LPF1000-04	RF0012-01	2021/3/8	2022/3/31
SH01	Standard Horn Antenna (18-26G)	A.H. Systems	SAS-572	208	2020/7/4	2022/7/31
SH05	Standard Horn Antenna (12-18G)	A.H. Systems	SAS-586	214	2020/7/23	2022/7/31

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

This document is issued by the Company subject to its General Conditions of Service accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. この試験報告書は裏面に記載された、もしくはhttp://www.sgs.comで入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償の範囲及び司法管轄の項 目をご注意ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この書面全体の複製以外には、弊社からの事前の許可を得ること無く複製することを禁じま す。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります。