


1.0 Safety Instructions

- This product contains magnetic material. Please consult your doctor about whether it will affect implantable medical devices.
- Please place this product away from sources of fire and heat. Do not place an open flame source (such as a lit candle) on or near this product.
- Do not modify the product without authorization.
- Do not use this product with an inverter.
- Only use this product with a power supply that has been approved by the relevant authorities and meets local regulatory requirements (e.g. UL, CSA, VDE, CCC).
- The batteries included with this product may pose a fire or chemical burn hazard if not handled properly.
- Do not overheat the product containing the batteries (e.g., keep out of direct sunlight and away from sources of ignition, etc.).
- If the speaker is exposed to salt or chlorinated water, rinse it gently with fresh water afterwards to remove the residue.
- Before charging, make sure the connector port is completely dry.
- Do not charge the speaker when it is wet.

2.0 Product description

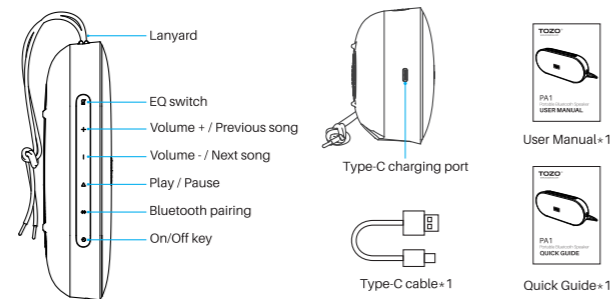

3.0 Specifications

Speaker unit	2.5 inch
Speaker type	Full-range speakers
Passive diaphragm of loudspeaker	(80mm+50mm) ×2
Amplifier power	20W
Total power of whole machine	20W
Play time	50% volume, 12H

Frequency response range	55Hz - 18KHz
Waterproof grade	IPX7
Signal to noise ratio	≥80dB
Battery specifications	4000mAh/3.7V
Product size	210 x 91 x 61(mm)
Product weight	590g
Charging time	≤2.5H
Support decoding format	SBC AAC
Bluetooth protocol	A2DP/AVRCP/HFP/HSP/OPP/HID/SPP/PBAP/GATT/SM
Bluetooth transmission distance	10 meters
Calling	1 mic

4.0 Key function guide

X1: Press once **Hold:** Press and hold for 1.5 seconds




- Bluetooth pairing**
Short press BT key Blue light flashing fast (light 250ms, off 250ms)
1. For the first time to boot into pairing mode, blue light fast flashing, blue light is always on after connecting the device successfully.
 2. When there is a pairing history, power on into the back connection mode blue light slow flashing (light 500ms, 500ms off), short press BT key to enter the pairing mode, Bluetooth pairing time for 5 minutes, pairing failure after shutdown.
 3. Bluetooth connection status, short press the BT key, disconnect the Bluetooth connection into the pairing state.

- Volume up**
Short press to increase the volume by 1 step (total 16 steps)
- Volume down**
Short press to increase the volume by 1 step (total 16 steps)
- Next song**
Long press 1.5S to switch to the next song
- Previous song**
Long press 1.5S to switch to the previous song

- Play/Pause**
In music mode: Switch between play/pause
- Answer/Hang up**
In phone mode: short press play key answer/hang up call
- Reject**
In phone mode: Long press > 1S to reject the call
- Power on/off**
Long press to power on, Short press to power off
- EQ switch**
Switch between the EQ modes, switch the broadcast tone and the actual EQ mode correspond to each other

5.0 TWS function guide

1. After the speaker is turned on, connect this speaker with cell phone Bluetooth.
2. Then the speaker long press Bluetooth key 5S to enter the TWS group state.
3. Prepare another speaker on and in the pairing state can automatically connect with the first speaker.

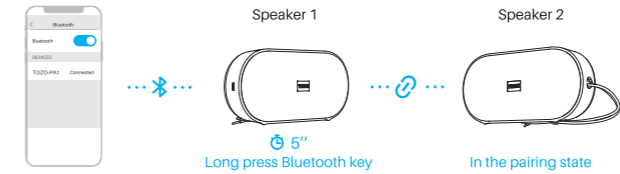

6.0 Solutions to common problems

- If there is a problem with the speaker.
- Power on the speaker.
 - Check the status of the status indicator.
 - Make sure the mobile device supports Bluetooth technology.
 - Charge the battery.
 - Turn up the volume on the speaker, device, and music app.
 - If necessary, the product can be restored to the factory settings.
 - Move the device closer to the speaker and away from other distractions or obstructions.
- If you cannot solve the problem, see the table below for symptoms and solutions to common problems. If you are still unable to resolve the problem, please contact TOZO Customer Service. Please visit: www.tozostore.com

Symptoms	Solutions
Not powered (battery)	The battery may be in protection mode or the battery may be fully discharged. Connect the speaker to the wall charger.
Speakers cannot be connected to mobile devices	On your device. 1:Disable and reactivate the Bluetooth function. 2:Remove the speaker from the Bluetooth list on your device. 3:Clear the pairing list of the speaker. Connect again.ected to mobile devices.

No sound	1: Make sure the voice prompt is on, press the Bluetooth button and listen to the connected device. 2: Make sure you are using the right device. 3: Please use another music source. 4: If two devices are connected, pause the audio on the first device and then play the audio on the other device. 5: If two devices are connected, move the device to within speaker range (within 10m).
Poor sound quality	1: Please use another music source. 2: Disable any audio enhancements on your device or music app. 3: If the speakers have been in contact with water, let them dry and try again.
Speaker cannot be charged	1: Make sure the connector of the cable is properly aligned with the connector on the speaker. 2: Try another charging source. 3: Secure both ends of the USB cable. 4: If your speaker has been exposed to high or low temperatures, wait for it to return to room temperature, then retry charging.
The microphone does not receive sound	1: Try calling again. 2: Try another compatible device. 3: If the speaker has been in contact with water, wait for it to dry and try again. 4: Try to be close to the speaker while talking. 5: During the call, make sure the speaker is selected as the audio source in the current call window.

7.0 Disclaimers

TOZO has the final authority to interpret this manual. Design and specifications are subject to change without notice.

8.0 FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Thank you for purchasing the TOZO authentic product.
For more latest products, parts and accessories,
please visit: www.tozostore.com
For any assistance please contact Email: info@tozostore.com



TOZO®
www.tozostore.com



PA1
USER MANUAL