


Wireless Numeric Keypad

User Manual

Pairing Instructions

1. Switch the keypad power button to the right side. The status indicator will light up in green for 2-3 seconds.
2. Press  for 3 seconds, the status indicator will start to blink in green. The keypad is now ready to connect to your device.
3. Activate the Bluetooth function on your device. Select Settings > Bluetooth > On.
4. Locate and select “Keyboard” in your Bluetooth menu. The status indicator will stop blinking to indicate a successful connection.

Sleep Mode

The keypad will enter sleep mode after remaining idle for 30 minutes. To activate it, press any key and wait for 3 seconds.

Charging Your Keypad

When the battery is low, the battery indicator will turn red. If there is no light displayed at all, the battery is completely drained. For both situations, it is time to charge the keypad.

1. Plug the included charging cable into the keypad charging port, and the USB end into either a USB AC adapter or USB port on your computer.
2. When charging, the status indicator will turn red. Generally, it takes around 1 hour for a full charge. (Output: DC 5V/500mA)

Package Contents


- 1 x Numeric Keypad
- 1 x Charging Cable
- 1 x User Manual


Specifications

Bluetooth Version	Bluetooth 5.1
Operating Range	< 10m / 32.8ft
Working Voltage	3.7V



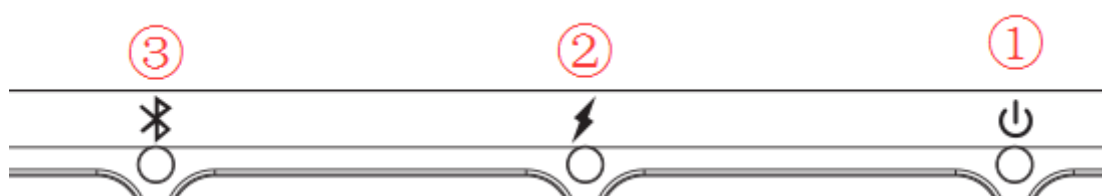

Working Current	2mA
Charging Current	200mA
Sleeping Current	0.8mA
Re-connect Time	3 seconds
Stand-by Time	90 days
Charge Time	1 hour
Uninterrupted Work Time	80 hours
Lithium Battery Capacity	200mAh

Product Overview



- ① **Power Indicator:** Slide the power button to right side, the indicator will be green for 2-3 seconds.
- ② **Charging Indicator:** The indicator will turn red when the keypad is charging and turn green once fully charged.
- ③ **Bluetooth Pairing:** Long Press  for 3 seconds, the keypad will enter pairing mode.

Keys and Function

Icons	iOS	Mac	Android	Windows
Num Lock	N/A	Clear	Num Lock	Num Lock
	N/A	N/A	N/A	Calculator
	Screenshot	N/A	Screenshot	Screenshot
	Search for	N/A	Search for	Search for
	Bluetooth pairing	Bluetooth pairing	Bluetooth pairing	Bluetooth pairing
Home	N/A	Home (Web Interface)	Home	Home (Web Interface)
End	N/A	End (Web Interface)	End	End (Web Interface)
PgUp	N/A	PgUp (Web Interface)	PgUp	PgUp (Web Interface)

PgDn	N/A	PgDn (Web Interface)	PgDn	PgDn (Web Interface)
Ins	N/A	N/A	N/A	Insert

Note:

1. The Num Lock function is applicable for both Windows system and Android system. (Inapplicable for iOS and Mac system).
2. When the keypad is paired with Windows devices, the Num Lock indicator will light up in red when pressed. When paired with Android devices, the Num Lock indicator will not light up when pressed, but it still functions.

Troubleshooting

If your device doesn't respond to the keypad, try the following steps:

1. Restart your device.
2. Turn your keypad off and back on.
3. Delete the Bluetooth keypad from the search list, then follow the instruction and try to connect again.
4. If your keypad does not establish or maintain a Bluetooth connection, reset the Bluetooth module by charging the keypad.
5. If your keypad does not operate correctly after charging, please contact the authorized retailer.

Safety Tips

- Do not disassemble the product.
- Keep away from sharp objects.
- Dispose of battery according to local laws.
- Do not place heavy objects on the keypad.
- Keep the product away from oils, chemicals, and organic liquids.
- Use only a damp, soft cloth, like microfiber, to wipe the keypad.

Warranty

This Bluetooth keypad is covered with Fintie parts and labor warranty for 90 days from date of the original purchase. If the device fails due to a manufacturing defect, please contact the seller immediately to launch a warranty claim.

The following are excluded from Fintie's warranty coverage:

- Device purchased as 2nd hand or used.
- Damage resulted from natural disaster.
- Damage due to improper use or normal wear and tear.
- Device purchased from unauthorized retailer or distributor.
- Damage resulted from chemical, fire, radioactive substance, poison, liquid.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.