

### 9.0" TABLET COMBO WITH POGO PIN DETACHABLE KEYBOARD

EID- 9000



Instruction Manual Please read carefully before use and keep for future reference.

#### Thank You

We know you have many choices when it comes to technology; thank you for choosing us here at Naxa Electronics. Established in 2001 in Los Angeles, California, we are dedicated to delivering products that entertain and delight. We trust that you will be happy with your purchase. Please read this manual carefully and save it for reference. You may also find the latest FAQ, documentation, and other product material at our website. Come visit us on the web atwww.naxa.com and see all that we have to offer!

#### In the Box


Please take a moment to make sure that you have every eferything in the list below. Although we make every effort to ensure that each Naxa device is securely packed and sealed, we know a lot can happen in between us and you. If anything is missing, check back with your local retailer to get immediate assistance. If they cannot help you, please contact our Emerson Support team at support@emersonaudio.com


- EID-9000 tablet
- Power Adapter
- Headphone
  - USB cable
- User's manual
- Warranty Card
- Case & Keyboard(see the image below)



Before You Start	
Please take note of the following before you start.	
<ol> <li>Do not drop the unit. Avoid forceful shaking of the display to prevent damage or unusual operation.</li> </ol>	<ol><li>It is normal for the tablet to become slightly warm during the charging process.</li></ol>
<ol><li>Do not touch the unit with metal or sharp objects to avoid short circuit or damage.</li></ol>	10) The USB port is for transferring data only. The port is not used to charge any devices.
<ol> <li>Schedule regular backup of your data to prevent the loss of important data. Always backup your data before upgrading the firmware.</li> </ol>	11) Specifications are subject to change without prior notice.
<ol> <li>Do not disassemble. Do not wipe the surface of the unit with alcohol, thinner or benzene.</li> </ol>	
<ol> <li>Do not disconnect the tablet while it is formatting or uploading/downloading. Doing so may corrupt your data.</li> </ol>	
<ol><li>bo not allow water or foreign objects to enter the tablet.</li></ol>	
<ol> <li>Do not use the tablet in places that are extremely hot, cold, dusty, or humid.</li> </ol>	
<ol> <li>Please charge your tablet when the Low Battery icon is displayed, system turns off automatically, or keys are not responsive.</li> </ol>	
www.emersonaudio.com	Page 3

Ð	
Ŭ	
<u> </u>	
U	
Э	
Ļ	

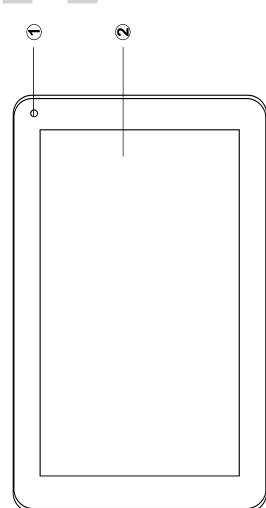


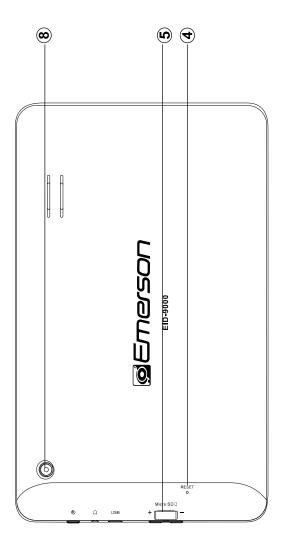

Front camera	LCD touchscreen	Power button	Reset
<del>, -</del>	7	m	4



	-	-
	۲	-
	Ξ	
	ç	)
	C	)
	~	:
	C	)
-	,	ξ.
	5	<b>,</b>
	Ξ	5
	π	5
	2	
	Z	
	C	)
	r S S Z	٦.
	ž	
	đ	J
	C	
	2	
	۵	)
		•
	<	2
	<	5
	≤	5
	S	>
	۶	>

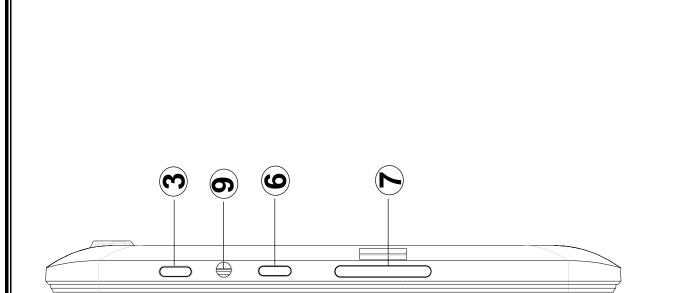


Memory Card Slot
TYPE-C USB
Volume+/-
Rear Camera
Headphone Jack

<b>Basic Operation</b>	<ol> <li>When device is not in use, press the power button once to go into sleep mode.</li> </ol>
Charging your device	2. Shut down applications when not in use.
To ensure the longevity of your battery, please charge your tablet for 10 hours upon initial charge. Afterwards,	<ol> <li>I ULLI WLAN WHEN TO LEAD</li> <li>Disable application sync.</li> <li>Sat a charter time for displayed within the formation of the formatio</li></ol>
charge the device accordingly as needed. Connect the	6. Reduce brightness on the display.
DC adapter that is supplied with your device and plug it into an AC outlet that supports 100–240V ~50/60 Hz	Powering On
	Press and hold the Power Button for 2-3 seconds
	to turn on the unit.
	Sleep Mode
	After the device is on, press the power button once
	and it will go into sleep mode. The screen is now on
	standby and under low battery consumption. To wake up the device, simply press the power button again.
Saving Battery Life	Downer Off
Please review the following several key points on extending the battery life of your tablet.	To power off the device, press and hold the power button for 2–3 seconds until the screen displays
	"Power Off", then select "OK" to power off the unit completely.

# Reset / Force Shutdown

If the device is locking up, use a small pin to press Reset, as it will force shut down and restart the device.

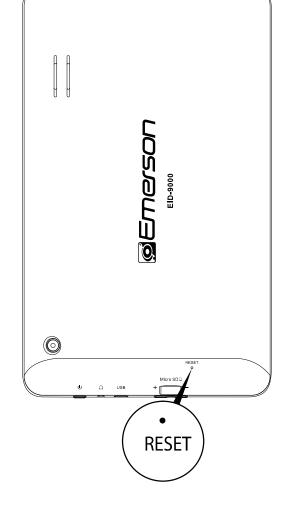


#### **Touch Panel**

Click – Use finger or capacity panel pen to touch once, to select or activate function, select menu, or turn on applications.



Tap and hold - Tap and hold for 2 seconds, a pop up menu with options will display.



Slide – Slide up, down, left or right for fast scrolling, browsing page and display screen.



Drag - drag an icon to relocate the position.



Double Click – Double click to enlarge or shrink the display size of the picture or while browsing a website.



Shut – Use two fingers at same time on touch panel, to enlarge or to shrink the display scale.





6



- (1) Google<sup>TM</sup> search
- 2) Tap to turn on voice search, it will search
- according to voice input ( Make sure WI-FI is on) ③ List of current running applications
  - (4) Back to Home screen

5 Back to previous screen
6 Display of icons and device status, tap to turn on notification screen

Changing the Wallpaper	Adding Widgets to the
1. Press the home screen for about 2 seconds, it will	Home Screen
pop-up the wallpaper selection. 2. Select from the preloaded wallpapers or a picture as your desired wallpaper. 3. Click "set wallpaper" to confirm.	Some apps have Widgets that can be placed on a Home screen. Widgets are like windows into your apps; they allow you to use some features of the app quickly from the Home screen.
Adding a Shortcut on a Home	To add a widget:
Screen	1) Tap & hold on an empty part of a Home screen,
1. On the application page, tag an application icon.	
<ol><li>Tap and hold an app icon, then drag it to a home screen to create a shortcut that is easily accessible.</li></ol>	2) Swipe left/right to browse the available widgets. Tap and hold a widget to pick it up. then drag it to
To place an app icon shortcut on another	an empty space on a Home screen.
home screen, drag it to the edge of the	If you have dragged the widget to a Home
screen and wait jor a new nonne screen to appear. (If the current home screen is empty,	screen that doesn't have room for it, the widget will not be added.
the tablet will not create a new home screen).	
	Some widgets will prompt you to make additional before it is subdated to the
	auditorial citores vervie it is audeu to tite Home screen.
Page 10	EMERSON RADIO CORP

Using Folders on the Home
Screen

You can combine several app icons in a folder. Tap and hold an icon to pick it up, then drop it onto another icon. A folder will be created that contains both icons.

On any Home screen, you can:

- 1) Open a folder. Tap it—the folder opens.
- 2) Rename a folder. Tap the folder label under the icon.
- Reposition an app or folder icon on the screen. Tap & hold the icon, then drag the icon to where you want it.
- Place related app icons in the same folder
   (e.g., video apps, game apps, communication apps, etc.)
   Dot ot of Corooo Cottinoo

# **Rotate Screen Setting**

- 1) Go to Menu Setting page.
- 2) Tap "Display" and locate "Auto-Rotate Screen."
- Tap "AUTO ROTATE" icon to open/close auto rotation function.

The Notification Bar is found at the top of the screen and displays quick status information (e.g., the time and battery life).

con	con	Description
-	WiFi signal	Wifi connection, icon is full under strong signal
Ū	Battery	Status of battery or if device is being charged

### Applications

## Internet Browsing

The Browser app lets you browse and view websites.




- 1) Go to Application page and select the CHROME icon.
- 2) Tap the address bar and enter in a URL.

### **Browser Settings**

When browsing a webpage, tap the upper right ":", then you can adjust the settings, add bookmark, view history, etc.

e tus	Sending a Message (Gmail)
Add/Delete Webpage	<ol> <li>Enter the Application page and select "G-Mail".</li> <li>Click</li></ol>
1) Tap "1" at the upper right corner, then press "New Tab." to dehead we have a week	<ol><li>Type in the recipient email address. (use ; when entering more than 1 address).</li></ol>
2) Tap "X" to delete the webpage.	<ol> <li>Input a message subject.</li> <li>In the body, compose your message.</li> </ol>
Binner         Binner         Binner         H           0	<ol> <li>Tap the sif you are wanting to include an attachment.</li> <li>Tap = we to send out the email message.</li> </ol>
F-Mail	Check Incoming Messages
E-Mail Account Setup	In your email account, you can check downloaded messages by going online to check new messages.
1. Enter the Application page and select "G-Mail".	Sound Recorder
<ol> <li>Enter your email address and password.</li> <li>Select "Next Step (Personal Email Account)" or "Manual Setting (Company Email Account)".</li> </ol>	<ol> <li>Click Sound Recorder in the Application page.</li> <li>Tap to start recording.</li> </ol>
4. Follow the prompts and input your credentials.	<ol> <li>I ap to stop and save the recording.</li> <li>Recordings can be found in the</li> </ol>



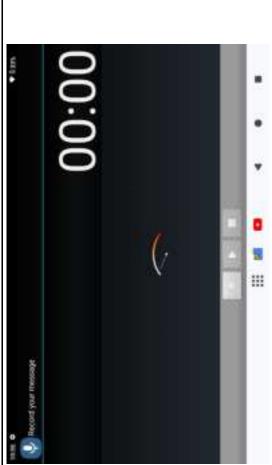


#### Play Music

Click "YT Music" in the Application page. With your Music Library displayed, select a track to begin playback.

	e unte					
	14					5
						(*
					1.14.2 (19) 10.0	
			9	-0.	and the second data actually much also affects	•
					A ATT LOW TO	×
		Artists				
•		Papers Alum				*
•	les	-				
)	us Device files	-				

#### Video Player

The built-in front camera can take pictures and videos. Tap o in the Application page, then slide right on the screen and it will display the camera and video shooting mode.

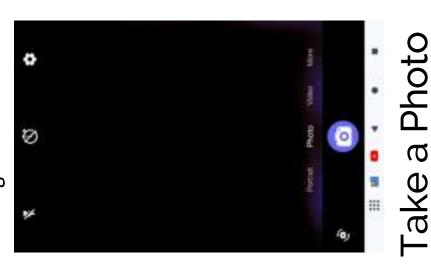

2. To capture a photo, tap 💽.

1. Tap the Camera icon 💿

- 1. Tap " Video" to select video
  - recording.
- Tap Contect a video.
   Tap O to stop recording.
- 4. You can find the video file in the

video player.

### Camera Settings

In camera and video mode, tap 💽 to access the setup menu.

#### File Explorer

Go to the Application page and select "Files"

#### View a File

memory card, Internal Storage and USB storage. In"Files", you can view and manage files in an

#### Managing Application Files In the Android system, all application files are in Installation of Applications

APK format. APK files can be installed through a memory card, internal memory, or downloaded from third-party providers.

# Close Running Applications

- 1. Go to the settings menu page.
  - 2. Select "Apps".
- 3. Choose which app you would like to close.


# Connecting to a PC


You can connect your tablet with a PC by using a USB cable.

- 1. Connect the PC and the tablet.
- On your tablet, select "File Transfer Mode", as you can now transfer files between the two devices.

# Connecting a USB device

- USB Keyboards and mice are supported by this device.
- View media files on USB storage with pre-loaded photo, music, and video applications.

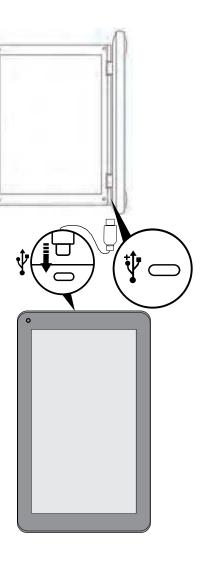

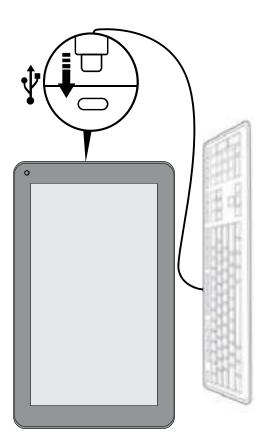

Inserting a Memory Card You may install a memory card to expand your device's storage space. 1. This device supports a memory card with up to 32GB capacity. 2. Insert a memory card in the card slot .	To use Wi-Fi, you connect to a wireless access point, or "hotspot." Some hotspots are open and you can simply connect to them. Others implement security features that require other steps to set up, such as digital cer- tificates or other ways to ensure that only authorized users can connect.
Make sure that the memory card is inserted all the way into the slot. Before removing the card, make sure your device is not accessing data on the card.	Connecting to a Wi-Fi Network
Wi-Fi Setup	If you're adding a Wi-Fi network when first setting up your device, Wi-Fi is turned on automatically. 1. Swipe down from the top of your screen to reveal
Your tablet works best when it is connected to the internet. Your tablet can connect wirelessly to the internet using Wi-Fi networks.	<ul> <li>the Noulf callons partet, swipe down the top bar, and then tap the Settings icon .</li> <li>2. Under Connections, tap Wi-Fi.</li> <li>3. Slide the Mi_Fi switch to the on position The device</li> </ul>
Wi-Fi is a wireless networking technology that can provide internet access at distances of up to 100 meters depending on the Wi-Fi router and your surroundings.	

<ul> <li>Modify a network's settings to change the password or to configure its advanced options (i.e., Proxy and static IP settings). Networks are</li> </ul>	configured by default to not use proxy servers and to use automatic IP addressing. Proxy	settings need to be added for each individual Wi–Fi network.	Language & Input	1. Setting-System-Languages	<ol> <li>Language: Users can choose User Languages.</li> <li>Keyboard &amp; Input Methods: Select language method.</li> <li>In this state, Users can switch the input method.</li> </ol>	tats to Bearch settings		& controliq interview and interview T <sub>A</sub> . Languages interview and interview buttons interview.	G Google Keythoard Internet Anternations and Internet Anternations	System     System     Destures     Costures     Destures     Destures	About tablet     Constant in the constant
• • • • • •	MrFT hunstiftP40 Pro	HUAWELESST& FOUT	<ul> <li>zhu2023</li> <li>造</li> <li>詰まれど</li> <li>造</li> <li>造</li> <li></li> <li>&lt;</li></ul>	志和)// wifs	Tap a network name to see more details or to con-	prompted to enter a password or other credentials. (If you don't know the password, you will need to	ask the owner of the network to provide it.) If the	Lautet finas a network that you connected to previously, it will connect to it automatically.	To forget a network or to modify its settings, tap &	hold the network name. You mav want the tablet to forget a network if	you don't want to connect automatically or if

Page 17

Date & Time	Users are soley responsible for the apps they
When connected to the internet, turn on "Automatic date & time," so the device can obtain real date & time.	download. Be sure that the apps are from an entrusted source prior to downloading as Naxa Electronics, Inc. is not liable for any shape
m ***** ◆ Date & time	or form should the tablet become damaged for something that was downloaded.
Set time automatically	Troubleshooting
	<b>1. Cannot Power on</b> Connect the power cable to charge the device. check
Tree sector to set time zone	back in a few minutes and try again.
Time zone	2. Noise coming from unit.
	Check to see if audio file is not corrupted.
Developer Options	Audio files that are corrupted will cause an alarming or jumping sound.
Enter Setting Menu, then select "About Tablet", then tap "Build number" about 8 times until the Developer	<b>3. Cannot download or copy.</b> Check to see if the tablet is connected online and
Options menu appears on the screen.	receiving a strong internet connection. Check to see if there is enough storage.
	Check the USB cable.
	4. Unable to connect via USB Make sure that the USB device is securely connected.
	Check to make sure the cable is not damaged.
Page 18	EMERSON RADIO CORP

	<ul> <li>To prevent fire or shock hazard, do not expose this appliance to rain or moisture.</li> </ul>	Important Safety Information <ol> <li>Read Instructions: All the safety and operating instructions should be read before the product is operated.</li> </ol>	<ol><li>Retain Instructions: The safety and operating instructions should be retained for future reference.</li></ol>	<ol><li>Heed Warnings: All warnings on the product and in the operating in- structions should be adhered to.</li></ol>	<ol> <li>Follow Instructions: All operating and usage instructions should be followed.</li> </ol>	<ol> <li>Cleaning: Unplug this product from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.</li> </ol>	6. Attachments: Use only attachments recommended by the manufac- turer. Use of other attachments may be hazardous.	<ol> <li>Water and Moisture: Do not use this product near water (e.g., near a bathtub, washbowl, kitchen sink, laundry tub, in wet basements, or near a swimming pool and the like).</li> </ol>	8. Accessories: Do not place this product on an unstable cart, stand, tripod, bracket, or table. Use only with carts,	stands, tripods, brackets, or tables recommended by the manufacturer or sold with the product. Any	mounting of the product should follow the manu- facturer's instructions and should use a mount- ing accessory recommended by the manufacturer.
Warnings and Precautions		WARNING: SHOCK HAZARD. DO NOT OPEN. AVIS: RISQUE DE CHOC ELECTRIQUE. NE PAS OUVRIR	CAUTION: TO REDUCE THE RISK OF FIRE AND ELECTRIC SHOCK, DO NOT REMOVE THE COVER (OR		The lightning flash with arrowhead symbol within an equilateral		_	to alert the user to the presence of important operation and ser- vicing instructions in the literature accompanying the appliance.	<ul> <li>CAUTION</li> <li>Do not block the ventilation openings or holes.</li> </ul>	<ul> <li>Do not place any naked flames (such as lighted candles) on the apparatus.</li> </ul>	<ul> <li>When discarding batteries, follow all local rules and laws governing the disposal of batteries. Consider the environmental impact of your actions!</li> </ul>

<ul> <li>A product and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces may cause the product and cart combination to overturn.</li> <li>9. Ventilation: Slots and openings in the cabinet are provided for ventilation to ensure reliable operation of the product and to protect it from overheating These openings should never be blocked by ploting.</li> </ul>	<ul> <li>service technician has used a replacement plug that has the same overload protection as the original plug as specified by the manufacturer.</li> <li>14. Lightning: For added protection for this product, unplug it from the wall outlet during a lightning storm or when it is left unattended and unused for long periods of time. This will prevent damage to the product during or nower-line surges</li> </ul>
the product on a bed, sofa, rug, or other similar surface. This product	15. Overloading: Do not overload wall outlets, extension cords, or inte-
should not be placed in a built-in installation such as a bookcase or	gral convenience receptacles as this can result in a risk of fire or elec-
rack unless proper ventilation is provided or the manufacturer in-	tric shock.
10. Power Sources: This product should be operated only from the type of power Sources: This product should be operated only from the type of power source indicated on the rating label. If you are not sure of the type of power supply to your home, consult your product dealer or	16. Object and Liquid Entry: Never push objects of any kind into this prod- uct through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock. Never spill liquid of any kind on the product.
local power company. For products intended to operate from battery	17. Servicing: Do not attempt to service this product yourself as open-
power or other sources, refer to the operating instructions.	ing or removing covers may expose you to dangerous voltage or other
11. Grounding or Polarization: This product may be equipped with a po-	hazards. Refer all servicing to qualified service personnel.
larized alternating-current line plug that has one blade wider than	18. Damage Requiring Service: Unplug this product from the wall outlet
the other. This plug will only fit into the power outlet in one direction.	and refer servicing to qualified service personnel under the follow-
This is a safety feature. If you are unable to insert the plug fully into	ing conditions: a) when the power-supply or plug is damaged; b) if
the outlet, try reversing the direction of the plug. If the plug should	liquid has been spilled or if objects have fallen into the product: c) if
still fail to fit, contact an electrician to replace the obsolete outlet. Do	the product has been exposed to rain or water; d) if the product does
not defeat the safety purpose of the polarized plug.	not operate normally by following the operating instructions. Adjust
12. Power-Cord Protection: Power supply cords should be routed so that	only those controls that are covered by the operating instructions as
they are not likely to be walked on or pinched by items placed upon	improper adjustment of other controls may result in damage and will
or against them, paying particular attention to cords at plugs, conve-	often require extensive work by a qualified technician to restore the
nience receptacles, and at the point which they exit from the product.	product to its normal operation; e) if the product has been dropped or
13. Protective Attachment Plug: The product may be equipped with an at-	damaged in any way; f) when the product exhibits a distinct change in
tachment plug with overload protection. This is a safety feature. See	performance—this indicates a need for service.
the operating instructions for replacement or directions to reset the	19. Replacement Parts: When replacement parts are required, be sure
protective device. If replacement of the plug is required, be sure the	that your service technician has used replacement parts specified
Page 20	by life indulations of have the same characteristics as the original EMERSON RADIO CORP

part. Unauthorized substitutions may result in fire, electric shock, or	to which the receiver is connected.
ouner mazanus. 20. Safety Check: Upon completion of any service or repairs to this	<ul> <li>Consult the dealer or an experienced radio/TV technician for help.</li> </ul>
product,ask the service technician to perform safety checks to ensure that the product is in proper operating condition.	<b>CAUTION ON MODIFICATIONS</b> Any changes or modifications not expressly approved by the grantee of
21. Wall or Ceiling Mounting: The product should be mounted to a wall or ceiling only as recommended by the manufacturer.	this device may void the authority granted by the FCC to operate the equipment.
22. Heat: The product should be situated away from heat sources such as radiators,heat registers, stoves, or other products (including amplifiers) that produce heat.	WARNING: This product can expose you to chemicals including BBP, DEHP, DBP, which are known to the State of California to cause cancer and birth
FCC NOTICE	defects or other reproductive harm. For more information go to
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accent any interference received	www.P65Warnings.ca.gov. Teodomodice & Doculotory Statemonts
including interference that may cause undesired operation.	@2024 NAXA® ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.
Note: This equipment has been tested and found to comply with the lim- its for a Class B digital device, pursuant to Part 15 of the FCC Rules. These	Naxa® is a registered trademark of Naxa Electronics, Inc. All other trademarks and logos are property of their respective owners unless in-
limits are designed to provide reasonable protection against harmful in- terference in a residential installation. This equipment generates, uses	dicated otherwise. No portion of this packaging may be photographed, copied, or redistributed without prior notive of Naxa Electronics, Inc.
and can radiate radio frequency energy and, if not installed and used in accordance with the instructions. may cause harmful interference to ra-	Specifications are subject to change without notice. Google, Android, Google Play and other marks are trademarks of Google
dio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause	LLC.
harmful interference to radio or television reception, which can be de- termined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:	
Reorient or relocate the receiving antenna.	
<ul> <li>Increase the separation between the equipment and receiver.</li> </ul>	

Connect the equipment into an outlet on a circuit different from that

#### Specifications

Display Panel	9" TFT LCD
Display Resolution	1024 x 600
Touch layer	Capacitive touch screen
OS	Android™ 14
CPU	Allwinner A133 1.5GHz (Quad Core)
RAM	2 GB
Memory	32 GB
External Memory	Memory Card (up to 64GB)
Wireless Connectivity	WiFi 802.11 b/g/n
	Bluetooth <sup>®</sup> 5.0
A/V connectivity	Headphone out (3.5 mm)
	Built-in microphone
	Built-in stereo speakers (1*1 W)
Camera	Rear: 2.0 MP
	Front: 0.3 MP
Audio	MP3, WMA, FLAC, APE, OGG

Video	MPEG4–sp, ASP, WMV, H.264/H.265/1080P
Power adapter	AC 100~240V, 50/60 Hz; DC 5V out
Battery	Rechargeable lithium battery (4000 mAh)

Note: Product are improved continuously. We reserve the right to modify the product and specifications without prior notice.

In case of malfunction due to electrostatic discharge, just reset the product to resume normal operation (reconnecting the power source may be required).

#### Support

If you have problems with your device, please consult the instructions in this manual. Please also visit us on the web at www.emersonaudio.com to get up to the minute news, alerts, and documentation for your device. For additional assistance, please contact Technical Support.

EMERSON Technical Support 2320 East 49th Street Vernon, CA 90058 Tel: (866 ) 411-6292

Made in China

Email: support@emersonaudio.com