

# Bluetooth stereo Headset

## (EH-03L)



## User's manual

**PLEASE READ THIS USER MANUAL COMPLETELY BEFORE OPERATING  
THIS UNIT AND RETAIN THIS BOOKLET FOR FUTURE REFERENCE**

### SPECIFICATION

|                    |                    |                 |                    |
|--------------------|--------------------|-----------------|--------------------|
| MODEL NO           | EH-03              | Version         | BLUETOOTH V3.0+EDR |
| Bluetooth profiles | HSP,HFP,A2DP,AVRCP | Effective range | 10 meters          |
| Music Time         | 7 hours            | Talk time       | 9 hours            |
| Standby time       | Up to 250 hours    | input           | DC:5V/380mAh       |
| Charge Time        | 2 hours            | dimensions      | 145*165*45 mm      |

*Battery life may vary depending on usage.*

*Specifications may change without notice due to continuous product enhancement.*

### About the EH-03

EH-03 is a stereo headset with Bluetooth technology. it supports the following Bluetooth profiles:


**HSP—headset profile**

**HFP—hands-free-profile**

**A2DP—Advanced Audio distribution profile**

**AVRCP—Audio/Video remote control profile**

## Overview:

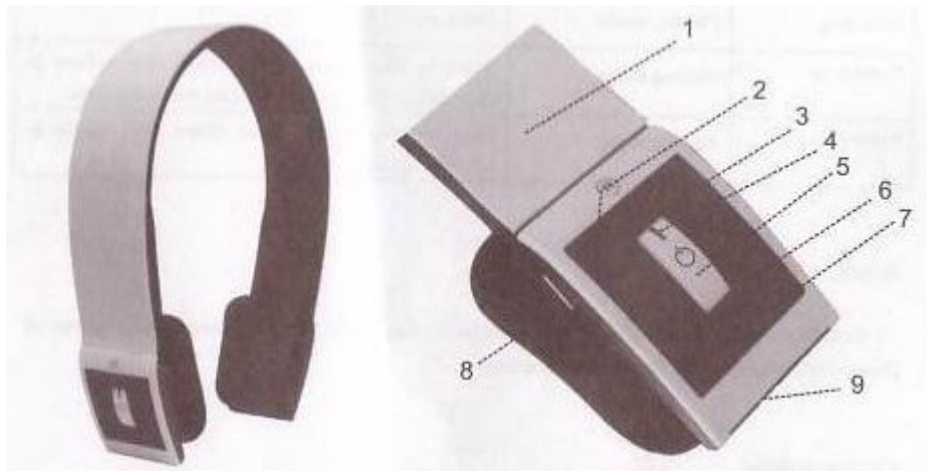

1. Retractable string
2. ,<key: last song
3. >key: next song
4. **Multifunction button (MFB):** a) Answer; b): end; c) reject call; d) Pause; e) Play
5. LED indicator
6. + key: volume up
7. -key: volume down
8. Charging port
9. Build-in microphone

### Re-mark:

1. the battery is rechargeable
2. first time charging: before using the Bluetooth headset, please charge the battery of headset fully.

### How to use

#### 1) Switching on /off the headset

| Function   | Operation                           | LED indicator                      |
|------------|-------------------------------------|------------------------------------|
| Switch on  | Press and hold the MFB for 3 second | Blue LED is flashing 1 or 2 second |
| Switch off | Press and hold the MFB for 3 second | Blue LED is flashing 1 or 2 second |

#### 2) Pairing the headset with Bluetooth device

##### 2.1 how to enter pairing mode

be sure the headset is in power off status first. Press and hold the MFB for 5-6 seconds until red and blue LED blink alternately, then release the MFB, the unit is becoming pairing mode.

## 2.2 Pairing the headset with Bluetooth mobile phone:

Make sure your mobile phone with Bluetooth function. Then, turn on its Bluetooth function and searching Bluetooth device.


## 2.3 Keep the headset and mobile within 0.8 meter when pairing.

## 2.4 Make the Bluetooth headset in pairing mode, after searched, select the model No "EH-03L" in the Bluetooth device list.

## 2.5 After successful pairing ,the red LED of headset will be quickly blinks.

## Wearing the headset

The string of headset is retractable, the user could be adjust it until feel comfortable.

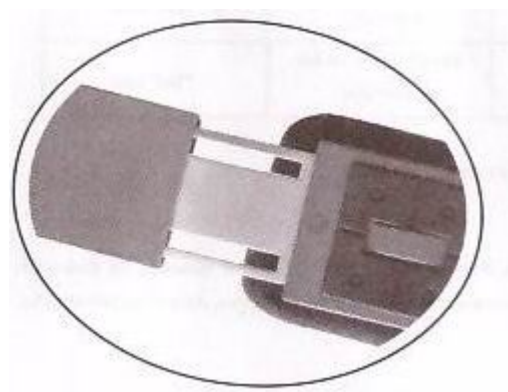

## Making calls with the headset

| Function       | Status of headset  | Operation         |
|----------------|--------------------|-------------------|
| Answer calling | Ringing            | Press MFB shortly |
| Volume up      | Conversation model | Press +key        |
| Volume down    | Conversation model | Press - key       |

Warning: Excessive pressure on the headset would cause hearing loss.

## TROUBLESHOOTING GUIDE

| Symptom                           | Possible Problems                                                                                                                                                    | Solution                                                                                                                                                                                                  |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The headset does not turn on.     | <ul style="list-style-type: none"><li>- No power.</li><li>- Power Switch is not set to "ON" correctly</li></ul>                                                      | <ul style="list-style-type: none"><li>- Recharge batteries enough time with cable .</li><li>Press MFB( Power switch) on about 3 second again.</li></ul>                                                   |
| There's no music from the headset | <ul style="list-style-type: none"><li>- The headset hasn't pair the Bluetooth device.</li><li>- Too Long distance between the headset and device</li><li>-</li></ul> | <ul style="list-style-type: none"><li>- turn of the headset and turn on it again. And make the Bluetooth device in the status mode.</li><li>- short the distance between the device..</li><li>-</li></ul> |
|                                   |                                                                                                                                                                      |                                                                                                                                                                                                           |

**90 DAY LIMITED WARRANTY AND SERVICE  
VALID IN THE COUNTRY ONLY**

SENTRY INDUSTRIES INC warrants this unit to be free from defective materials or factory workmanship for a period of 90 days from the date of original customer purchase and provided the product is utilized within the COUNTRY . This warranty is not assignable or transferable. Our obligation under this warranty is the repair or replacement of the defective unit or any part thereof, when it is returned to the Service Department, accompanied by proof of the date of original consumer purchase, such as a duplicated copy of a sales receipt. You must pay all shipping charges required to ship the product to THE SERVICE CENTER for warranty service.

This warranty is valid only in accordance with the conditions set forth below:

1. The warranty applies to the SENTRY product only while:
  - a. It remains in the possession of the original purchaser and proof of purchase is demonstrated.
  - b. It has not been subjected to accident, misuse, abuse, improper service, usage outside the descriptions and warnings covered within the owner's manual
  - c. Claims are made within the warranty period.
2. This warranty does not cover damage or equipment failure caused by owner's manual specifications, or failure to provide reasonable care and necessary maintenance as outlined in the owner's manual.
3. Warranty of the headset applies to residential use only and is void when products are used in a nonresidential environment or installed outside the United States.

To register your product, visit the link below on the website to enter your information.  
<http://www.sentryindustries.com>

**FCC Statement:**

This equipment has been tested and found to comply with the limits for Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**Note: Modifications to this product will void the user's authority to operate this equipment.**

**IC Statement :**

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device."

**IC Déclaration:**

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

**Remarque:** Toute modification de ce produit annule l'autorité de l'utilisateur à utiliser cet équipement.