



深圳市盛邦尔科技有限公司
Shenzhen Surbaner Technology CO.,LTD.

承 认 书

SPECIFICATION FOR APPROVAL

客户名称 Customer Name			
客户项目名 Customer Project Name	ZQ102	盛邦尔料号 Surbaner P/N	160180-01272
客户编码 Customer P/N	L03010259	工作频段 Working Band	2400-2500MHz
产品描述 Product description	FPC/29.80*20.44*0.12MM		
版本号 Version	V01		
设计人信息/Designer Information			
射频工程师 RF Engineer		研发主管 R&D Director	
结构工程师 ME Engineer			

盛邦尔审批/Surbaner Approval				客户批准/Customer Approval	
	制作 Prepared By	审核 Checked By	批准 Approval By	审核 Checked By	批准 Approval By
签章 Signature	王海华林				
日期 Date	2025.01.13				

修订履历/Change Log				
版本 Version	修订内容 Change Description	责任人 Person in Charge	核准 Approval By	日期 Date

地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城B25栋2楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn

1/12

FM: SBR-QR-RD-37 REV: A2

目录/Catalogue

序号 No.	项目 Item	页码 Page No.
1	图纸或实物图片 Drawing or Product Image	3
2	技术参数 Technical Parameter	4
3	射频性能测试报告 RF Performance Test Report	5-10
4	尺寸测量报告 Dimensions Test Report	11
5	可靠性测试报告 Reliability Test Report1	12

地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.


SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn

2 / 12

FM: SBR-QR-RD-37 REV: A2

一. 产品图纸或实物图片/Drawing or Product Image

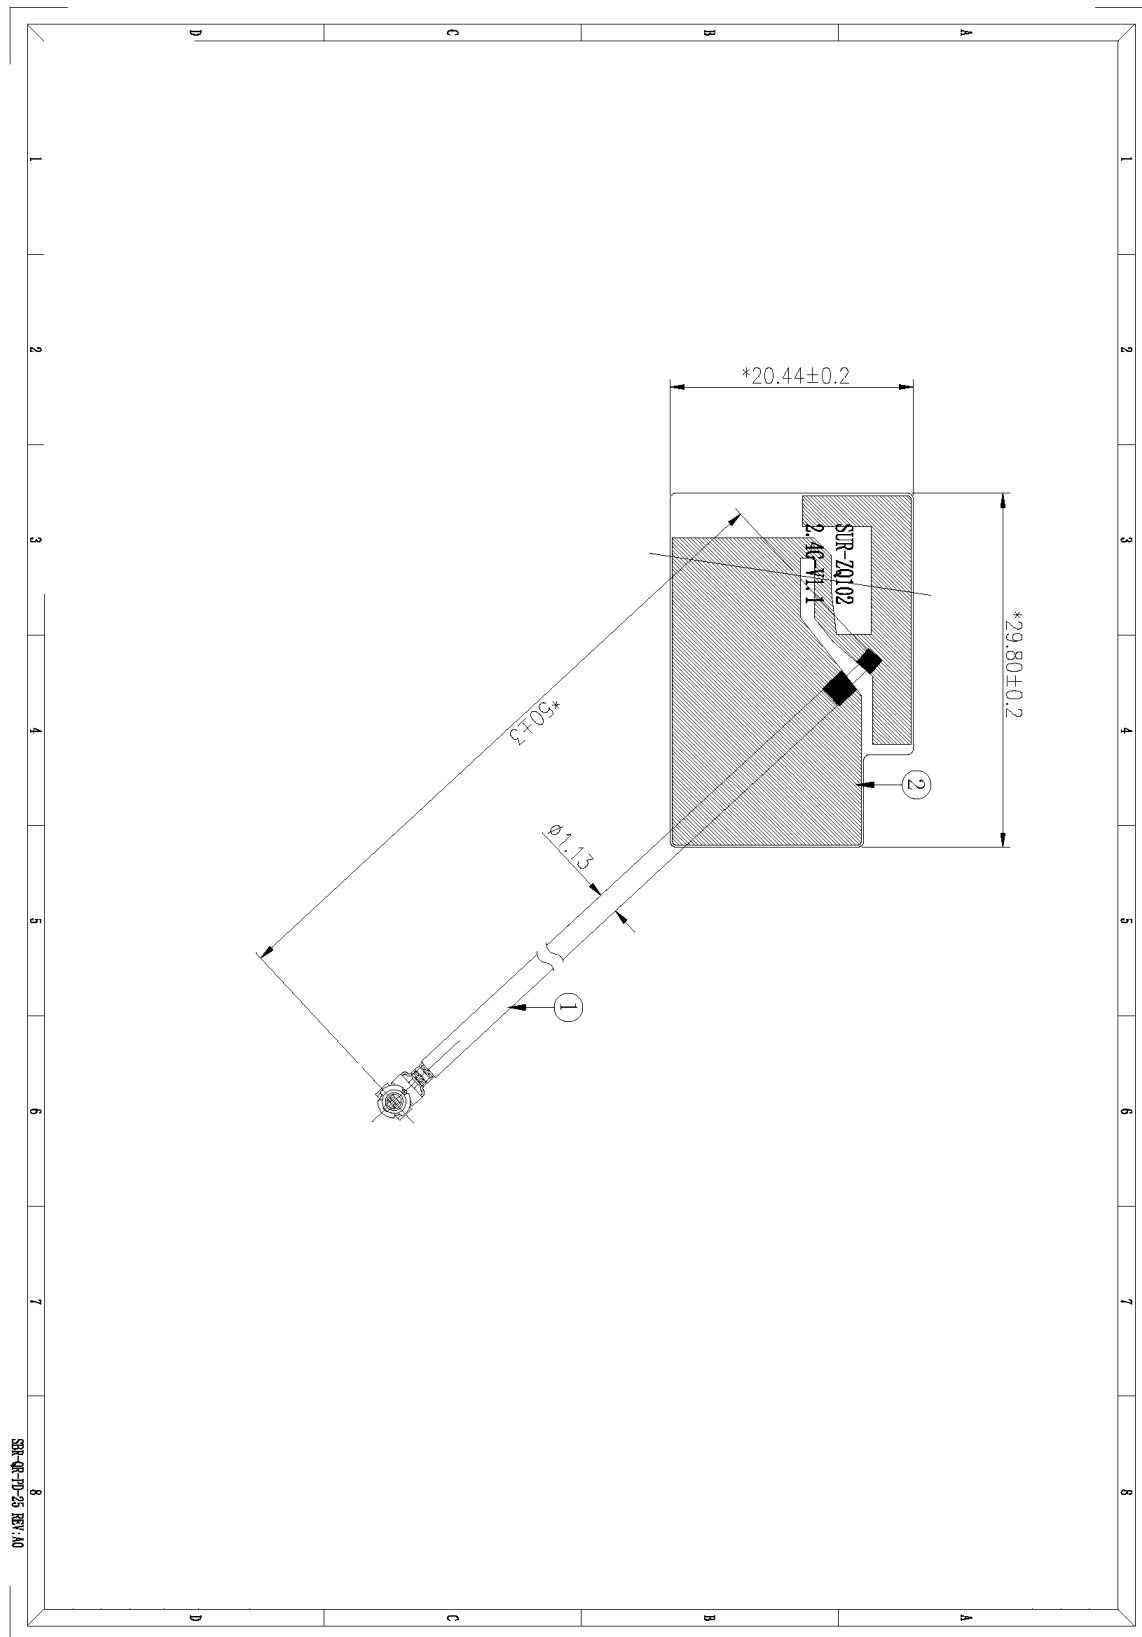

地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

二. Technical Parameter /技术参数

1. Antenna/天线		
No/序号	Part Name/项目	SPEC/规格
1	Frequency Range/ 频率范围	2400-2500MHz
2	Impendence/阻抗	50 ohm nominal
3	Gain/增益	$\geq 2\text{dBi}$
4	Polarization/极化	LINE
5	VSWR/驻波比	< 2
6	Efficiency/效率	$\geq 55\%$ AVG
7	RF Cable/射频连接线	1.13 黑色线 50MM
8	RF Connector/连接器	一代端子
2. Environmental Characteristics/环境特性		
No/序号	Part Name/项目	SPEC/规格
1	Operation Humidity /工作湿度	5~95%不冷凝
2	Operating Temperature /工作温度	$-20 \sim +60^{\circ}\text{C}$
3	Store Temperatuer /工作储存温度	$-30 \sim +70^{\circ}\text{C}$
4	Salt Spray Test /盐雾试验	24H

地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

射频性能测量报告

RF Performance Test Report

客户名称 Customer Name		项目名称 Project Name	ZQ102	盛邦尔料号 Surbaner P/N	160180-01272
频段 Band	2400-2500MHz	测试日期 Test Date	2025/01/13	测试人 Inspector	

天线测试设备简介

Antenna Test Equipment Introduction

测试天线输入特性使用 Agilent E5071C and Agilent 5062A 矢量网络分析仪；辐射特性利用 Satimo 三维近场暗室进行测试，并分别使用 8960 E5515 和 Agilent E4438C 进行了分析。暗房的测试坐标如下：

Test of antenna input characteristics using Agilent E5071C and Agilent 5062A vector network analyzer; The radiation pattern of the antenna are tested using the Satimo starlab 3D near field Anechoic Chamber, and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:

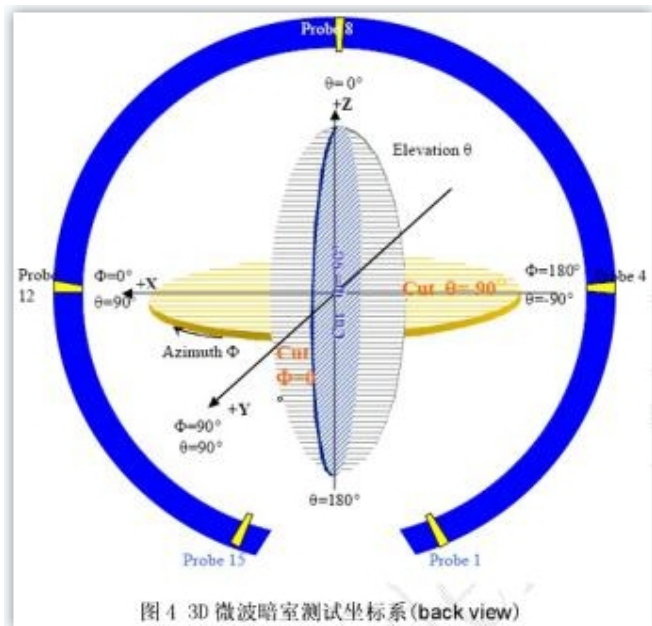


图 4 3D 微波暗室测试坐标系 (back view)

1. S11 参数测量 / S11 Parameter-VSWR

使用一根 50 Ω 同轴电缆连接到天线，然后该电缆连接到网络分析仪测量 S11 参数，被测量产品远离金属至少 20 厘米。

Measuring Method is a 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.

2. Product Overview & Environmental Treatment



Test System

Sequence Number	Test Item	equipment
S parameter	VSWR	Agilent 5071C & Agilent 5062A
OTA Test	TRP&TIS	Agilent 8960 E5515C& Agilent 4438C&CMW500 &CMW270 ETS&SATIMO
Gain & Efficiency	Gain & Efficiency	ETS&SATIMO Agilent 5071C



地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.


SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn

6 / 12


FM: SBR-QR-RD-37 REV: A2

Antenna Matching Network

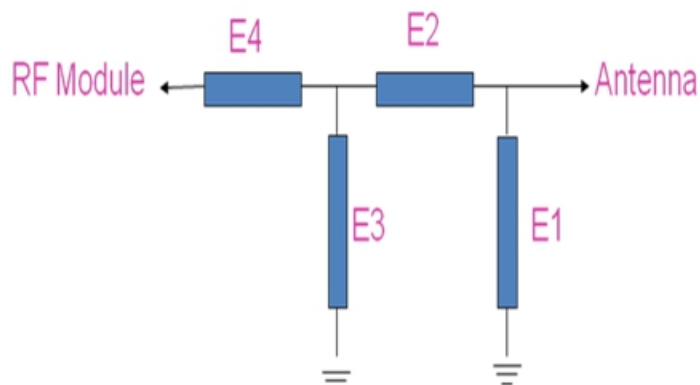

Element	Capacitor	Inductor
E1	N/A	N/A
E2	N/A	N/A
E3	N/A	N/A
E4	N/A	N/A

S11 Parameter-S11

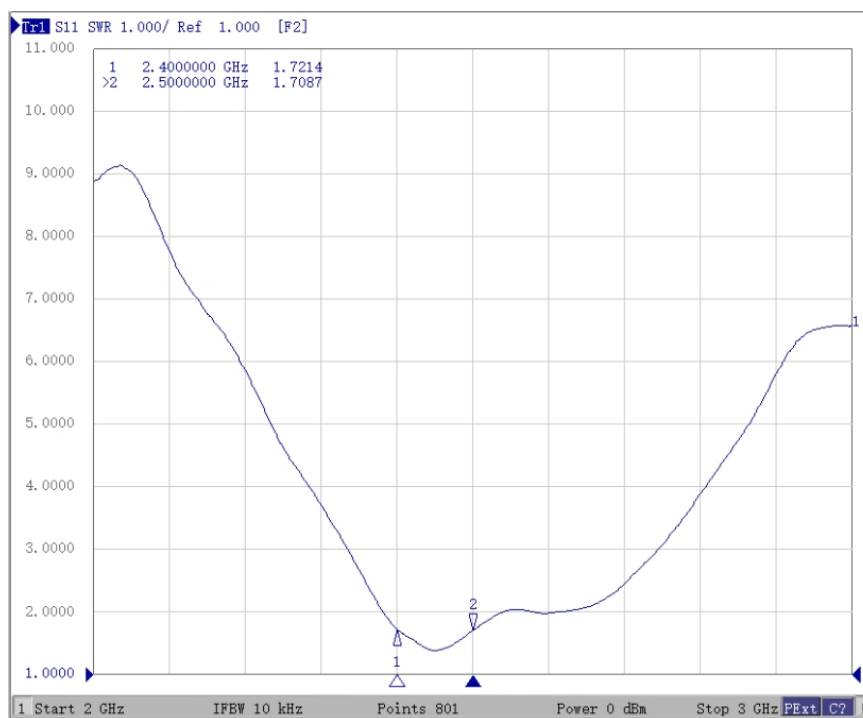

Frequency	2400	2500
VSWR	1.72	1.70

地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn


7 / 12

FM: SBR-QR-RD-37 REV: A2

Gain & Efficiency

Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	58.75	2.83
2420	60.81	3.40
2440	62.19	3.60
2450	63.19	3.81
2460	65.38	4.01
2480	65.66	3.86
2500	66.98	3.91



2D Pattern

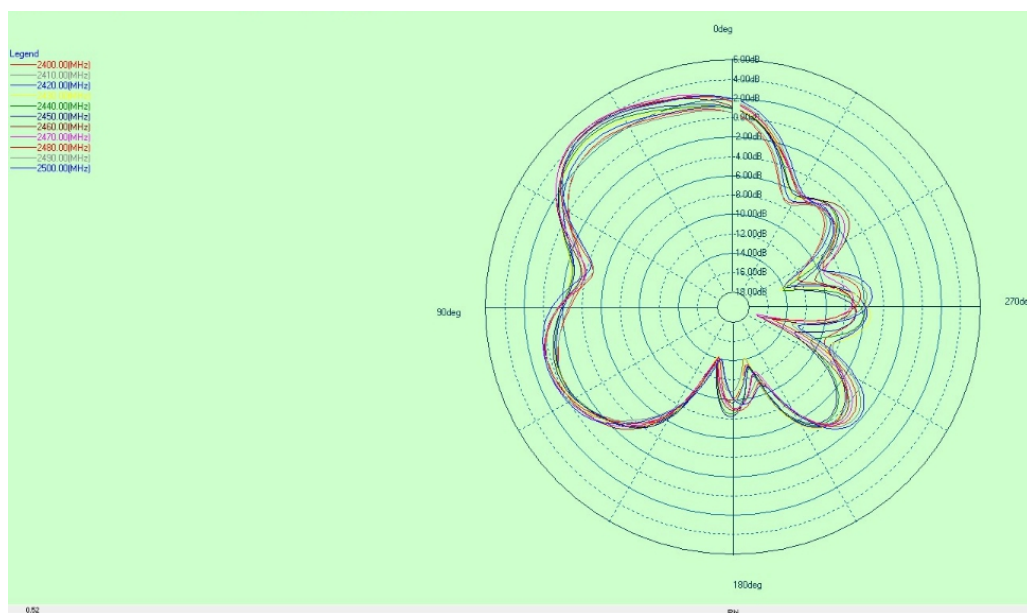

地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

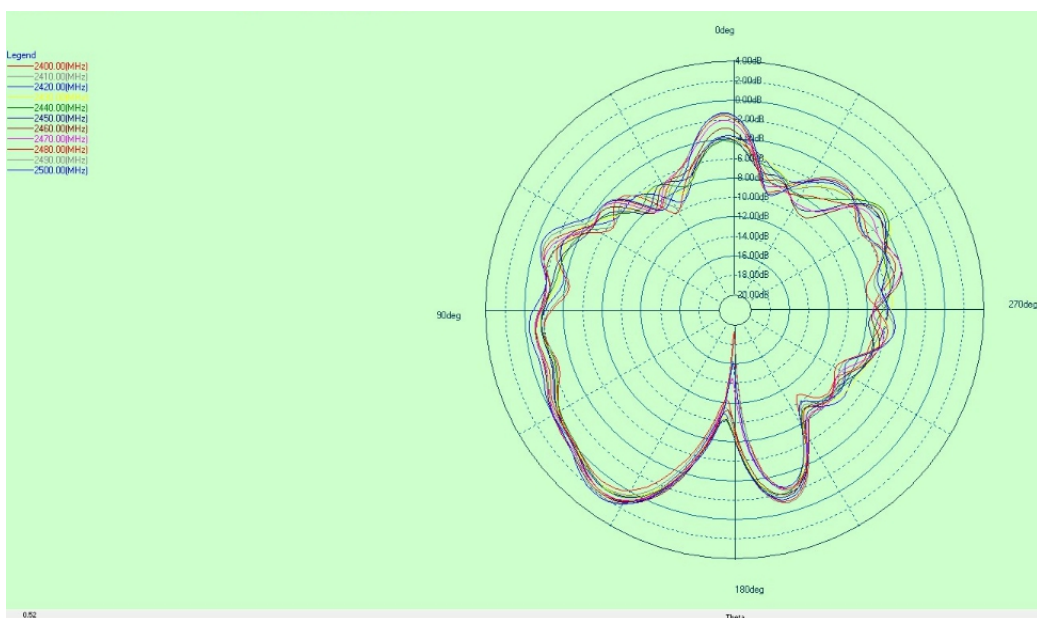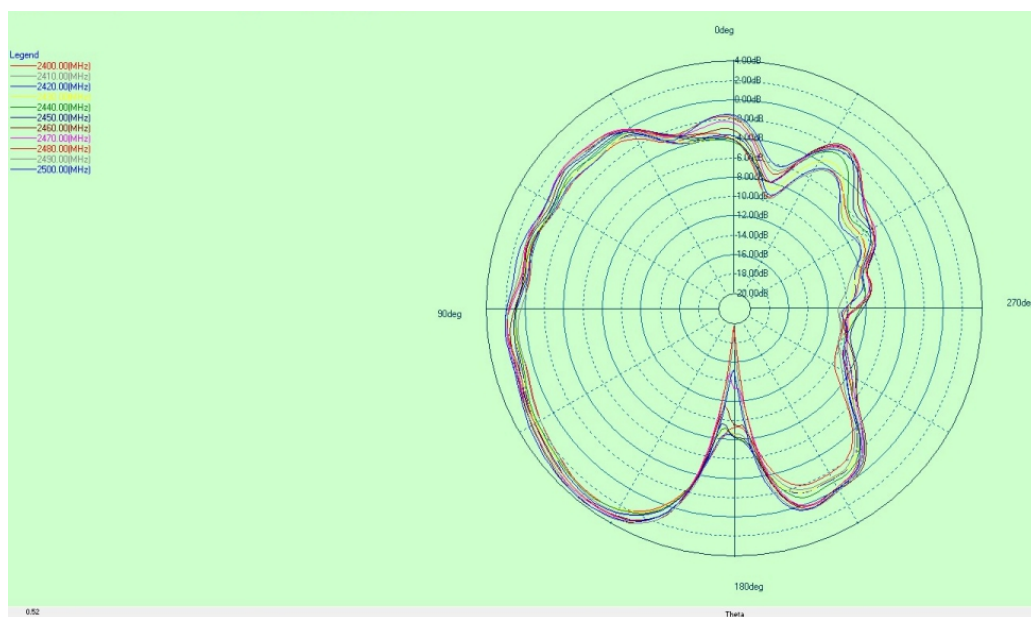

地址：深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

OTA

Test Equipment	R&S CMW500			
Test Condition	3D chamber			
Band	Wireless Protocol	Channel	TRP (dBm)	TIS (dBm)
WIFI	802.11 b/11Mbps	1	17.98	-75.57
		6	17.56	-77.98
		11	17.40	-77.51