# **User Guide**Bluetooth Headset

## **Bluetooth your safety**


#### Introduction

This Wireless headset is base on Bluetooth technology, connects to a compatible phone without wires. It is easily converting your mobile phone communication to the headset. This headset integrated CSR BC02 and Formosa Teletek LTCC technology, providing fast and reliable voice transmission.

Note: This bluetooth headset just supports "call receiving" function, if bluetooth phone only has headset profile, without handsfree profile.

It doesn't support a bluetooth phone without headset and handsfree profile, such as Nokia 7650.

The following page of this user manual focus on how to use this product

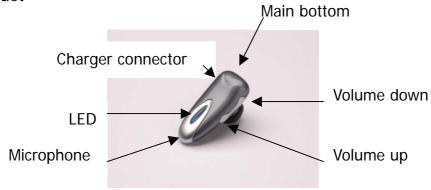

## **Getting started**

## Charging the battery

The headset has a rechargeable Lithium Polymer battery. You have 2 ways to charge the battery:

- 1. Charging by the AC charger
  - a . Connect the charger cable to the charger connector on headset
  - b · Connect the charger to an AC wall outlet. The red LED is on, during charge mode. It takes around 1.5 hours to fully charge the battery. The red LED is off when the battery is full.
- 2. Charging by USB on the PC or notebook
  - a . Connect the USB cable to the charger connector on the headset.
  - b Connect the other end of USB cable to the USB port on the PC or notebook
  - c The RED LED is on when the headset is charged. It takes about 1.5 hours to fully charge the battery. The red LED is off when the battery is full.

#### **Battery Low**

When the battery is low, the RED flashes, the headset will product a warning sound.

#### **Switch ON/OFF**

- 1. Switch ON: in off mode, press and hold the main bottom for 1 second to switch on. The headset produces 2 beeps, (low-hi). The blue LED flashes 5 times.
- 2. Standby mode: Headset switch to standby mode from link mode automatically, to save the power. The blue LED flashes once in each 3 seconds.
- 3. Switch OFF: in standby mode, press and hold the main bottom for 1 second. The blue LED is off.

## **Pairing**

You pair the headset with the phone by adding it to the pairing list in the phone. The two devices then recognize each other when they connect.

- 1. When the headset is off, press and hold the main bottom for 2 seconds until the blue/red LED fast flashes.
- 2. Prepare your phone for turning on bluetooth function, searching new device, according to the phone user's guide. Make sure the product is within 5m of the phone.
- 3. "Auto Blue" appears in the pairing list on your phone. Selects it. Key-in the password "1234".
- 4. The headset goes into link mode after pairing. The blue LED flashes 4 times in each 3 seconds.

Note: You only pair the headset with your mobile phone at the first time. You don't have to redo the pairing process until you want to use it with another mobile phone.

#### **Calls**

## Answer a coming call

- 1. When you receive a call, headset rings, and the blue LED fast flashes 4 times in each 3 seconds.
- 2. Press the main button to answer the call.
- 3. If you answer the coming call by your phone, the voice remains on the phone. Press the main bottom briefly to transfer the voice to the headset.

#### Terminate a call

Press the main button during the talking mode to terminate the call.

#### Making a call

When the headset is connected to your phone, make a call by using your phone in the normal way.

#### Making a voice dialing

If your phone supports voice dialing, and it is activated, you can use this feature with this headset

- Refer to the phone user guide to enable the voice commands on your phone;
- 2. On standby mode, press the main button. Wait for the tone that indicates you can say the name as you recorded on your phone.

## Redialing the last dialing number

In the standby mode, long press the volume up or volume down bottom to redial the last call.

## **Adjusting the Volume**

- To increase the volume, press the volume up bottom in talking mode.
- 2. To decrease the volume, press the volume down bottom in talking mode.

## Reject a coming call

- 1. When you receive a call, headset rings, and the blue LED fast flashes 3 times in each 3 seconds.
- 2. Long press the main button to reject the call.

#### **FCC Statement**

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## **User Information**

This device complies with part 15 of FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

To comply with FCC RF exposure requirement, this device and its antenna must not be co-located or operating in the conjunction with any other antenna or transmitter.