

AIR PURIFIER

AIR PURIFIER

Please read the user manual carefully before use, and keep it for future reference.

Thank you very much for using our products.

CONTENT

Points for Attention	01
Product Overview	02
Specifications	04
Installation Filter	04
Function Instruction	06
Maintenance	11
FAQ	12

POINTS FOR ATTENTION Before using, please read this user manual carefully and keep it for future reference.

Warning

to get into or to clean the product. 2. Do not spray insecticide, perfume or other flammable spray around the products. 3. Before connecting the power supply, please check whether the voltage of the product is consistent with the local power supply voltage. 4. This product can not replace normal ventilation, daily dust collection or oil pumping

1. To avoid electric shock and fire, do not allow water, liquid or any flammable detergent

when cooking. 5. Ensure the product is used in condition of a stable and horizontal level. 6. Leave at least 30cm of space on the back and sides of the product, and at least 50cm of space above the product when using.

7. Ensure both the filter and its cover are properly installed before using. 8. Do not insert finger or other things into the air outlet/inlet to prevent physical damage or trouble.

01

03

05

07


09

11


13

Components

PRODUCT OVERVIEW

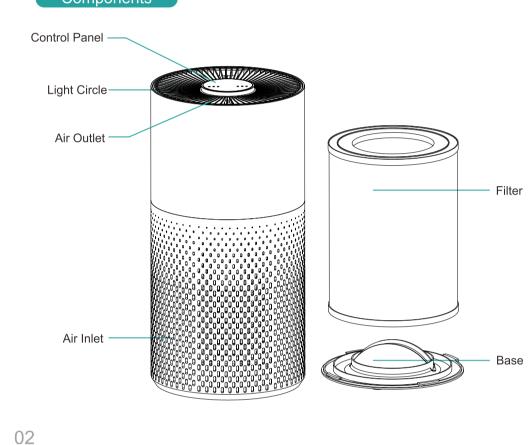

Control Panel

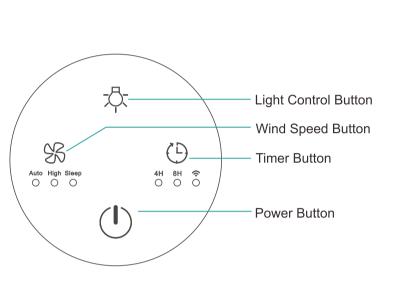

Packaging

Model No.

SPECIFICATIONS

Size	195*195*388m
Net weight	2KG
Adapter	Input:100-240V 50Hz/60Hz;Output:24V 1.2A
Power	23W
CADR	130m³/h
Coverage area	≤16m²

Kilo

INSTALLATION FILTER Notice: • Please remove the packaging of the filter before using for the first time. • Ensure the machine is unplugged before removing or installing the filter.

04

- When the lamp rings keeps flashing in red, the filter should be replaced. • Please wipe the dust on the filter regularly, do not wash or use it repeatedly. • Please use the filter specially designed for this product.
- Steps of Installing Filter:

Unplug the power socket of the machine before replacing or installing the filter.

off with all lights turn off.

FUNCTION INSTRUCTION

When connect to the power socket, the buzzer will ring for 1 second. The machine enters the pre-processing mode (the light ring will change in blue, cyan, green, yellow, red, purple, and after 30 seconds of pre-processing, the color corresponding to the current air quality will be displayed.)

(Button Operation) () Power Button

- ① Touch the power button to turn on the machine, the buzzer will ring for one time, and the High mode of wind speed indicator lights on. ② Touch the button again, the buzzer will ring for one time and the machine will turn
- Wind Speed Button ① In the condition of working, press the wind speed button, the buzzer will ring for one time, the wind speed will cycle between Sleep-High-Auto, and

the corresponding indicator light will be white.

the fan will run at high wind speed. When turn to Auto, the wind speed will automatically adjust according to air quality. ③ When the air quality is poor, the wind speed is automatically adjusted to the high mode, and the light ring will display red color; When the air quality is normal, the wind speed is automatically adjusted to the mid mode, the light ring will display yellow color; When the air quality is excellent, the

wind speed is automatically adjusted to the low mode, and the light ring will

② When turn to Sleep, the fan will run at low wind speed; when turn to High,

① In the condition of working, press the timer button to set among the circulation of 2H, 4H and 8H timer with buzzer rings, and the corresponding indicator will be on. ② Press again, the timer indicator turns off and the machine will work continuously

sleep mode, press any button can wake up the light.

1. Invert the machine, and rotate the base along the direction marked "OPEN".

5. Then Install the base, rotate and tighten the base along the direction marked "CLOSE".

Notice: Touch the wind speed button, night light will white gradient for about 3 seconds.in the

sleep mode, if no operation for 5 seconds, all lights will be off and the product will run in

③ In the status of timing, the machine begins to count down. When the time is up, the fan

(L) Timer/WiFi Button

Night Light Button

2. Take out the filter from the machine. 3. Remove the packaging of the filter 4. Install the filter into the machine.

- will stop working and all lights will be off. 4 Long press (Timer/WiFi Button) can switch to WiFi working mode, when the WiFi indicator flashes quickly (3 times per second), which means WiFi work in Easy
- Mode, if Easy Mode connection is fail, long press (Timer/WiFi Button), the indicator flashes slowly (3 seconds once); If the WiF indicator is off during the connection, it means the connection fails. You need to operate the previous step to reconnect the WiFi. Notice: Touch the timer button, night light will white gradient for about 3 seconds.
- ② Touch again, the LED light turns off. **Notice:** The light control button couldn't operate in the status of shutdown.

between soft light and standard light mode with buzzer rings.

① In the condition of working, touch the light control button, the light degree can be set


Smart Operation Instruction Works with smart life APP

1.Download & Registration • Scan the QR code to download "Smart Life" APP. You can also search "Smart Life" in either APP store or Google Play to install the APP.

display blue color.

06

- Open the "Smart Life" APP, tap "Register" to register a "Smart Life" account with your phone number or E-mail. Then sign in the APP.

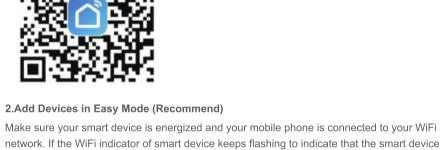

enters the mode of configuring the mobile phone; if not, please press the Timer button for more than 5 seconds, after hearing the smart devices "beep", then loose it and this means

the device is already for configuration. • Open your "Smart Life" APP and tap "+" on the top right of the APP. Select type of service device, tap "All devices" and turn to "Add Device", then automatically fetch the password of the WiFi network that your mobile phone connects to. Then tap "OK" to connect to the 08

d.Make sure the connected devices have not reached the maximum number of WiFi router.

f.Make sure you have not used any Chinese Characters to name your WiFi network. (2) Can I control device with 2G/3G/4G/5G network? When adding device for the first time, it requires that your mobile phone and device are

e.Make sure password of the WiFi network is correct when adding new device.

connected to the same WiFi network. After adding device successfully, you can remote control your device with 2G/3G/4G/5G network. (3) How can I share my device with others?

If not, please disconnect the network of some devices.

(4) How can I manager the device shared by others?

"Shared devices" and "Add sharing", then select the "country/region" where the account belongs to and input the "Account number" (a phone number or an E-mail address) you want to share with. (Please make sure the phone number or E-mail is registered.)

Open your Smart Life APP, select your device and tap the button in the top right corner. Tap

Open your Smart Life and you can operate the device by tapping the product in the "Shared device I received" on the home page.

(5) How to remove device? Method 1: Press the Power button for more than 7 seconds, you will hear "beep", it means the device is removed, and the WiFi indicator light begin to flash quickly again. Method 2: Open your "Smart Life" APP, select your device and tap the button in the top right corner. Tap "More". Then tap the "Remove Device" in the bottom, the WiFi indicator light begin to flash quickly again.

your device will be listed in your APP list. 3.Add Devices in AP Mode • If failed in Easy Mode, users could also add devices in AP Mode.

• When appearing "Successfully added 1 device", it means the connection is complete and

• Press the Timer button for more than 5 seconds until hearing "beep" and the WiFi indicator

light begin to flash quickly, then press the Timer button for another 5 seconds until hearing "beep"and the indicator light begin flash slowly, this means the device is already for configuration in the AP Mode.

• Tap "+" on the top right of the APP. Select Device Type and tap it. Then select "AP Mode" on the top right of the APP. Tap "Connect now" to go to the WLAN Settings interface in your mobile phone and select the WiFi network named "Smart Life_XXXX" to connect it. • Return to the "Smart Life" APP, the connection will start automatically.

your device will be listed in your APP list. Now you can control your smart device via your mobile phone APP anytime and anywhere (Make sure your mobile phone and smart device are all connected to the network). You can share your devices with your friend or family after you add your devices successfully.

• When appears "Successfully added 1 device", it means the connection is complete and

4.Q&A (1) Why failed in adding device? a. Make sure the device is powered on and close to your mobile phone when adding device.

b.Make sure your mobile phone is connected to the WiFi network and your WiFi router is working properly. c.Make sure the device is ready for configuration.Please refer to the Product Instruction "Add Devices in Easy Mode" or "Add Devices in AP Mode" for details.

MAINTENANCE Note

• Ensure the machine is unplugged before maintenance.

- Do not t immerse the air purifier into water or any liquid. • Do not use abrasive, corrosive or flammable cleansers (such as bleach or alcohol) to clean any part of the unit. • Do not wash the filter.
- Do not use a vacuum cleaner to clean the filter. · Please sterilize the filter under sunlight regularly.

Cleaning & Storage ① Ensure the machine is power-off and unplugged. ② Use a soft cloth with neutral cleanser to clean away any dust or debris from the

surface of the machine and air inlet/outlet. ③ After the machine completely dry out, put on the bag and place it in a cool and

④ If you do not use it for a long time, please turn on the machine for a few minutes from time to time to ensure a good performance. Notice: Please don't drop any water into the machine when clean the air outlet.

FCC warning

well-ventilated place.

Significant noise

flashing after user have

replaced a new one.

12

10

FAQ SITUATION REASON • Is the home leakage switch or fuse cut off? • Is the filter replacing indicator keep flashing?

• Is it plugged into a power socket? Is there a power outage? No working • Is there any dust in the surface of pre-filter? Poor performance • Is there any obstacle blocking the air inlet/outlet. • Is there anything stuck on the fan in the air outlet?

• Is the machine tilted?

• It is the normal phenomenon that the machine emits the smell of plastic for the first time. The machine will emit nasty smell if the filter is dusty, so in this Coming out situation, please clean or replace the filter. nasty smell If the burning smell emits from the machine, please unplug the power socket and contact with buyer or customer service. The reminder of replacing filter is sitll • Please press the power button () for 7s to reset the machine and the life counter of the filter will start.

• Please set a lower grade of wind speed if the noise is too loud ,

or set low grade of wind speed when using in bedroom at night.

Notice: If the above FAQ can not solve your problems and need maintenance, please contact the supplier or after sales service center. Please do not disassemble the machine to maintain by yourself.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no quarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be

correct the interference by one or more of the following measures: -Reorient or relocate the receiving antenna. -Increase the separation between the equipment and receiver. -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -Consult the dealer or an experienced radio/TV technician for help.

determined by turning the equipment off and on, the user is encouraged to try to

with minimum distance 20cm between the radiator & your body.

This equipment complies with FCC radiation exposure limits set forth for an

uncontrolled environment. This equipment should be installed and operated