EX3DV4- SN:7472 August 30, 2019

| 10300 | AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | LTE-FDD | 6.60 | ± 9.6 % |
|-------|-----|---|----------|-------|---------|
| 10301 | AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC) | WiMAX | 12.03 | ± 9.6 % |
| 10302 | AAA | IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | WiMAX | 12.57 | ± 9.6 % |
| 10303 | AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC) | WiMAX | 12.52 | ± 9.6 % |
| 10304 | AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC) | WiMAX | 11.86 | ± 9.6 % |
| 10305 | AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 | WiMAX | 15.24 | ± 9.6 % |
| 10306 | AAA | symbols) IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols) | WiMAX | 14.67 | ± 9.6 % |
| 10307 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols) | WiMAX | 14.49 | ± 9.6 % |
| 10308 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC) | WiMAX | 14.46 | ± 9.6 % |
| 10309 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | WiMAX | 14.58 | ± 9.6 % |
| 10310 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols) | WiMAX | 14.57 | ± 9.6 % |
| 10311 | AAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | LTE-FDD | 6.06 | ± 9.6 % |
| 10313 | AAA | iDEN 1:3 | iDEN | 10.51 | ± 9.6 % |
| 10314 | AAA | iDEN 1:6 | iDEN | 13.48 | ± 9.6 % |
| 10315 | AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | WLAN | 1.71 | ± 9.6 % |
| 10316 | AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| 10317 | AAC | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| 10352 | AAA | Pulse Waveform (200Hz, 10%) | Generic | 10.00 | ± 9.6 % |
| 10353 | AAA | Pulse Waveform (200Hz, 20%) | Generic | 6.99 | ± 9.6 % |
| 10354 | AAA | Pulse Waveform (200Hz, 40%) | Generic | 3.98 | ± 9.6 % |
| 10355 | AAA | Pulse Waveform (200Hz, 60%) | Generic | 2.22 | ± 9.6 % |
| 10356 | AAA | Pulse Waveform (200Hz, 80%) | Generic | 0.97 | ± 9.6 % |
| 10387 | AAA | QPSK Waveform, 1 MHz | Generic | 5.10 | ± 9.6 % |
| 10388 | AAA | QPSK Waveform, 10 MHz | Generic | 5.22 | ± 9.6 % |
| 10396 | AAA | 64-QAM Waveform, 100 kHz | Generic | 6.27 | ± 9.6 % |
| 10399 | AAA | 64-QAM Waveform, 40 MHz | Generic | 6.27 | ± 9.6 % |
| 10400 | AAD | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle) | WLAN | 8.37 | ± 9.6 % |
| 10401 | AAD | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle) | WLAN | 8.60 | ± 9.6 % |
| 10401 | AAD | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle) | WLAN | 8.53 | ± 9.6 % |
| 10402 | AAB | CDMA2000 (1xEV-DO, Rev. 0) | CDMA2000 | 3.76 | ± 9.6 % |
| 10404 | AAB | CDMA2000 (1xEV-DO, Rev. 0) | CDMA2000 | 3.77 | ± 9.6 % |
| 10404 | AAB | CDMA2000 (TXEV-DO, Rev. A) CDMA2000, RC3, SO32, SCH0, Full Rate | CDMA2000 | 5.22 | ± 9.6 % |
| 10410 | AAG | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL | LTE-TDD | 7.82 | ± 9.6 % |
| | | Subframe=2,3,4,7,8,9, Subframe Conf=4) | | | |
| 10414 | AAA | WLAN CCDF, 64-QAM, 40MHz | Generic | 8.54 | ± 9.6 % |
| 10415 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | WLAN | 1.54 | ± 9.6 % |
| 10416 | AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | WLAN | 8.23 | ± 9.6 % |
| 10417 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle) | WLAN | 8.23 | ± 9.6 % |
| 10418 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preambule) | WLAN | 8.14 | ± 9.6 % |
| 10419 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preambule) | WLAN | 8.19 | ± 9.6 % |
| 10422 | AAB | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK) | WLAN | 8.32 | ± 9.6 % |
| 10423 | AAB | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM) | WLAN | 8.47 | ± 9.6 % |
| 10424 | AAB | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM) | WLAN | 8.40 | ± 9.6 % |
| 10425 | AAB | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) | WLAN | 8.41 | ± 9.6 % |
| 10426 | AAB | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM) | WLAN | 8.45 | ± 9.6 % |
| 10427 | AAB | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM) | WLAN | 8.41 | ± 9.6 % |
| 10430 | AAD | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1) | LTE-FDD | 8.28 | ± 9.6 % |
| 10430 | AAD | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) | LTE-FDD | 8.38 | ± 9.6 % |
| 10431 | AAC | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) | LTE-FDD | 8.34 | ± 9.6 % |
| 10433 | AAC | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) | LTE-FDD | 8.34 | ± 9.6 % |
| 10434 | AAA | W-CDMA (BS Test Model 1, 64 DPCH) | WCDMA | 8.60 | ± 9.6 % |
| 10434 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL | LTE-TDD | 7.82 | ± 9.6 % |
| | - | Subframe=2,3,4,7,8,9) | LTCCCC | 7.50 | +000 |
| 10447 | AAD | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | LTE-FDD | 7.56 | ± 9.6 % |
| 10448 | AAD | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%) | LTE-FDD | 7.53 | ± 9.6 % |
| 10449 | AAC | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%) | LTE-FDD | 7.51 | ± 9.6 % |
| 10450 | AAC | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | LTE-FDD | 7.48 | ± 9.6 % |

| 10451 | AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%) | WCDMA | 7.59 | ± 9.6 % |
|-------|-----|--|----------|------|---------|
| 10456 | AAB | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle) | WLAN | 8.63 | ± 9.6 % |
| 10457 | AAA | UMTS-FDD (DC-HSDPA) | WCDMA | 6.62 | ± 9.6 % |
| 10458 | AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers) | CDMA2000 | 6.55 | ± 9.6 % |
| 10459 | AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers) | CDMA2000 | 8.25 | ± 9.6 % |
| 10460 | AAA | UMTS-FDD (WCDMA, AMR) | WCDMA | 2.39 | ± 9.6 % |
| 10461 | AAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.82 | ± 9.6 % |
| 10462 | AAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.30 | ± 9.6 % |
| 10463 | AAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.56 | ±9.6 % |
| 10464 | AAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.82 | ± 9.6 % |
| 10465 | AAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.32 | ± 9.6 % |
| 10466 | AAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.57 | ± 9.6 % |
| 10467 | AAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL | LTE-TDD | 7.82 | ± 9.6 % |
| 10468 | AAF | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL | LTE-TDD | 8.32 | ± 9.6 % |
| 10469 | AAF | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL | LTE-TDD | 8.56 | ± 9.6 % |
| 10470 | AAF | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL | LTE-TDD | 7.82 | ± 9.6 % |
| 10471 | AAF | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL | LTE-TDD | 8.32 | ± 9.6 % |
| 10472 | AAF | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL | LTE-TDD | 8.57 | ± 9.6 % |
| 10473 | AAE | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL | LTE-TDD | 7.82 | |
| | | Subframe=2,3,4,7,8,9) | | | ± 9.6 % |
| 10474 | AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.32 | ± 9.6 % |
| 10475 | AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.57 | ± 9.6 % |
| 10477 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.32 | ± 9.6 % |
| 10478 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.57 | ± 9.6 % |
| 10479 | AAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.74 | ± 9.6 % |
| 10480 | AAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.18 | ± 9.6 % |
| 10481 | AAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.45 | ± 9.6 % |
| 10482 | AAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL | LTE-TDD | 7.71 | ± 9.6 % |
| 10483 | AAC | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL | LTE-TDD | 8.39 | ± 9.6 % |
| 10484 | AAC | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL | LTE-TDD | 8.47 | ± 9.6 % |
| 10485 | AAF | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL | LTE-TDD | 7.59 | ± 9.6 % |
| 10486 | AAF | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL | LTE-TDD | 8.38 | ± 9.6 % |
| 10487 | AAF | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL | LTE-TDD | 8.60 | ± 9.6 % |
| 10488 | AAF | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL | LTE-TDD | 7.70 | ± 9.6 % |
| 10489 | AAF | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL | LTE-TDD | 8.31 | ± 9.6 % |
| 10490 | AAF | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL | LTE-TDD | 8.54 | |
| | | Subframe=2,3,4,7,8,9) | | | ± 9.6 % |
| 10491 | AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.74 | ± 9.6 % |

| 10492 | AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL | LTE-TDD | 8.41 | ± 9.6 % |
|----------------|-----|---|---------|------|-----------|
| 10493 | AAE | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL | LTE-TDD | 8.55 | ± 9.6 % |
| 10494 | AAF | Subframe=2,3,4,7,8,9) LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.74 | ± 9.6 % |
| 10495 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.37 | ± 9.6 % |
| 10496 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.54 | ± 9.6 % |
| 10497 | AAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.67 | ± 9.6 % |
| 10498 | AAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.40 | ± 9.6 % |
| 10499 | AAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.68 | ± 9.6 % |
| 10500 | AAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.67 | ± 9.6 % |
| 10501 | AAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.44 | ± 9.6 % |
| 10502 | AAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.52 | ± 9.6 % |
| 10503 | AAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.72 | ± 9.6 % |
| 10504 | AAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.31 | ± 9.6 % |
| 10505 | AAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.54 | ± 9.6 % |
| 10506 | AAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.74 | ± 9.6 % |
| 10507 | AAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.36 | ± 9.6 % |
| 10508 | AAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.55 | ± 9.6 % |
| 10509 | AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.99 | ± 9.6 % |
| 10510 | AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.49 | ± 9.6 % |
| 10511 | AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.51 | ± 9.6 % |
| 10512 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.74 | ± 9.6 % |
| 10513 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.42 | ± 9.6 % |
| 10514 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.45 | ± 9.6 % |
| 10515 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle) | WLAN | 1.58 | ± 9.6 % |
| 10516 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle) | WLAN | 1.57 | ± 9.6 % |
| 10517 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle) | WLAN | 1.58 | ± 9.6 % |
| 10518 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle) | WLAN | 8.23 | ± 9.6 % |
| 10519 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle) | WLAN | 8.39 | ± 9.6 % |
| | | JEEE 002.11a/H WII 13 GHz (OFDM, 12 Mbps, 03pc duty cycle) | WLAN | 8.12 | ± 9.6 % |
| 10520 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle) | | | |
| 10521 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle) | WLAN | 7.97 | ± 9.6 % |
| 10522 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle) | WLAN | 8.45 | ± 9.6 % |
| 10523 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | WLAN | 8.08 | ± 9.6 % |
| 10524 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | WLAN | 8.27 | ± 9.6 % |
| 10525 | AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| 10526 | AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle) | WLAN | 8.42 | ± 9.6 % |
| 10527 | AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle) | WLAN | 8.21 | ± 9.6 % |
| 10528 | AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| 10529 | AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| | | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle) | WLAN | 8.43 | ± 9.6 % |
| 10531 | AAB | | WLAN | 8.29 | ± 9.6 % |
| 10532 | AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle) | WLAN | 8.38 | ± 9.6 % |
| 10533 10534 | AAB | JEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle) | | | ± 9.6 % |
| | AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle) | WLAN | 8.45 | I I J.O % |

| 10707 | | I | | | |
|-------|-----|--|-------------|------|---------|
| 10535 | AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle) | WLAN | 8.45 | ± 9.6 % |
| 10536 | AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle) | WLAN | 8.32 | ± 9.6 % |
| 10537 | AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle) | WLAN | 8.44 | ± 9.6 % |
| 10538 | AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle) | WLAN | 8.54 | ± 9.6 % |
| 10540 | AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle) | WLAN | 8.39 | ± 9.6 % |
| 10541 | AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle) | WLAN | 8.46 | ± 9.6 % |
| 10542 | AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle) | WLAN | 8.65 | ± 9.6 % |
| 10543 | AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle) | WLAN | 8.65 | ± 9.6 % |
| 10544 | AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) | WLAN | | |
| 10545 | AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle) | | 8.47 | ± 9.6 % |
| 10546 | AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle) | WLAN | 8.55 | ± 9.6 % |
| 10547 | | | WLAN | 8.35 | ± 9.6 % |
| | AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle) | WLAN | 8.49 | ± 9.6 % |
| 10548 | AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle) | WLAN | 8.37 | ± 9.6 % |
| 10550 | AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle) | WLAN | 8.38 | ± 9.6 % |
| 10551 | AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle) | WLAN | 8.50 | ± 9.6 % |
| 10552 | AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle) | WLAN | 8.42 | ± 9.6 % |
| 10553 | AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle) | WLAN | 8.45 | ± 9.6 % |
| 10554 | AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | WLAN | 8.48 | ± 9.6 % |
| 10555 | AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | WLAN | 8.47 | ± 9.6 % |
| 10556 | AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | WLAN | 8.50 | ± 9.6 % |
| 10557 | AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | WLAN | 8.52 | ± 9.6 % |
| 10558 | AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle) | WLAN | 8.61 | ± 9.6 % |
| 10560 | AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle) | WLAN | | |
| 10561 | AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle) | | 8.73 | ± 9.6 % |
| 10562 | AAC | IEEE 002.11ac WIFI (160MIF, MCS7, 99pc duty cycle) | WLAN | 8.56 | ± 9.6 % |
| | | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle) | WLAN | 8.69 | ± 9.6 % |
| 10563 | AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10564 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty | WLAN | 8.25 | ± 9.6 % |
| | | cycle) | | | |
| 10565 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | WLAN | 8.45 | ± 9.6 % |
| 10566 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | WLAN | 8.13 | ± 9.6 % |
| 10567 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty | WLAN | 8.00 | ± 9.6 % |
| | | cycle) | | | |
| 10568 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty | WLAN | 8.37 | ± 9.6 % |
| | | cycle) | | | |
| 10569 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | WLAN | 8.10 | ± 9.6 % |
| 10570 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty | WLAN | 8.30 | ± 9.6 % |
| 10571 | | cycle) | | | |
| 10571 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle) | WLAN | 1.99 | ± 9.6 % |
| 10572 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle) | WLAN | 1.99 | ± 9.6 % |
| 10573 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle) | WLAN | 1.98 | ± 9.6 % |
| 10574 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle) | WLAN | 1.98 | ± 9.6 % |
| 10575 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle) | WLAN | 8.59 | ± 9.6 % |
| 10576 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty | WLAN | 8.60 | ± 9.6 % |
| | | cycle) | | | |
| 10577 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | WLAN | 8.70 | ± 9.6 % |
| 10578 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | WLAN | 8.49 | ± 9.6 % |
| 10579 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| 10580 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty | WLAN | 8.76 | ± 9.6 % |
| 10581 | AAA | cycle) IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty | WLAN | 8.35 | ± 9.6 % |
| | | cycle) | | | |
| 10582 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | WLAN | 8.67 | ± 9.6 % |
| 10583 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle) | WLAN | 8.59 | ± 9.6 % |
| 10584 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle) | WLAN | 8.60 | ± 9.6 % |
| 10585 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle) | WLAN | 8.70 | ± 9.6 % |
| 10586 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle) | WLAN | 8.49 | ± 9.6 % |
| 10587 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| | | Total total to the to the total to the total tot | TT MAY 11 T | 0.00 | 0.0 /0 |

August 30, 2019

| 10588 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle) | WLAN | 8.76 | ± 9.6 % |
|---|---|---|---|--|--|
| 10589 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle) | WLAN | 8.35 | ± 9.6 % |
| 10590 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle) | WLAN | 8.67 | ± 9.6 % |
| 10591 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | WLAN | 8.63 | ± 9.6 % |
| 10592 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | WLAN | 8.79 | ± 9.6 % |
| 10593 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | WLAN | 8.64 | ± 9.6 % |
| 10594 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | WLAN | 8.74 | ± 9.6 % |
| 10595 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | WLAN | 8.74 | ± 9.6 % |
| 10596 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | WLAN | 8.71 | ± 9.6 % |
| 10597 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | WLAN | 8.72 | ± 9.6 % |
| 10598 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | WLAN | 8.50 | ± 9.6 % |
| 10599 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | WLAN | 8.79 | ± 9.6 % |
| 10600 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | WLAN | 8.88 | ± 9.6 % |
| 10601 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10602 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 30pc duty cycle) | WLAN | 8.94 | ± 9.6 % |
| 10602 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 30pc duty cycle) | WLAN | 9.03 | ± 9.6 % |
| | | | WLAN | 8.76 | ± 9.6 % |
| 10604 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | WLAN | 8.97 | ± 9.6 % |
| 10605 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | | | |
| 10606 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10607 | AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | WLAN | 8.64 | ± 9.6 % |
| 10608 | AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10609 | AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | WLAN | 8.57 | ± 9.6 % |
| 10610 | AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | WLAN | 8.78 | ± 9.6 % |
| 10611 | AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | WLAN | 8.70 | ± 9.6 % |
| 10612 | AAB | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10613 | AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | WLAN | 8.94 | ± 9.6 % |
| 10614 | AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | WLAN | 8.59 | ± 9.6 % |
| 10615 | AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10616 | AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10617 | AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | WLAN | 8.81 | ± 9.6 % |
| 10618 | AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | WLAN | 8.58 | ± 9.6 % |
| 10619 | AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | WLAN | 8.86 | ± 9.6 % |
| 10620 | AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | WLAN | 8.87 | ± 9.6 % |
| 10621 | AAB | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10622 | AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | WLAN | 8.68 | ± 9.6 % |
| 10623 | AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10624 | AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle) | WLAN | 8.96 | ± 9.6 % |
| 10625 | AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) | WLAN | 8.96 | ± 9.6 % |
| 10626 | AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) | WLAN | 8.83 | ± 9.6 % |
| 10627 | AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) | WLAN | 8.88 | ± 9.6 % |
| 10627 | AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) | WLAN | 8.71 | ± 9.6 % |
| 10628 | AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) | WLAN | 8.85 | ± 9.6 % |
| | | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle) | WLAN | 8.72 | ± 9.6 % |
| 10630 | AAB | | | - | ± 9.6 % |
| 10631 | AAB | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle) | WLAN | 8.81 | ± 9.6 % |
| 10632 | AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle) | WLAN | 8.74 | |
| 10633 | AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle) | WLAN | 8.83 | ± 9.6 % |
| | | | | | |
| 10634 | AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) | WLAN | 8.80 | ± 9.6 % |
| 10634 10635 | AAB AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) | WLAN WLAN | 8.81 | ± 9.6 % |
| 10634 10635 10636 | AAB AAB AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | WLAN WLAN WLAN | 8.81 8.83 | ± 9.6 % ± 9.6 % |
| 10634 10635 10636 10637 | AAB AAB AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 | ± 9.6 % ± 9.6 % ± 9.6 % |
| 10634 10635 10636 10637 10638 | AAB AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 | ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % |
| 10634 10635 10636 10637 | AAB AAC AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) | WLAN WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 8.85 | ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % |
| 10634 10635 10636 10637 10638 10639 10640 | AAB AAC AAC AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) | WLAN WLAN WLAN WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 8.85 8.98 | ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % |
| 10634 10635 10636 10637 10638 10639 10640 10641 | AAB AAC AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) | WLAN WLAN WLAN WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 8.85 | ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % |
| 10634 10635 10636 10637 10638 10639 10640 | AAB AAC AAC AAC AAC AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) | WLAN WLAN WLAN WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 8.85 8.98 | ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % |
| 10634 10635 10636 10637 10638 10639 10640 10641 | AAB AAC AAC AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) | WLAN WLAN WLAN WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 8.85 8.98 9.06 | ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % |
| 10634 10635 10636 10637 10638 10639 10640 10641 10642 10643 | AAB AAC AAC AAC AAC AAC AAC AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) | WLAN WLAN WLAN WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 8.85 8.98 9.06 9.06 | ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % |
| 10634 10635 10636 10637 10638 10639 10640 10641 10642 10643 10644 | AAB AAC AAC AAC AAC AAC AAC AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) | WLAN WLAN WLAN WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 8.85 8.98 9.06 9.06 8.89 | ± 9.6 % ± 9.6 % |
| 10634 10635 10636 10637 10638 10639 10640 10641 10642 10643 10644 10645 | AAB AAC AAC AAC AAC AAC AAC AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) | WLAN WLAN WLAN WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 8.85 8.98 9.06 9.06 8.89 9.05 | ±9.6 % ±9.6 % |
| 10634 10635 10636 10637 10638 10639 10640 10641 10642 10643 10644 10645 10646 | AAB AAC AAC AAC AAC AAC AAC AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) | WLAN WLAN WLAN WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 8.85 8.98 9.06 9.06 8.89 9.05 9.11 | ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % |
| 10634 10635 10636 10637 10638 10639 10640 10641 10642 10643 10644 10645 10646 10647 | AAB AAC AAC AAC AAC AAC AAC AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | WLAN WLAN WLAN WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 8.85 8.98 9.06 9.06 8.89 9.05 9.11 11.96 | ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % |
| 10634 10635 10636 10637 10638 10639 10640 10641 10642 10643 10644 10645 10646 10647 10648 | AAB AAC AAC AAC AAC AAC AAC AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) CDMA2000 (1x Advanced) | WLAN WLAN WLAN WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 8.85 8.98 9.06 9.06 8.89 9.05 9.11 11.96 11.96 | ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % ±9.6 % |
| 10634 10635 10636 10637 10638 10639 10640 10641 10642 10643 10644 10645 10646 10647 | AAB AAC AAC AAC AAC AAC AAC AAC AAC AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | WLAN WLAN WLAN WLAN WLAN WLAN WLAN WLAN | 8.81 8.83 8.79 8.86 8.85 8.98 9.06 9.06 8.89 9.05 9.11 11.96 | ±9.6 % ±9.6 % |

| 10655 | AAE | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | LTE-TDD | 7.21 | ± 9.6 % |
|----------------|------------|--|--------------|--------------|--------------------|
| 10658 | AAA | Pulse Waveform (200Hz, 10%) | Test | 10.00 | ±9.6 % |
| 10659 | AAA | Pulse Waveform (200Hz, 20%) | Test | 6.99 | ± 9.6 % |
| 10660 | AAA | Pulse Waveform (200Hz, 40%) | Test | 3.98 | ± 9.6 % |
| 10661 | AAA | Pulse Waveform (200Hz, 60%) | Test | 2.22 | ± 9.6 % |
| 10662 | AAA | Pulse Waveform (200Hz, 80%) | Test | 0.97 | ± 9.6 % |
| 10670 | AAA | Bluetooth Low Energy | Bluetooth | 2.19 | ± 9.6 % |
| 10671 | AAA | IEEE 802.11ax (20MHz, MCS0, 90pc duty cycle) | WLAN | 9.09 | ± 9.6 % |
| 10672 | AAA | IEEE 802.11ax (20MHz, MCS1, 90pc duty cycle) | WLAN | 8.57 | ± 9.6 % |
| 10673 | AAA | IEEE 802.11ax (20MHz, MCS2, 90pc duty cycle) | WLAN | 8.78 | ± 9.6 % |
| 10674 | AAA | IEEE 802.11ax (20MHz, MCS3, 90pc duty cycle) | WLAN | 8.74 | ± 9.6 % |
| 10675 | AAA | IEEE 802.11ax (20MHz, MCS4, 90pc duty cycle) | WLAN | 8.90 | ± 9.6 % |
| 10676 | AAA | IEEE 802.11ax (20MHz, MCS5, 90pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10677 10678 | AAA | IEEE 802.11ax (20MHz, MCS6, 90pc duty cycle) | WLAN | 8.73 | ± 9.6 % |
| 10678 | AAA | IEEE 802.11ax (20MHz, MCS7, 90pc duty cycle) | WLAN | 8.78 | ± 9.6 % |
| 10679 | AAA | IEEE 802.11ax (20MHz, MCS8, 90pc duty cycle) | WLAN | 8.89 | ± 9.6 % |
| 10681 | AAA | IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle) IEEE 802.11ax (20MHz, MCS10, 90pc duty cycle) | WLAN WLAN | 8.80 8.62 | ± 9.6 % ± 9.6 % |
| 10682 | AAA | IEEE 802.11ax (20MHz, MCS11, 90pc duty cycle) | WLAN | 8.83 | ± 9.6 % |
| 10683 | AAA | IEEE 802.11ax (20MHz, MCS0, 99pc duty cycle) | WLAN | 8.42 | ± 9.6 % |
| 10684 | AAA | IEEE 802.11ax (20MHz, MCS1, 99pc duty cycle) | WLAN | 8.26 | ± 9.6 % |
| 10685 | AAA | IEEE 802.11ax (20MHz, MCS2, 99pc duty cycle) | WLAN | 8.33 | ± 9.6 % |
| 10686 | AAA | IEEE 802.11ax (20MHz, MCS3, 99pc duty cycle) | WLAN | 8.28 | ± 9.6 % |
| 10687 | AAA | IEEE 802.11ax (20MHz, MCS4, 99pc duty cycle) | WLAN | 8.45 | ± 9.6 % |
| 10688 | AAA | IEEE 802.11ax (20MHz, MCS5, 99pc duty cycle) | WLAN | 8.29 | ± 9.6 % |
| 10689 | AAA | IEEE 802.11ax (20MHz, MCS6, 99pc duty cycle) | WLAN | 8.55 | ± 9.6 % |
| 10690 | AAA | IEEE 802.11ax (20MHz, MCS7, 99pc duty cycle) | WLAN | 8.29 | ± 9.6 % |
| 10691 | AAA | IEEE 802.11ax (20MHz, MCS8, 99pc duty cycle) | WLAN | 8.25 | ± 9.6 % |
| 10692 | AAA | IEEE 802.11ax (20MHz, MCS9, 99pc duty cycle) | WLAN | 8.29 | ± 9.6 % |
| 10693 | AAA | IEEE 802.11ax (20MHz, MCS10, 99pc duty cycle) | WLAN | 8.25 | ± 9.6 % |
| 10694 | AAA | IEEE 802.11ax (20MHz, MCS11, 99pc duty cycle) | WLAN | 8.57 | ± 9.6 % |
| 10695 10696 | AAA | IEEE 802.11ax (40MHz, MCS0, 90pc duty cycle) | WLAN | 8.78 | ± 9.6 % |
| 10696 | AAA | IEEE 802.11ax (40MHz, MCS1, 90pc duty cycle) IEEE 802.11ax (40MHz, MCS2, 90pc duty cycle) | WLAN | 8.91 8.61 | ± 9.6 % |
| 10698 | AAA | IEEE 802.11ax (40MHz, MCS3, 90pc duty cycle) | WLAN | 8.89 | ± 9.6 % ± 9.6 % |
| 10699 | AAA | IEEE 802.11ax (40MHz, MCS4, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10700 | AAA | IEEE 802.11ax (40MHz, MCS5, 90pc duty cycle) | WLAN | 8.73 | ± 9.6 % |
| 10701 | AAA | IEEE 802.11ax (40MHz, MCS6, 90pc duty cycle) | WLAN | 8.86 | ± 9.6 % |
| 10702 | AAA | IEEE 802.11ax (40MHz, MCS7, 90pc duty cycle) | WLAN | 8.70 | ± 9.6 % |
| 10703 | AAA | IEEE 802.11ax (40MHz, MCS8, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10704 | AAA | IEEE 802.11ax (40MHz, MCS9, 90pc duty cycle) | WLAN | 8.56 | ± 9.6 % |
| 10705 | AAA | IEEE 802.11ax (40MHz, MCS10, 90pc duty cycle) | WLAN | 8.69 | ± 9.6 % |
| 10706 | AAA | IEEE 802.11ax (40MHz, MCS11, 90pc duty cycle) | WLAN | 8.66 | ± 9.6 % |
| 10707 | AAA | IEEE 802.11ax (40MHz, MCS0, 99pc duty cycle) | WLAN | 8.32 | ± 9.6 % |
| 10708 | AAA | IEEE 802.11ax (40MHz, MCS1, 99pc duty cycle) | WLAN | 8.55 | ± 9.6 % |
| 10709 | AAA | IEEE 802.11ax (40MHz, MCS2, 99pc duty cycle) | WLAN | 8.33 | ± 9.6 % |
| 10710 | AAA | IEEE 802.11ax (40MHz, MCS3, 99pc duty cycle) | WLAN | 8.29 | ± 9.6 % |
| 10711 10712 | AAA AAA | IEEE 802.11ax (40MHz, MCS4, 99pc duty cycle) | WLAN | 8.39 | ± 9.6 % |
| 10712 | AAA | IEEE 802.11ax (40MHz, MCS5, 99pc duty cycle) IEEE 802.11ax (40MHz, MCS6, 99pc duty cycle) | WLAN WLAN | 8.67 | ± 9.6 % |
| 10713 | AAA | IEEE 802.11ax (40MHz, MCS6, 99pc duty cycle) | WLAN | 8.33 8.26 | ±9.6% |
| 10715 | AAA | IEEE 802.11ax (40MHz, MCS8, 99pc duty cycle) | WLAN | 8.45 | ± 9.6 % ± 9.6 % |
| 10716 | AAA | IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) | WLAN | 8.30 | ± 9.6 % |
| 10717 | AAA | IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) | WLAN | 8.48 | ± 9.6 % |
| 10718 | AAA | IEEE 802.11ax (40MHz, MCS11, 99pc duty cycle) | WLAN | 8.24 | ± 9.6 % |
| 10719 | AAA | IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle) | WLAN | 8.81 | ± 9.6 % |
| 10720 | AAA | IEEE 802.11ax (80MHz, MCS1, 90pc duty cycle) | WLAN | 8.87 | ± 9.6 % |
| 10721 | AAA | IEEE 802.11ax (80MHz, MCS2, 90pc duty cycle) | WLAN | 8.76 | ± 9.6 % |
| 10722 | AAA | IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle) | WLAN | 8.55 | ± 9.6 % |
| 10723 | AAA | IEEE 802.11ax (80MHz, MCS4, 90pc duty cycle) | WLAN | 8.70 | ± 9.6 % |
| 10724 | AAA | IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle) | WLAN | 8.90 | ± 9.6 % |
| 10725 | AAA | IEEE 802.11ax (80MHz, MCS6, 90pc duty cycle) | WLAN | 8.74 | ± 9.6 % |
| 10726 | AAA | IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle) | WLAN | 8.72 | ± 9.6 % |
| 10727 | AAA | IEEE 802.11ax (80MHz, MCS8, 90pc duty cycle) | WLAN | 8.66 | ± 9.6 % |

August 30, 2019

| 10728 | AAA | IEEE 802.11ax (80MHz, MCS9, 90pc duty cycle) | WLAN | 8.65 | ± 9.6 % |
|-------|---------|--|-----------|------|----------|
| 10729 | AAA | IEEE 802.11ax (80MHz, MCS10, 90pc duty cycle) | WLAN | 8.64 | ± 9.6 % |
| 10730 | AAA | IEEE 802.11ax (80MHz, MCS11, 90pc duty cycle) | WLAN | 8.67 | ± 9.6 % |
| 10731 | AAA | IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle) | WLAN | 8.42 | ± 9.6 % |
| 10732 | AAA | IEEE 802.11ax (80MHz, MCS1, 99pc duty cycle) | WLAN | 8.46 | ± 9.6 % |
| 10733 | AAA | IEEE 802.11ax (80MHz, MCS2, 99pc duty cycle) | WLAN | 8.40 | ± 9.6 % |
| 10734 | AAA | IEEE 802.11ax (80MHz, MCS3, 99pc duty cycle) | WLAN | 8.25 | ± 9.6 % |
| 10735 | AAA | IEEE 802.11ax (80MHz, MCS4, 99pc duty cycle) | WLAN | 8.33 | ± 9.6 % |
| 10736 | AAA | IEEE 802.11ax (80MHz, MCS5, 99pc duty cycle) | WLAN | 8.27 | ± 9.6 % |
| 10737 | AAA | IEEE 802,11ax (80MHz, MCS6, 99pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| 10738 | AAA | IEEE 802.11ax (80MHz, MCS7, 99pc duty cycle) | WLAN | 8.42 | ± 9.6 % |
| 10739 | AAA | IEEE 802.11ax (80MHz, MCS8, 99pc duty cycle) | WLAN | 8.29 | ± 9.6 % |
| 10740 | AAA | IEEE 802.11ax (80MHz, MCS9, 99pc duty cycle) | WLAN | 8.48 | ± 9.6 % |
| 10741 | AAA | IEEE 802.11ax (80MHz, MCS10, 99pc duty cycle) | WLAN | 8.40 | ± 9.6 % |
| 10741 | AAA | IEEE 802.11ax (80MHz, MCS11, 99pc duty cycle) | WLAN | 8.43 | ± 9.6 % |
| 10742 | AAA | IEEE 802.11ax (60MHz, MCS11, 99pc duty cycle) | WLAN | 8.94 | ± 9.6 % |
| | | | | | |
| 10744 | AAA | IEEE 802.11ax (160MHz, MCS1, 90pc duty cycle) | WLAN | 9.16 | ± 9.6 % |
| 10745 | AAA | IEEE 802.11ax (160MHz, MCS2, 90pc duty cycle) | WLAN | 8.93 | ± 9.6 % |
| 10746 | AAA | IEEE 802.11ax (160MHz, MCS3, 90pc duty cycle) | WLAN | 9.11 | ± 9.6 % |
| 10747 | AAA | IEEE 802.11ax (160MHz, MCS4, 90pc duty cycle) | WLAN | 9,04 | ± 9.6 % |
| 10748 | AAA | IEEE 802.11ax (160MHz, MCS5, 90pc duty cycle) | WLAN | 8.93 | ± 9.6 % |
| 10749 | AAA | IEEE 802.11ax (160MHz, MCS6, 90pc duty cycle) | WLAN | 8.90 | ± 9.6 % |
| 10750 | AAA | IEEE 802.11ax (160MHz, MCS7, 90pc duty cycle) | WLAN | 8.79 | ± 9.6 % |
| 10751 | AAA | IEEE 802.11ax (160MHz, MCS8, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10752 | AAA | IEEE 802.11ax (160MHz, MCS9, 90pc duty cycle) | WLAN | 8.81 | ± 9.6 % |
| 10753 | AAA | IEEE 802.11ax (160MHz, MCS10, 90pc duty cycle) | WLAN | 9.00 | ± 9.6 % |
| 10754 | AAA | IEEE 802.11ax (160MHz, MCS11, 90pc duty cycle) | WLAN | 8.94 | ± 9.6 % |
| 10755 | AAA | IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle) | WLAN | 8.64 | ± 9.6 % |
| 10756 | AAA | IEEE 802.11ax (160MHz, MCS1, 99pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10757 | AAA | IEEE 802.11ax (160MHz, MCS2, 99pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10758 | AAA | IEEE 802.11ax (160MHz, MCS3, 99pc duty cycle) | WLAN | 8.69 | ± 9.6 % |
| 10759 | | IEEE 802.11ax (160MHz, MCS4, 99pc duty cycle) | WLAN | 8.58 | ± 9.6 % |
| | AAA | | | | |
| 10760 | AAA | IEEE 802.11ax (160MHz, MCS5, 99pc duty cycle) | WLAN | 8.49 | ± 9.6 % |
| 10761 | AAA | IEEE 802.11ax (160MHz, MCS6, 99pc duty cycle) | WLAN | 8.58 | ± 9.6 % |
| 10762 | AAA | IEEE 802.11ax (160MHz, MCS7, 99pc duty cycle) | WLAN | 8.49 | ± 9.6 % |
| 10763 | AAA | IEEE 802.11ax (160MHz, MCS8, 99pc duty cycle) | WLAN | 8.53 | ± 9.6 % |
| 10764 | AAA | IEEE 802.11ax (160MHz, MCS9, 99pc duty cycle) | WLAN | 8.54 | ± 9.6 % |
| 10765 | AAA | IEEE 802.11ax (160MHz, MCS10, 99pc duty cycle) | WLAN | 8.54 | ± 9.6 % |
| 10766 | AAA | IEEE 802.11ax (160MHz, MCS11, 99pc duty cycle) | WLAN | 8.51 | ± 9.6 % |
| 10767 | AAA | 5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz) | 5G NR FR1 | 7.99 | ± 9.6 % |
| | | | TDD | | |
| 10768 | AAA | 5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz) | 5G NR FR1 | 8.01 | ± 9.6 % |
| | | | TDD | | |
| 10769 | AAA | 5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz) | 5G NR FR1 | 8.01 | ± 9.6 % |
| | | | TDD | | |
| 10770 | AAA | 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) | 5G NR FR1 | 8.02 | ± 9.6 % |
| 10110 | ' ' ' ' | 00 M (01 01 BM, 1 MB, 20 M 12, Q1 014, 10 M 12) | TDD | 0.02 | 2 0.0 70 |
| 10771 | AAA | 5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz) | 5G NR FR1 | 8.02 | ± 9.6 % |
| 10771 | 1 | 30 N/ (01 -01 DW, 1 ND, 23 W/ 12, Q1 3N, 13 K/ 12) | TDD | 0.02 | 1 2.0 /0 |
| 10772 | ΛΛΛ | 5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz) | 5G NR FR1 | 0 22 | +069/ |
| 10772 | AAA | SG NR (CP-OFDINI, 1 RB, 30 MINZ, QP3K, 13 KNZ) | | 8.23 | ± 9.6 % |
| 40770 | 1000 | FO ND (OD OEDM 4 DD 40 MH, ODOK 45 HL) | TDD FD4 | 0.00 | 10000 |
| 10773 | AAA | 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz) | 5G NR FR1 | 8.03 | ± 9.6 % |
| | | | TDD | | |
| 10774 | AAA | 5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz) | 5G NR FR1 | 8.02 | ± 9.6 % |
| | - | | TDD | | |
| 10776 | AAA | 5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz) | 5G NR FR1 | 8.30 | ± 9.6 % |
| | | | TDD | | |
| 10778 | AAA | 5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz) | 5G NR FR1 | 8.34 | ± 9.6 % |
| | | | TDD | | |
| 10780 | AAA | 5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz) | 5G NR FR1 | 8.38 | ± 9.6 % |
| | | Victory Appropriate State May Section 2000 1000 1000 1000 1000 1000 1000 100 | TDD | | |
| 10781 | AAA | 5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz) | 5G NR FR1 | 8.38 | ± 9.6 % |
| | | , | TDD | | |
| | | | | 0.10 | 1 0 0 0/ |
| 10782 | AAA | 5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz) | 5G NR FR1 | 8.43 | ± 9.6 % |

| 10783 | T AAA | 5C ND (CD OFDM 1000/ DD 5 MU- ODG/ 45 MU- | FO NID ED4 | 0.04 | |
|-------|-------|--|------------------|------|---------|
| | | 5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.31 | ± 9.6 % |
| 10784 | AAA | 5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.29 | ± 9.6 % |
| 10785 | AAA | 5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.40 | ± 9.6 % |
| 10786 | AAA | 5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.35 | ± 9.6 % |
| 10787 | AAA | 5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.44 | ± 9.6 % |
| 10788 | AAA | 5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.39 | ± 9.6 % |
| 10789 | AAA | 5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.37 | ± 9.6 % |
| 10790 | AAA | 5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.39 | ± 9.6 % |
| 10791 | AAA | 5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.83 | ± 9.6 % |
| 10792 | AAA | 5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.92 | ± 9.6 % |
| 10793 | AAA | 5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.95 | ± 9.6 % |
| 10794 | AAA | 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.82 | ± 9.6 % |
| 10795 | AAA | 5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz) | 5G NR FR1 | 7.84 | ± 9.6 % |
| 10796 | AAA | 5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.82 | ± 9.6 % |
| 10797 | AAA | 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.01 | ± 9.6 % |
| 10798 | AAA | 5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz) | 5G NR FR1 | 7.89 | ± 9.6 % |
| 10799 | AAA | 5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz) | 5G NR FR1 | 7.93 | ± 9.6 % |
| 10801 | AAA | 5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz) | 5G NR FR1 | 7.89 | ± 9.6 % |
| 10802 | AAA | 5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz) | 5G NR FR1 | 7.87 | ± 9.6 % |
| 10803 | AAA | 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 7.93 | ± 9.6 % |
| 10805 | AAA | 5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz) | 5G NR FR1 | 8.34 | ± 9.6 % |
| 10806 | AAA | 5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz) | 5G NR FR1 | 8.37 | ± 9.6 % |
| 10809 | AAA | 5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz) | 5G NR FR1 | 8.34 | ± 9.6 % |
| 10810 | AAA | 5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz) | 5G NR FR1 | 8.34 | ± 9.6 % |
| 10812 | AAA | 5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz) | 5G NR FR1 | 8.35 | ± 9.6 % |
| 10817 | AAA | 5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.35 | ± 9.6 % |
| 10818 | AAA | 5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz) | 5G NR FR1 | 8.34 | ± 9.6 % |
| 10819 | AAA | 5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz) | 5G NR FR1 | 8.33 | ± 9.6 % |
| 10820 | AAA | 5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz) | 5G NR FR1 | 8.30 | ± 9.6 % |
| 10821 | AAA | 5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz) | 5G NR FR1 | 8.41 | ± 9.6 % |
| 10822 | AAA | 5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10823 | AAA | 5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz) | 5G NR FR1 | 8.36 | ± 9.6 % |
| 10824 | AAA | 5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.39 | ± 9.6 % |

EX3DV4- SN:7472 August 30, 2019

| 10825 | AAA | 5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz) | 5G NR FR1 | 8.41 | ± 9.6 % |
|-------|-----|---|------------------|------|---------|
| 10827 | AAA | 5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz) | TDD 5G NR FR1 | 8.42 | ± 9.6 % |
| | | | TDD | | |
| 10828 | AAA | 5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz) | 5G NR FR1 | 8.43 | ± 9.6 % |
| 10829 | AAA | 5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.40 | ± 9.6 % |
| 10830 | AAA | 5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz) | 5G NR FR1 | 7.63 | ± 9.6 % |
| 10831 | AAA | 5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz) | 5G NR FR1 | 7.73 | ± 9.6 % |
| 10832 | AAA | 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz) | 5G NR FR1 | 7.74 | ± 9.6 % |
| 10833 | AAA | 5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz) | TDD 5G NR FR1 | 7.70 | ± 9.6 % |
| 10834 | AAA | 5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz) | TDD 5G NR FR1 | 7.75 | ± 9.6 % |
| | | | TDD | | |
| 10835 | AAA | 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.70 | ± 9.6 % |
| 10836 | AAA | 5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 7.66 | ± 9.6 % |
| 10837 | AAA | 5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz) | 5G NR FR1 | 7.68 | ± 9.6 % |
| 10839 | AAA | 5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz) | 5G NR FR1 | 7.70 | ± 9.6 % |
| 10840 | AAA | 5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz) | 5G NR FR1 | 7.67 | ± 9.6 % |
| 10841 | AAA | 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz) | TDD 5G NR FR1 | 7.71 | ± 9.6 % |
| 10843 | AAA | 5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz) | TDD 5G NR FR1 | 8.49 | ± 9.6 % |
| | | | TDD | | |
| 10844 | AAA | 5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10846 | AAA | 5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10854 | AAA | 5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz) | 5G NR FR1 | 8.34 | ± 9.6 % |
| 10855 | AAA | 5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz) | 5G NR FR1 | 8.36 | ± 9.6 % |
| 10856 | AAA | 5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz) | 5G NR FR1 | 8.37 | ± 9.6 % |
| 10857 | AAA | 5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz) | TDD 5G NR FR1 | 8.35 | ± 9.6 % |
| 10858 | AAA | 5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz) | TDD 5G NR FR1 | 8.36 | ± 9.6 % |
| | | | TDD | | |
| 10859 | AAA | 5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10860 | AAA | 5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10861 | AAA | 5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz) | 5G NR FR1 TDD | 8.40 | ± 9.6 % |
| 10863 | AAA | 5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz) | 5G NR FR1 | 8.41 | ± 9.6 % |
| 10864 | AAA | 5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz) | 5G NR FR1 | 8.37 | ± 9.6 % |
| 10865 | AAA | 5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz) | 5G NR FR1 | 8.41 | ± 9.6 % |
| 10866 | AAA | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) | TDD 5G NR FR1 | 5.68 | ± 9.6 % |
| | | | TDD | | |
| 10868 | AAA | 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 5.89 | ± 9.6 % |
| 10869 | AAA | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 5.75 | ± 9.6 % |
| 10870 | AAA | 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz) | 5G NR FR2 | 5.86 | ± 9.6 % |

| 10871 | AAA | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 5.75 | ± 9.6 % |
|-------|-----|--|------------------|------|---------|
| 10872 | AAA | 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 6.52 | ± 9.6 % |
| 10873 | AAA | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 6.61 | ± 9.6 % |
| 10874 | AAA | 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 6.65 | ± 9.6 % |
| 10875 | AAA | 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 7.78 | ± 9.6 % |
| 10876 | AAA | 5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 8.39 | ± 9.6 % |
| 10877 | AAA | 5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 7.95 | ± 9.6 % |
| 10878 | AAA | 5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 8.41 | ± 9.6 % |
| 10879 | AAA | 5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 8.12 | ± 9.6 % |
| 10880 | AAA | 5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 8.38 | ± 9.6 % |
| 10881 | AAA | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 5.75 | ± 9.6 % |
| 10882 | AAA | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 5.96 | ± 9.6 % |
| 10883 | AAA | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 6.57 | ± 9.6 % |
| 10884 | AAA | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 6.53 | ± 9.6 % |
| 10885 | AAA | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 6.61 | ± 9.6 % |
| 10886 | AAA | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 6.65 | ± 9.6 % |
| 10887 | AAA | 5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 7.78 | ± 9.6 % |
| 10888 | AAA | 5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz) | 5G NR FR2 TDD | 8.35 | ± 9.6 % |
| 10889 | AAA | 5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 8.02 | ± 9.6 % |
| 10890 | AAA | 5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 8.40 | ± 9.6 % |
| 10891 | AAA | 5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz) | 5G NR FR2 | 8.13 | ± 9.6 % |
| 10892 | AAA | 5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz) | 5G NR FR2 | 8.41 | ± 9.6 % |

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Client

BV ADT (Auden)

Certificate No: EX3-7537_Jun19

CALIBRATION CERTIFICATE

Object

EX3DV4 - SN:7537

Calibration procedure(s)

QA CAL-01.v9, QA CAL-14.v5, QA CAL-23.v5, QA CAL-25.v7

Calibration procedure for dosimetric E-field probes

Calibration date:

June 18, 2019

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP | SN: 104778 | 03-Apr-19 (No. 217-02892/02893) | Apr-20 |
| Power sensor NRP-Z91 | SN: 103244 | 03-Apr-19 (No. 217-02892) | Apr-20 |
| Power sensor NRP-Z91 | SN: 103245 | 03-Apr-19 (No. 217-02893) | Apr-20 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-19 (No. 217-02894) | Apr-20 |
| DAE4 | SN: 660 | 19-Dec-18 (No. DAE4-660_Dec18) | Dec-19 |
| Reference Probe ES3DV2 | SN: 3013 | 31-Dec-18 (No. ES3-3013_Dec18) | Dec-19 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-18) | In house check: Jun-20 |
| Network Analyzer E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-18) | In house check: Oct-19 |

Calibrated by:

Name
Function
Signature
Laboratory Technician

Approved by:

Katja Pokovic
Technical Manager

Issued: June 20, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid
NORMx,y,z sensitivity in free space
ConvF sensitivity in TSL / NORMx,y,z
DCP diode compression point

CF crest factor (1/duty_cycle) of the RF signal modulation dependent linearization parameters

Polarization φ φ rotation around probe axis

Polarization 9 9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

 a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

- b) IEC 62209-1, ", "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization θ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Certificate No: EX3-7537_Jun19 Page 2 of 19

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7537

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|--------------------------|----------|----------|----------|-----------|
| Norm $(\mu V/(V/m)^2)^A$ | 0.61 | 0.68 | 0.60 | ± 10.1 % |
| DCP (mV) ^B | 98.8 | 99.9 | 101.0 | |

Calibration Results for Modulation Response

| UID | Communication System Name | | A dB | B dBõV | С | D dB | VR mV | Max dev. | Max Unc ^E (k=2) |
|--------|-----------------------------|---|---------|-----------|-------|---------|----------|-------------|----------------------------------|
| 0 | CW | X | 0.00 | 0.00 | 1.00 | 0.00 | 158.3 | ± 3.3 % | ± 4.7 % |
| | | Y | 0.00 | 0.00 | 1.00 | | 146.8 | | |
| | | Z | 0.00 | 0.00 | 1.00 | | 153.3 | | |
| 10352- | Pulse Waveform (200Hz, 10%) | X | 15.00 | 90.12 | 21.07 | 10.00 | 60.0 | ± 3.6 % | ± 9.6 % |
| AAA | | Υ | 15.00 | 88.44 | 20.30 | | 60.0 | | |
| | | Z | 15.00 | 89.91 | 21.20 | | 60.0 | | |
| 10353- | Pulse Waveform (200Hz, 20%) | X | 15.00 | 91.13 | 20.59 | 6.99 | 80.0 | ± 1.9 % | ± 9.6 % |
| AAA | | Υ | 15.00 | 89.10 | 19.48 | | 80.0 | | |
| | | Z | 15.00 | 91.90 | 21.20 | | 80.0 | | |
| 10354- | Pulse Waveform (200Hz, 40%) | X | 15.00 | 98.91 | 23.19 | 3.98 | 95.0 | ± 1.2 % | ± 9.6 % |
| AAA | | Υ | 15.00 | 90.09 | 18.46 | | 95.0 | | |
| | | Z | 15.00 | 96.54 | 22.16 | | 95.0 | | |
| 10355- | Pulse Waveform (200Hz, 60%) | X | 15.00 | 107.32 | 25.78 | 2.22 | 120.0 | ± 1.2 % | ± 9.6 % |
| AAA | | Y | 15.00 | 89.56 | 16.77 | | 120.0 | | |
| | | Z | 15.00 | 104.15 | 24.43 | | 120.0 | | |
| 10387- | QPSK Waveform, 1 MHz | X | 0.83 | 63.23 | 10.56 | 0.00 | 150.0 | ± 2.7 % | ± 9.6 % |
| AAA | | Υ | 0.71 | 61.44 | 8.94 | | 150.0 | | |
| | | Z | 0.92 | 64.76 | 11.27 | | 150.0 | | |
| 10388- | QPSK Waveform, 10 MHz | X | 2.36 | 68.95 | 16.32 | 0.00 | 150.0 | ± 1.0 % | ± 9.6 % |
| AAA | | Y | 2.23 | 67.93 | 15.54 | | 150.0 | | |
| | | Z | 2.51 | 70.17 | 16.91 | | 150.0 | | |
| 10396- | 64-QAM Waveform, 100 kHz | X | 3.41 | 72.74 | 19.90 | 3.01 | 150.0 | ± 0.7 % | ± 9.6 % |
| AAA | | Υ | 3.00 | 69.78 | 18.51 | | 150.0 | | |
| | | Z | 3.43 | 72.93 | 19.89 | | 150.0 | | |
| 10399- | 64-QAM Waveform, 40 MHz | X | 3.59 | 67.46 | 16.05 | 0.00 | 150.0 | ± 1.8 % | ± 9.6 % |
| AAA | | Υ | 3.55 | 67.18 | 15.79 | | 150.0 | | |
| | | Z | 3.54 | 67.47 | 16.08 | | 150.0 | | |
| 10414- | WLAN CCDF, 64-QAM, 40MHz | X | 4.93 | 65.76 | 15.69 | 0.00 | 150.0 | ± 3.8 % | ± 9.6 % |
| AAA | | Υ | 4.98 | 65.85 | 15.71 | | 150.0 | | |
| | | Z | 4.84 | 65.60 | 15.60 | | 150.0 | | |

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX3-7537_Jun19

A The uncertainties of Norm X,Y,Z do not affect the E2-field uncertainty inside TSL (see Page 5).

^B Numerical linearization parameter: uncertainty not required.

E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7537

Sensor Model Parameters

| | C1 | C2 | α | T1 | T2 | T3 | T4 | T5 | Т6 |
|---|------|--------|-----------------|--------|--------|------|------|------|------|
| | fF | fF | V ⁻¹ | ms.V⁻² | ms.V⁻¹ | ms | V-2 | V-1 | |
| Х | 48.7 | 366.14 | 36.06 | 17.67 | 0.13 | 5.10 | 1.48 | 0.30 | 1.01 |
| Υ | 49.8 | 384.45 | 37.67 | 16.87 | 0.40 | 5.10 | 0.00 | 0.59 | 1.01 |
| Z | 47.6 | 353.84 | 35.33 | 17.81 | 0.26 | 5.10 | 1.13 | 0.35 | 1.01 |

Other Probe Parameters

| Sensor Arrangement | Triangular |
|---|------------|
| Connector Angle (°) | -0.6 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |

Certificate No: EX3-7537_Jun19

EX3DV4-SN:7537

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7537

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|---------------------------------------|-------------------------|---------|---------|---------|--------------------|----------------------------|--------------|
| 750 | 41.9 | 0.89 | 10.77 | 10.77 | 10.77 | 0.44 | 1.01 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 10.48 | 10.48 | 10.48 | 0.34 | 1.10 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 10.28 | 10.28 | 10.28 | 0.44 | 0.87 | ± 12.0 % |
| 1450 | 40.5 | 1.20 | 8.85 | 8.85 | 8.85 | 0.38 | 0.80 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.44 | 8.44 | 8.44 | 0.39 | 0.85 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 8.13 | 8.13 | 8.13 | 0.31 | 0.85 | ± 12.0 % |
| 2000 | 40.0 | 1.40 | 7.94 | 7.94 | 7.94 | 0.38 | 0.90 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 7.75 | 7.75 | 7.75 | 0.32 | 0.80 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.39 | 7.39 | 7.39 | 0.35 | 0.80 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 7.19 | 7.19 | 7.19 | 0.41 | 0.80 | ± 12.0 % |
| 3300 | 38.2 | 2.71 | 6.75 | 6.75 | 6.75 | 0.30 | 1.25 | ± 13.1 % |
| 3500 | 37.9 | 2.91 | 6.71 | 6.71 | 6.71 | 0.30 | 1.25 | ± 13.1 % |
| 3700 | 37.7 | 3.12 | 6.65 | 6.65 | 6.65 | 0.30 | 1.25 | ± 13.1 % |
| 3900 | 37.5 | 3.32 | 6.45 | 6.45 | 6.45 | 0.40 | 1.50 | ± 13.1 % |
| 4100 | 37.2 | 3.53 | 6.13 | 6.13 | 6.13 | 0.40 | 1.50 | ± 13.1 % |
| 4200 | 37.1 | 3.63 | 5.98 | 5.98 | 5.98 | 0.40 | 1.50 | ± 13.1 % |
| 4400 | 36.9 | 3.84 | 5.94 | 5.94 | 5.94 | 0.45 | 1.70 | ± 13.1 % |
| 4600 | 36.7 | 4.04 | 5.93 | 5.93 | 5.93 | 0.45 | 1.70 | ± 13.1 % |
| 4800 | 36.4 | 4.25 | 5.59 | 5.59 | 5.59 | 0.45 | 1.60 | ± 13.1 % |
| 4950 | 36.3 | 4.40 | 5.56 | 5.56 | 5.56 | 0.45 | 1.80 | ± 13.1 % |
| 5250 | 35.9 | 4.71 | 5.36 | 5.36 | 5.36 | 0.40 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.75 | 4.75 | 4.75 | 0.40 | 1.80 | ± 13.1 % |
| 5750 | 35.4 | 5.22 | 4.99 | 4.99 | 4.99 | 0.40 | 1.80 | ± 13.1 % |


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

F At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

SAINHAIDENTH are determined during calibration.


^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

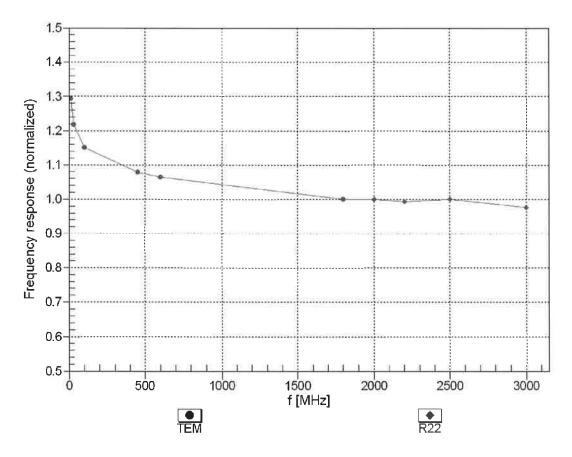

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^{\circ}$

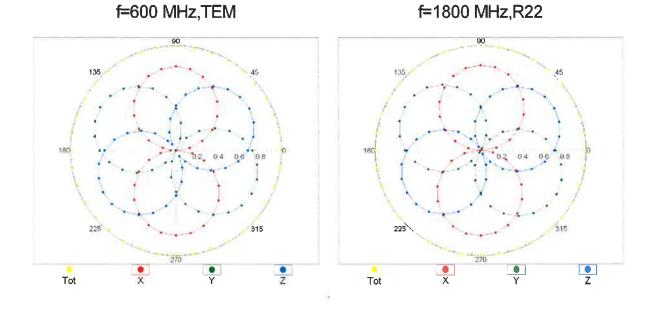


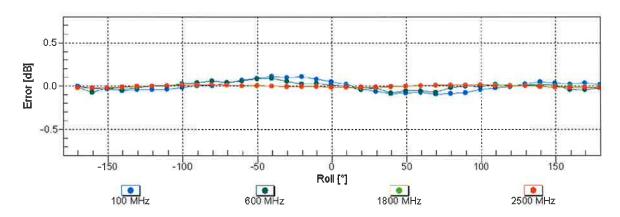


Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

June 18, 2019 EX3DV4-SN:7537


Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

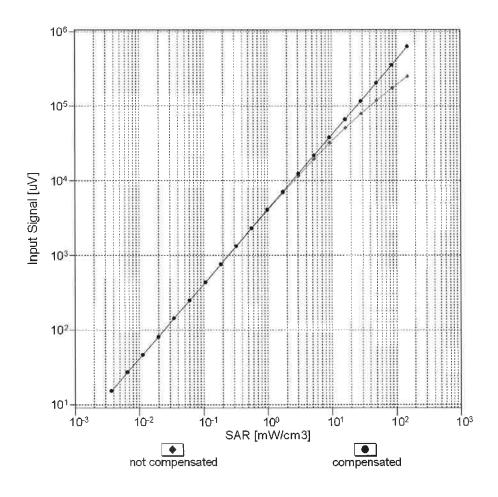

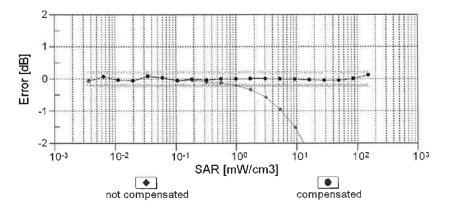


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

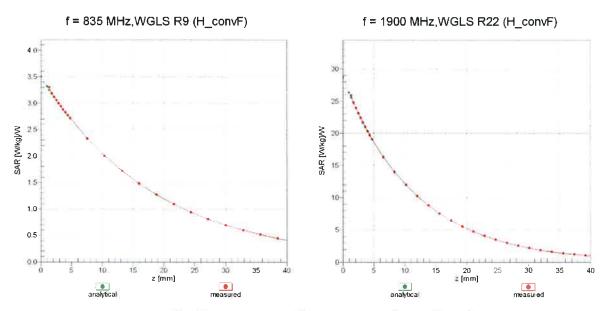

Deviation from Isotropy in Liquid Error (ϕ, θ) , f = 900 MHz

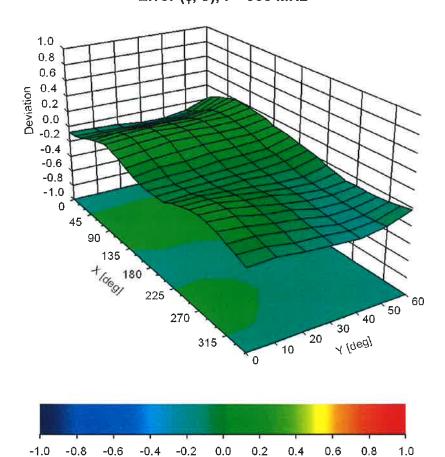

Appendix: Modulation Calibration Parameters

| UID | Rev | Communication System Name | Group | PAR (dB) | Unc ^E (k=2) |
|-------|-----|--|-----------|-------------|---------------------------|
| 0 | | CW | CW | 0.00 | ±4.7 % |
| 10010 | CAA | SAR Validation (Square, 100ms, 10ms) | Test | 10.00 | ± 9.6 % |
| 10011 | CAB | UMTS-FDD (WCDMA) | WCDMA | 2.91 | ± 9.6 % |
| 10012 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | WLAN | 1.87 | ± 9.6 % |
| 10013 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | WLAN | 9.46 | ± 9.6 % |
| 10021 | DAC | GSM-FDD (TDMA, GMSK) | GSM | 9.39 | ± 9.6 % |
| 10023 | DAC | GPRS-FDD (TDMA, GMSK, TN 0) | GSM | 9.57 | ± 9.6 % |
| 10024 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-1) | GSM | 6.56 | ± 9.6 % |
| 10025 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0) | GSM | 12.62 | ± 9.6 % |
| 10026 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1) | GSM | 9.55 | ± 9.6 % |
| 10027 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | GSM | 4.80 | ± 9.6 % |
| 10028 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | GSM | 3.55 | ± 9.6 % |
| 10029 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2) | GSM | 7.78 | ± 9.6 % |
| 10030 | CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1) | Bluetooth | 5.30 | ± 9.6 % |
| 10031 | CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3) | Bluetooth | 1.87 | ± 9.6 % |
| 10032 | CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | Bluetooth | 1.16 | ± 9.6 % |
| 10033 | CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1) | Bluetooth | 7.74 | ± 9.6 % |
| 10034 | CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3) | Bluetooth | 4.53 | ± 9.6 % |
| 10035 | CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5) | Bluetooth | 3.83 | ± 9.6 % |
| 10036 | CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1) | Bluetooth | 8.01 | ± 9.6 % |
| 10037 | CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3) | Bluetooth | 4.77 | ± 9.6 % |
| 10038 | CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5) | Bluetooth | 4.10 | ± 9.6 % |
| 10039 | CAB | CDMA2000 (1xRTT, RC1) | CDMA2000 | 4.57 | ± 9.6 % |
| 10042 | CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | AMPS | 7.78 | ± 9.6 % |
| 10044 | CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM) | AMPS | 0.00 | ± 9.6 % |
| 10048 | CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24) | DECT | 13.80 | ± 9.6 % |
| 10049 | CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12) | DECT | 10.79 | ± 9.6 % |
| 10056 | CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps) | TD-SCDMA | 11.01 | ± 9.6 % |
| 10058 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3) | GSM | 6.52 | ± 9.6 % |
| 10059 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps) | WLAN | 2.12 | ± 9.6 % |
| 10060 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps) | WLAN | 2.83 | ± 9.6 % |
| 10061 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps) | WLAN | 3.60 | ± 9.6 % |
| 10061 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | WLAN | 8.68 | ± 9.6 % |
| 10062 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps) | WLAN | 8.63 | ± 9.6 % |
| 10063 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps) | WLAN | 9.09 | ± 9.6 % |
| 10065 | CAC | And the state of t | WLAN | | |
| 10065 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps) IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps) | WLAN | 9.00 | ± 9.6 % |
| 10067 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps) | WLAN | 10.12 | ± 9.6 % |
| 10067 | CAC | | | | ± 9.6 % |
| | | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps) | WLAN | 10.24 | ± 9.6 % |
| 10069 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps) IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps) | WLAN | 10.56 | ± 9.6 % |
| 10071 | | | WLAN | 9.83 | ± 9.6 % |
| 10072 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | WLAN | 9.62 | ± 9.6 % |
| 10073 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | WLAN | 9.94 | ± 9.6 % |
| 10074 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | WLAN | 10.30 | ± 9.6 % |
| 10075 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | WLAN | 10.77 | ± 9.6 % |
| 10076 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | WLAN | 10.94 | ± 9.6 % |
| 10077 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | WLAN | 11.00 | ± 9.6 % |
| 10081 | CAB | CDMA2000 (1xRTT, RC3) | CDMA2000 | 3.97 | ± 9.6 % |
| 10082 | CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | AMPS | 4.77 | ± 9.6 % |
| 10090 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-4) | GSM | 6.56 | ± 9.6 % |
| 10097 | CAB | UMTS-FDD (HSDPA) | WCDMA | 3.98 | ± 9.6 % |
| 10098 | CAB | UMTS-FDD (HSUPA, Subtest 2) | WCDMA | 3.98 | ± 9.6 % |
| 10099 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4) | GSM | 9.55 | ± 9.6 % |
| 10100 | CAE | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | LTE-FDD | 5.67 | ± 9.6 % |
| 10101 | CAE | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | LTE-FDD | 6.42 | ± 9.6 % |
| 10102 | CAE | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | LTE-FDD | 6.60 | ± 9.6 % |
| 10103 | CAG | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | LTE-TDD | 9.29 | ± 9.6 % |
| 10104 | CAG | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | LTE-TDD | 9.97 | ± 9.6 % |
| 10105 | CAG | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | LTE-TDD | 10.01 | ± 9.6 % |
| 10108 | CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | LTE-FDD | 5.80 | ± 9.6 % |

Certificate No: EX3-7537_Jun19 Page 10 of 19

| 10109 | CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | LTE-FDD | 6.43 | ± 9.6 % |
|-------|-----|--|---------|-------|---------|
| 10110 | CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | LTE-FDD | 5.75 | ± 9.6 % |
| 10111 | CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | LTE-FDD | 6.44 | ± 9.6 % |
| 10112 | CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | LTE-FDD | 6.59 | ± 9.6 % |
| 10113 | CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | LTE-FDD | 6.62 | ± 9.6 % |
| 10114 | CAC | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | WLAN | 8.10 | ± 9.6 % |
| 10115 | CAC | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM) | WLAN | 8.46 | ± 9.6 % |
| 10116 | CAC | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | WLAN | 8.15 | ± 9.6 % |
| 10117 | CAC | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | WLAN | 8.07 | ± 9.6 % |
| 10118 | CAC | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM) | WLAN | 8.59 | ± 9.6 % |
| 10119 | CAC | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM) | WLAN | 8.13 | ± 9.6 % |
| 10140 | CAE | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | LTE-FDD | 6.49 | ± 9.6 % |
| 10141 | CAE | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | LTE-FDD | 6.53 | ± 9.6 % |
| 10142 | CAE | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10143 | CAE | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | LTE-FDD | 6.35 | ± 9.6 % |
| 10144 | CAE | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | LTE-FDD | 6.65 | ± 9.6 % |
| 10145 | CAF | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | LTE-FDD | 5.76 | ± 9.6 % |
| 10146 | CAF | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | LTE-FDD | 6.41 | ± 9.6 % |
| 10147 | CAF | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | LTE-FDD | 6.72 | ± 9.6 % |
| 10149 | CAE | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | LTE-FDD | 6.42 | ± 9.6 % |
| 10150 | CAE | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | LTE-FDD | 6.60 | ± 9.6 % |
| 10151 | CAG | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | LTE-TDD | 9.28 | ± 9.6 % |
| 10152 | CAG | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | LTE-TDD | 9.92 | ± 9.6 % |
| 10153 | CAG | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | LTE-TDD | 10.05 | ± 9.6 % |
| 10154 | CAG | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | LTE-FDD | 5.75 | ± 9.6 % |
| 10155 | CAG | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | LTE-FDD | 6.43 | ± 9.6 % |
| 10156 | CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | LTE-FDD | 5.79 | ± 9.6 % |
| 10157 | CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | LTE-FDD | 6.49 | ± 9.6 % |
| 10158 | CAG | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | LTE-FDD | 6.62 | ± 9.6 % |
| 10159 | CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | LTE-FDD | 6.56 | ± 9.6 % |
| 10160 | CAE | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | LTE-FDD | 5.82 | ± 9.6 % |
| 10161 | CAE | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | LTE-FDD | 6.43 | ± 9.6 % |
| 10162 | CAE | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | LTE-FDD | 6.58 | ± 9.6 % |
| 10166 | CAF | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | LTE-FDD | 5.46 | ± 9.6 % |
| 10167 | CAF | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | LTE-FDD | 6.21 | ± 9.6 % |
| 10168 | CAF | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | LTE-FDD | 6.79 | ± 9.6 % |
| 10169 | CAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10170 | CAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10171 | AAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | LTE-FDD | 6.49 | ± 9.6 % |
| 10172 | CAG | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | LTE-TDD | 9.21 | ± 9.6 % |
| 10173 | CAG | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10174 | CAG | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10175 | | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | LTE-FDD | 5.72 | ± 9.6 % |
| 10176 | CAG | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10177 | CAI | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10178 | CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10179 | CAG | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10180 | CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10181 | CAE | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | LTE-FDD | 5.72 | ± 9.6 % |
| 10182 | CAE | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10183 | AAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10184 | CAE | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10185 | CAE | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | LTE-FDD | 6.51 | ± 9.6 % |
| 10186 | AAE | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10187 | CAF | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10188 | CAF | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10189 | AAF | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10193 | CAC | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | WLAN | 8.09 | ± 9.6 % |
| 10194 | CAC | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | WLAN | 8.12 | ± 9.6 % |
| 10195 | CAC | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | WLAN | 8.21 | ± 9.6 % |
| 10196 | CAC | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | WLAN | 8.10 | ± 9.6 % |
| 10197 | CAC | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM) | WLAN | 8.13 | ± 9.6 % |
| 10198 | CAC | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM) | WLAN | 8.27 | ± 9.6 % |
| 10219 | CAC | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | WLAN | 8.03 | ± 9.6 % |

| 10000 | CAC | IEEE 000 44 - (UT Nove + 40 0 NU - 40 0 AND | 140.441 | | 0.00/ 1 |
|-------|-----|---|----------|--------------|---------|
| 10220 | CAC | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM) | WLAN | 8.13 | ± 9.6 % |
| 10221 | CAC | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM) | WLAN | 8.27 | ± 9.6 % |
| 10222 | CAC | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | WLAN | 8.06 | ± 9.6 % |
| 10223 | CAC | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM) | WLAN | 8.48 | ± 9.6 % |
| 10224 | CAC | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | WLAN | 8.08 | ± 9.6 % |
| 10225 | CAB | UMTS-FDD (HSPA+) | WCDMA | 5.97 | ± 9.6 % |
| 10226 | CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | LTE-TDD | 9.49 | ± 9.6 % |
| 10227 | CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | LTE-TDD | 10.26 | ± 9.6 % |
| 10228 | CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | LTE-TDD | 9.22 | ± 9.6 % |
| 10229 | CAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10230 | CAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10231 | CAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | LTE-TDD | 9.19 | ± 9.6 % |
| 10232 | CAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10233 | CAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10234 | CAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | LTE-TDD | 9.21 | ± 9.6 % |
| 10235 | CAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10236 | CAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10237 | CAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | LTE-TDD | 9.21 | ± 9.6 % |
| 10238 | CAF | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10239 | CAF | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10240 | CAF | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | LTE-TDD | 9.21 | ± 9.6 % |
| 10241 | CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | LTE-TDD | 9.82 | ± 9.6 % |
| 10242 | CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | LTE-TDD | 9.86 | ± 9.6 % |
| 10243 | CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | LTE-TDD | 9.46 | ± 9.6 % |
| 10244 | CAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | LTE-TDD | 10.06 | ± 9.6 % |
| 10245 | CAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | LTE-TDD | 10.06 | ± 9.6 % |
| 10246 | CAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | LTE-TDD | 9.30 | ± 9.6 % |
| 10247 | CAF | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | LTE-TDD | 9.91 | ± 9.6 % |
| 10248 | CAF | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | LTE-TDD | 10.09 | ± 9.6 % |
| 10249 | CAF | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | LTE-TDD | 9.29 | ± 9.6 % |
| 10250 | CAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | LTE-TDD | 9.81 | ± 9.6 % |
| 10251 | CAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | LTE-TDD | 10.17 | ± 9.6 % |
| 10251 | CAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | LTE-TDD | 9.24 | ± 9.6 % |
| 10252 | | | | | |
| 10253 | CAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | LTE-TDD | 9.90 | ± 9.6 % |
| | | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | LTE-TDD | 10.14 | ± 9.6 % |
| 10255 | CAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | LTE-TDD | 9.20 | ± 9.6 % |
| 10256 | CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | LTE-TDD | 9.96 | ± 9.6 % |
| 10257 | CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | LTE-TDD | 10.08 | ± 9.6 % |
| 10258 | CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | LTE-TDD | 9.34 | ± 9.6 % |
| 10259 | CAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | LTE-TDD | 9.98 | ± 9.6 % |
| 10260 | CAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | LTE-TDD | 9.97 | ± 9.6 % |
| 10261 | CAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | LTE-TDD | 9.24 | ± 9.6 % |
| 10262 | | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | LTE-TDD | 9.83 | ± 9.6 % |
| 10263 | CAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | LTE-TDD | 10.16 | ± 9.6 % |
| 10264 | CAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | LTE-TDD | 9.23 | ± 9.6 % |
| 10265 | CAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | LTE-TDD | 9.92 | ± 9.6 % |
| 10266 | CAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | LTE-TDD | 10.07 | ± 9.6 % |
| 10267 | CAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | LTE-TDD | 9.30 | ± 9.6 % |
| 10268 | CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | LTE-TDD | 10.06 | ± 9.6 % |
| 10269 | CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | LTE-TDD | 10.13 | ± 9.6 % |
| 10270 | CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | LTE-TDD | 9.58 | ± 9.6 % |
| 10274 | CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | WCDMA | 4.87 | ± 9.6 % |
| 10275 | CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | WCDMA | 3.96 | ± 9.6 % |
| 10277 | CAA | PHS (QPSK) | PHS | 11.81 | ± 9.6 % |
| 10278 | CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5) | PHS | 11.81 | ± 9.6 % |
| 10279 | CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38) | PHS | 12.18 | ± 9.6 % |
| 10290 | AAB | CDMA2000, RC1, SO55, Full Rate | CDMA2000 | 3.91 | ± 9.6 % |
| 10291 | AAB | CDMA2000, RC3, SO55, Full Rate | CDMA2000 | 3.46 | ± 9.6 % |
| 10292 | AAB | CDMA2000, RC3, SO32, Full Rate | CDMA2000 | 3.39 | ± 9.6 % |
| 10293 | AAB | CDMA2000, RC3, SO3, Full Rate | CDMA2000 | 3.50 | ± 9.6 % |
| 10295 | AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr. | CDMA2000 | 12.49 | ± 9.6 % |
| 10293 | AAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | LTE-FDD | 5.81 | ± 9.6 % |
| 10297 | | | LTE-FDD | | |
| 10298 | AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | LTE-FDD | 5.72 6.39 | ± 9.6 % |
| 10299 | AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | LIE-FUU | 0.38 | ± 9.6 % |

| 10300 | AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | LTE-FDD | 6.60 | ± 9.6 % |
|----------------|------|--|----------|-------|---------|
| 10301 | AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC) | WiMAX | 12.03 | ± 9.6 % |
| 10302 | AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | WiMAX | 12.57 | ± 9.6 % |
| 10303 | AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC) | WiMAX | 12.52 | ± 9.6 % |
| 10304 | AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC) | WiMAX | 11.86 | ± 9.6 % |
| 10305 | AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols) | WiMAX | 15.24 | ± 9.6 % |
| 10306 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols) | WiMAX | 14.67 | ± 9.6 % |
| 10307 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols) | WiMAX | 14.49 | ± 9.6 % |
| 10308 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC) | WiMAX | 14.46 | ± 9.6 % |
| 10309 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | WiMAX | 14.58 | ± 9.6 % |
| 10310 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols) | WiMAX | 14.57 | ± 9.6 % |
| 10311 | AAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | LTE-FDD | 6.06 | ± 9.6 % |
| 10313 | AAA | IDEN 1:3 | iDEN | 10.51 | ± 9.6 % |
| 10314 | AAA | iDEN 1:6 | iDEN | 13.48 | ± 9.6 % |
| 10315 | AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | WLAN | 1.71 | ± 9.6 % |
| 10316 | AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| 10317 | AAC | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| 10352 | AAA | Pulse Waveform (200Hz, 10%) | Generic | 10.00 | ± 9.6 % |
| 10353 | AAA | Pulse Waveform (200Hz, 20%) | Generic | 6.99 | ± 9.6 % |
| 10354 | AAA | Pulse Waveform (200Hz, 40%) | Generic | 3.98 | ± 9.6 % |
| 10355 | AAA | Pulse Waveform (200Hz, 60%) | Generic | 2.22 | ± 9.6 % |
| 10356 | AAA | Pulse Waveform (200Hz, 80%) | Generic | 0.97 | ± 9.6 % |
| 10387 | AAA | QPSK Waveform, 1 MHz | Generic | 5.10 | ± 9.6 % |
| 10388 | AAA | QPSK Waveform, 10 MHz | Generic | 5.22 | ± 9.6 % |
| 10396 | AAA | 64-QAM Waveform, 100 kHz | Generic | 6.27 | ± 9.6 % |
| 10399 | AAA | 64-QAM Waveform, 40 MHz | Generic | 6.27 | ± 9.6 % |
| 10400 | AAD | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle) | WLAN | 8.37 | ± 9.6 % |
| 10401 | AAD | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle) | WLAN | 8.60 | ± 9.6 % |
| 10402 | AAD | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle) | WLAN | 8.53 | ± 9.6 % |
| 10403 | AAB | CDMA2000 (1xEV-DO, Rev. 0) | CDMA2000 | 3.76 | ± 9.6 % |
| 10404 | AAB | CDMA2000 (1xEV-DO, Rev. A) | CDMA2000 | 3.77 | ± 9.6 % |
| 10406 | AAB | CDMA2000, RC3, SO32, SCH0, Full Rate | CDMA2000 | 5.22 | ± 9.6 % |
| 10410 | AAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4) | LTE-TDD | 7.82 | ± 9.6 % |
| 10414 | AAA | WLAN CCDF, 64-QAM, 40MHz | Generic | 8.54 | ± 9.6 % |
| 10415 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | WLAN | 1.54 | ± 9.6 % |
| 10416 | AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | WLAN | 8.23 | ± 9.6 % |
| 10417 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle) | WLAN | 8.23 | ± 9.6 % |
| 10418 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preambule) | WLAN | 8.14 | ± 9.6 % |
| 10419 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preambule) | WLAN | 8.19 | ± 9.6 % |
| 10422 | AAB | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK) | WLAN | 8.32 | ± 9.6 % |
| 10423 | AAB | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM) | WLAN | 8.47 | ± 9.6 % |
| 10424 | AAB | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM) | WLAN | 8.40 | ± 9.6 % |
| 10425 | AAB | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) | WLAN | 8.41 | ± 9.6 % |
| 10426 | AAB | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM) | WLAN | 8.45 | ± 9.6 % |
| 10427 | AAB | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM) | WLAN | 8.41 | ± 9.6 % |
| 10430 | AAD | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1) | LTE-FDD | 8.28 | ± 9.6 % |
| 10431 | AAD | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) | LTE-FDD | 8.38 | ± 9.6 % |
| 10432 | AAC | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) | LTE-FDD | 8.34 | ± 9.6 % |
| 10433 | AAC | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) | LTE-FDD | 8.34 | ± 9.6 % |
| 10434 | AAA | W-CDMA (BS Test Model 1, 64 DPCH) | WCDMA | 8.60 | ± 9.6 % |
| 10435 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.82 | ± 9.6 % |
| 10447 | AAD | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | LTE-FDD | 7.56 | ± 9.6 % |
| 10441 | | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%) | LTE-FDD | 7.53 | ± 9.6 % |
| | LAAD | TETET DD (OF DIVIA, TO WILL, L-TIVES. F. CHODIN 44 /8) | | | |
| 10448 10449 | AAD | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%) | LTE-FDD | 7.51 | ± 9.6 % |

| 10451 | AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%) | WCDMA | 7.59 | ± 9.6 % |
|-------|-----|---|----------|------|---------|
| 10456 | AAB | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle) | WLAN | 8.63 | ± 9.6 % |
| 10457 | AAA | UMTS-FDD (DC-HSDPA) | WCDMA | 6.62 | ± 9.6 % |
| 10458 | AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers) | CDMA2000 | 6.55 | ± 9.6 % |
| 10459 | AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers) | CDMA2000 | 8.25 | ± 9.6 % |
| 10460 | AAA | UMTS-FDD (WCDMA, AMR) | WCDMA | 2.39 | ± 9.6 % |
| 10461 | AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.82 | ± 9.6 % |
| 10462 | AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.30 | ± 9.6 % |
| 10463 | AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.56 | ± 9.6 % |
| 10464 | AAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.82 | ± 9.6 % |
| 10465 | AAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.32 | ± 9.6 % |
| 10466 | AAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.57 | ± 9.6 % |
| 10467 | AAE | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.82 | ± 9.6 % |
| 10468 | AAE | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.32 | ± 9.6 % |
| 10469 | AAE | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.56 | ± 9.6 % |
| 10470 | AAE | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.82 | ± 9.6 % |
| 10471 | AAE | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.32 | ± 9.6 % |
| 10472 | AAE | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.57 | ± 9.6 % |
| 10473 | AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.82 | ± 9.6 % |
| 10474 | AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.32 | ± 9.6 % |
| 10475 | AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.57 | ± 9.6 % |
| 10477 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.32 | ± 9.6 % |
| 10478 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.57 | ± 9.6 % |
| 10479 | AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.74 | ± 9.6 % |
| 10480 | AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.18 | ± 9.6 % |
| 10481 | AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.45 | ± 9.6 % |
| 10482 | AAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.71 | ± 9.6 % |
| 10483 | AAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.39 | ± 9.6 % |
| 10484 | AAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.47 | ± 9.6 % |
| 10485 | AAE | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.59 | ± 9.6 % |
| 10486 | AAE | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.38 | ± 9.6 % |
| 10487 | AAE | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.60 | ± 9.6 % |
| 10488 | AAE | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.70 | ± 9.6 % |
| 10489 | AAE | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.31 | ± 9.6 % |
| 10490 | AAE | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.54 | ± 9.6 % |
| 10491 | AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.74 | ± 9.6 % |

| 10492 | AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL | LTE-TDD | 8.41 | ± 9.6 % |
|----------------|-----|---|---------|------|------------|
| | | Subframe=2,3,4,7,8,9) | | | |
| 10493 | AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.55 | ± 9.6 % |
| 10494 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.74 | ± 9.6 % |
| 10495 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.37 | ± 9.6 % |
| 10496 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.54 | ± 9.6 % |
| 10497 | AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.67 | ± 9.6 % |
| 10498 | AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.40 | ± 9.6 % |
| 10499 | AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.68 | ± 9.6 % |
| 10500 | AAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.67 | ± 9.6 % |
| 10501 | AAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.44 | ± 9.6 % |
| 10502 | AAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.52 | ± 9.6 % |
| 10503 | AAE | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.72 | ± 9.6 % |
| 10504 | AAE | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.31 | ± 9.6 % |
| 10505 | AAE | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.54 | ± 9.6 % |
| 10506 | AAE | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.74 | ± 9.6 % |
| 10507 | AAE | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.36 | ± 9.6 % |
| 10508 | AAE | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.55 | ± 9.6 % |
| 10509 | AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.99 | ± 9.6 % |
| 10510 | AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.49 | ± 9.6 % |
| 10511 | AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.51 | ± 9.6 % |
| 10512 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 7.74 | ± 9.6 % |
| 10513 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.42 | ± 9.6 % |
| 10514 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.45 | ± 9.6 % |
| 10515 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle) | WLAN | 1.58 | ± 9.6 % |
| 10516 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle) | WLAN | 1.57 | ± 9.6 % |
| 10517 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle) | WLAN | 1.58 | ± 9.6 % |
| 10518 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle) | WLAN | 8.23 | ± 9.6 % |
| 10519 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle) | WLAN | 8.39 | ± 9.6 % |
| 10520 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle) | WLAN | 8.12 | ± 9.6 % |
| 10521 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle) | WLAN | 7.97 | ± 9.6 % |
| 10522 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle) | WLAN | | ± 9.6 % |
| | | | | 8.45 | |
| 10523 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | WLAN | 8.08 | ± 9.6 % |
| 10524 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | WLAN | 8.27 | ± 9.6 % |
| 10525 | AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| 10526 | AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle) | WLAN | 8.42 | ± 9.6 % |
| 10527 | AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle) | WLAN | 8.21 | ± 9.6 % |
| 10528 | AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| 10529 | AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| 10531 | AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle) | WLAN | 8.43 | ± 9.6 % |
| | AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle) | WLAN | 8.29 | ± 9.6 % |
| 10532 | | | | | 1 - 3.0 /0 |
| 10532 10533 | AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle) | WLAN | 8.38 | ± 9.6 % |

| 10505 | 1 | Tuese ood at the same transfer of the same transfer | | | |
|-------|-----|--|------|------|---------|
| 10535 | AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle) | WLAN | 8.45 | ± 9.6 % |
| 10536 | AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle) | WLAN | 8.32 | ± 9.6 % |
| 10537 | AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle) | WLAN | 8.44 | ± 9.6 % |
| 10538 | AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle) | WLAN | 8.54 | ± 9.6 % |
| 10540 | AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle) | WLAN | 8.39 | ± 9.6 % |
| 10541 | AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle) | WLAN | 8.46 | ± 9.6 % |
| 10542 | AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle) | WLAN | 8.65 | ± 9.6 % |
| 10543 | AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle) | WLAN | 8.65 | ± 9.6 % |
| 10544 | AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) | WLAN | 8.47 | ± 9.6 % |
| 10545 | AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle) | WLAN | 8.55 | ± 9.6 % |
| 10546 | AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle) | WLAN | 8.35 | ± 9.6 % |
| 10547 | AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle) | WLAN | 8.49 | ± 9.6 % |
| 10548 | AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle) | WLAN | 8.37 | ± 9.6 % |
| 10550 | AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle) | WLAN | 8.38 | ± 9.6 % |
| 10551 | AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle) | WLAN | 8.50 | ± 9.6 % |
| 10552 | AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle) | WLAN | 8.42 | ± 9.6 % |
| 10553 | AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle) | WLAN | 8.45 | ± 9.6 % |
| 10554 | AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | WLAN | 8.48 | ± 9.6 % |
| 10555 | AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | WLAN | | |
| 10556 | AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | | 8.47 | ± 9.6 % |
| 10557 | AAC | | WLAN | 8.50 | ± 9.6 % |
| | | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | WLAN | 8.52 | ± 9.6 % |
| 10558 | AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle) | WLAN | 8.61 | ± 9.6 % |
| 10560 | AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle) | WLAN | 8.73 | ± 9.6 % |
| 10561 | AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle) | WLAN | 8.56 | ± 9.6 % |
| 10562 | AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle) | WLAN | 8.69 | ± 9.6 % |
| 10563 | AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10564 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty | WLAN | 8.25 | ± 9.6 % |
| | | cycle) | | | |
| 10565 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | WLAN | 8.45 | ± 9.6 % |
| 10566 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | WLAN | 8.13 | ± 9.6 % |
| 10567 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | WLAN | 8.00 | ± 9.6 % |
| 10568 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty | WLAN | 8.37 | ± 9.6 % |
| 10569 | AAA | cycle) IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty | WLAN | 8.10 | ± 9.6 % |
| | | cycle) | | | |
| 10570 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | WLAN | 8.30 | ± 9.6 % |
| 10571 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle) | WLAN | 1.99 | ± 9.6 % |
| 10572 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle) | WLAN | 1.99 | ± 9.6 % |
| 10573 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle) | WLAN | 1.98 | ± 9.6 % |
| 10574 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle) | WLAN | 1.98 | ± 9.6 % |
| 10575 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty | WLAN | 8.59 | ± 9.6 % |
| 10576 | AAA | cycle) IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty | WLAN | 8.60 | ± 9.6 % |
| 10577 | AAA | cycle) IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty | WLAN | 8.70 | ± 9.6 % |
| 10578 | AAA | Cycle) IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty | WLAN | 8.49 | ± 9.6 % |
| 10579 | AAA | cycle) IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty | WLAN | 8.36 | ± 9.6 % |
| 10580 | AAA | cycle) IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty | WLAN | 8.76 | ± 9.6 % |
| 10581 | AAA | cycle) IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty | WLAN | 8.35 | ± 9.6 % |
| 740 5 | | cycle) | | | |
| 10582 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | WLAN | 8.67 | ± 9.6 % |
| 10583 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle) | WLAN | 8.59 | ± 9.6 % |
| 10584 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle) | WLAN | 8.60 | ± 9.6 % |
| 10585 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle) | WLAN | 8.70 | ± 9.6 % |
| 10586 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle) | WLAN | 8.49 | ± 9.6 % |
| 10587 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle) | WLAN | 8.36 | ± 9.6 % |

| 10588 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle) | WLAN | 8.76 | ± 9.6 % |
|--|--|--|--|--|---|
| 10589 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle) | WLAN | 8.35 | ± 9.6 % |
| 10590 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle) | WLAN | 8.67 | ± 9.6 % |
| 10591 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | WLAN | 8.63 | ± 9.6 % |
| 10592 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | WLAN | 8.79 | ± 9.6 % |
| 10593 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | WLAN | 8.64 | ± 9.6 % |
| 10594 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | WLAN | 8.74 | ± 9.6 % |
| 10595 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | WLAN | 8.74 | ± 9.6 % |
| 10596 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 30pc duty cycle) | WLAN | 8.71 | ± 9.6 % |
| 10597 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | WLAN | 8.72 | ± 9.6 % |
| 10598 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | WLAN | 8.50 | ± 9.6 % |
| 10599 | AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS), 90pc duty cycle) | WLAN | 8.79 | ± 9.6 % |
| 10600 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | WLAN | 8.88 | ± 9.6 % |
| 10600 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| | | | | 8.94 | ± 9.6 % |
| 10602 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | WLAN | 9.03 | |
| 10603 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | WLAN | | ± 9.6 % |
| 10604 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | WLAN | 8.76 | ± 9.6 % |
| 10605 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | WLAN | 8.97 | ± 9.6 % |
| 10606 | AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10607 | AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | WLAN | 8.64 | ± 9.6 % |
| 10608 | AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10609 | AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | WLAN | 8.57 | ± 9.6 % |
| 10610 | AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | WLAN | 8.78 | ± 9.6 % |
| 10611 | AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | WLAN | 8.70 | ± 9.6 % |
| 10612 | AAB | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10613 | AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | WLAN | 8.94 | ± 9.6 % |
| 10614 | AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | WLAN | 8.59 | ± 9.6 % |
| 10615 | AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10616 | AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10617 | AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | WLAN | 8.81 | ± 9.6 % |
| 10618 | AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | WLAN | 8.58 | ± 9.6 % |
| 10619 | AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | WLAN | 8.86 | ± 9.6 % |
| 10620 | AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | WLAN | 8.87 | ± 9.6 % |
| 10621 | AAB | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10622 | AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | WLAN | 8.68 | ± 9.6 % |
| 10623 | AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10624 | AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle) | WLAN | 8.96 | ± 9.6 % |
| 10625 | AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) | WLAN | 8.96 | ± 9.6 % |
| 10626 | AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) | WLAN | 8.83 | ± 9.6 % |
| 10627 | AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) | WLAN | 8.88 | ± 9.6 % |
| 10628 | AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) | WLAN | 8.71 | ± 9.6 % |
| 10629 | AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle) | WLAN | 8.85 | ± 9.6 % |
| 10630 | AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle) | WLAN | 8.72 | ± 9.6 % |
| 10631 | AAB | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle) | WLAN | 8.81 | ± 9.6 % |
| 10632 | AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle) | WLAN | 8.74 | ± 9.6 % |
| 10633 | AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle) | WLAN | 8.83 | ± 9.6 % |
| 10634 | AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) | WLAN | 8.80 | ± 9.6 % |
| 10635 | AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) | WLAN | 8.81 | ± 9.6 % |
| 10636 | AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | WLAN | 8.83 | ± 9.6 % |
| 10637 | AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | WLAN | 8.79 | ± 9.6 % |
| 10638 | AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | WLAN | 8.86 | ± 9.6 % |
| | | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) | WLAN | 8.85 | ± 9.6 % |
| | AAC | | | | |
| 10639 10640 | AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) | WLAN | 8.98 | ± 9.6 % |
| 10639 10640 | AAC | | | 8.98 9.06 | ± 9.6 % ± 9.6 % |
| 10639 10640 10641 | AAC AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) | WLAN | | ± 9.6 % |
| 10639 10640 10641 10642 | AAC AAC AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) | WLAN WLAN WLAN | 9.06 9.06 | ± 9.6 % ± 9.6 % |
| 10639 10640 10641 10642 10643 | AAC AAC AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) | WLAN WLAN WLAN WLAN | 9.06 9.06 8.89 | ± 9.6 % ± 9.6 % ± 9.6 % |
| 10639 10640 10641 10642 10643 10644 | AAC AAC AAC AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) | WLAN WLAN WLAN WLAN WLAN | 9.06 9.06 8.89 9.05 | ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % |
| 10639 10640 10641 10642 10643 10644 10645 | AAC AAC AAC AAC AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) | WLAN WLAN WLAN WLAN WLAN WLAN | 9.06 9.06 8.89 9.05 9.11 | ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % |
| 10639 10640 10641 10642 10643 10644 10645 10646 | AAC AAC AAC AAC AAC AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) | WLAN WLAN WLAN WLAN WLAN WLAN LTE-TDD | 9.06 9.06 8.89 9.05 9.11 11.96 | ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % |
| 10639 10640 10641 10642 10643 10644 10645 10646 10647 | AAC AAC AAC AAC AAC AAC AAF | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | WLAN WLAN WLAN WLAN WLAN WLAN LTE-TDD LTE-TDD | 9.06 9.06 8.89 9.05 9.11 11.96 | ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % |
| 10639 10640 10641 10642 10643 10644 10645 10646 10647 10648 | AAC AAC AAC AAC AAC AAC AAF AAF | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) CDMA2000 (1x Advanced) | WLAN WLAN WLAN WLAN WLAN WLAN LTE-TDD LTE-TDD CDMA2000 | 9.06 9.06 8.89 9.05 9.11 11.96 11.96 3.45 | ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % |
| 10639 10640 10641 10642 10643 10644 10645 10646 10647 | AAC AAC AAC AAC AAC AAC AAF | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | WLAN WLAN WLAN WLAN WLAN WLAN LTE-TDD LTE-TDD | 9.06 9.06 8.89 9.05 9.11 11.96 | ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % ± 9.6 % |

| 10699 | 10655 | AAE | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | LTE-TDD | 7.21 | ± 9.6 % |
|--|-------|-------|---|---------|------|---------|
| 10656 | | + | | | | |
| 10661 AAA Pulse Waveform (2001x, 40%) Test 3.98 9.96 % 10662 AAA Pulse Waveform (2001x, 60%) Test 2.22 9.6 % 10662 AAA Pulse Waveform (2001x, 60%) Test 2.22 9.6 % 10670 AAA Elee Bot (2.11 xx (2.000 Hz, 80%) Test 2.22 9.6 % 10671 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) Test 0.97 4.9.6 % 10671 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 9.09 4.9.6 % 10672 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.57 4.9.6 % 10673 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.76 4.9.6 % 10673 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.76 4.9.6 % 10674 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.77 4.9.6 % 10675 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.70 4.9.6 % 10676 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.77 4.9.6 % 10677 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.73 4.9.6 % 10678 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.73 4.9.6 % 10679 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.73 4.9.6 % 10679 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.73 4.9.6 % 10689 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.73 4.9.6 % 10689 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.80 4.9.6 % 10689 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.80 4.9.6 % 10689 AAA EEEE Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.82 4.9.6 % 10689 AAA EEEB Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.82 4.9.6 % 10689 AAA EEEB Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.20 4.9.6 % 10689 AAA EEEB Bot (2.11 xx (2.000 Hz, 80%) 900 ctuly cycle) WILAN 8.20 4.9.6 % 10689 AAA E | | | | | | |
| 10661 AAA Pulse Waveform (200Hz, 60%) Test 0.27 | | | | | | |
| 10692 | | | | | | |
| 10671 AAA IEEE 802 11ax (20MHz, MCS0, 90pc duty cycle) WLAN 9.9 a 5 % 10672 AAA IEEE 802 11ax (20MHz, MCS1, 90pc duty cycle) WLAN 8.57 ±9.6 % 10673 AAA IEEE 802 11ax (20MHz, MCS2, 90pc duty cycle) WLAN 8.74 ±9.6 % 10674 AAA IEEE 802 11ax (20MHz, MCS2, 90pc duty cycle) WLAN 8.74 ±9.6 % 10674 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.74 ±9.6 % 10675 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.74 ±9.6 % 10676 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.77 ±9.6 % 10676 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.77 ±9.6 % 10677 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.77 ±9.6 % 10678 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.78 ±9.6 % 10679 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.78 ±9.6 % 10689 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.78 ±9.6 % 10681 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.80 ±9.6 % 10681 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.80 ±9.6 % 10683 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.80 ±9.6 % 10683 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.80 ±9.6 % 10688 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.20 ±9.6 % 10688 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.20 ±9.6 % 10688 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.20 ±9.6 % 10688 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.20 ±9.6 % 10688 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.20 ±9.6 % 10688 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.20 ±9.6 % 10688 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.20 ±9.6 % 10689 AAA IEEE 802 11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.20 ±9.6 % 10689 AAA IEEE 802 11ax | | | | | | |
| 10671 AAA IEEE 802.11ax (20MHz, MCS1, 90pc duty cycle) | | | | | | |
| 10673 AAA IEEE 802.11ax (20MHz, MCS1, 90pc dulty cycle) WLAN 8.67 19.6 % 10674 AAA IEEE 802.11ax (20MHz, MCS2, 90pc dulty cycle) WLAN 8.74 19.6 % 10675 AAA IEEE 802.11ax (20MHz, MCS3, 90pc dulty cycle) WLAN 8.74 19.6 % 10676 AAA IEEE 802.11ax (20MHz, MCS3, 90pc dulty cycle) WLAN 8.90 19.6 % 10676 AAA IEEE 802.11ax (20MHz, MCS3, 90pc dulty cycle) WLAN 8.77 19.6 % 10677 AAA IEEE 802.11ax (20MHz, MCS3, 90pc dulty cycle) WLAN 8.77 19.6 % 10679 AAA IEEE 802.11ax (20MHz, MCS3, 90pc dulty cycle) WLAN 8.78 19.6 % 10679 AAA IEEE 802.11ax (20MHz, MCS3, 90pc dulty cycle) WLAN 8.78 19.6 % 10689 AAA IEEE 802.11ax (20MHz, MCS3, 90pc dulty cycle) WLAN 8.80 19.6 % 10681 AAA IEEE 802.11ax (20MHz, MCS3, 90pc dulty cycle) WLAN 8.80 19.6 % 10681 AAA IEEE 802.11ax (20MHz, MCS3, 90pc dulty cycle) WLAN 8.80 19.6 % 10681 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.80 19.6 % 10683 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.80 19.6 % 10683 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.83 19.6 % 10684 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.20 19.6 % 10686 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.20 19.6 % 10686 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.20 19.6 % 10686 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.20 19.6 % 10686 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.20 19.6 % 10686 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.20 19.6 % 10686 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.20 19.6 % 10686 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.20 19.6 % 10686 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.20 19.6 % 10687 AAA IEEE 802.11ax (20MHz, MCS3), 90pc dulty cycle) WLAN 8.20 | | + | | | | |
| 19673 AAA IEEE 802.11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.74 ± 9.6 % 19676 AAA IEEE 802.11ax (20MHz, MCS4, 90pc duty cycle) WLAN 8.74 ± 9.6 % 19676 AAA IEEE 802.11ax (20MHz, MCS5, 90pc duty cycle) WLAN 8.77 ± 9.6 % 19677 AAA IEEE 802.11ax (20MHz, MCS5, 90pc duty cycle) WLAN 8.77 ± 9.6 % 19677 AAA IEEE 802.11ax (20MHz, MCS7, 90pc duty cycle) WLAN 8.73 ± 9.6 % 19678 AAA IEEE 802.11ax (20MHz, MCS7, 90pc duty cycle) WLAN 8.73 ± 9.6 % 19679 AAA IEEE 802.11ax (20MHz, MCS7, 90pc duty cycle) WLAN 8.78 ± 9.6 % 19680 AAA IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle) WLAN 8.89 ± 9.6 % 19680 AAA IEEE 802.11ax (20MHz, MCS1) 90pc duty cycle) WLAN 8.80 ± 9.6 % 19681 AAA IEEE 802.11ax (20MHz, MCS1) 90pc duty cycle) WLAN 8.80 ± 9.6 % 19682 AAA IEEE 802.11ax (20MHz, MCS1) 90pc duty cycle) WLAN 8.80 ± 9.6 % 19683 AAA IEEE 802.11ax (20MHz, MCS1) 90pc duty cycle) WLAN 8.80 ± 9.6 % 19684 AAA IEEE 802.11ax (20MHz, MCS1) 90pc duty cycle) WLAN 8.82 ± 9.6 % 19685 AAA IEEE 802.11ax (20MHz, MCS1) 90pc duty cycle) WLAN 8.26 ± 9.6 % 19686 AAA IEEE 802.11ax (20MHz, MCS3) 90pc duty cycle) WLAN 8.26 ± 9.6 % 19686 AAA IEEE 802.11ax (20MHz, MCS3) 90pc duty cycle) WLAN 8.28 ± 9.6 % 19686 AAA IEEE 802.11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.28 ± 9.6 % 19686 AAA IEEE 802.11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.28 ± 9.6 % 19686 AAA IEEE 802.11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.28 ± 9.6 % 19686 AAA IEEE 802.11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.29 ± 9.6 % 19686 AAA IEEE 802.11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.29 ± 9.6 % 19686 AAA IEEE 802.11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.29 ± 9.6 % 19686 AAA IEEE 802.11ax (20MHz, MCS3, 90pc duty cycle) WLAN 8.29 ± 9.6 % 19686 AAA IEEE 802.11ax (40MHz, MCS3, 90pc duty cycle) WLAN 8.29 | | | | | | |
| 10874 | | | | | | |
| 19675 | | | | | | |
| 10676 | | AAA | | | | |
| 10677 | | | | | | |
| 10678 | 10677 | AAA | | | | |
| 10679 | 10678 | AAA | | | | |
| 10880 | 10679 | AAA | | | | |
| 10881 AAA IEEE 802.11ax (20MHz, MCS10, 90pc duty cycle) WLAN 8.62 ± 9.6 % 10883 AAA IEEE 802.11ax (20MHz, MCS1, 90pc duty cycle) WLAN 8.42 ± 9.6 % 10884 AAA IEEE 802.11ax (20MHz, MCS0, 99pc duty cycle) WLAN 8.42 ± 9.6 % 10884 AAA IEEE 802.11ax (20MHz, MCS1, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10885 AAA IEEE 802.11ax (20MHz, MCS2, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10886 AAA IEEE 802.11ax (20MHz, MCS2, 99pc duty cycle) WLAN 8.28 ± 9.6 % 10886 AAA IEEE 802.11ax (20MHz, MCS2, 99pc duty cycle) WLAN 8.28 ± 9.6 % 10889 AAA IEEE 802.11ax (20MHz, MCS4, 99pc duty cycle) WLAN 8.45 ± 9.6 % 10889 AAA IEEE 802.11ax (20MHz, MCS4, 99pc duty cycle) WLAN 8.29 ± 9.6 % 10890 AAA IEEE 802.11ax (20MHz, MCS4, 99pc duty cycle) WLAN 8.29 ± 9.6 % 10890 AAA IEEE 802.11ax (20MHz, MCS6, 99pc duty cycle) WLAN 8.29 ± 9.6 % 10890 AAA IEEE 802.11ax (20MHz, MCS6, 99pc duty cycle) WLAN 8.29 ± 9.6 % 10890 AAA IEEE 802.11ax (20MHz, MCS8, 99pc duty cycle) WLAN 8.29 ± 9.6 % 10890 AAA IEEE 802.11ax (20MHz, MCS9, 99pc duty cycle) WLAN 8.25 ± 9.6 % 10893 AAA IEEE 802.11ax (20MHz, MCS9, 99pc duty cycle) WLAN 8.25 ± 9.6 % 10893 AAA IEEE 802.11ax (20MHz, MCS9, 99pc duty cycle) WLAN 8.25 ± 9.6 % 10896 AAA IEEE 802.11ax (20MHz, MCS9, 99pc duty cycle) WLAN 8.25 ± 9.6 % 10896 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.57 ± 9.6 % 10896 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.57 ± 9.6 % 10896 AAA IEEE 802.11ax (40MHz, MCS9, 90pc duty cycle) WLAN 8.57 ± 9.6 % 10896 AAA IEEE 802.11ax (40MHz, MCS9, 90pc duty cycle) WLAN 8.57 ± 9.6 % 10996 AAA IEEE 802.11ax (40MHz, MCS9, 90pc duty cycle) WLAN 8.51 ± 9.6 % 10996 AAA IEEE 802.11ax (40MHz, MCS9, 90pc duty cycle) WLAN 8.51 ± 9.6 % 10996 AAA IEEE 802.11ax (40MHz, MCS9, 90pc duty cycle) WLAN 8.58 ± 9.6 % | 10680 | AAA | | | 8.80 | |
| 10682 | 10681 | AAA | IEEE 802.11ax (20MHz, MCS10, 90pc duty cycle) | WLAN | 8.62 | |
| 10683 | 10682 | AAA | IEEE 802.11ax (20MHz, MCS11, 90pc duty cycle) | WLAN | 8.83 | |
| 10865 | | | | | | |
| 10686 | | | | WLAN | 8.26 | |
| 10687 | | | | | 8.33 | |
| 10688 | | + | | | 8.28 | |
| 10689 | | | IEEE 802.11ax (20MHz, MCS4, 99pc duty cycle) | | | |
| 10690 | | | | | | |
| 10691 | | | | | | |
| 10692 | | | | | | |
| 10693 | | | IEEE 802.11ax (20MHz, MCS8, 99pc duty cycle) | | | |
| 10694 | | | | | | |
| 10695 | | + | | | | |
| 10696 | | | | | - | |
| 10697 | | + | | | | |
| 10698 | | | | | | |
| 10699 | | | | | | |
| 10700 | - | | | | | |
| 10701 | | | | | | |
| 10702 | | + | | | | |
| 10703 | | | | | | |
| 10704 | | + | | | | |
| 10705 | | | | | | |
| 10706 AAA IEEE 802.11ax (40MHz, MCS11, 90pc duty cycle) WLAN 8.66 ± 9.6 % 10707 AAA IEEE 802.11ax (40MHz, MCS0, 99pc duty cycle) WLAN 8.32 ± 9.6 % 10708 AAA IEEE 802.11ax (40MHz, MCS1, 99pc duty cycle) WLAN 8.55 ± 9.6 % 10709 AAA IEEE 802.11ax (40MHz, MCS2, 99pc duty cycle) WLAN 8.29 ± 9.6 % 10710 AAA IEEE 802.11ax (40MHz, MCS3, 99pc duty cycle) WLAN 8.29 ± 9.6 % 10711 AAA IEEE 802.11ax (40MHz, MCS4, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10712 AAA IEEE 802.11ax (40MHz, MCS5, 99pc duty cycle) WLAN 8.67 ± 9.6 % 10713 AAA IEEE 802.11ax (40MHz, MCS6, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10714 AAA IEEE 802.11ax (40MHz, MCS7, 99pc duty cycle) WLAN 8.26 ± 9.6 % 10715 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.45 ± 9.6 % 10716 AAA IEEE 802.11ax (40MHz, MCS1, 99pc duty | | | | | | |
| 10707 AAA IEEE 802.11ax (40MHz, MCS0, 99pc duty cycle) WLAN 8.32 ± 9.6 % 10708 AAA IEEE 802.11ax (40MHz, MCS1, 99pc duty cycle) WLAN 8.55 ± 9.6 % 10709 AAA IEEE 802.11ax (40MHz, MCS2, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10710 AAA IEEE 802.11ax (40MHz, MCS3, 99pc duty cycle) WLAN 8.29 ± 9.6 % 10711 AAA IEEE 802.11ax (40MHz, MCS4, 99pc duty cycle) WLAN 8.39 ± 9.6 % 10712 AAA IEEE 802.11ax (40MHz, MCS5, 99pc duty cycle) WLAN 8.67 ± 9.6 % 10713 AAA IEEE 802.11ax (40MHz, MCS6, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10714 AAA IEEE 802.11ax (40MHz, MCS7, 99pc duty cycle) WLAN 8.26 ± 9.6 % 10715 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.45 ± 9.6 % 10716 AAA IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) WLAN 8.48 ± 9.6 % 10718 AAA IEEE 802.11ax (40MHz, MCS1, 99pc duty | | | | | | |
| 10708 AAA IEEE 802.11ax (40MHz, MCS1, 99pc duty cycle) WLAN 8.55 ± 9.6 % 10709 AAA IEEE 802.11ax (40MHz, MCS2, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10710 AAA IEEE 802.11ax (40MHz, MCS3, 99pc duty cycle) WLAN 8.29 ± 9.6 % 10711 AAA IEEE 802.11ax (40MHz, MCS4, 99pc duty cycle) WLAN 8.39 ± 9.6 % 10712 AAA IEEE 802.11ax (40MHz, MCS5, 99pc duty cycle) WLAN 8.67 ± 9.6 % 10713 AAA IEEE 802.11ax (40MHz, MCS6, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10714 AAA IEEE 802.11ax (40MHz, MCS7, 99pc duty cycle) WLAN 8.26 ± 9.6 % 10715 AAA IEEE 802.11ax (40MHz, MCS8, 99pc duty cycle) WLAN 8.45 ± 9.6 % 10716 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.30 ± 9.6 % 10717 AAA IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) WLAN 8.24 ± 9.6 % 10719 AAA IEEE 802.11ax (80MHz, MCS1, 90pc duty | | | | | | |
| 10709 AAA IEEE 802.11ax (40MHz, MCS2, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10710 AAA IEEE 802.11ax (40MHz, MCS3, 99pc duty cycle) WLAN 8.29 ± 9.6 % 10711 AAA IEEE 802.11ax (40MHz, MCS4, 99pc duty cycle) WLAN 8.39 ± 9.6 % 10712 AAA IEEE 802.11ax (40MHz, MCS5, 99pc duty cycle) WLAN 8.67 ± 9.6 % 10713 AAA IEEE 802.11ax (40MHz, MCS6, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10714 AAA IEEE 802.11ax (40MHz, MCS7, 99pc duty cycle) WLAN 8.26 ± 9.6 % 10715 AAA IEEE 802.11ax (40MHz, MCS8, 99pc duty cycle) WLAN 8.45 ± 9.6 % 10716 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.30 ± 9.6 % 10717 AAA IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) WLAN 8.48 ± 9.6 % 10718 AAA IEEE 802.11ax (80MHz, MCS11, 99pc duty cycle) WLAN 8.24 ± 9.6 % 10720 AAA IEEE 802.11ax (80MHz, MCS2, 90pc duty | | + | | | | |
| 10710 AAA IEEE 802.11ax (40MHz, MCS3, 99pc duty cycle) WLAN 8.29 ± 9.6 % 10711 AAA IEEE 802.11ax (40MHz, MCS4, 99pc duty cycle) WLAN 8.39 ± 9.6 % 10712 AAA IEEE 802.11ax (40MHz, MCS5, 99pc duty cycle) WLAN 8.67 ± 9.6 % 10713 AAA IEEE 802.11ax (40MHz, MCS6, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10714 AAA IEEE 802.11ax (40MHz, MCS7, 99pc duty cycle) WLAN 8.26 ± 9.6 % 10715 AAA IEEE 802.11ax (40MHz, MCS8, 99pc duty cycle) WLAN 8.45 ± 9.6 % 10716 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.30 ± 9.6 % 10717 AAA IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) WLAN 8.48 ± 9.6 % 10718 AAA IEEE 802.11ax (40MHz, MCS11, 99pc duty cycle) WLAN 8.24 ± 9.6 % 10719 AAA IEEE 802.11ax (80MHz, MCS1, 90pc duty cycle) WLAN 8.81 ± 9.6 % 10720 AAA IEEE 802.11ax (80MHz, MCS2, 90pc duty | | | | | | |
| 10711 AAA IEEE 802.11ax (40MHz, MCS4, 99pc duty cycle) WLAN 8.39 ± 9.6 % 10712 AAA IEEE 802.11ax (40MHz, MCS5, 99pc duty cycle) WLAN 8.67 ± 9.6 % 10713 AAA IEEE 802.11ax (40MHz, MCS6, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10714 AAA IEEE 802.11ax (40MHz, MCS7, 99pc duty cycle) WLAN 8.26 ± 9.6 % 10715 AAA IEEE 802.11ax (40MHz, MCS8, 99pc duty cycle) WLAN 8.45 ± 9.6 % 10716 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.30 ± 9.6 % 10717 AAA IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) WLAN 8.48 ± 9.6 % 10718 AAA IEEE 802.11ax (40MHz, MCS11, 99pc duty cycle) WLAN 8.24 ± 9.6 % 10719 AAA IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle) WLAN 8.81 ± 9.6 % 10720 AAA IEEE 802.11ax (80MHz, MCS2, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10721 AAA IEEE 802.11ax (80MHz, MCS3, 90pc duty | | | | | | |
| 10712 AAA IEEE 802.11ax (40MHz, MCS5, 99pc duty cycle) WLAN 8.67 ± 9.6 % 10713 AAA IEEE 802.11ax (40MHz, MCS6, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10714 AAA IEEE 802.11ax (40MHz, MCS7, 99pc duty cycle) WLAN 8.26 ± 9.6 % 10715 AAA IEEE 802.11ax (40MHz, MCS8, 99pc duty cycle) WLAN 8.45 ± 9.6 % 10716 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.30 ± 9.6 % 10717 AAA IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) WLAN 8.48 ± 9.6 % 10718 AAA IEEE 802.11ax (40MHz, MCS11, 99pc duty cycle) WLAN 8.24 ± 9.6 % 10719 AAA IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle) WLAN 8.81 ± 9.6 % 10720 AAA IEEE 802.11ax (80MHz, MCS1, 90pc duty cycle) WLAN 8.87 ± 9.6 % 10721 AAA IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10723 AAA IEEE 802.11ax (80MHz, MCS4, 90pc duty | | | | | | |
| 10713 AAA IEEE 802.11ax (40MHz, MCS6, 99pc duty cycle) WLAN 8.33 ± 9.6 % 10714 AAA IEEE 802.11ax (40MHz, MCS7, 99pc duty cycle) WLAN 8.26 ± 9.6 % 10715 AAA IEEE 802.11ax (40MHz, MCS8, 99pc duty cycle) WLAN 8.45 ± 9.6 % 10716 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.30 ± 9.6 % 10717 AAA IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) WLAN 8.48 ± 9.6 % 10718 AAA IEEE 802.11ax (40MHz, MCS11, 99pc duty cycle) WLAN 8.24 ± 9.6 % 10719 AAA IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle) WLAN 8.81 ± 9.6 % 10720 AAA IEEE 802.11ax (80MHz, MCS1, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10721 AAA IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10723 AAA IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle) WLAN 8.70 ± 9.6 % 10724 AAA IEEE 802.11ax (80MHz, MCS6, 90pc duty | | | | | | |
| 10714 AAA IEEE 802.11ax (40MHz, MCS7, 99pc duty cycle) WLAN 8.26 ± 9.6 % 10715 AAA IEEE 802.11ax (40MHz, MCS8, 99pc duty cycle) WLAN 8.45 ± 9.6 % 10716 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.30 ± 9.6 % 10717 AAA IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) WLAN 8.48 ± 9.6 % 10718 AAA IEEE 802.11ax (40MHz, MCS11, 99pc duty cycle) WLAN 8.24 ± 9.6 % 10719 AAA IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle) WLAN 8.81 ± 9.6 % 10720 AAA IEEE 802.11ax (80MHz, MCS1, 90pc duty cycle) WLAN 8.87 ± 9.6 % 10721 AAA IEEE 802.11ax (80MHz, MCS2, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10722 AAA IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle) WLAN 8.70 ± 9.6 % 10724 AAA IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle) WLAN 8.70 ± 9.6 % 10725 AAA IEEE 802.11ax (80MHz, MCS6, 90pc duty | | | | | | |
| 10715 AAA IEEE 802.11ax (40MHz, MCS8, 99pc duty cycle) WLAN 8.45 ± 9.6 % 10716 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.30 ± 9.6 % 10717 AAA IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) WLAN 8.48 ± 9.6 % 10718 AAA IEEE 802.11ax (40MHz, MCS11, 99pc duty cycle) WLAN 8.24 ± 9.6 % 10719 AAA IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle) WLAN 8.81 ± 9.6 % 10720 AAA IEEE 802.11ax (80MHz, MCS1, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10721 AAA IEEE 802.11ax (80MHz, MCS2, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10722 AAA IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle) WLAN 8.55 ± 9.6 % 10723 AAA IEEE 802.11ax (80MHz, MCS4, 90pc duty cycle) WLAN 8.70 ± 9.6 % 10724 AAA IEEE 802.11ax (80MHz, MCS6, 90pc duty cycle) WLAN 8.74 ± 9.6 % 10726 AAA IEEE 802.11ax (80MHz, MCS6, 90pc duty | | + | | | | |
| 10716 AAA IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle) WLAN 8.30 ± 9.6 % 10717 AAA IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) WLAN 8.48 ± 9.6 % 10718 AAA IEEE 802.11ax (40MHz, MCS11, 99pc duty cycle) WLAN 8.24 ± 9.6 % 10719 AAA IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle) WLAN 8.81 ± 9.6 % 10720 AAA IEEE 802.11ax (80MHz, MCS1, 90pc duty cycle) WLAN 8.87 ± 9.6 % 10721 AAA IEEE 802.11ax (80MHz, MCS2, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10722 AAA IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle) WLAN 8.55 ± 9.6 % 10723 AAA IEEE 802.11ax (80MHz, MCS4, 90pc duty cycle) WLAN 8.70 ± 9.6 % 10724 AAA IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle) WLAN 8.74 ± 9.6 % 10725 AAA IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle) WLAN 8.72 ± 9.6 % | 10715 | | | | | |
| 10717 AAA IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) WLAN 8.48 ± 9.6 % 10718 AAA IEEE 802.11ax (40MHz, MCS11, 99pc duty cycle) WLAN 8.24 ± 9.6 % 10719 AAA IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle) WLAN 8.81 ± 9.6 % 10720 AAA IEEE 802.11ax (80MHz, MCS1, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10721 AAA IEEE 802.11ax (80MHz, MCS2, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10722 AAA IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle) WLAN 8.55 ± 9.6 % 10723 AAA IEEE 802.11ax (80MHz, MCS4, 90pc duty cycle) WLAN 8.70 ± 9.6 % 10724 AAA IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle) WLAN 8.90 ± 9.6 % 10725 AAA IEEE 802.11ax (80MHz, MCS6, 90pc duty cycle) WLAN 8.74 ± 9.6 % 10726 AAA IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle) WLAN 8.72 ± 9.6 % | 10716 | | | | | |
| 10718 AAA IEEE 802.11ax (40MHz, MCS11, 99pc duty cycle) WLAN 8.24 ± 9.6 % 10719 AAA IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle) WLAN 8.81 ± 9.6 % 10720 AAA IEEE 802.11ax (80MHz, MCS1, 90pc duty cycle) WLAN 8.87 ± 9.6 % 10721 AAA IEEE 802.11ax (80MHz, MCS2, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10722 AAA IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle) WLAN 8.55 ± 9.6 % 10723 AAA IEEE 802.11ax (80MHz, MCS4, 90pc duty cycle) WLAN 8.70 ± 9.6 % 10724 AAA IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle) WLAN 8.90 ± 9.6 % 10725 AAA IEEE 802.11ax (80MHz, MCS6, 90pc duty cycle) WLAN 8.74 ± 9.6 % 10726 AAA IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle) WLAN 8.72 ± 9.6 % | | | IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle) | WLAN | | |
| 10719 AAA IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle) WLAN 8.81 ± 9.6 % 10720 AAA IEEE 802.11ax (80MHz, MCS1, 90pc duty cycle) WLAN 8.87 ± 9.6 % 10721 AAA IEEE 802.11ax (80MHz, MCS2, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10722 AAA IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle) WLAN 8.55 ± 9.6 % 10723 AAA IEEE 802.11ax (80MHz, MCS4, 90pc duty cycle) WLAN 8.70 ± 9.6 % 10724 AAA IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle) WLAN 8.90 ± 9.6 % 10725 AAA IEEE 802.11ax (80MHz, MCS6, 90pc duty cycle) WLAN 8.74 ± 9.6 % 10726 AAA IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle) WLAN 8.72 ± 9.6 % | | | | | 8.24 | |
| 10721 AAA IEEE 802.11ax (80MHz, MCS2, 90pc duty cycle) WLAN 8.76 ± 9.6 % 10722 AAA IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle) WLAN 8.55 ± 9.6 % 10723 AAA IEEE 802.11ax (80MHz, MCS4, 90pc duty cycle) WLAN 8.70 ± 9.6 % 10724 AAA IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle) WLAN 8.90 ± 9.6 % 10725 AAA IEEE 802.11ax (80MHz, MCS6, 90pc duty cycle) WLAN 8.74 ± 9.6 % 10726 AAA IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle) WLAN 8.72 ± 9.6 % | | | | | 8.81 | ± 9.6 % |
| 10722 AAA IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle) WLAN 8.55 ± 9.6 % 10723 AAA IEEE 802.11ax (80MHz, MCS4, 90pc duty cycle) WLAN 8.70 ± 9.6 % 10724 AAA IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle) WLAN 8.90 ± 9.6 % 10725 AAA IEEE 802.11ax (80MHz, MCS6, 90pc duty cycle) WLAN 8.74 ± 9.6 % 10726 AAA IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle) WLAN 8.72 ± 9.6 % | | | | | 8.87 | |
| 10723 AAA IEEE 802.11ax (80MHz, MCS4, 90pc duty cycle) WLAN 8.70 ± 9.6 % 10724 AAA IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle) WLAN 8.90 ± 9.6 % 10725 AAA IEEE 802.11ax (80MHz, MCS6, 90pc duty cycle) WLAN 8.74 ± 9.6 % 10726 AAA IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle) WLAN 8.72 ± 9.6 % | | | | | | |
| 10724 AAA IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle) WLAN 8.90 ± 9.6 % 10725 AAA IEEE 802.11ax (80MHz, MCS6, 90pc duty cycle) WLAN 8.74 ± 9.6 % 10726 AAA IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle) WLAN 8.72 ± 9.6 % | | | | | | |
| 10725 AAA IEEE 802.11ax (80MHz, MCS6, 90pc duty cycle) WLAN 8.74 ± 9.6 % 10726 AAA IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle) WLAN 8.72 ± 9.6 % | | | | | | |
| 10726 AAA IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle) WLAN 8.72 ± 9.6 % | | | | | | |
| The state of the s | | | | | | |
| 10/2/ AAA IEEE 802.11ax (80MHz, MCS8, 90pc duty cycle) WLAN 8.66 ± 9.6 % | | | | | | |
| | 10727 | I AAA | IEEE 802.11ax (80MHz, MCS8, 90pc duty cycle) | WLAN | 8.66 | ± 9.6 % |

| 10728 | TAAA | IEEE 802.11ax (80MHz, MCS9, 90pc duty cycle) | WLAN | 8.65 | ± 9.6 % |
|-------|------|--|------|------|---------|
| 10729 | AAA | IEEE 802.11ax (80MHz, MCS10, 90pc duty cycle) | WLAN | 8.64 | ± 9.6 % |
| 10730 | AAA | IEEE 802.11ax (80MHz, MCS11, 90pc duty cycle) | WLAN | 8.67 | ± 9.6 % |
| 10731 | AAA | IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle) | WLAN | 8.42 | ± 9.6 % |
| 10732 | AAA | IEEE 802.11ax (80MHz, MCS1, 99pc duty cycle) | WLAN | 8.46 | ± 9.6 % |
| 10733 | AAA | IEEE 802.11ax (80MHz, MCS2, 99pc duty cycle) | WLAN | 8.40 | ± 9.6 % |
| 10734 | AAA | IEEE 802.11ax (80MHz, MCS3, 99pc duty cycle) | WLAN | 8.25 | ± 9.6 % |
| 10735 | AAA | IEEE 802.11ax (80MHz, MCS4, 99pc duty cycle) | WLAN | 8.33 | ± 9.6 % |
| 10736 | AAA | IEEE 802.11ax (80MHz, MCS5, 99pc duty cycle) | WLAN | 8.27 | ± 9.6 % |
| 10737 | AAA | IEEE 802.11ax (80MHz, MCS6, 99pc duty cycle) | WLAN | 8.36 | ± 9.6 % |
| 10738 | AAA | IEEE 802.11ax (80MHz, MCS7, 99pc duty cycle) | WLAN | 8.42 | ± 9.6 % |
| 10739 | AAA | IEEE 802.11ax (80MHz, MCS8, 99pc duty cycle) | WLAN | 8.29 | ± 9.6 % |
| 10740 | AAA | IEEE 802.11ax (80MHz, MCS9, 99pc duty cycle) | WLAN | 8.48 | ± 9.6 % |
| 10741 | AAA | IEEE 802.11ax (80MHz, MCS10, 99pc duty cycle) | WLAN | 8.40 | ± 9.6 % |
| 10742 | AAA | IEEE 802.11ax (80MHz, MCS11, 99pc duty cycle) | WLAN | 8.43 | ± 9.6 % |
| 10743 | AAA | IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle) | WLAN | 8.94 | ± 9.6 % |
| 10744 | AAA | IEEE 802.11ax (160MHz, MCS1, 90pc duty cycle) | WLAN | 9.16 | ± 9.6 % |
| 10745 | AAA | IEEE 802.11ax (160MHz, MCS2, 90pc duty cycle) | WLAN | 8.93 | ± 9.6 % |
| 10746 | AAA | IEEE 802.11ax (160MHz, MCS3, 90pc duty cycle) | WLAN | 9.11 | ± 9.6 % |
| 10747 | AAA | IEEE 802.11ax (160MHz, MCS4, 90pc duty cycle) | WLAN | 9.04 | ± 9.6 % |
| 10748 | AAA | IEEE 802.11ax (160MHz, MCS5, 90pc duty cycle) | WLAN | 8.93 | ± 9.6 % |
| 10749 | AAA | IEEE 802.11ax (160MHz, MCS6, 90pc duty cycle) | WLAN | 8.90 | ± 9.6 % |
| 10750 | AAA | IEEE 802.11ax (160MHz, MCS7, 90pc duty cycle) | WLAN | 8.79 | ± 9.6 % |
| 10751 | AAA | IEEE 802.11ax (160MHz, MCS8, 90pc duty cycle) | WLAN | 8.82 | ± 9.6 % |
| 10752 | AAA | IEEE 802.11ax (160MHz, MCS9, 90pc duty cycle) | WLAN | 8.81 | ± 9.6 % |
| 10753 | AAA | IEEE 802.11ax (160MHz, MCS10, 90pc duty cycle) | WLAN | 9.00 | ± 9.6 % |
| 10754 | AAA | IEEE 802.11ax (160MHz, MCS11, 90pc duty cycle) | WLAN | 8.94 | ± 9.6 % |
| 10755 | AAA | IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle) | WLAN | 8.64 | ± 9.6 % |
| 10756 | AAA | IEEE 802.11ax (160MHz, MCS1, 99pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10757 | AAA | IEEE 802.11ax (160MHz, MCS2, 99pc duty cycle) | WLAN | 8.77 | ± 9.6 % |
| 10758 | AAA | IEEE 802.11ax (160MHz, MCS3, 99pc duty cycle) | WLAN | 8.69 | ± 9.6 % |
| 10759 | AAA | IEEE 802.11ax (160MHz, MCS4, 99pc duty cycle) | WLAN | 8.58 | ± 9.6 % |
| 10760 | AAA | IEEE 802.11ax (160MHz, MCS5, 99pc duty cycle) | WLAN | 8.49 | ± 9.6 % |
| 10761 | AAA | IEEE 802.11ax (160MHz, MCS6, 99pc duty cycle) | WLAN | 8.58 | ± 9.6 % |
| 10762 | AAA | IEEE 802.11ax (160MHz, MCS7, 99pc duty cycle) | WLAN | 8.49 | ± 9.6 % |
| 10763 | AAA | IEEE 802.11ax (160MHz, MCS8, 99pc duty cycle) | WLAN | 8.53 | ± 9.6 % |
| 10764 | AAA | IEEE 802.11ax (160MHz, MCS9, 99pc duty cycle) | WLAN | 8.54 | ± 9.6 % |
| 10765 | AAA | IEEE 802.11ax (160MHz, MCS10, 99pc duty cycle) | WLAN | 8.54 | ± 9.6 % |
| 10766 | AAA | IEEE 802.11ax (160MHz, MCS11, 99pc duty cycle) | WLAN | 8.51 | ± 9.6 % |

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Appendix D. Photographs of EUT and Setup

The setup photographs for SAR testing are shown as follows.

Report Format Version 5.0.0 Issued Date : Aug. 19, 2020

Report No. : SF190628E01J Reference No. : 200706E02