



QCY-T3

User Manual

Overview

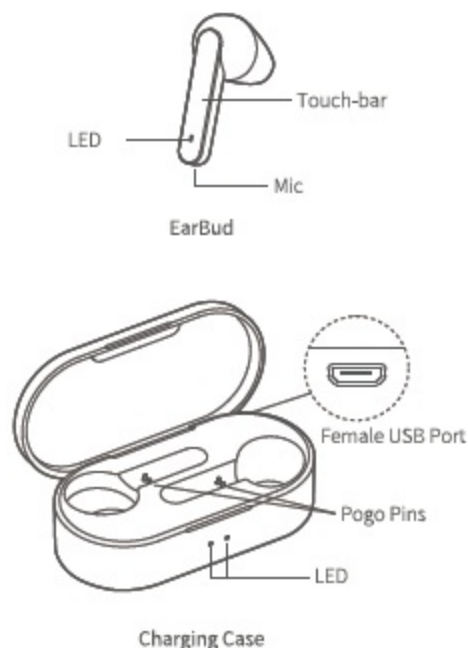

How to Wear

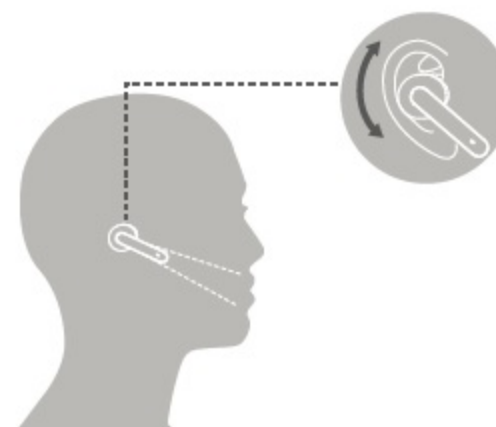


Adjust Mic towards mouth

TWS Mode

Open the lid to power on earbuds and two of them will auto pair with each other. Right earbud will auto turn to be connectable to phone when LED on left earbud turns off. On cellphone, search for QCY-T3_R and tap to connect both earbuds to cellphone.

(Please try the following steps if two earbuds fail to pair with each other)

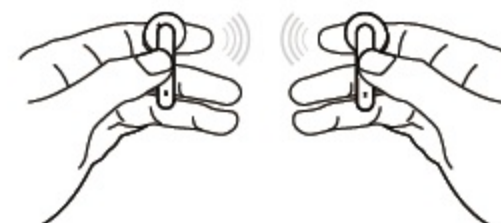


Power off T3, touch both bars for about 20s or until LED blinks red and white. Put them into the case and close lid. Re-open the lid and two earbuds will auto power on and pair with each other. The right earbud will auto turn to be connectable to phone when LED on left earbud turns off. On cellphone, search for QCY-T3_R and tap to connect.

Note: two earbuds should pair with each other in 20s otherwise they will turn to be connectable to phone.


Answer Call

Double touch the bar to answer incoming call and double touch again to end it



Ignore Call

Touch the bar for 2s to ignore incoming call



Three-way Calling & Switch

Double touch the bar to answer incoming call from phone1. If another call is coming from phone2 in sync, double touch the bar to put the first call on hold while activating the second one. Switch: touch the bar for 2s to switch between active call and held call

Charging the Earphones

LEDs on earbuds will glow solid red when charging and turn to white for 1 minute once topped up



Put earbuds into the case to charge (pogo pins should be well-contacted)

Charging the Case

LEDs on the case will glow solid green once topped up



Charge the case via USB cable

Features

- BT v5.0 chipset transmits signal stably with low lag
- Easy touch control
- Crystal-clear stereo talking thanks to NC technology

Product Parameters

Model: In1915
BT version: V5.0
Standby time: approx. 150hr
Charging time: approx. 2hr
Music time: approx. 5 or 6hr
Talking time: approx. 5 or 6hr
Operation range: 10m(with no obstacle)
Battery type: li-ion
Battery capacity(earphones): 3.7V 60mAh
Battery capacity(charging case): 3.7V 600mAh
Input parameter(charging case): 5V 500mA
BT profiles: HSP/HFP/A2DP/AVRCP
(All technical data shall be subject to practical performance)

Stereo Mode

Power-on

Touch the bar for 2s or open the lid to power on (LED turns white for 1s)

Power-off

Touch the bar for 8s(LED turns on red for 2s) or put earbuds back to the case then close the lid to power off

Volume Control

Volume Up: when playing, slip up on touch bar

Volume down: when playing, slip down on touch bar

Skip Track Forward/backward

When playing, touch the bar on right/left earbud for 2s to skip track forward/backward

Voice Assistant

When standby or playing, triple touch the bar on left earbud to activate voice assistant

Factory Setting

Power off earphones, touch the bar for 20s or until LED blinks red and white then turns off.

Playback in Stereo Mode



Playback/pause

When playing, double touch the bar to pause/resume playing.

Mono Mode




1. Power off earphones then touch the bar on either earbud for 5s to enter pairing mode(LED blinks red and white)
2. On cellphone, search for QCY-T3_R/L and tap to connect

Operation


Power-on

Touch the bar for 2s or open the lid to power on (LED turns white for 1s)



Power-off

Touch the bar for 8s(LED turns on red for 2s) or put earbud back to the case then close the lid to power off



Hazardous substances and their contents in the item

Part Name	Hazardous Substances					
	(Pb)	(Hg)	(Cd)	(Cr(VI))	(PBB)	(PBDE)
Main body	X	○	○	○	○	○
Battery	○	○	○	○	○	○
Ear tips	○	○	○	○	○	○
Accessories	○	○	○	○	○	○
Charging cable	X	○	○	○	○	○

This form is made by SJ/T 11364 regulation.
 O: means that hazardous substance content in the homogeneous materials of this part is within the limits of GB/T 26572 regulation.
 X: means that hazardous substance content in, at least, one certain homogeneous material of this part is beyond the limits of GB/T 26572 regulation.

Notes: Please arrange using time properly as your hearing may be damaged by using the device for a long time.

Perform standard: Q/HL 1-2016 ; Q/HL 2-2017
 Manufacturer: Dongguan Hele Electronics Co., Ltd.
 Address: Daojiao Town, Dongguan City, Guangdong, China

Tips

1. Before using the headset, please read the manual carefully and keep it for future references.
2. The headset need to be fully charged prior to first-time use.
3. If the headset is left unused for over two weeks, please recharge it periodically.
4. Please use the chargers made by qualified manufacturer.
5. If the headset cannot be found by your phone, please check whether it is in pairing mode; if left unconnected for a long while, the headset will exit pairing mode, please re-enter the mode; if a procedure error of your phone occurs, reboot it; if a procedure error of the headset occurs, reboot or reset it.

Caveats

1. Never disassemble or modify your headset for any reasons to avoid any damages and danger.
2. Do not store the headset in extreme temperatures (under 0°C or over 45°C).
3. Avoid using the indicator close to the eyes of children or animals.
4. Do not use this headset during a thunderstorm to avoid irregular function and increased risk of electric shock.
5. Do not use harsh chemicals or strong detergents to clean the headset.
6. Keep the headset dry.

Warranty Card

Warranty Period
 12 months after you purchase this item.(or you may inquire your local shopper for more details.)
 Free Service:
 Supposing any defects caused by quality issues occur within the warranty period, please take this warranty card and purchase receipts to your distributor for free exchange service.

Model Number:
Date of Purchasing:
User's Name:
User's Phone:
User's Address:
Shop's Name:
Shop's Address:
Comments:

Free exchange service will not be accessed under following circumstances:
 1. Damages caused unauthorized disassembly.
 2. Defects or physical damages caused by leaking or dropping off.
 3. Damages by act of God. Supposing your item is within any damages or defects except the above circumstances, please return to us or your distributor for free repairing.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 — Reorient or relocate the receiving antenna.
 — Increase the separation between the equipment and receiver.
 — Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 — Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



FCC ID:RDR-QCY-IN1915R MADE IN CHINA
 FCC ID:RDR-QCY-IN1915L