


Swiitech

Model: T ONE
Swiitech Wireless 2 in 1 Adapter
User Guide



Thank you for choosing the Swiitech T ONE Wireless 2 in 1 Adapter. Please read this guide carefully and keep it in a safe place for future reference. If you need any further assistance, please contact our customer support team at service@swiitech.com.

What's in the box?

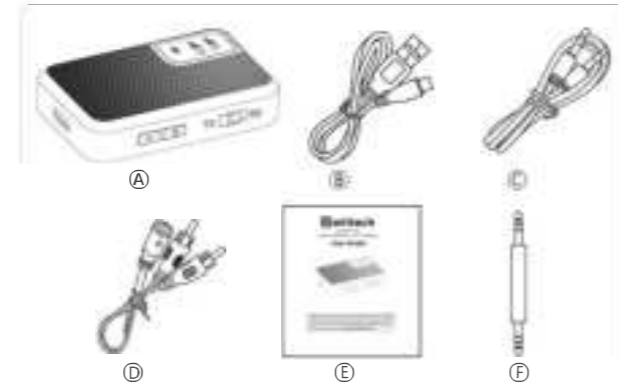

Package Contents

- (A) Wireless 2 in 1 Adapter x 1
- (B) Type C Charging Cable x 1
- (C) 3.5mm Audio Cable x 1
- (D) 3.5mm Female to 2 RCA Male Cable x 1
- (E) User Guide x 1
- (F) 3.5mm Audio Plug x 1

Product Features

- ① MFB(Multi functional Button)
- ② Charging Port
- ③ Volume -/Previous Track
- ④ Volume +/Next Track
- ⑤ Mode Switch Button
- ⑥ 3.5mm Audio Port
- ⑦ LED Indicator A
- ⑧ LED Indicator B
- ⑨ Power LED Indicator



Specifications


Bluetooth Profile	A2DP/AVRCP
Audio Codec	SBC/aptX
Range	33R/10m
Charging Power	DC5V
Battery Capacity	300mAh
Working Time	Approx. 26hours
Charging Time	2 hours
Dimensions(LxWxH)	56.5mm x 35mm x 14mm
Weight	20g

Basic Operation

- MFB**
- Power On/Off** In RX/TX mode, press and hold "MFB"
- Play/Pause** Single click "MFB" in RX mode(When playing music)

NOTE

- Power on**
 - Press and hold the power button for 1 seconds. The adapter will automatically enter its pairing state. During this time, the LED indicator A&B will alternately flash blue. If the adapter discovers a previously connected device, it will connect. If not, it will wait for a new device to try to connect to. Within 3 minutes, if no connection is made after 3 minutes, the adapter will automatically shut down.
- Power off**
 - Press and hold the power button for 5 seconds. The red power LED indicator will light for 1 second and then the adapter will shut off.



Quick Start

- Volume +/-** In RX mode, single click Volume +/-
- Next/Previous Track** In RX mode, press and hold Volume +/-

NOTE

- In TX mode, there are no Play/Pause, Volume +/-, Next/Previous Track functions available.

How to enter pairing mode manually?

- Mode Switch**
 - Turn the mode switch button to RX
 - Turn the mode switch button to TX
- In standby or connection mode, you can freely switch between TX and RX modes. After switching modes, the connected devices from the last mode will be disconnected, and the adapter will enter its pairing state.

LED Indicators

- Power LED Indicator**
 - So id blue: Power on status in TX/RX mode
 - So id red: Charging in TX/RX mode
 - Blue to red blinking: Low battery
- LED Indicator A/B**
 - Flashing blue: Pairing in TX/RX mode
 - So id blue: Successfully paired in TX/RX mode
 - LED off: No Bluetooth device paired in TX/RX mode


Charging

- 1. Use a USB Type C cable and connect the adapter to any active Type C port.
- 2. The LED indicator will turn red when adapter is charging. It will turn blue when the device is charged and charging will stop automatically.

NOTES

- We recommend charging the unit for at least 2 hours before using it for the first time.
- When the adapter needs to be used continuously for longer than the battery lasts, it can be connected to a charging power supply while you are using it.
- It is not recommended that you use this function frequently because it may affect the service life of the battery.

How to use Pairing Mode

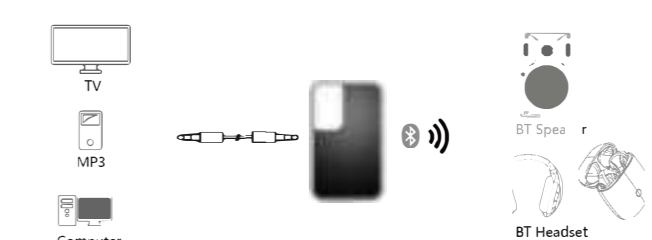

1. Set the adapter to TX mode, connect it to your Non Bluetooth device (television, music player, etc.). Connect one end of a 3.5mm audio cable/plug into the audio port of the adapter, and the other end into the audio out jack of the Non Bluetooth device.
2. Bring your Bluetooth audio receiving device (earphones, speakers, etc.) within a 3 feet/1 meter range and power it on. Set it to pairing mode.
3. Press and hold the power button of the adapter for 3 seconds to turn it on and enter pairing mode. The LED indicator A and B of the adapter will alternate flash blue. At this point, the nearby Bluetooth receiving device will automatically connect to the adapter, then the LED indicator A on the adapter will become solid blue, the LED indicator B will be off.

NOTES(In TX mode)

- A 3.5mm female to 2 RCA male cable is suitable for connecting the adapter to a TV without a 3.5mm audio output jack. This cable is included in the package.

- In pairing mode, if there is no Bluetooth device connected to the adapter, the Bluetooth indicator light will flash for 3 minutes and the adapter will automatically shut down.

- After the first successful connection, if the adapter and Bluetooth device are turned on again, the adapter and Bluetooth device will automatically connect.

How to pair with Non Bluetooth devices at the same time


In TX mode, the adapter is able to pair with two Bluetooth stereo earphones/speakers at the same time

1. Follow the previous instructions in the "How to use Pairing in TX mode" section to pair the adapter with your first device.
2. Double click the adapter "MFB" button to enter pairing mode (The LED indicator A and B of the adapter will alternately flash blue).
3. Turn on the second Bluetooth device. Make sure this device is also in pairing mode.
4. Move the adapter and the second device close together and the pairing will be completed automatically.
5. After pairing is completed, the LED indicators A and B of the adapter will turn blue and remain on.

NOTES

- To ensure that the adapter will successfully pair with the two Bluetooth devices you want to connect to, make sure there are no other Bluetooth devices within 10 meters of the adapter, especially those that have previously paired with your Bluetooth headset.
- When the adapter is paired with the second Bluetooth device, the first Bluetooth device will not disconnect from the adapter.
- When you pair with two devices, both can play music at the same time.

How to use Pairing Mode

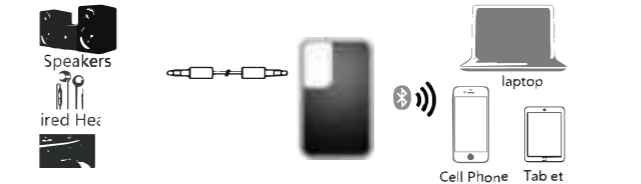

1. Set the adapter to RX mode and insert one end of a 3.5mm audio cable/plug into the audio port of the adapter. Insert the other end into your Non Bluetooth audio receiving device (speakers, headset, etc.).
2. Press and hold the power button of the adapter for 3 seconds to turn it on and enter pairing mode. The LED indicator A and B of the adapter will alternately flash blue.
3. Activate the Bluetooth function on your transmitting device (phone, tablet, etc.) and search for nearby Bluetooth devices.
4. Find "T-ONE" in the search results and tap on it to connect. Once connected, the LED indicator A on the adapter will be solid blue, the LED indicator B will be off.

NOTES(In RX mode)

- In pairing mode, if there is no Bluetooth device connected to the adapter, the Bluetooth indicator light will flash for 3 minutes and the adapter will shut down automatically.
- After the first successful connection, if the adapter and Bluetooth device are turned on again, the adapter and Bluetooth device will connect automatically.

How to pair with Non Bluetooth devices at the same time

In RX mode, the adapter is able to pair with two Bluetooth devices at the same time

1. Follow the previous instructions in the "How to use Pairing in RX mode" section to pair the adapter with your first device.
2. Double click the adapter "MFB" button to enter pairing mode (The LED indicator A and B of the adapter will alternately flash blue).
3. Turn on the second Bluetooth device. Find "T-ONE" in the search results and tap on it to pair.
4. After pairing is completed, the LED indicators A and B of the adapter will turn blue and remain on. At this time, the adapter has already connected to two Bluetooth devices simultaneously.

NOTES

- Only one device can play music through the adapter at any time. You have to stop the music on the one device to play on the other.
- When the adapter is paired with the second Bluetooth device, the first Bluetooth device will not disconnect from the adapter.
- If the adapter is already connected to two Bluetooth devices simultaneously, double click the "MFB" button, and the adapter will enter pairing mode and clear the two connected Bluetooth devices.
- In RX mode, you can operate the volume buttons on the adapter to control the volume.

How to connect to pair TV with Bluetooth

Types 1 3.5mm Audio cable

- Step 1:** Using the 3.5mm audio cable we provided to connect your TV to the adapter (in TX mode). Long press the power button of the adapter (in TX mode), then turn on your Bluetooth headset or other device and bring it close to the adapter. After the pairing is successful, you should be able to hear your TV through the headset.
- Step 2:** If not, check your TV settings to make sure that the TV speaker has been set to headset.



Types 2 RCA cable

- Step 1:** For RCA, this option. Please Only Use the port labeled "audio out". Any other port will not work.



- Step 2:** Connect the 3.5mm audio cable to the RCA aux converter cable that we provided, then use this to connect your TV to the adapter (in TX mode). Turn on your Bluetooth headset or other device and move it near the adapter. After the pairing is successful, you should be able to hear your TV through the headset.
- Step 3:** If not, check your TV settings to make sure your TV speaker is set to external speaker.



PRECAUTIONS

1. When power is low or the adapter is not used for a long time, it should be charged before use to prevent the product from working abnormally or receiving battery damage.
2. Bluetooth signals will be blocked and absorbed by surrounding objects. For the best sound quality, try to use the adapter in a direct line-of-sight with your connected device.
3. The adapter has a built-in lithium battery, please charge frequently when using it.
4. Please keep the adapter away from water or other liquids to avoid damage.
5. If you have any problems, please feel free to contact us at service@swiitech.com and we will be happy to help you.

Bluetooth®

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. And any use of such marks by sunvalleytek international inc. is under license. Other trademarks and trade names are those of their respective owners.

- Note:** This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. The device has evaluated to meet general RF exposure requirement. The device can be used in portable exposure without restriction.



E-mail: service@swiitech.com



尺寸: 92*110mm
材质: 105g铜版纸
折叠方式: 风琴折页

