

# 深圳市盛邦尔科技有限公司 Shenzhen Surbaner Technology CO.,LTD.

#### SPECIFICATION FOR APPROVAL

客户名称 Customer Name		熵基	KIL
客户项目名 Customer Project Name	Zface11000	盛邦尔料号 Surbaner P/N	3160-180-00766
客户编码 Customer P/N	1	工作频段 Working Band	2400-2500MHz
产品描述 Description	2.4G天线:丝印白色 Zf /尺寸: 42.39*15.77*0	acel1000-WIFI-V1.0 .12MM/1.13 黑色线 150mm	1代端子
版本号 Version	V01	1 4	/
	设计人信息	/Designer Information	
射頻工程师 RF Engineer	林德友	研发主管 R&D Diretor	朱浩奎
结构工程师 WE Engineer	蔡杰	100	

	盛邦尔审批/Surba	aner Approval		客户批准/Cust	tomer Approval
5	制作 Prepared By	审核 Checked By	批准 Approval By	审核 Checked By	批准 Approval By
签章 Signature	曹心荥	被教	43/12		
日期 Date	2023. 12. 15	12/200	12/20		

版本	修订内容	责任人	核准	日期
Version	Change Description	Person in Charge	Approval By	Date

地址: 深圳市宝安区西乡街道鹤灣社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726
Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of preprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.



Shenzhen Surbaner Technology CO.,LTD.

# 日录/Catalogue


序号 No.	项目 Item	页码 Page No.
1	图纸或实物图片 Drawing or Product Image	3
2	技术参数 Technical Parameter	4
3	射频性能测试报告 RF Performance Test Report	5-9
4	包装文件 Package Document	10
5	尺寸测量报告 Dimensions Test Report	11
6	可靠性测试报告 Reliability Test Report1	12
7	环境有害物质管控一览表 RoHS Control list for Sample	13
1	5/4/	
7		

地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726



Shenzhen Surbaner Technology CO.,LTD.

-. 产品图纸或实物图片/Drawing or Product Image

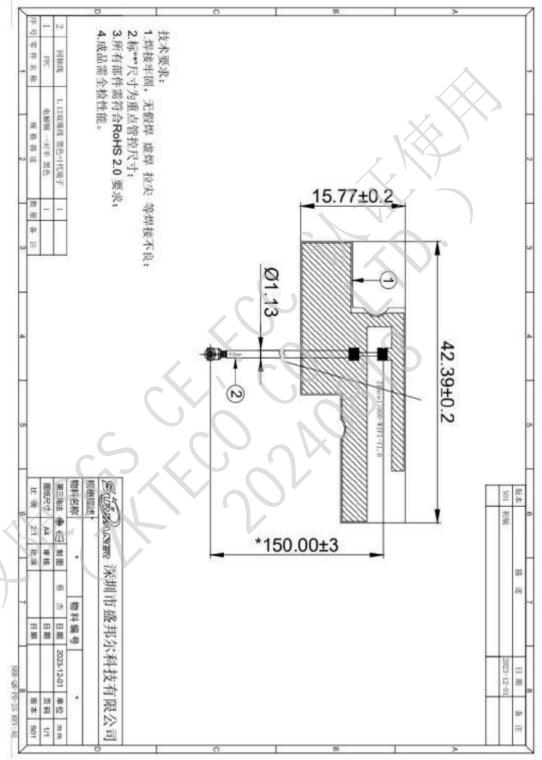

地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



# 盛邦尔 深圳市盛邦尔科技有限公司 NER Shenzhen Surbaner Technology CO.,LTD.

#### 二. Technical Parameter /技术参数

### 1. Antenna/天线

No/序号	Part Name/项目	SPEC/规格
1	Frequency Range/ 频率范围	2400-2500MHz
2	Impendence/阻抗	50 ohm nominal
3	Gain/增益	≤3.9dBi
4	Polarization/极化	LINE
5	VSWR/驻波比	<2.0
6	Efficiency/效率	≥50% AVG
7	RF Cable/射频连接线	1.13 黑色线 150mm
8	RF Connector/连接器	1 代端子

### 2. Environmental Characteristics/环境特性

No/序号	Part Name/项目	SPEC/规格
51	Operation Humidity /工作湿度	5~95%不冷凝
2 Operating Temperature/ 工作温度		-20~+60℃
3 Store Temperatuer/工作 储存温度		-30~+70℃
4	Salt Spray Test/ 盐雾试验	24H

地址:深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 株2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

# 射频性能测量报告

#### RF Performance Test Report


客户名称 Customer Name	熵基	项目名称 Project Name	Zface11000	盛邦尔科号 Surbaner P/N	3160-180-00766
频段 Band	2400-2500MHz	測试日期 Test Date	2023/12/15	测试人 Inspector	林德友

#### 天线测试设备简介

Antenna Test Equipment Introduction

测试天线输入特性使用 Agilent E5071C and Agilent 5062A 矢量网络分析仪;辐射特性利用 Satimo 三维近场暗室进行测试,并分别使用 8960 E5515 和 Agilent E4438C 进行了分析。暗房的测试坐标如下:

Test of antenna input characteristics using Agilent E5071C and Agilent 5062A vector network analyzer; The radiation pattern of the antenna are tested using the Satimo starlab 3D near field Anechoic Chamber, and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:



#### 1. S11 参数测量/S11 Parameter-VSWR

使用一根 50 O 同轴电缆连接到天线, 然后该电缆连接到网络分析仪测量 S11 参数, 被测量产品远离 金属至少 20 厘米。

Measuring Method is a  $50\Omega$ coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.

地址:深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 株 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

#### Antenna Matching Network



#### Test System

Sequence Number	Test Item	equipment
S parameter	VSWR	Agilent 5071C & Agilent 5062A
OTA Test	TRP&TIS	Agilent 8960 E5515C8 Agilent 4438C8CMW500 &CMW270 ETS&SATIMO
Gain & Efficiency	Gain & Efficiency	ETS& SATIMO Agilent 5071C









地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726


Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.



Shenzhen Surbaner Technology CO.,LTD.


#### 2.Antenna MatchingNetwork

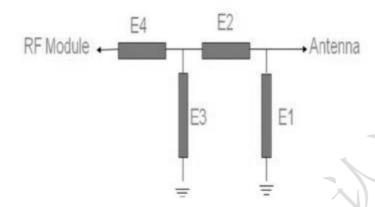

Element	Value
E1	N/A
- E2	N/A
E3	N/A
E4	N/A

PCB 板端匹配电路未改动

#### S11 Parameter-VSWR

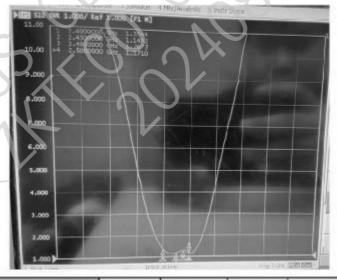

Frequency	2400	2450	2480	2500
VSWR	1.35	1.14	1.26	1.17

地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn




Shenzhen Surbaner Technology CO.,LTD.

#### 3.Gain & Efficiency

Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	45.2%	265
2410	46.0%	3.01
2420	46.9%	3.38
2430	51.8%	3.59
2440	52.9%	3.75
2450	52.4%	3.84
2460	52.4%	3.90
2470	53.9%	3.85
2480	51.5%	3.80
2490	50.0%	370
2500	50.8%	3.69

#### 2D Pattern

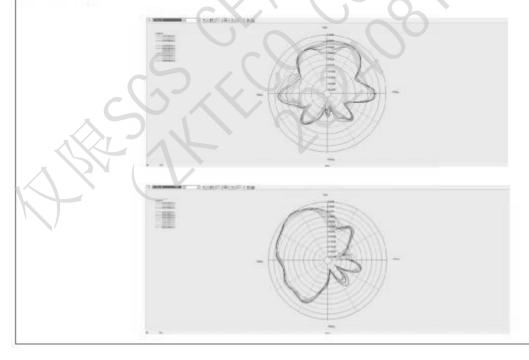


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.



Shenzhen Surbaner Technology CO.,LTD.

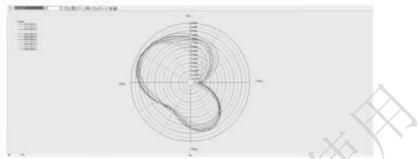

#### 4.OTA

Test Equipment:	R&S CMW270 3D chamber				
Test Condition:					
Band	Wireless Protocol	Channel	TRP(dBm)	TIS(dBm)	
WIFI	802.11 b/11 Mbs	1	16.72	-81.50	
		6	14.98	-81.17	
		11	15.11	-79.86	
	802.11 g/54Mbs	1	16.70	-68.56	
WIFI		6	14.01	-68.31	
		11	14.67	-68.18	
	802.11 n/65Mbs	1	16.47	-65.54	
WIFI		6	13.16	-64.29	
		11	13.76	-65.96	


地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726



Shenzhen Surbaner Technology CO.,LTD.

#### 产品包装规范

Product packaging specifications

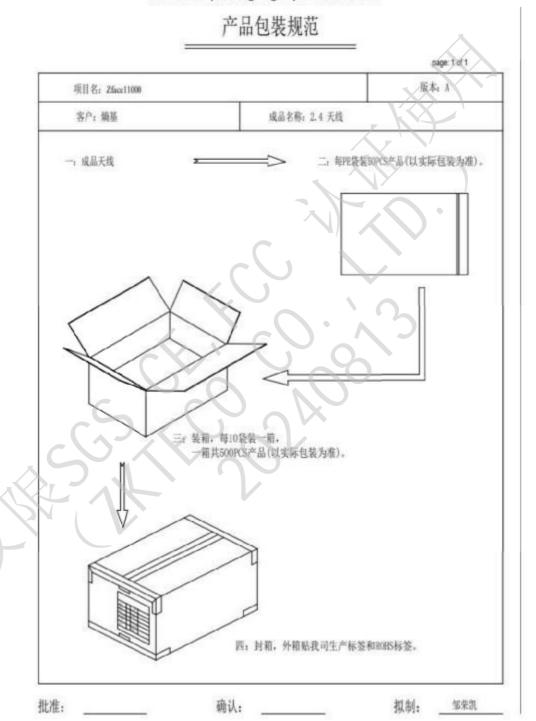

地址:深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

# 样品尺寸测量报告

Sample Dimensions Test Report

客户名称 Customer Name	熵基	客户料号 Customer P/N	/	盛邦尔料号 Surbaner P/N	3160-180-00766 曾心荣 Pass/NG	
测试日期 Test Date	2023/12/15	样品数量 Sample Otty.	3	测试人 Inspector		
尺寸编号 Dimension No.	标准 Standard	样品 1 Sample 1	样品 2 Sample 2	样品3 Sample 3		
① 长度 42.39±0.2mm		42. 39	42. 40	42. 41	Pass	
② 宽度	② 宽度 15.77±0.2mm		15. 79	15. 76	Pass	
③厚度	0.32±0.05mm	0. 31	0. 33	0. 31	Pass	
③ 线长	150±3mm	151	150.5	151	Pass	
5	6	0,0	U.C.			
6	- (O) X		31			
0						
8						
		最终结论 Conclusion			PASS	
测试人&日期 Inspector & Date	曾心荣 2023/1	2/15	批准&日期 Approval &D ate			

地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.



Shenzhen Surbaner Technology CO.,LTD.

# 可靠性测试报告

Reliability Test Report

客户名称 Customer Name	熵基	客户料号 Customer P/N	7	盛邦尔科号 Surbaner P/N	3160-180-00766		
测试日期 Test Date	2023/12/15	样品数量 Sample Qty.	3	测试人 Inspector	何春辉		
測试项目 Test Item	要求 Requirement	试验设备 testing equipment	样品 1 Sample 1	样品 2 Sample 2	样品 3 Sample 3	判定 PASS/NG	
高温存储	在+70°C条件下暴露 24H, 恢复 2H 后进行测试电气 性能正常	恒温恒湿箱	ok	OK	ок	Pass	
低温存储	在-30°C条件下暴露 24H, 恢复 2H 后进行测试电气 性能正常	恒温恒湿箱	ОК	ОК	ок	Pass	
高温工作	在+60°C条件下通电工作 24H 电气性能正常	恒温恒湿箱	OK	ОК	ок	Pass	
低温工作	在-20°C条件下通电工作 24H电气性能正常	恒温恒湿箱	OK OK		ок	Pass	
端子 盐雾试验	(5 ± 0. 5)%氯化钠、pH 值为 6. 5~7. 2,实验箱温 度(35±2)℃ ☑24H □48H	盐雾试验机	OK	ОК	0K	Pass	
端子铆压 拉拔力	1 13 线径接 1 代 IPEX ≥10N	推拉力计	12N	13N	15N	Pass	
7	ii. si	最终结论 Conclusion		<u>.</u> 8		Pass	
测试人&日 期 Inspector & Date	何春辉 2023/12/15	5	批准& 日 期 Approval &D ate				

地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726

Address: 2/F, Building B25, Hengfeng industrial city, Hezhou community, Xixiang Street, Baoan District, Shenzhen City.

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.



Shenzhen Surbaner Technology CO.,LTD.

#### 产品 ROHS 成分宣告表 Product ROHS ingredient declaration table

产品 名				有害物质含量( PPM )										HS 測试
称	均匀物质材料		Pb	Cd	Hg	Cr6+	PBBs	PBDEs	DEHP	BBP	DBP	DIBP	HS 測试报告编号	报告日期
2.4G 天线		文字油墨	ND	ND	ND	ND	ND	ND.	ND	ND	ND	ND	ETR23A00862M01	23/10/13
	1	3M 飛達	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	SHAEC2217569205	23/1/4
	FPC	基材	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	SHAEC23001049106	23/2/15
		防焊油墨	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ETR23701480	23/7/13
		抗氧剂	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	SZXEC23000119402	23/2/27
	线材	氟化物	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	NGBMR23000169901	23/2/6
		镀锡铜线	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	SHAEC23010829308	23/7/26
		黑色色母	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	A2230222421101001C	23/5/23
	端 子	黄铜	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	TA0EC2209224506	23/1/6
		塑胶	4, 77	ND	ND	ND	ND	ND.	ND	ND	ND	ND	ETR23705937	23/8/4

地址: 深圳市宝安区西乡街道鹤洲社区恒丰工业城 B25 栋 2 楼 TEL: 0755-82790675 FAX: 0755-82809726